

Surface Mount Frequency Mixer

SCM-2500+

Level 7 (LO Power +7 dBm) 500 to 2500 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	1
RF	8
IF	3
GROUND	2,4,5,6,7

Outline Drawing

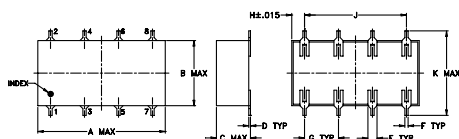


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.720	.740	.100	.150	grams
1.91	15.24	18.29	18.80	2.54	3.81	1.6

Demo Board MCL P/N: TB-171 Suggested PCB Layout (PL-130)

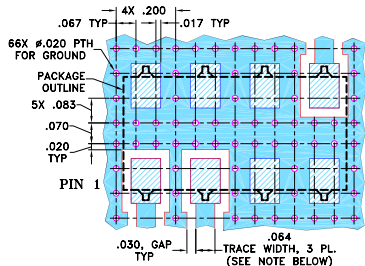

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 5.88 dB typ.
- wide bandwidth, 500 to 2500 MHz
- high L-R isolation, 35 dB typ.

Applications

- UHF
- cellular
- satellite distribution
- GPS/PCS



Generic photo used for illustration purposes only

CASE STYLE: YY109

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)	LO-IF ISOLATION (dB)	IP3 at center band (dBm)
LO/RF $f_L - f_U$	Mid-Band m $\bar{X}$ σ Max. Total Range Max.	Typ. Min.	Typ. Min.	Typ.
500-2500 DC-500	5.88 .08 6.9 10	35 22	18 12	13

1 dB COMP: +1 dBm typ.
m= mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
500.00	530.00	5.45	54.10	25.42	1.90	2.44
650.00	680.00	5.24	46.72	24.17	1.19	2.42
800.00	830.00	5.18	50.53	24.04	1.21	2.60
950.00	980.00	5.34	39.92	22.92	1.56	2.84
1000.00	1030.00	5.61	38.68	21.93	1.74	2.92
1100.00	1070.00	6.52	35.67	19.02	1.90	2.94
1150.00	1120.00	6.54	35.25	17.69	2.78	2.95
1250.00	1220.00	6.21	35.47	16.09	3.17	2.82
1350.00	1320.00	6.10	38.09	15.24	3.20	2.88
1500.00	1470.00	6.10	40.51	17.24	3.59	3.05
1650.00	1620.00	6.97	39.61	20.00	3.82	3.00
1750.00	1720.00	7.73	40.56	21.79	4.92	2.60
1800.00	1770.00	7.87	41.20	23.27	5.75	2.00
1950.00	1920.00	7.91	37.08	25.03	6.73	1.71
2000.00	1970.00	7.83	36.28	24.82	6.63	1.59
2150.00	2120.00	7.95	34.61	21.63	7.22	1.54
2300.00	2270.00	8.12	34.07	19.31	7.66	1.68
2400.00	2370.00	8.32	33.85	18.30	8.43	2.03
2450.00	2420.00	7.93	33.63	17.81	8.60	2.45
2500.00	2470.00	7.98	34.92	18.95	8.16	2.65

Electrical Schematic

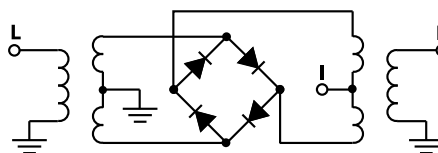







Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
SCM-2500
DJ/TD/CP/AM
200820
Page 1 of 2

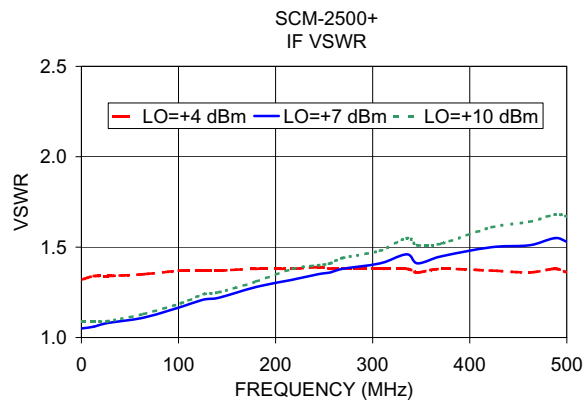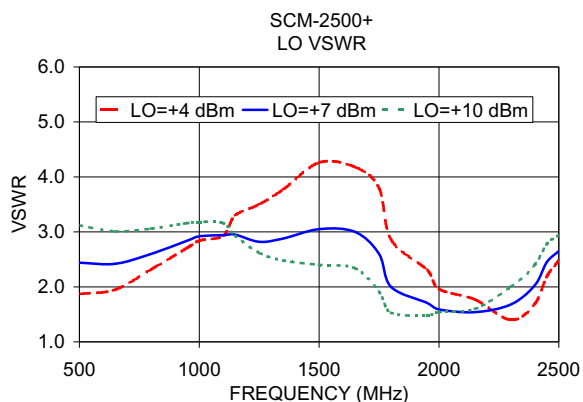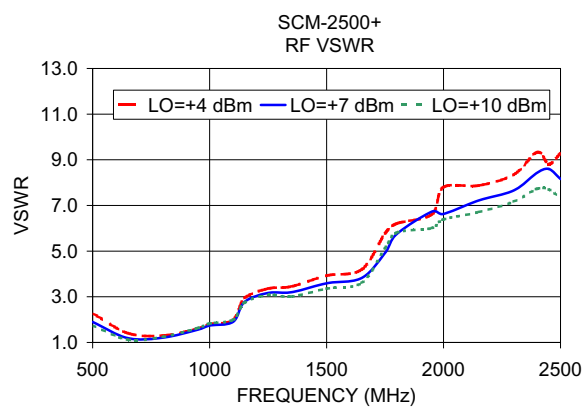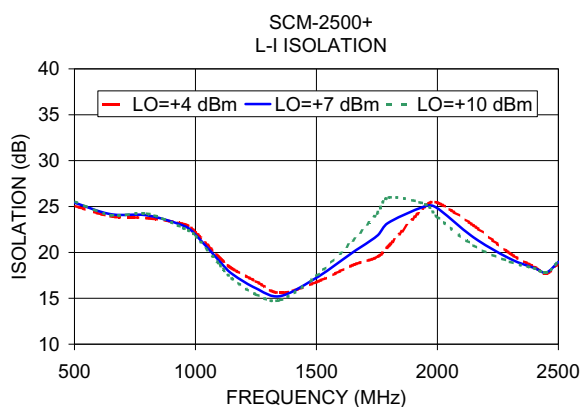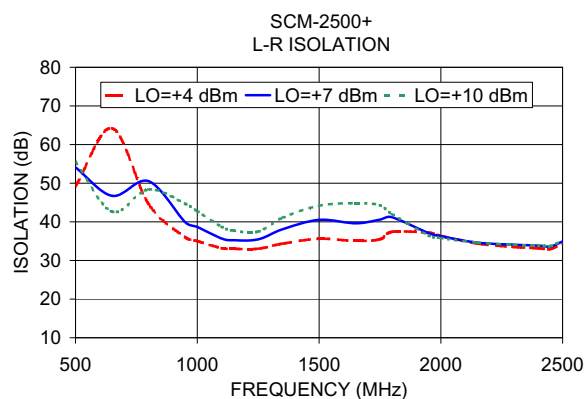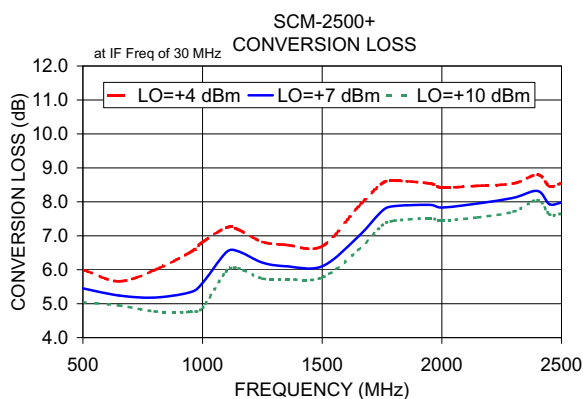

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SCM-2500+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	10.59	9.95	9.59
330.4	360.4	8.87	8.25	7.91
410.6	440.6	7.51	6.91	6.59
490.9	520.9	6.50	6.01	5.77
571.1	601.1	6.17	5.77	5.59
651.4	681.4	6.36	5.95	5.75
731.6	761.6	6.12	5.54	5.29
811.9	841.9	5.89	5.16	4.83
892.1	922.1	6.13	5.31	4.90
972.4	1002.4	6.35	5.81	5.48
1052.6	1082.6	6.18	5.70	5.44
1132.9	1162.9	6.25	5.77	5.55
1213.2	1243.2	6.33	5.87	5.70
1293.4	1323.4	6.44	6.05	5.93
1373.7	1403.7	6.58	6.13	6.08
1453.9	1483.9	6.74	6.19	6.09
1534.2	1564.2	7.43	6.64	6.40
1614.4	1644.4	7.91	7.08	6.79
1694.7	1724.7	7.96	7.21	6.96
1774.9	1804.9	7.88	7.16	6.90
1855.2	1885.2	7.77	7.10	6.86
1935.5	1965.5	7.65	7.04	6.74
2015.7	2045.7	7.66	7.10	6.80
2096.0	2126.0	7.68	7.18	6.85
2176.2	2206.2	7.68	7.23	6.92
2256.5	2286.5	7.40	6.98	6.76
2336.7	2366.7	7.24	6.66	6.39
2417.0	2447.0	7.26	6.61	6.31
2497.2	2527.2	7.44	6.43	6.04
2577.5	2607.5	8.29	6.66	5.98
2657.7	2687.7	8.68	6.61	5.84
2738.0	2768.0	8.95	6.41	5.56
2818.3	2848.3	9.29	6.44	5.53
2898.5	2928.5	9.35	6.77	5.80
2978.8	3008.8	9.34	7.16	6.15
3059.0	3089.0	9.83	7.63	6.52
3139.3	3169.3	10.32	8.16	7.15
3219.5	3249.5	11.14	8.88	7.86
3299.8	3329.8	12.61	9.92	8.87
3400.1	3430.1	14.03	10.97	10.05

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	12.75	13.21	15.22
330.4	360.4	10.68	13.32	13.61
410.6	440.6	6.37	7.17	8.15
490.9	520.9	6.49	7.42	8.75
571.1	601.1	16.84	12.84	11.68
651.4	681.4	9.90	13.40	17.43
731.6	761.6	10.79	9.86	9.75
811.9	841.9	4.08	5.29	6.18
892.1	922.1	3.06	4.67	6.29
972.4	1002.4	1.96	3.26	4.74
1052.6	1082.6	2.89	3.73	4.79
1132.9	1162.9	3.99	4.95	6.08
1213.2	1243.2	6.16	7.67	10.00
1293.4	1323.4	7.73	8.69	9.89
1373.7	1403.7	10.73	12.26	12.45
1453.9	1483.9	10.06	12.95	14.17
1534.2	1564.2	8.51	11.54	13.09
1614.4	1644.4	13.87	12.13	13.40
1694.7	1724.7	11.75	12.14	12.12
1774.9	1804.9	10.96	11.96	13.31
1855.2	1885.2	11.61	11.36	13.69
1935.5	1965.5	12.38	11.52	12.08
2015.7	2045.7	11.90	10.79	11.63
2096.0	2126.0	12.47	11.42	10.72
2176.2	2206.2	10.84	11.08	11.91
2256.5	2286.5	10.35	10.76	10.44
2336.7	2366.7	9.01	9.81	9.94
2417.0	2447.0	7.06	8.41	8.42
2497.2	2527.2	6.38	7.38	7.92
2577.5	2607.5	3.38	5.23	6.51
2657.7	2687.7	1.63	3.44	5.27
2738.0	2768.0	0.42	2.62	5.21
2818.3	2848.3	0.40	3.40	6.99
2898.5	2928.5	2.79	4.83	7.91
2978.8	3008.8	4.38	6.20	8.89
3059.0	3089.0	3.58	6.60	9.69
3139.3	3169.3	4.70	7.41	10.05
3219.5	3249.5	5.54	10.55	11.50
3299.8	3329.8	3.54	16.80	15.44
3400.1	3430.1	3.62	14.53	16.57

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	0.04	-0.02	0.02
330.4	360.4	0.40	0.34	0.30
410.6	440.6	0.89	0.77	0.63
490.9	520.9	1.30	1.08	0.89
571.1	601.1	1.48	1.10	0.86
651.4	681.4	1.85	1.52	1.26
731.6	761.6	2.91	2.49	2.11
811.9	841.9	3.52	3.17	2.77
892.1	922.1	3.23	3.10	2.87
972.4	1002.4	2.78	2.50	2.31
1052.6	1082.6	2.70	2.39	2.13
1132.9	1162.9	2.60	2.17	1.85
1213.2	1243.2	2.42	1.80	1.48
1293.4	1323.4	2.11	1.50	1.22
1373.7	1403.7	1.92	1.30	0.99
1453.9	1483.9	1.99	1.42	1.11
1534.2	1564.2	1.69	1.43	1.18
1614.4	1644.4	1.14	1.03	0.87
1694.7	1724.7	0.97	0.84	0.69
1774.9	1804.9	0.94	0.76	0.60
1855.2	1885.2	0.96	0.80	0.63
1935.5	1965.5	0.94	0.76	0.63
2015.7	2045.7	0.93	0.75	0.59
2096.0	2126.0	0.99	0.75	0.59
2176.2	2206.2	1.18	0.82	0.64
2256.5	2286.5	1.48	1.03	0.79
2336.7	2366.7	1.69	1.17	0.92
2417.0	2447.0	2.07	1.36	1.07
2497.2	2527.2	2.52	1.67	1.32
2577.5	2607.5	2.22	1.58	1.20
2657.7	2687.7	2.35	1.95	1.33
2738.0	2768.0	2.40	2.51	1.69
2818.3	2848.3	2.45	2.77	1.99
2898.5	2928.5	2.85	2.98	2.12
2978.8	3008.8	3.24	2.79	1.95
3059.0	3089.0	2.91	2.49	1.64
3139.3	3169.3	2.48	2.15	1.26
3219.5	3249.5	1.95	1.64	0.87
3299.8	3329.8	1.01	1.25	0.61
3400.1	3430.1	0.13	0.90	0.42

Frequency Mixer

SCM-2500+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
500.0	1000.1	6.62	10.0	510.1	6.00	500.0	2000.1	7.15
479.6	1020.5	6.75	22.6	522.7	5.97	487.4	2012.7	7.14
459.2	1040.9	6.70	35.1	535.2	5.99	474.9	2025.2	7.15
438.8	1061.4	6.78	47.7	547.8	6.04	462.3	2037.8	7.13
418.3	1081.8	6.87	60.3	560.4	6.04	449.7	2050.4	7.11
397.9	1102.2	6.85	72.8	572.9	6.01	437.2	2062.9	7.09
377.5	1122.6	6.99	85.4	585.5	6.02	424.6	2075.5	7.05
357.1	1143.0	7.01	97.9	598.0	5.95	412.1	2088.0	7.06
336.7	1163.4	6.97	110.5	610.6	5.94	399.5	2100.6	7.05
316.3	1183.9	6.93	123.1	623.2	5.98	386.9	2113.2	7.03
295.8	1204.3	6.80	135.6	635.7	6.00	374.4	2125.7	7.00
275.4	1224.7	6.75	148.2	648.3	6.15	361.8	2138.3	6.92
255.0	1245.1	6.65	160.8	660.9	6.21	349.2	2150.9	6.85
234.6	1265.5	6.56	173.3	673.4	6.26	336.7	2163.4	6.82
214.2	1285.9	6.52	185.9	686.0	6.41	324.1	2176.0	6.76
193.8	1306.4	6.39	198.5	698.6	6.40	311.5	2188.6	6.73
173.3	1326.8	6.29	211.0	711.1	6.51	299.0	2201.1	6.70
152.9	1347.2	6.22	223.6	723.7	6.59	286.4	2213.7	6.68
132.5	1367.6	6.19	236.2	736.3	6.62	273.8	2226.3	6.68
112.1	1388.0	6.18	248.7	748.8	6.76	261.3	2238.8	6.63
71.3	1428.9	6.26	261.3	761.4	6.73	248.7	2251.4	6.58
50.8	1449.3	6.26	273.8	773.9	6.76	236.2	2263.9	6.54
10.0	1490.1	6.41	286.4	786.5	6.85	223.6	2276.5	6.54
10.0	1510.1	6.55	299.0	799.1	6.83	211.0	2289.1	6.57
50.8	1550.9	6.45	311.5	811.6	6.97	198.5	2301.6	6.61
71.3	1571.4	6.53	324.1	824.2	7.03	185.9	2314.2	6.58
112.1	1612.2	6.74	336.7	836.8	7.07	173.3	2326.8	6.56
132.5	1632.6	6.81	349.2	849.3	7.24	160.8	2339.3	6.52
173.3	1673.4	6.98	361.8	861.9	7.27	148.2	2351.9	6.49
193.8	1693.9	7.09	374.4	874.5	7.35	135.6	2364.5	6.47
234.6	1734.7	7.20	386.9	887.0	7.45	123.1	2377.0	6.46
255.0	1755.1	7.28	399.5	899.6	7.45	110.5	2389.6	6.44
295.8	1795.9	7.34	412.1	912.2	7.58	97.9	2402.2	6.44
316.2	1816.4	7.41	424.6	924.7	7.61	85.4	2414.7	6.40
357.1	1857.2	7.56	437.2	937.3	7.61	72.8	2427.3	6.38
377.5	1877.6	7.69	449.7	949.8	7.67	60.3	2439.8	6.35
418.3	1918.4	7.81	462.3	962.4	7.67	47.7	2452.4	6.32
438.8	1938.9	7.87	474.9	975.0	7.71	35.1	2465.0	6.35
479.6	1979.7	7.93	487.4	987.5	7.78	22.6	2477.5	6.36
500.0	2000.1	7.97	500.0	1000.1	7.74	10.0	2490.1	6.55

REV. X2
SCM-2500+
100818
Page 2 of 5

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
250.1	54.97	55.83	55.65	36.23	36.09	35.88
330.4	56.23	58.93	56.23	32.53	32.38	32.55
410.6	53.63	62.38	59.59	29.28	29.65	29.94
490.9	48.30	54.74	63.25	27.31	27.78	28.11
571.1	46.72	50.74	48.85	25.34	25.71	25.93
651.4	47.45	48.72	45.46	23.63	24.12	24.47
731.6	46.28	51.27	47.81	22.38	22.93	23.26
811.9	38.77	42.74	47.09	21.24	21.70	22.04
892.1	35.09	38.02	40.72	20.06	20.54	20.77
972.4	32.44	34.87	37.29	18.66	19.04	19.15
1052.6	31.14	33.14	34.97	17.09	17.29	17.41
1132.9	30.15	32.14	33.77	15.76	15.86	15.81
1213.2	29.69	31.80	33.26	14.45	14.60	14.72
1293.4	29.78	31.89	33.33	13.60	13.92	14.28
1373.7	30.53	32.74	33.84	13.75	14.29	14.78
1453.9	30.72	33.80	35.98	14.01	14.68	15.21
1534.2	27.54	31.04	34.41	14.18	15.03	15.74
1614.4	26.95	30.99	35.33	14.55	15.61	16.53
1694.7	29.46	33.57	38.03	15.58	16.59	17.47
1774.9	33.18	37.03	40.09	16.76	17.72	18.33
1855.2	36.22	38.47	39.21	17.92	18.59	18.96
1935.5	37.72	38.61	38.55	18.95	19.32	19.43
2015.7	37.14	37.05	37.11	19.77	19.80	19.69
2096.0	37.02	36.75	36.30	20.46	20.15	19.77
2176.2	36.89	36.80	36.28	20.94	20.18	19.57
2256.5	37.36	37.77	37.56	20.91	20.04	19.45
2336.7	36.52	36.94	37.16	20.67	19.70	19.05
2417.0	36.17	36.52	36.56	19.95	19.36	18.77
2497.2	36.49	36.76	37.15	19.08	18.88	18.45
2577.5	36.87	36.02	35.85	18.06	18.08	18.02
2657.7	39.11	38.30	37.36	17.09	17.42	17.56
2738.0	41.97	40.97	38.35	16.32	16.69	16.92
2818.3	49.79	41.20	35.72	15.58	15.98	16.26
2898.5	39.44	36.00	33.06	15.20	15.63	16.02
2978.8	30.78	33.42	32.41	15.70	16.07	16.49
3059.0	29.35	32.95	33.19	16.56	16.75	17.02
3139.3	29.91	33.75	34.38	17.02	16.87	16.94
3219.5	30.99	34.92	36.26	16.69	16.49	16.40
3299.8	32.70	36.41	38.04	15.90	15.83	15.59
3400.1	35.24	38.57	40.82	14.95	14.92	14.75

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	24.62	23.87	23.29
330.4	360.4	23.14	22.37	21.70
410.6	440.6	21.62	21.07	20.81
490.9	520.9	20.81	20.17	19.84
571.1	601.1	18.61	17.95	17.54
651.4	681.4	17.34	16.86	16.47
731.6	761.6	17.31	17.06	16.88
811.9	841.9	20.08	19.74	19.27
892.1	922.1	26.64	25.21	23.70
972.4	1002.4	34.31	31.10	29.00
1052.6	1082.6	27.22	25.40	23.61
1132.9	1162.9	22.54	20.76	19.57
1213.2	1243.2	19.03	17.50	16.77
1293.4	1323.4	18.10	17.00	16.39
1373.7	1403.7	18.66	17.79	17.13
1453.9	1483.9	21.20	20.70	20.10
1534.2	1564.2	19.06	19.15	19.07
1614.4	1644.4	18.20	18.59	18.77
1694.7	1724.7	19.09	19.65	19.92
1774.9	1804.9	20.64	21.04	21.14
1855.2	1885.2	22.06	22.39	22.61
1935.5	1965.5	23.23	23.37	23.50
2015.7	2045.7	24.31	24.30	24.53
2096.0	2126.0	25.28	25.35	25.35
2176.2	2206.2	26.31	26.41	26.38
2256.5	2286.5	27.26	27.28	27.27
2336.7	2366.7	27.96	27.94	27.86
2417.0	2447.0	28.75	28.75	28.62
2497.2	2527.2	29.58	29.21	29.03
2577.5	2607.5	30.73	29.84	29.26
2657.7	2687.7	31.19	29.93	29.03
2738.0	2768.0	30.18	29.02	28.23
2818.3	2848.3	28.40	28.52	28.34
2898.5	2928.5	27.44	29.16	30.75
2978.8	3008.8	26.43	27.35	28.49
3059.0	3089.0	23.39	24.41	25.58
3139.3	3169.3	21.33	22.95	24.40
3219.5	3249.5	20.84	22.75	24.49
3299.8	3329.8	21.30	23.38	25.26
3400.1	3430.1	23.01	25.03	27.08

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
250.1	280.1	10.96	9.69	9.18	250.1	2.05	2.73	3.56	10.0	1.31	1.20	1.27
330.4	360.4	6.73	6.05	5.72	330.4	2.07	2.74	3.53	22.6	1.33	1.05	1.11
410.6	440.6	4.26	3.84	3.62	410.6	2.08	2.72	3.45	35.1	1.30	1.14	1.23
490.9	520.9	2.80	2.56	2.46	490.9	2.10	2.70	3.37	47.7	1.32	1.19	1.27
571.1	601.1	2.27	2.18	2.16	571.1	2.12	2.66	3.29	60.3	1.37	1.21	1.29
651.4	681.4	2.25	2.17	2.13	651.4	2.18	2.67	3.25	72.8	1.39	1.21	1.28
731.6	761.6	2.13	1.95	1.85	731.6	2.29	2.70	3.21	85.4	1.41	1.24	1.31
811.9	841.9	1.95	1.69	1.54	811.9	2.53	2.84	3.26	97.9	1.44	1.31	1.37
892.1	922.1	2.09	1.81	1.63	892.1	2.74	2.93	3.27	110.5	1.50	1.39	1.45
972.4	1002.4	2.31	2.21	2.10	972.4	2.89	2.99	3.24	123.1	1.54	1.46	1.51
1052.6	1082.6	2.39	2.36	2.32	1052.6	2.95	2.95	3.13	135.6	1.57	1.48	1.52
1132.9	1162.9	2.58	2.53	2.52	1132.9	2.95	2.78	2.86	148.2	1.56	1.49	1.54
1213.2	1243.2	2.72	2.69	2.71	1213.2	2.98	2.62	2.60	160.8	1.58	1.51	1.59
1293.4	1323.4	2.81	2.82	2.85	1293.4	3.14	2.61	2.44	173.3	1.64	1.57	1.64
1373.7	1403.7	2.78	2.75	2.78	1373.7	3.19	2.54	2.25	185.9	1.70	1.62	1.67
1453.9	1483.9	2.75	2.59	2.55	1453.9	3.15	2.42	2.04	198.5	1.74	1.67	1.70
1534.2	1564.2	3.05	2.89	2.80	1534.2	3.03	2.28	1.83	211.0	1.76	1.70	1.72
1614.4	1644.4	3.35	3.29	3.26	1614.4	2.89	2.12	1.68	223.6	1.78	1.74	1.77
1694.7	1724.7	3.89	3.73	3.70	1694.7	2.68	1.98	1.59	236.2	1.83	1.81	1.85
1774.9	1804.9	4.45	4.13	4.00	1774.9	2.41	1.86	1.60	248.7	1.90	1.87	1.91
1855.2	1885.2	4.86	4.35	4.12	1855.2	2.14	1.80	1.70	261.3	1.95	1.89	1.93
1935.5	1965.5	5.17	4.66	4.26	1935.5	1.96	1.82	1.86	273.8	1.96	1.88	1.91
2015.7	2045.7	5.27	4.89	4.53	2015.7	1.87	1.90	2.05	286.4	1.96	1.90	1.93
2096.0	2126.0	5.36	4.98	4.63	2096.0	1.85	2.03	2.26	299.0	2.00	1.96	2.00
2176.2	2206.2	5.30	4.87	4.61	2176.2	1.92	2.21	2.49	311.5	2.06	2.06	2.09
2256.5	2286.5	4.99	4.48	4.17	2256.5	2.07	2.41	2.73	324.1	2.11	2.11	2.14
2336.7	2366.7	4.80	4.19	3.80	2336.7	2.25	2.60	2.93	336.7	2.10	2.09	2.11
2417.0	2447.0	4.37	3.79	3.42	2417.0	2.49	2.78	3.10	349.2	2.05	2.04	2.05
2497.2	2527.2	4.27	3.45	2.97	2497.2	2.78	2.98	3.25	361.8	2.04	2.01	2.04
2577.5	2607.5	4.56	3.43	2.92	2577.5	3.15	3.22	3.43	374.4	2.06	2.04	2.07
2657.7	2687.7	4.20	2.90	2.44	2657.7	3.52	3.47	3.60	386.9	2.10	2.07	2.09
2738.0	2768.0	3.63	2.30	1.87	2738.0	3.87	3.70	3.73	399.5	2.10	2.07	2.07
2818.3	2848.3	2.86	1.74	1.39	2818.3	4.15	3.94	3.88	412.1	2.07	2.04	2.02
2898.5	2928.5	2.08	1.37	1.25	2898.5	4.39	4.24	4.15	424.6	2.04	2.01	2.00
2978.8	3008.8	1.49	1.16	1.47	2978.8	4.74	4.55	4.41	437.2	2.03	2.02	2.02
3059.0	3089.0	1.07	1.43	1.96	3059.0	5.06	4.78	4.51	449.7	2.03	2.01	2.01
3139.3	3169.3	1.57	2.09	2.83	3139.3	5.23	4.89	4.56	462.3	2.01	1.97	1.96
3219.5	3249.5	2.61	3.15	4.09	3219.5	5.34	4.96	4.60	474.9	1.95	1.91	1.89
3299.8	3329.8	4.28	4.60	5.70	3299.8	5.41	4.96	4.56	487.4	1.89	1.85	1.83
3400.1	3430.1	7.25	7.08	8.20	3400.1	5.36	4.88	4.44	500.0	1.87	1.84	1.82

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+13	26	14	30	13	34	29	33	31	47
1	-	15	+0	28	32	37	43	41	44	46	48	39
2	99	57	62	45	55	73	56	66	48	59	55	61
3	>100	68	77	62	63	77	>79	78	79	70	75	>79
4	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
5	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -14.00 dBm.
LO IN: 1530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -20.92 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	37	25	43	26	52	46	54	52	58
1	-	14	+0	28	31	37	45	44	49	52	54	53
2	82	46	56	39	48	78	50	59	43	56	51	59
3	>100	50	55	43	38	54	60	56	63	61	60	67
4	>100	79	82	73	64	56	65	69	67	70	59	65
5	>100	75	84	74	87	63	71	79	79	76	80	77
6	>100	84	81	>89	88	>89	71	78	81	83	80	82
7	>100	>89	>89	>89	>89	>89	>89	82	77	>89	86	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	84	80	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -4.00 dBm.
LO IN: 1530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.89 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
SCM-2500+
100818
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

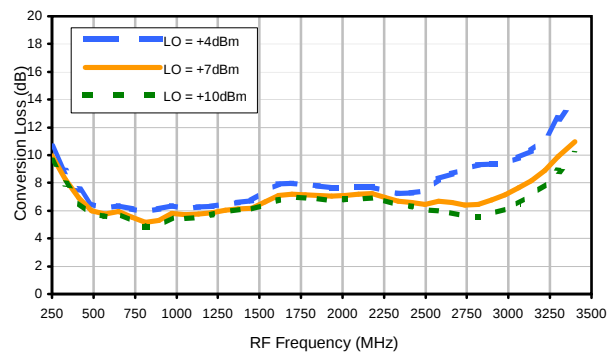


Conversion Loss vs. LO @ RF=1500.1MHz

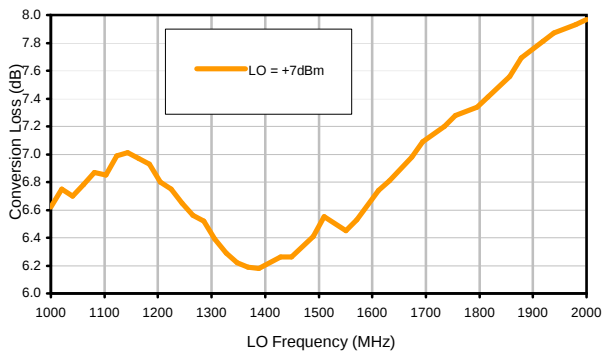


Conversion Loss vs. IF @ RF=1500.1MHz

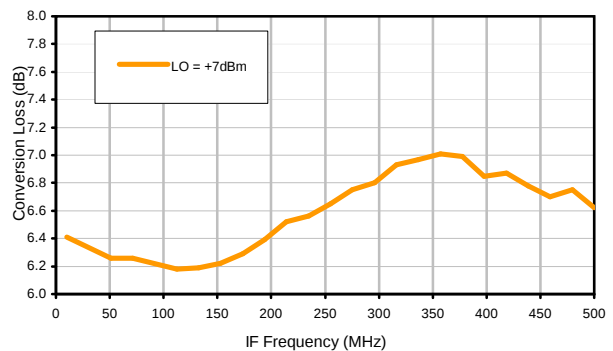


Conversion Loss vs. IF @ RF=500.1MHz

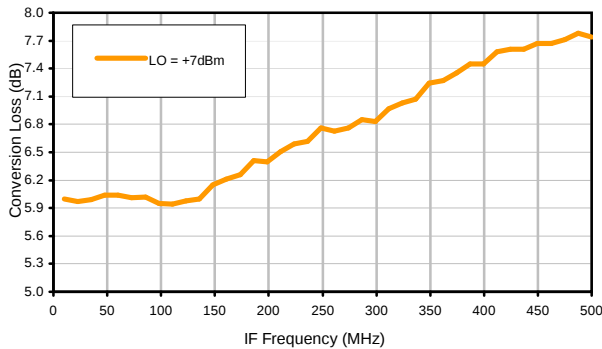


Conversion Loss vs. IF @ RF=2500.1MHz

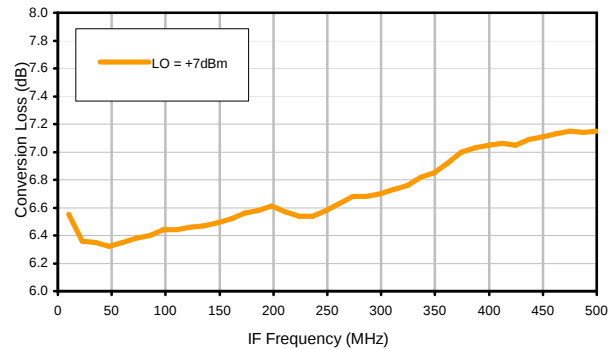

IP3 Input

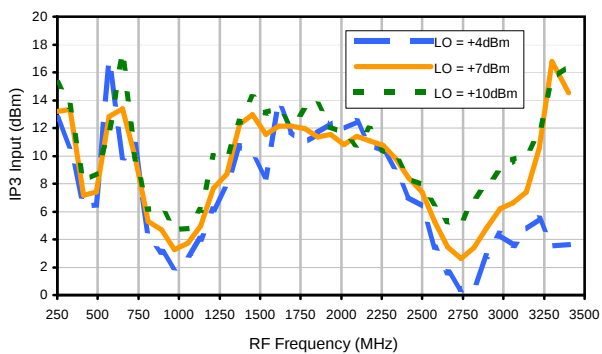


Compression @ RF IN=+1dBm

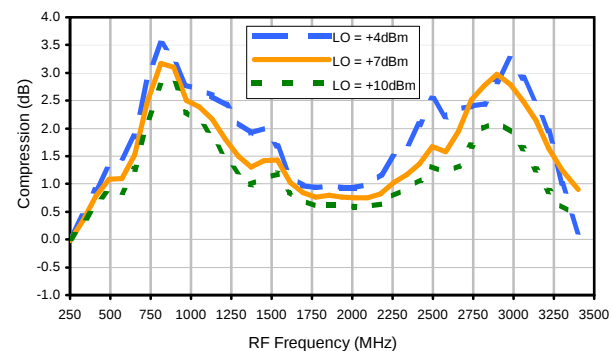


Typical Performance Curves


LO-RF Isolation

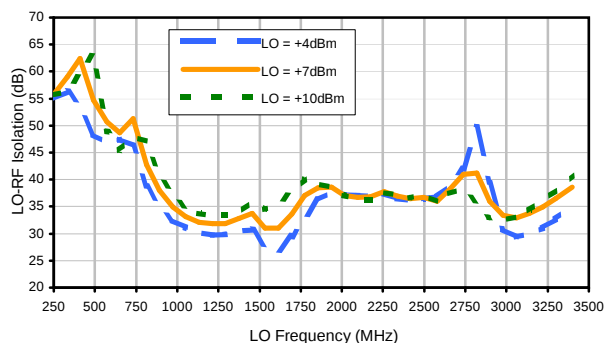


LO-IF Isolation

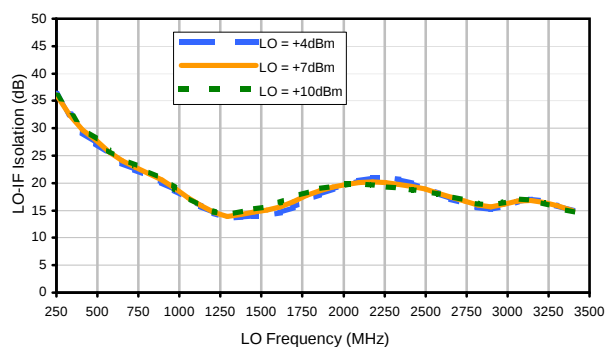


RF-IF Isolation

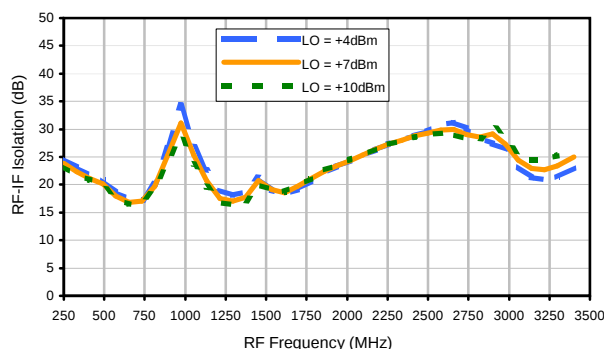


RF VSWR

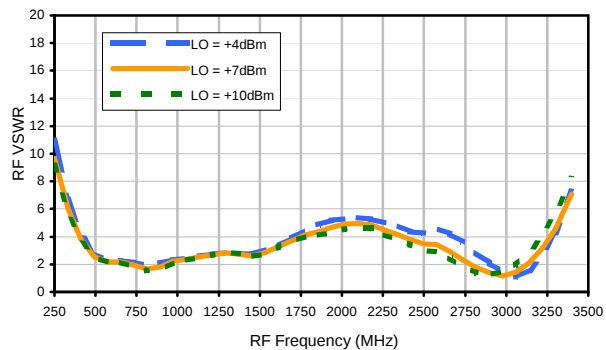

LO VSWR

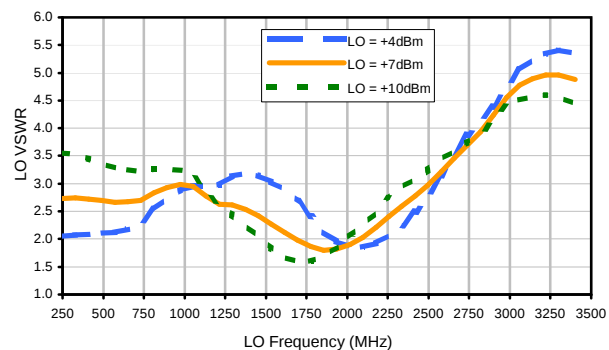

IF VSWR

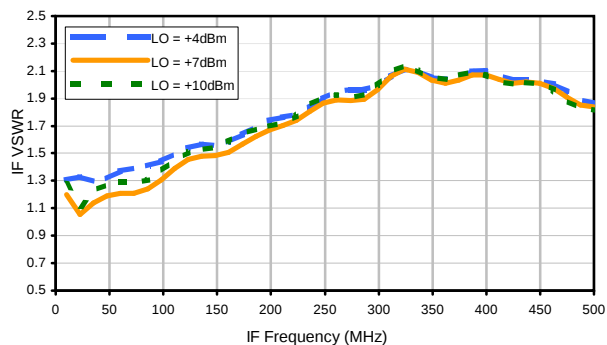

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+13	26	14	30	13	34	29	33	31	47
1	-	15	+0	28	32	37	43	41	44	46	48	39
2	99	57	62	45	55	73	56	66	48	59	55	61
3	>100	68	77	62	63	77	>79	78	79	70	75	>79
4	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
5	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -14.00 dBm.
LO IN: 1530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -20.92 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	37	25	43	26	52	46	54	52	58
1	-	14	+0	28	31	37	45	44	49	52	54	53
2	82	46	56	39	48	78	50	59	43	56	51	59
3	>100	50	55	43	38	54	60	56	63	61	60	67
4	>100	79	82	73	64	56	65	69	67	70	59	65
5	>100	75	84	74	87	63	71	79	79	76	80	77
6	>100	84	81	>89	88	>89	71	78	81	83	80	82
7	>100	>89	>89	>89	>89	>89	>89	82	77	>89	86	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	84	80	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -4.00 dBm.
LO IN: 1530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.89 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
SCM-2500+
100818
Page 3 of 3




Case Style


YY

Outline Dimensions

YY101
YY109
YY161

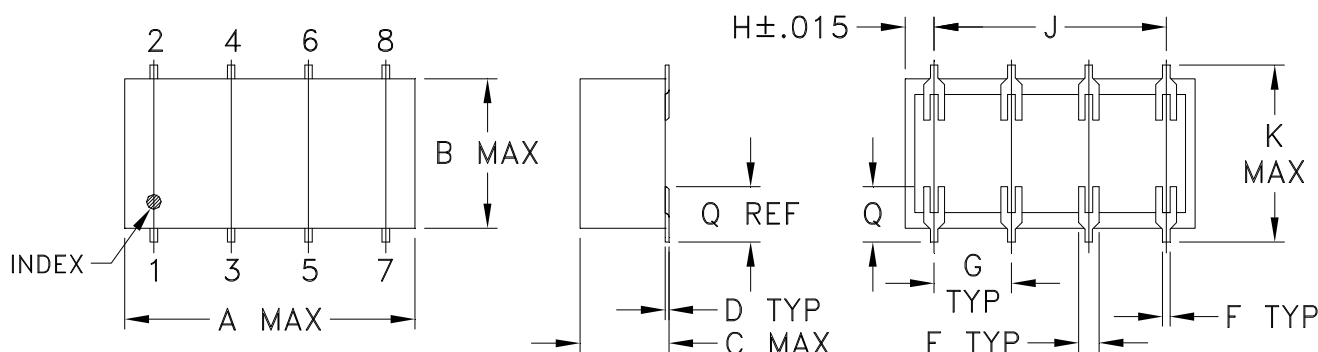

PCB Land Pattern

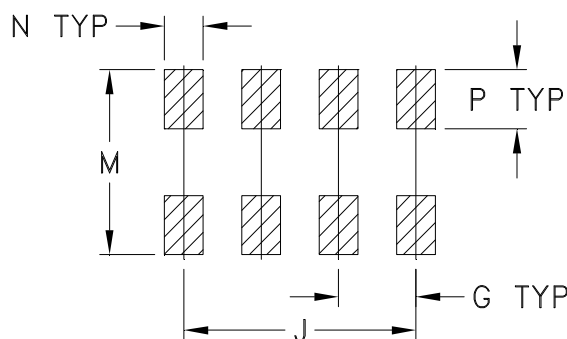

Suggested Layout
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAM S
YY101*			.20 (5.08)							.450 (11.43)	--	.470 (11.94)				1.6
YY109*	.75 (19.05)	.38 (9.65)	.20 (5.08)	.010 (0.25)	.050 (1.27)	.020 (0.51)	.200 (5.08)	.075 (1.91)	.600 (15.24)	.720 (18.29)	--	.740 (18.80)	.100 (2.54)	.150 (3.81)	.148 (3.76)	1.6
YY161			.28 (7.11)							.450 (11.43)	--	.470 (11.94)				1.6

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.
- Special Tolerances: Termination thickness $\pm .003$ inch.
- * Denotes: For SCM mixers, long termination version (case YY109) is available upon request, consult factory. To order short termination version (case YY101) add -NL suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Evaluation Board and Circuit

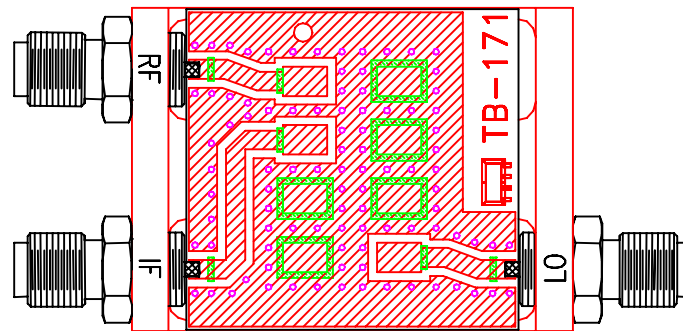

TB-171

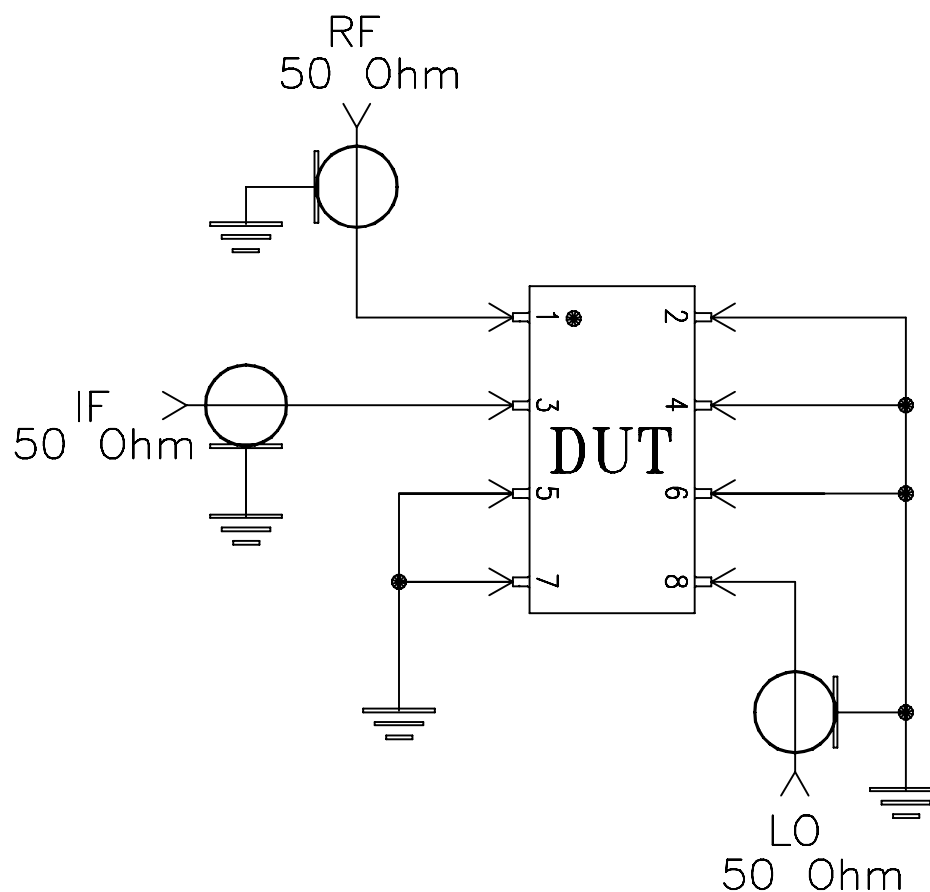

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215