

Frequency Mixer

SCM-2500NL+ SCM-2500NL

Level 7 (LO Power +7 dBm) 500 to 2500 MHz



Units are not marked with NL suffix

CASE STYLE: YY101

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	8
IF	3
GROUND	2,4,5,6,7

Features

- low conversion loss, 5.88 dB typ.
- wide bandwidth, 500 to 2500 MHz
- high L-R isolation, 35 dB typ.


Applications

- UHF
- cellular
- satellite distribution
- GPS/PCS


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

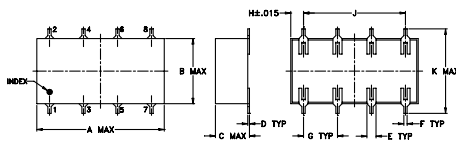

PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.75	.38	.20	.010	.050	.020	.200	
19.05	9.65	5.08	0.25	1.27	0.51	5.08	
H	J	K	M	N	P	wt	
.075	.600	.450	.470	.100	.150	grams	
1.91	15.24	11.43	11.94	2.54	3.81	1.6	

Demo Board MCL P/N: TB-171 Suggested PCB Layout (PL-130)

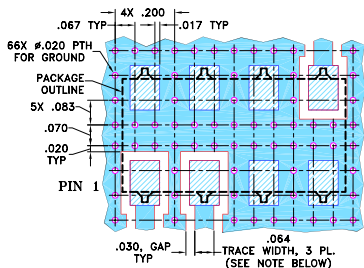

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)				
		Typ.	Min.	Typ.	Min.					
500-2500	DC-500	5.88	.08	6.9	10	36	22	18	12	13

1 dB COMP: +1 dBm typ.
m= mid band [2f_L to f_U/2]







Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
500.00	530.00	5.45	54.10	25.42	1.90	2.44
650.00	680.00	5.24	46.72	24.17	1.19	2.42
800.00	830.00	5.18	50.53	24.04	1.21	2.60
950.00	980.00	5.34	39.92	22.92	1.56	2.84
1000.00	1030.00	5.61	38.68	21.93	1.74	2.92
1100.00	1070.00	6.52	35.67	19.02	1.90	2.94
1150.00	1120.00	6.54	35.25	17.69	2.78	2.95
1250.00	1220.00	6.21	35.47	16.09	3.17	2.82
1350.00	1320.00	6.10	38.09	15.24	3.20	2.88
1500.00	1470.00	6.10	40.51	17.24	3.59	3.05
1650.00	1620.00	6.97	39.61	20.00	3.82	3.00
1750.00	1720.00	7.73	40.56	21.79	4.92	2.60
1800.00	1770.00	7.87	41.20	23.27	5.75	2.00
1950.00	1920.00	7.91	37.08	25.03	6.73	1.71
2000.00	1970.00	7.83	36.28	24.82	6.63	1.59
2150.00	2120.00	7.95	34.61	21.63	7.22	1.54
2300.00	2270.00	8.12	34.07	19.31	7.66	1.68
2400.00	2370.00	8.32	33.85	18.30	8.43	2.03
2450.00	2420.00	7.93	33.63	17.81	8.60	2.45
2500.00	2470.00	7.98	34.92	18.95	8.16	2.65

Electrical Schematic

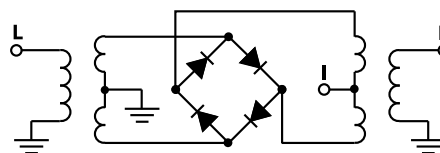

Performance Charts

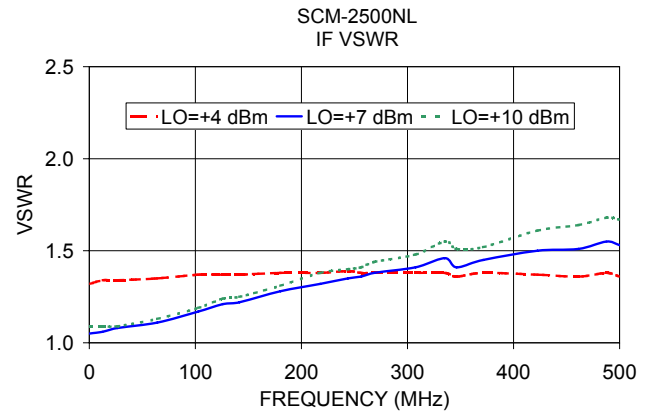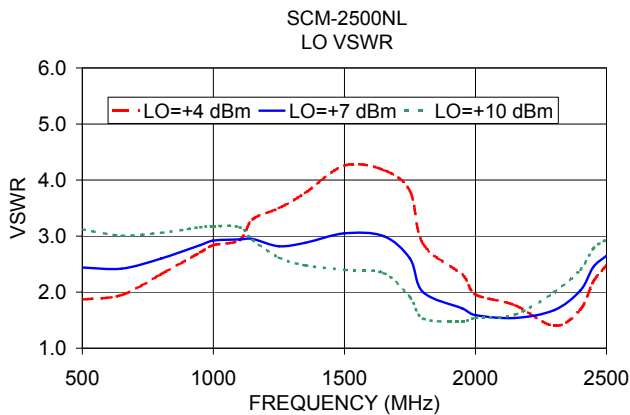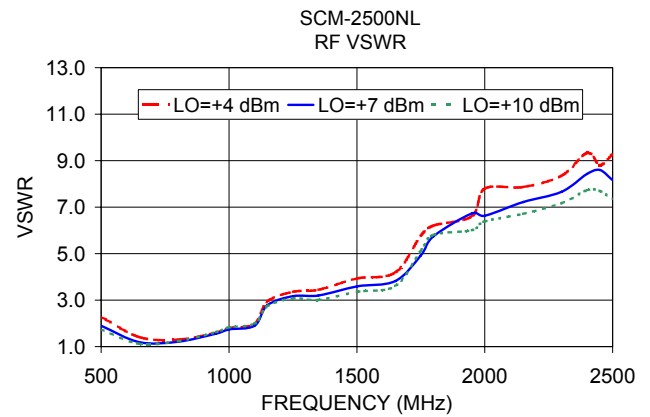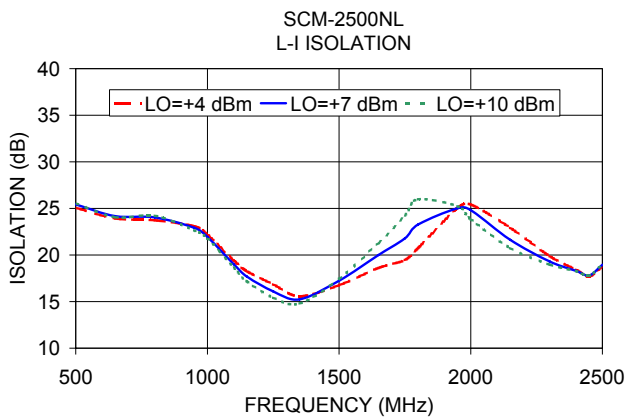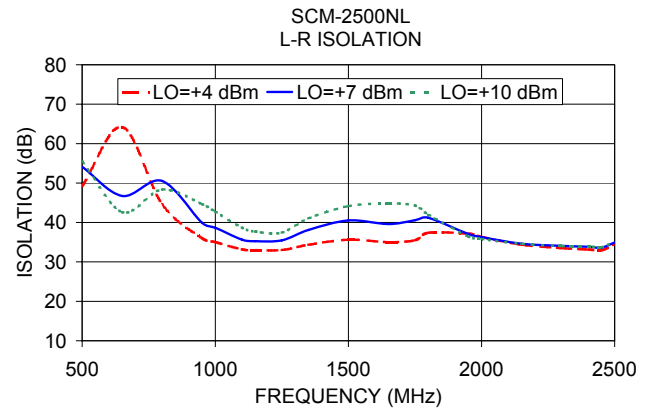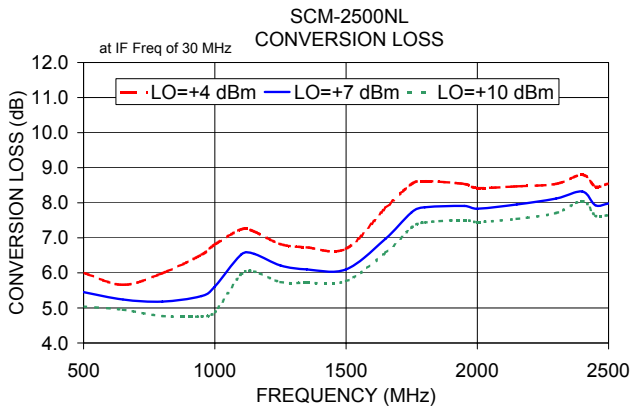

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SCM-2500NL

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
250.1	280.1	10.59	9.95	9.59	250.1	280.1	12.75	13.21	15.22	250.1	280.1	0.04	-0.02	0.02
330.4	360.4	8.87	8.25	7.91	330.4	360.4	10.68	13.32	13.61	330.4	360.4	0.40	0.34	0.30
410.6	440.6	7.51	6.91	6.59	410.6	440.6	6.37	7.17	8.15	410.6	440.6	0.89	0.77	0.63
490.9	520.9	6.50	6.01	5.77	490.9	520.9	6.49	7.42	8.75	490.9	520.9	1.30	1.08	0.89
571.1	601.1	6.17	5.77	5.59	571.1	601.1	16.84	12.84	11.68	571.1	601.1	1.48	1.10	0.86
651.4	681.4	6.36	5.95	5.75	651.4	681.4	9.90	13.40	17.43	651.4	681.4	1.85	1.52	1.26
731.6	761.6	6.12	5.54	5.29	731.6	761.6	10.79	9.86	9.75	731.6	761.6	2.91	2.49	2.11
811.9	841.9	5.89	5.16	4.83	811.9	841.9	4.08	5.29	6.18	811.9	841.9	3.52	3.17	2.77
892.1	922.1	6.13	5.31	4.90	892.1	922.1	3.06	4.67	6.29	892.1	922.1	3.23	3.10	2.87
972.4	1002.4	6.35	5.81	5.48	972.4	1002.4	1.96	3.26	4.74	972.4	1002.4	2.78	2.50	2.31
1052.6	1082.6	6.18	5.70	5.44	1052.6	1082.6	2.89	3.73	4.79	1052.6	1082.6	2.70	2.39	2.13
1132.9	1162.9	6.25	5.77	5.55	1132.9	1162.9	3.99	4.95	6.08	1132.9	1162.9	2.60	2.17	1.85
1213.2	1243.2	6.33	5.87	5.70	1213.2	1243.2	6.16	7.67	10.00	1213.2	1243.2	2.42	1.80	1.48
1293.4	1323.4	6.44	6.05	5.93	1293.4	1323.4	7.73	8.69	9.89	1293.4	1323.4	2.11	1.50	1.22
1373.7	1403.7	6.58	6.13	6.08	1373.7	1403.7	10.73	12.26	12.45	1373.7	1403.7	1.92	1.30	0.99
1453.9	1483.9	6.74	6.19	6.09	1453.9	1483.9	10.06	12.95	14.17	1453.9	1483.9	1.99	1.42	1.11
1534.2	1564.2	7.43	6.64	6.40	1534.2	1564.2	8.51	11.54	13.09	1534.2	1564.2	1.69	1.43	1.18
1614.4	1644.4	7.91	7.08	6.79	1614.4	1644.4	13.87	12.13	13.40	1614.4	1644.4	1.14	1.03	0.87
1694.7	1724.7	7.96	7.21	6.96	1694.7	1724.7	11.75	12.14	12.12	1694.7	1724.7	0.97	0.84	0.69
1774.9	1804.9	7.88	7.16	6.90	1774.9	1804.9	10.96	11.96	13.31	1774.9	1804.9	0.94	0.76	0.60
1855.2	1885.2	7.77	7.10	6.86	1855.2	1885.2	11.61	11.36	13.69	1855.2	1885.2	0.96	0.80	0.63
1935.5	1965.5	7.65	7.04	6.74	1935.5	1965.5	12.38	11.52	12.08	1935.5	1965.5	0.94	0.76	0.63
2015.7	2045.7	7.66	7.10	6.80	2015.7	2045.7	11.90	10.79	11.63	2015.7	2045.7	0.93	0.75	0.59
2096.0	2126.0	7.68	7.18	6.85	2096.0	2126.0	12.47	11.42	10.72	2096.0	2126.0	0.99	0.75	0.59
2176.2	2206.2	7.68	7.23	6.92	2176.2	2206.2	10.84	11.08	11.91	2176.2	2206.2	1.18	0.82	0.64
2256.5	2286.5	7.40	6.98	6.76	2256.5	2286.5	10.35	10.76	10.44	2256.5	2286.5	1.48	1.03	0.79
2336.7	2366.7	7.24	6.66	6.39	2336.7	2366.7	9.01	9.81	9.94	2336.7	2366.7	1.69	1.17	0.92
2417.0	2447.0	7.26	6.61	6.31	2417.0	2447.0	7.06	8.41	8.42	2417.0	2447.0	2.07	1.36	1.07
2497.2	2527.2	7.44	6.43	6.04	2497.2	2527.2	6.38	7.38	7.92	2497.2	2527.2	2.52	1.67	1.32
2577.5	2607.5	8.29	6.66	5.98	2577.5	2607.5	3.38	5.23	6.51	2577.5	2607.5	2.22	1.58	1.20
2657.7	2687.7	8.68	6.61	5.84	2657.7	2687.7	1.63	3.44	5.27	2657.7	2687.7	2.35	1.95	1.33
2738.0	2768.0	8.95	6.41	5.56	2738.0	2768.0	0.42	2.62	5.21	2738.0	2768.0	2.40	2.51	1.69
2818.3	2848.3	9.29	6.44	5.53	2818.3	2848.3	0.40	3.40	6.99	2818.3	2848.3	2.45	2.77	1.99
2898.5	2928.5	9.35	6.77	5.80	2898.5	2928.5	2.79	4.83	7.91	2898.5	2928.5	2.85	2.98	2.12
2978.8	3008.8	9.34	7.16	6.15	2978.8	3008.8	4.38	6.20	8.89	2978.8	3008.8	3.24	2.79	1.95
3059.0	3089.0	9.83	7.63	6.52	3059.0	3089.0	3.58	6.60	9.69	3059.0	3089.0	2.91	2.49	1.64
3139.3	3169.3	10.32	8.16	7.15	3139.3	3169.3	4.70	7.41	10.05	3139.3	3169.3	2.48	2.15	1.26
3219.5	3249.5	11.14	8.88	7.86	3219.5	3249.5	5.54	10.55	11.50	3219.5	3249.5	1.95	1.64	0.87
3299.8	3329.8	12.61	9.92	8.87	3299.8	3329.8	3.54	16.80	15.44	3299.8	3329.8	1.01	1.25	0.61
3400.1	3430.1	14.03	10.97	10.05	3400.1	3430.1	3.62	14.53	16.57	3400.1	3430.1	0.13	0.90	0.42



Frequency Mixer

SCM-2500NL

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
500.0	1000.1	6.62	10.0	510.1	6.00	500.0	2000.1	7.15
479.6	1020.5	6.75	22.6	522.7	5.97	487.4	2012.7	7.14
459.2	1040.9	6.70	35.1	535.2	5.99	474.9	2025.2	7.15
438.8	1061.4	6.78	47.7	547.8	6.04	462.3	2037.8	7.13
418.3	1081.8	6.87	60.3	560.4	6.04	449.7	2050.4	7.11
397.9	1102.2	6.85	72.8	572.9	6.01	437.2	2062.9	7.09
377.5	1122.6	6.99	85.4	585.5	6.02	424.6	2075.5	7.05
357.1	1143.0	7.01	97.9	598.0	5.95	412.1	2088.0	7.06
336.7	1163.4	6.97	110.5	610.6	5.94	399.5	2100.6	7.05
316.3	1183.9	6.93	123.1	623.2	5.98	386.9	2113.2	7.03
295.8	1204.3	6.80	135.6	635.7	6.00	374.4	2125.7	7.00
275.4	1224.7	6.75	148.2	648.3	6.15	361.8	2138.3	6.92
255.0	1245.1	6.65	160.8	660.9	6.21	349.2	2150.9	6.85
234.6	1265.5	6.56	173.3	673.4	6.26	336.7	2163.4	6.82
214.2	1285.9	6.52	185.9	686.0	6.41	324.1	2176.0	6.76
193.8	1306.4	6.39	198.5	698.6	6.40	311.5	2188.6	6.73
173.3	1326.8	6.29	211.0	711.1	6.51	299.0	2201.1	6.70
152.9	1347.2	6.22	223.6	723.7	6.59	286.4	2213.7	6.68
132.5	1367.6	6.19	236.2	736.3	6.62	273.8	2226.3	6.68
112.1	1388.0	6.18	248.7	748.8	6.76	261.3	2238.8	6.63
71.3	1428.9	6.26	261.3	761.4	6.73	248.7	2251.4	6.58
50.8	1449.3	6.26	273.8	773.9	6.76	236.2	2263.9	6.54
10.0	1490.1	6.41	286.4	786.5	6.85	223.6	2276.5	6.54
10.0	1510.1	6.55	299.0	799.1	6.83	211.0	2289.1	6.57
50.8	1550.9	6.45	311.5	811.6	6.97	198.5	2301.6	6.61
71.3	1571.4	6.53	324.1	824.2	7.03	185.9	2314.2	6.58
112.1	1612.2	6.74	336.7	836.8	7.07	173.3	2326.8	6.56
132.5	1632.6	6.81	349.2	849.3	7.24	160.8	2339.3	6.52
173.3	1673.4	6.98	361.8	861.9	7.27	148.2	2351.9	6.49
193.8	1693.9	7.09	374.4	874.5	7.35	135.6	2364.5	6.47
234.6	1734.7	7.20	386.9	887.0	7.45	123.1	2377.0	6.46
255.0	1755.1	7.28	399.5	899.6	7.45	110.5	2389.6	6.44
295.8	1795.9	7.34	412.1	912.2	7.58	97.9	2402.2	6.44
316.2	1816.4	7.41	424.6	924.7	7.61	85.4	2414.7	6.40
357.1	1857.2	7.56	437.2	937.3	7.61	72.8	2427.3	6.38
377.5	1877.6	7.69	449.7	949.8	7.67	60.3	2439.8	6.35
418.3	1918.4	7.81	462.3	962.4	7.67	47.7	2452.4	6.32
438.8	1938.9	7.87	474.9	975.0	7.71	35.1	2465.0	6.35
479.6	1979.7	7.93	487.4	987.5	7.78	22.6	2477.5	6.36
500.0	2000.1	7.97	500.0	1000.1	7.74	10.0	2490.1	6.55

Frequency Mixer

SCM-2500NL

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
250.1	54.97	55.83	55.65	36.23	36.09	35.88
330.4	56.23	58.93	56.23	32.53	32.38	32.55
410.6	53.63	62.38	59.59	29.28	29.65	29.94
490.9	48.30	54.74	63.25	27.31	27.78	28.11
571.1	46.72	50.74	48.85	25.34	25.71	25.93
651.4	47.45	48.72	45.46	23.63	24.12	24.47
731.6	46.28	51.27	47.81	22.38	22.93	23.26
811.9	38.77	42.74	47.09	21.24	21.70	22.04
892.1	35.09	38.02	40.72	20.06	20.54	20.77
972.4	32.44	34.87	37.29	18.66	19.04	19.15
1052.6	31.14	33.14	34.97	17.09	17.29	17.41
1132.9	30.15	32.14	33.77	15.76	15.86	15.81
1213.2	29.69	31.80	33.26	14.45	14.60	14.72
1293.4	29.78	31.89	33.33	13.60	13.92	14.28
1373.7	30.53	32.74	33.84	13.75	14.29	14.78
1453.9	30.72	33.80	35.98	14.01	14.68	15.21
1534.2	27.54	31.04	34.41	14.18	15.03	15.74
1614.4	26.95	30.99	35.33	14.55	15.61	16.53
1694.7	29.46	33.57	38.03	15.58	16.59	17.47
1774.9	33.18	37.03	40.09	16.76	17.72	18.33
1855.2	36.22	38.47	39.21	17.92	18.59	18.96
1935.5	37.72	38.61	38.55	18.95	19.32	19.43
2015.7	37.14	37.05	37.11	19.77	19.80	19.69
2096.0	37.02	36.75	36.30	20.46	20.15	19.77
2176.2	36.89	36.80	36.28	20.94	20.18	19.57
2256.5	37.36	37.77	37.56	20.91	20.04	19.45
2336.7	36.52	36.94	37.16	20.67	19.70	19.05
2417.0	36.17	36.52	36.56	19.95	19.36	18.77
2497.2	36.49	36.76	37.15	19.08	18.88	18.45
2577.5	36.87	36.02	35.85	18.06	18.08	18.02
2657.7	39.11	38.30	37.36	17.09	17.42	17.56
2738.0	41.97	40.97	38.35	16.32	16.69	16.92
2818.3	49.79	41.20	35.72	15.58	15.98	16.26
2898.5	39.44	36.00	33.06	15.20	15.63	16.02
2978.8	30.78	33.42	32.41	15.70	16.07	16.49
3059.0	29.35	32.95	33.19	16.56	16.75	17.02
3139.3	29.91	33.75	34.38	17.02	16.87	16.94
3219.5	30.99	34.92	36.26	16.69	16.49	16.40
3299.8	32.70	36.41	38.04	15.90	15.83	15.59
3400.1	35.24	38.57	40.82	14.95	14.92	14.75

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	24.62	23.87	23.29
330.4	360.4	23.14	22.37	21.70
410.6	440.6	21.62	21.07	20.81
490.9	520.9	20.81	20.17	19.84
571.1	601.1	18.61	17.95	17.54
651.4	681.4	17.34	16.86	16.47
731.6	761.6	17.31	17.06	16.88
811.9	841.9	20.08	19.74	19.27
892.1	922.1	26.64	25.21	23.70
972.4	1002.4	34.31	31.10	29.00
1052.6	1082.6	27.22	25.40	23.61
1132.9	1162.9	22.54	20.76	19.57
1213.2	1243.2	19.03	17.50	16.77
1293.4	1323.4	18.10	17.00	16.39
1373.7	1403.7	18.66	17.79	17.13
1453.9	1483.9	21.20	20.70	20.10
1534.2	1564.2	19.06	19.15	19.07
1614.4	1644.4	18.20	18.59	18.77
1694.7	1724.7	19.09	19.65	19.92
1774.9	1804.9	20.64	21.04	21.14
1855.2	1885.2	22.06	22.39	22.61
1935.5	1965.5	23.23	23.37	23.50
2015.7	2045.7	24.31	24.30	24.53
2096.0	2126.0	25.28	25.35	25.35
2176.2	2206.2	26.31	26.41	26.38
2256.5	2286.5	27.26	27.28	27.27
2336.7	2366.7	27.96	27.94	27.86
2417.0	2447.0	28.75	28.75	28.62
2497.2	2527.2	29.58	29.21	29.03
2577.5	2607.5	30.73	29.84	29.26
2657.7	2687.7	31.19	29.93	29.03
2738.0	2768.0	30.18	29.02	28.23
2818.3	2848.3	28.40	28.52	28.34
2898.5	2928.5	27.44	29.16	30.75
2978.8	3008.8	26.43	27.35	28.49
3059.0	3089.0	23.39	24.41	25.58
3139.3	3169.3	21.33	22.95	24.40
3219.5	3249.5	20.84	22.75	24.49
3299.8	3329.8	21.30	23.38	25.26
3400.1	3430.1	23.01	25.03	27.08

Frequency Mixer

SCM-2500NL

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
250.1	280.1	10.96	9.69	9.18
330.4	360.4	6.73	6.05	5.72
410.6	440.6	4.26	3.84	3.62
490.9	520.9	2.80	2.56	2.46
571.1	601.1	2.27	2.18	2.16
651.4	681.4	2.25	2.17	2.13
731.6	761.6	2.13	1.95	1.85
811.9	841.9	1.95	1.69	1.54
892.1	922.1	2.09	1.81	1.63
972.4	1002.4	2.31	2.21	2.10
1052.6	1082.6	2.39	2.36	2.32
1132.9	1162.9	2.58	2.53	2.52
1213.2	1243.2	2.72	2.69	2.71
1293.4	1323.4	2.81	2.82	2.85
1373.7	1403.7	2.78	2.75	2.78
1453.9	1483.9	2.75	2.59	2.55
1534.2	1564.2	3.05	2.89	2.80
1614.4	1644.4	3.35	3.29	3.26
1694.7	1724.7	3.89	3.73	3.70
1774.9	1804.9	4.45	4.13	4.00
1855.2	1885.2	4.86	4.35	4.12
1935.5	1965.5	5.17	4.66	4.26
2015.7	2045.7	5.27	4.89	4.53
2096.0	2126.0	5.36	4.98	4.63
2176.2	2206.2	5.30	4.87	4.61
2256.5	2286.5	4.99	4.48	4.17
2336.7	2366.7	4.80	4.19	3.80
2417.0	2447.0	4.37	3.79	3.42
2497.2	2527.2	4.27	3.45	2.97
2577.5	2607.5	4.56	3.43	2.92
2657.7	2687.7	4.20	2.90	2.44
2738.0	2768.0	3.63	2.30	1.87
2818.3	2848.3	2.86	1.74	1.39
2898.5	2928.5	2.08	1.37	1.25
2978.8	3008.8	1.49	1.16	1.47
3059.0	3089.0	1.07	1.43	1.96
3139.3	3169.3	1.57	2.09	2.83
3219.5	3249.5	2.61	3.15	4.09
3299.8	3329.8	4.28	4.60	5.70
3400.1	3430.1	7.25	7.08	8.20

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
250.1	2.05	2.73	3.56
330.4	2.07	2.74	3.53
410.6	2.08	2.72	3.45
490.9	2.10	2.70	3.37
571.1	2.12	2.66	3.29
651.4	2.18	2.67	3.25
731.6	2.29	2.70	3.21
811.9	2.53	2.84	3.26
892.1	2.74	2.93	3.27
972.4	2.89	2.99	3.24
1052.6	2.95	2.95	3.13
1132.9	2.95	2.78	2.86
1213.2	2.98	2.62	2.60
1293.4	3.14	2.61	2.44
1373.7	3.19	2.54	2.25
1453.9	3.15	2.42	2.04
1534.2	3.03	2.28	1.83
1614.4	2.89	2.12	1.68
1694.7	2.68	1.98	1.59
1774.9	2.41	1.86	1.60
1855.2	2.14	1.80	1.70
1935.5	1.96	1.82	1.86
2015.7	1.87	1.90	2.05
2096.0	1.85	2.03	2.26
2176.2	1.92	2.21	2.49
2256.5	2.07	2.41	2.73
2336.7	2.25	2.60	2.93
2417.0	2.49	2.78	3.10
2497.2	2.78	2.98	3.25
2577.5	3.15	3.22	3.43
2657.7	3.52	3.47	3.60
2738.0	3.87	3.70	3.73
2818.3	4.15	3.94	3.88
2898.5	4.39	4.24	4.15
2978.8	4.74	4.55	4.41
3059.0	5.06	4.78	4.51
3139.3	5.23	4.89	4.56
3219.5	5.34	4.96	4.60
3299.8	5.41	4.96	4.56
3400.1	5.36	4.88	4.44

IF (OUT) (MHz)	IF VSWR @LO=2500.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
10.0	1.31	1.20	1.27
22.6	1.33	1.05	1.11
35.1	1.30	1.14	1.23
47.7	1.32	1.19	1.27
60.3	1.37	1.21	1.29
72.8	1.39	1.21	1.28
85.4	1.41	1.24	1.31
97.9	1.44	1.31	1.37
110.5	1.50	1.39	1.45
123.1	1.54	1.46	1.51
135.6	1.57	1.48	1.52
148.2	1.56	1.49	1.54
160.8	1.58	1.51	1.59
173.3	1.64	1.57	1.64
185.9	1.70	1.62	1.67
198.5	1.74	1.67	1.70
211.0	1.76	1.70	1.72
223.6	1.78	1.74	1.77
236.2	1.83	1.81	1.85
248.7	1.90	1.87	1.91
261.3	1.95	1.89	1.93
273.8	1.96	1.88	1.91
286.4	1.96	1.90	1.93
299.0	2.00	1.96	2.00
311.5	2.06	2.06	2.09
324.1	2.11	2.11	2.14
336.7	2.10	2.09	2.11
349.2	2.05	2.04	2.05
361.8	2.04	2.01	2.04
374.4	2.06	2.04	2.07
386.9	2.10	2.07	2.09
399.5	2.10	2.07	2.07
412.1	2.07	2.04	2.02
424.6	2.04	2.01	2.00
437.2	2.03	2.02	2.02
449.7	2.03	2.01	2.01
462.3	2.01	1.97	1.96
474.9	1.95	1.91	1.89
487.4	1.89	1.85	1.83
500.0	1.87	1.84	1.82

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+13	26	14	30	13	34	29	33	31	47
1	-	15	+0	28	32	37	43	41	44	46	48	39
2	99	57	62	45	55	73	56	66	48	59	55	61
3	>100	68	77	62	63	77	>79	78	79	70	75	>79
4	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
5	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -14.00 dBm.
 LO IN: 1530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -20.92 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	37	25	43	26	52	46	54	52	58
1	-	14	+0	28	31	37	45	44	49	52	54	53
2	82	46	56	39	48	78	50	59	43	56	51	59
3	>100	50	55	43	38	54	60	56	63	61	60	67
4	>100	79	82	73	64	56	65	69	67	70	59	65
5	>100	75	84	74	87	63	71	79	79	76	80	77
6	>100	84	81	>89	88	>89	71	78	81	83	80	82
7	>100	>89	>89	>89	>89	>89	>89	82	77	>89	86	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	84	80	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 1500.1 MHz; -4.00 dBm.
 LO IN: 1530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -10.89 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.




Typical Performance Curves


Conversion Loss @ IF=30MHz

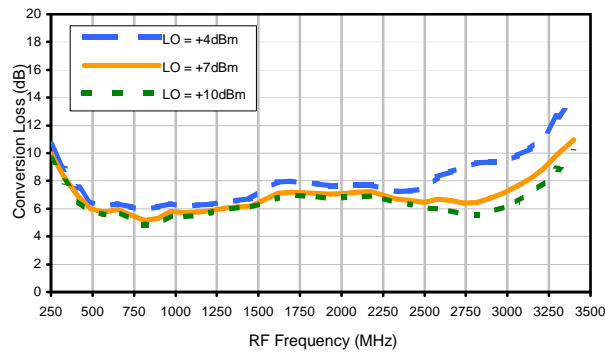


Conversion Loss vs. LO @ RF=1500.1MHz

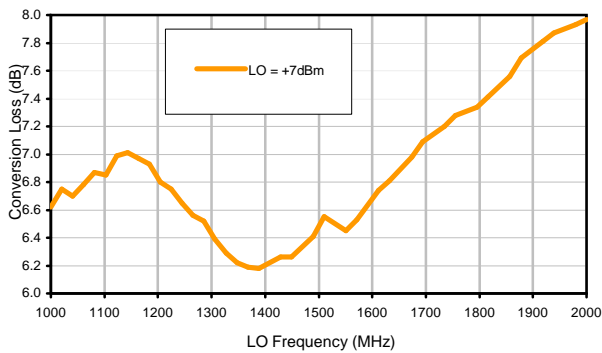


Conversion Loss vs. IF @ RF=1500.1MHz

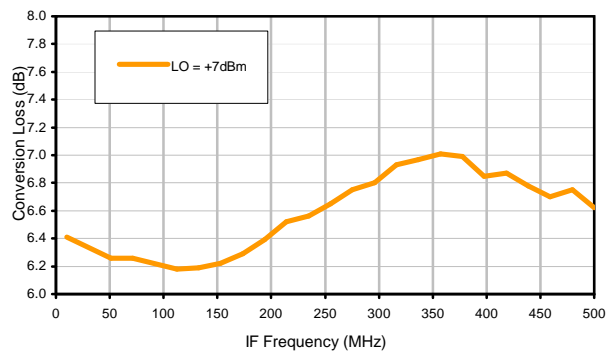


Conversion Loss vs. IF @ RF=500.1MHz

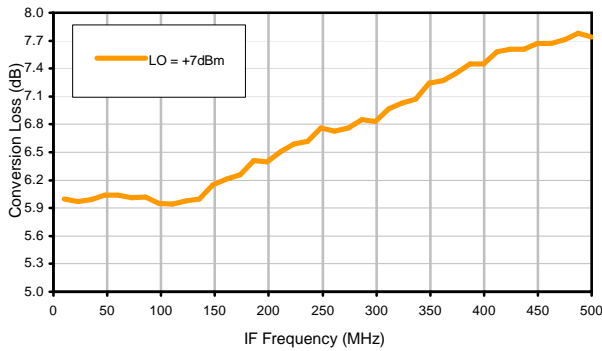


Conversion Loss vs. IF @ RF=2500.1MHz

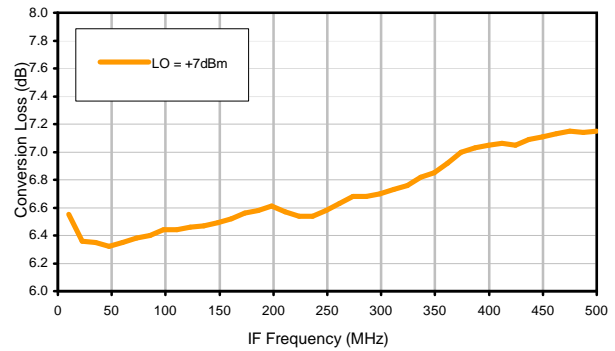

IP3 Input

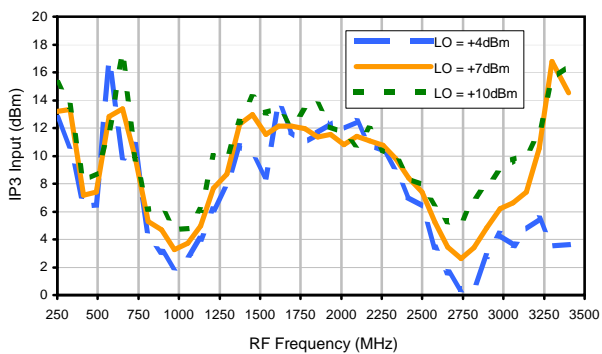


Compression @ RF IN=+1dBm

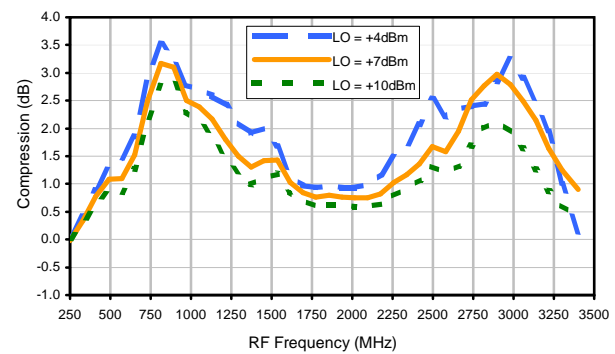


Typical Performance Curves


LO-RF Isolation

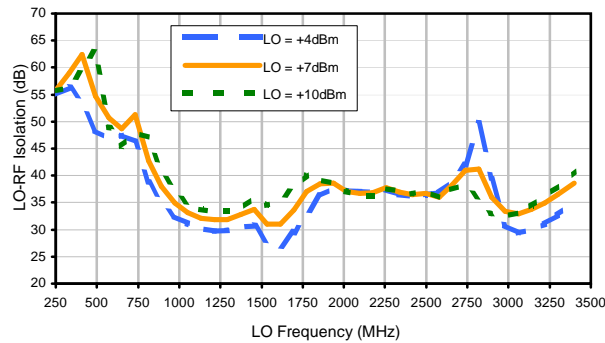


LO-IF Isolation

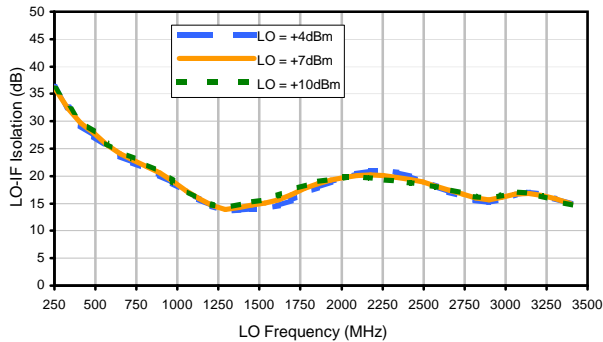


RF-IF Isolation

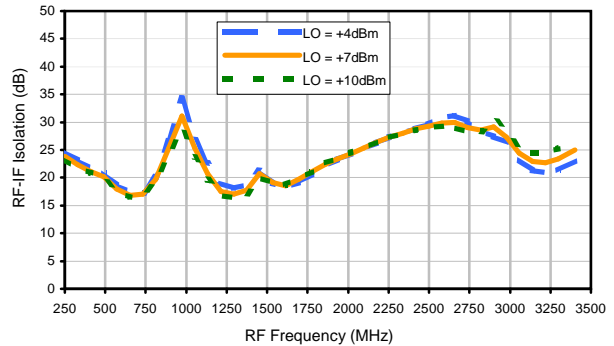


RF VSWR

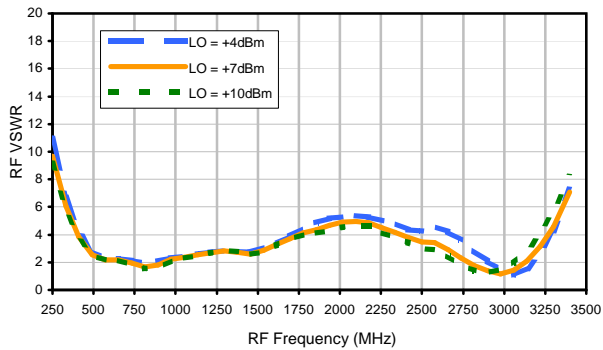

LO VSWR

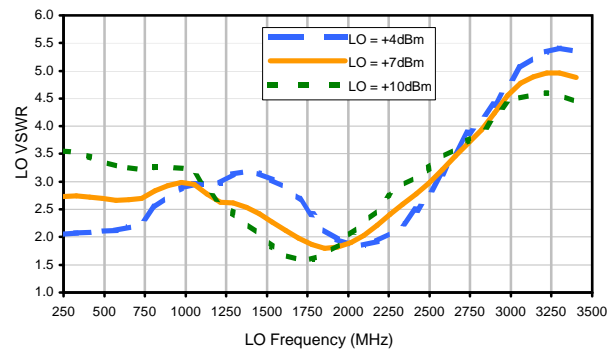

IF VSWR

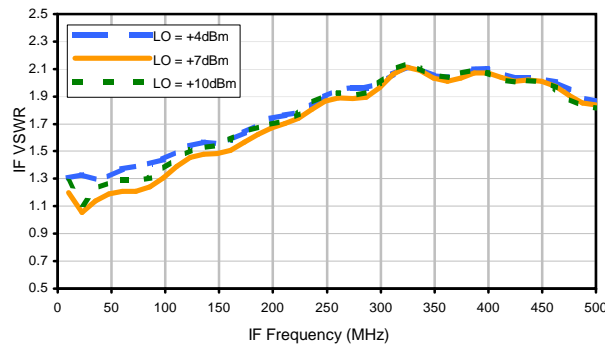

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+13	26	14	30	13	34	29	33	31	47
1	-	15	+0	28	32	37	43	41	44	46	48	39
2	99	57	62	45	55	73	56	66	48	59	55	61
3	>100	68	77	62	63	77	>79	78	79	70	75	>79
4	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
5	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>100	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -14.00 dBm.
 LO IN: 1530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -20.92 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	37	25	43	26	52	46	54	52	58
1	-	14	+0	28	31	37	45	44	49	52	54	53
2	82	46	56	39	48	78	50	59	43	56	51	59
3	>100	50	55	43	38	54	60	56	63	61	60	67
4	>100	79	82	73	64	56	65	69	67	70	59	65
5	>100	75	84	74	87	63	71	79	79	76	80	77
6	>100	84	81	>89	88	>89	71	78	81	83	80	82
7	>100	>89	>89	>89	>89	>89	>89	82	77	>89	86	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	84	80	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 1500.1 MHz; -4.00 dBm.
 LO IN: 1530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -10.89 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.




Outline Dimensions

YY101
YY109
YY161

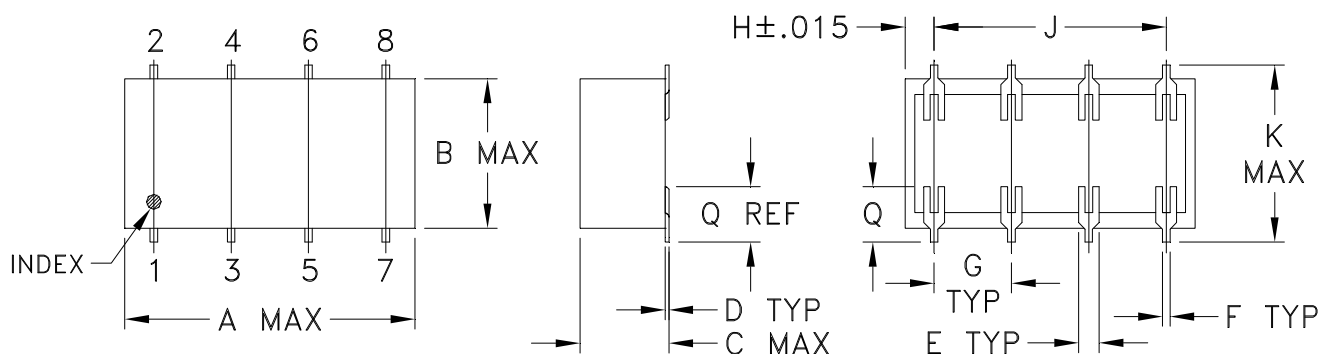

PCB Land Pattern

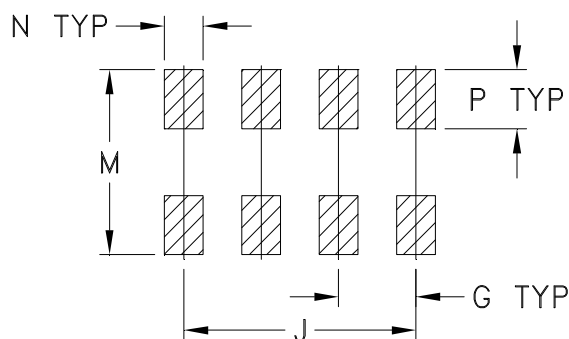

Suggested Layout
Tolerance to be within $\pm .002$


CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAMS
YY101*			.20 (5.08)							.450 (11.43)	-- (11.94)	.470 (11.94)				1.6
YY109*	.75 (19.05)	.38 (9.65)	.20 (5.08)	.010 (0.25)	.050 (1.27)	.020 (0.51)	.200 (5.08)	.075 (1.91)	.600 (15.24)	.720 (18.29)	-- (18.80)	.740 (18.80)	.100 (2.54)	.150 (3.81)	.148 (3.76)	1.6
YY161			.28 (7.11)							.450 (11.43)	-- (11.94)	.470 (11.94)				1.6

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.
- Special Tolerances: Termination thickness $\pm .003$ inch.
- * Denotes: For SCM mixers, long termination version (case YY109) is available upon request, consult factory. To order short termination version (case YY101) add -NL suffix.

Tape & Reel Packaging TR-F5

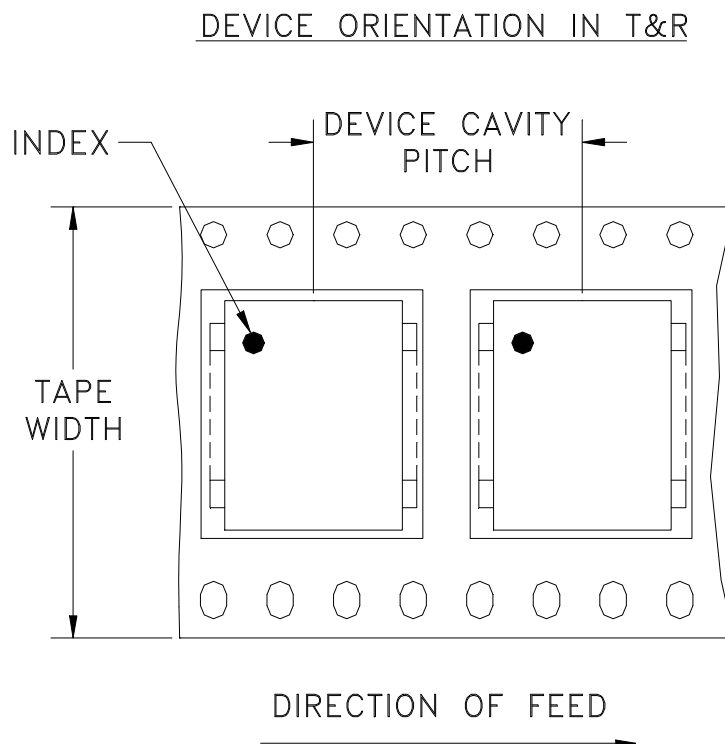

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL


SUGGESTED MOUNTING CONFIGURATION
FOR YY101 CASE STYLE, "d" PIN CONNECTION

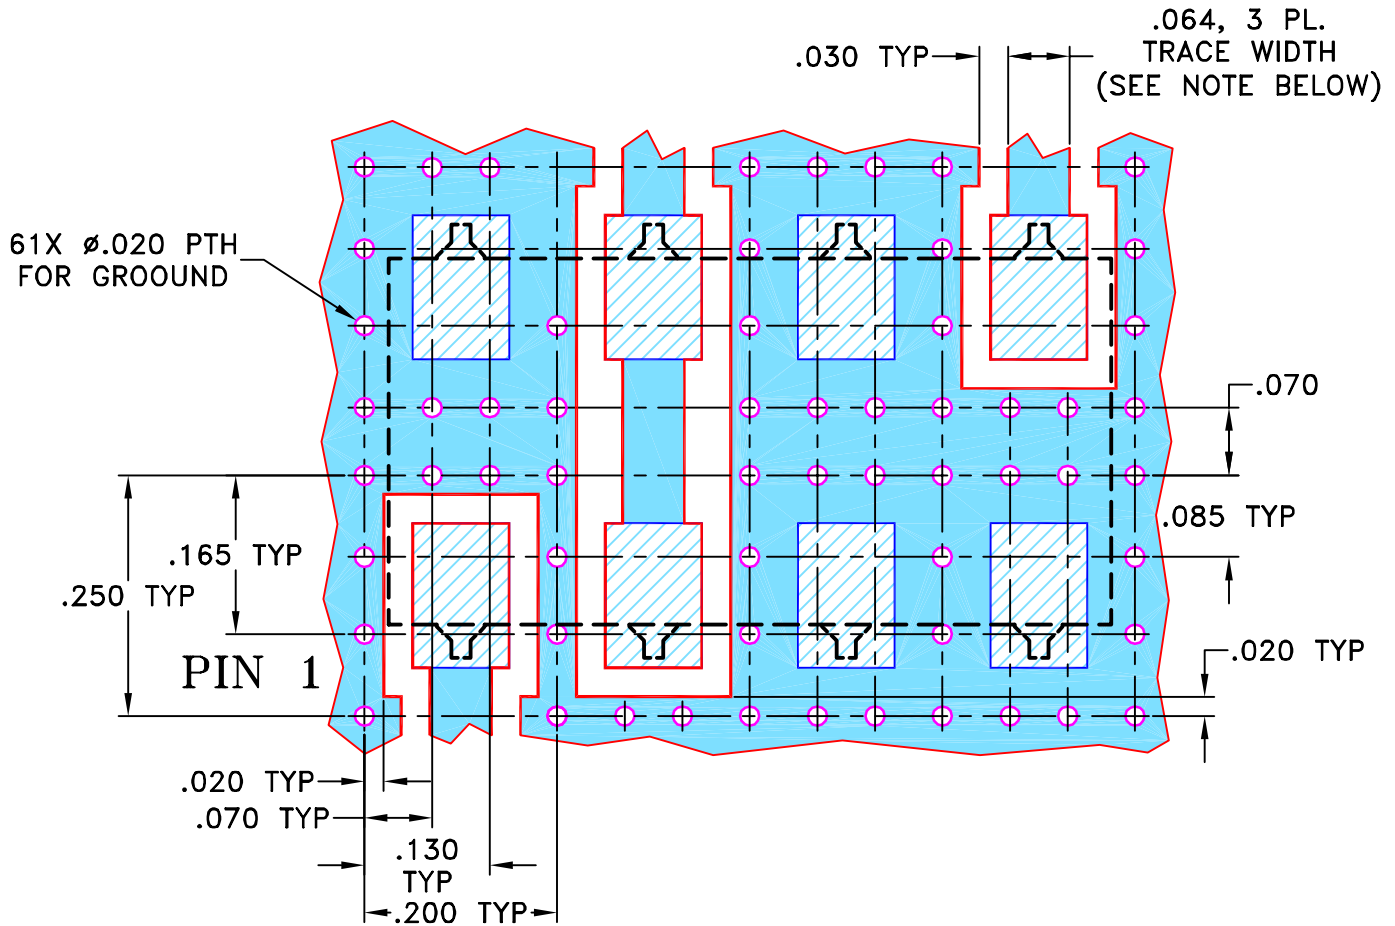

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN AV	07/22/02
TOLERANCES ON:	CHECKED WL	08/02/02
2 PL DECIMALS ±	APPROVED DJ	08/02/02
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		



Mini-Circuits®


13 Neptune Avenue
 Brooklyn NY 11235

PL, d, YY101, SCM, TB-170


Mini-Circuits®
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-084	A
FILE:	98PL084	SCALE:	5:1
		SHEET:	1 OF 1

Evaluation Board and Circuit

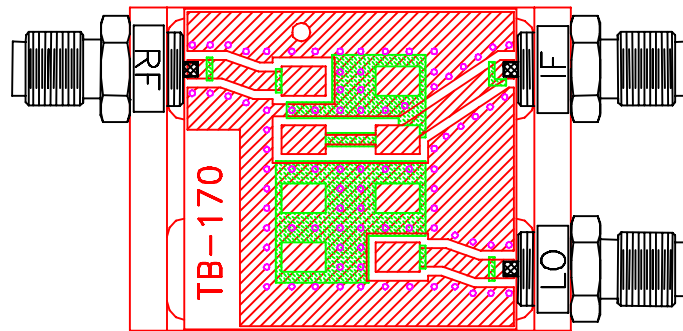


TB-170

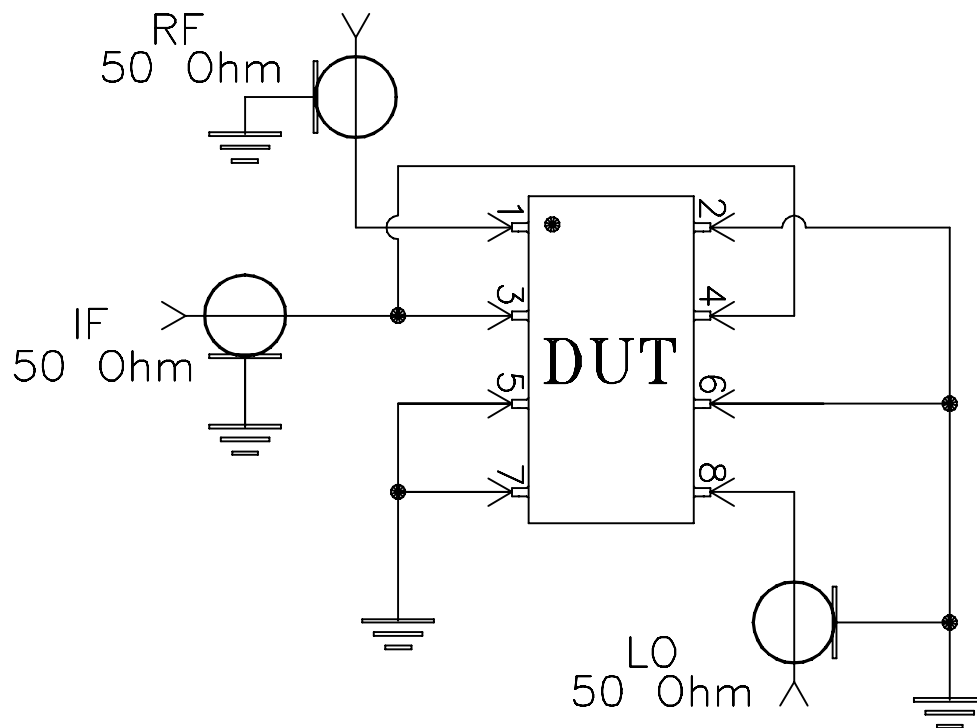

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215