SURFACE MOUNT top hat

RF Transformer

SCTX4-32HP-20W+

12.5/50Ω 1 to 310 MHz 20 Watt 1:4 Ratio

THE BIG DEAL

- High Power Input, 20 Watt max.
- Low Insertion Loss, 0.3 dB typ.
- Small size, 0.50 × 0.50 × 0.20"
- Excellent Return Loss, 23 dB typ.
- DC pass from IN to OUT



Generic photo used for illustration purposes only

CASE STYLE: CK2335

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Military mobile
- PCS
- BALUN
- Diode matching

PRODUCT OVERVIEW

Mini-Circuits' SCTX4-32HP-20W+ is a high-power, surface-mount transformer with a secondary/primary impedance ratio of 1:4, covering the 1.0 to 320 MHz band. DC current pass IN to OUT, the transformer is capable of handling RF input power up to 20W. It provides low insertion loss (0.3 dB) as well as good matching VSWR 1.10:1. Featuring core and wire construction mounted on PCB, the unit comes enclosed in a miniature, shielded package measuring just 0.50 × 0.50 × 0.20", ideal for dense circuit board layouts.

KEY FEATURES

Feature	Advantages
High RF Power Handling (20W)	Supports systems with high power requirements in small device size.
Low Insertion Loss, 0.3 dB	Provides excellent transmission of signal power from input to output.
Good Return Loss, 20 dB typ	Provide good in to output impedance matching.
Small footprint, 0.50 × 0.50 × 0.20"	Accommodates tight space requirements for dense PCB layouts.

REV. B
ECO-029613
SCTX4-32HP-20W+
MCL NY
260604

SURFACE MOUNT top hat

RF Transformer SCTX4-32HP-20W+

12.5/50Ω 1 to 310 MHz 20 Watt 1:4 Ratio

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			4		
Frequency Range		1	—	310	MHz
Insertion Loss (average)	5 - 100 1 - 310	— —	0.3 0.5	0.5 0.9	dB
Return Loss	5 - 100 1 - 310	20 14	30 20	— —	dB
Input Power	5 - 100	—	—	20	Watt


** Below 30 MHz current need to be linary decreased to 0 mA to achieve specified performance.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C case*
Storage Temperature	-55°C to 100°C
DC Current	1A/max **

*Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION D1

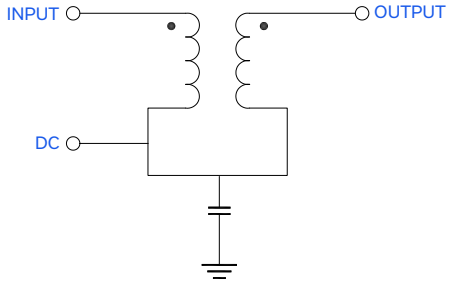

SURFACE MOUNT top hat


RF Transformer SCTX4-32HP-20W+

12.5/50Ω 1 to 310 MHz 20 Watt 1:4 Ratio

PAD CONNECTIONS


PRIMARY (12.5 ohm)	4,5
SECONDARY (50 ohm)	8,9
DC IN	1,2
GND	all others

OUTLINE DRAWING

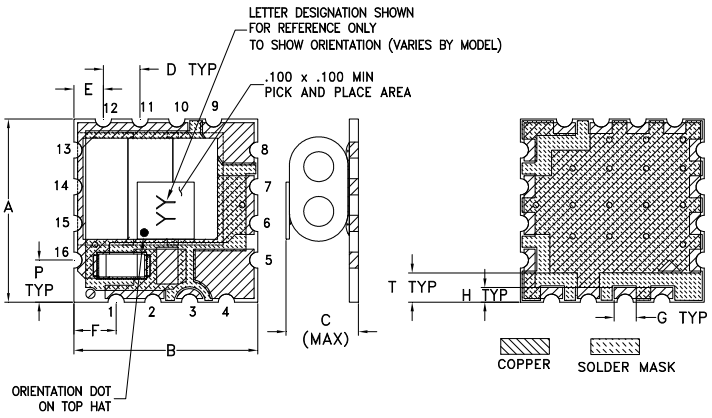


PRODUCT MARKING: N/A

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

DEMO BOARD MCL P/N: TB-SCTX432HP20W
SUGGESTED PCB LAYOUT (PL-533)

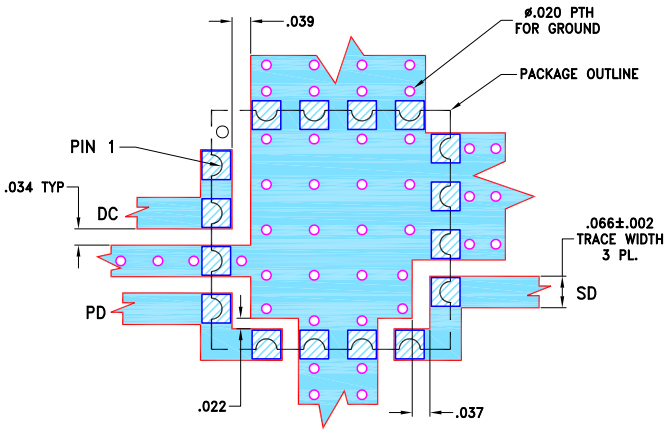

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B, WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

OUTLINE DIMENSIONS (Inch / mm)


A	B	C	D	E	F	G	H
.500	.500	.209	.100	.080	.115	.060	.040
12.70	12.70	5.31	2.54	2.03	2.92	1.52	1.02


J	K	L	M	N	P	T	wt.
.540	.060	.100	.135	.135	.115	.080	grams
13.72	1.52	2.54	3.43	3.43	2.92	2.03	1.0

TAPE & REEL INFORMATION: F37

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Primary Return Loss (dB)
1	0.17	20.57
51	0.17	34.31
100	0.22	31.23
130	0.25	28.86
160	0.29	27.77
190	0.33	25.54
220	0.38	23.53
250	0.43	21.43
280	0.50	19.39
310	0.58	17.40

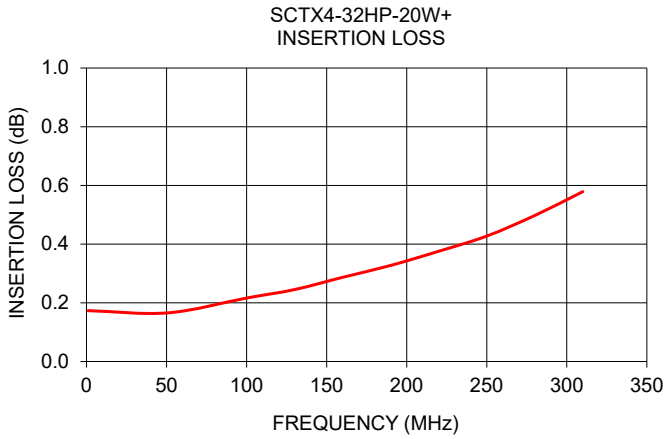

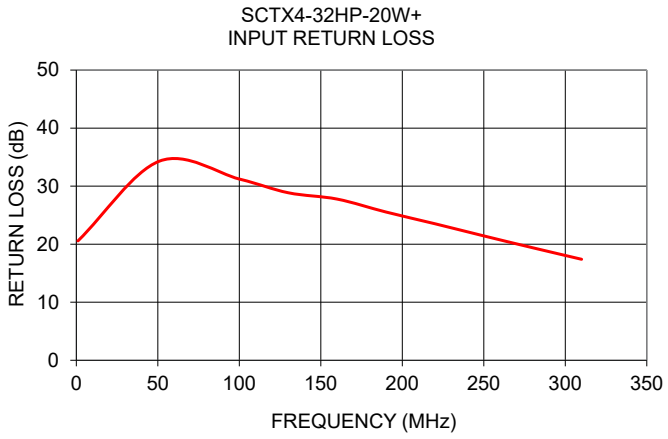

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html


RF Transformer SCTX4-32HP-20W+

Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
1	0.17	20.57
5	0.20	30.42
9	0.17	32.79
13	0.16	34.25
17	0.16	34.94
21	0.15	35.09
25	0.15	35.08
29	0.16	35.18
30	0.16	35.18
33	0.16	35.02
36	0.16	34.93
39	0.16	34.75
42	0.16	34.65
45	0.16	34.50
48	0.16	34.40
51	0.17	34.31
54	0.17	34.17
57	0.17	33.98
60	0.17	33.90
63	0.18	33.66
66	0.18	33.47
69	0.18	33.21
72	0.18	33.09
75	0.19	32.88
78	0.19	32.69
81	0.19	32.60
84	0.20	32.36
87	0.20	32.14
88	0.20	32.04
90	0.21	31.93
100	0.22	31.23
130	0.25	28.86
160	0.29	27.77
190	0.33	25.54
220	0.38	23.53
250	0.43	21.43
280	0.50	19.39
310	0.58	17.40
340	0.69	15.49
370	0.83	13.61
400	1.03	11.81

Typical Performance Data

Insertion Loss

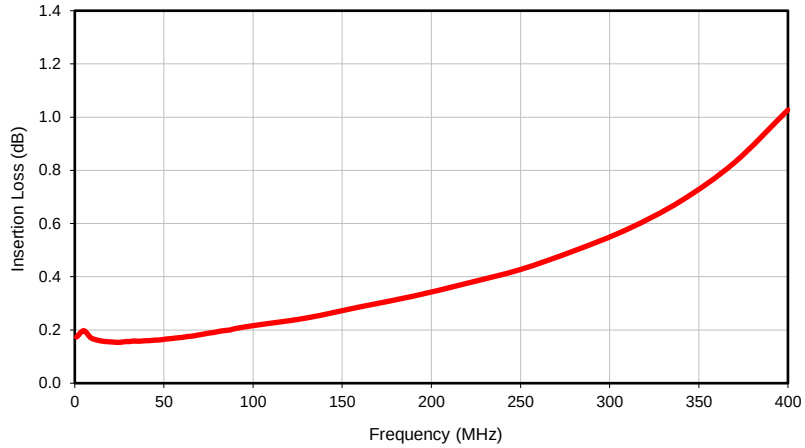


Return Loss

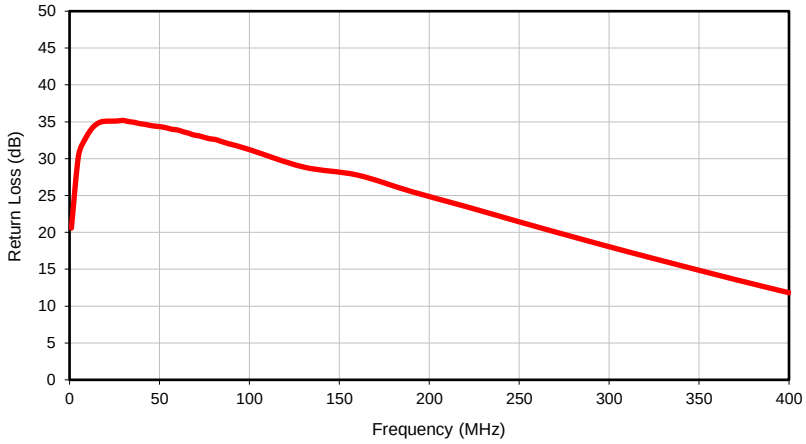


Case Style CK

Outline Dimensions CK2335

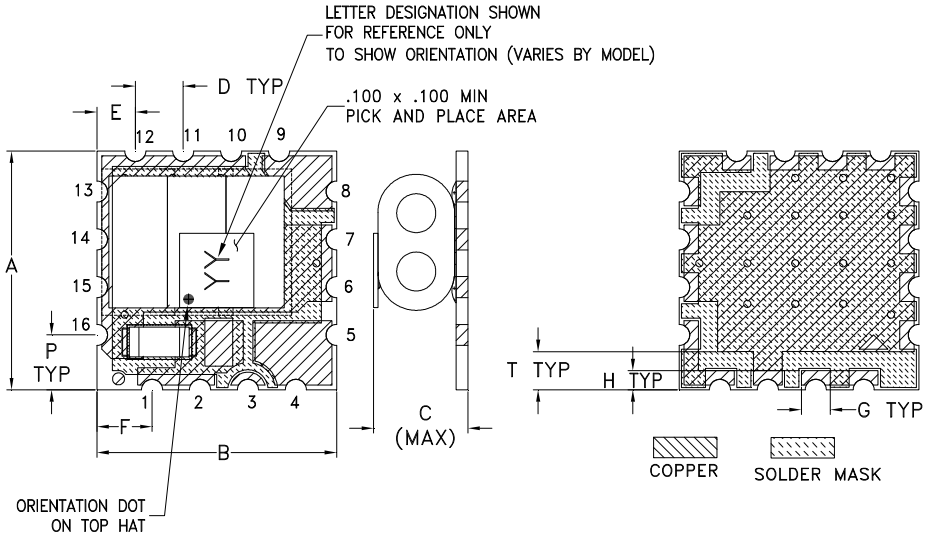

PCB Land Pattern

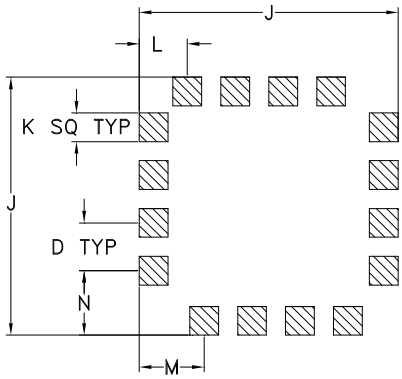

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K
CK2335	.500 (12.70)	.500 (12.70)	.209 (5.31)	.100 (2.54)	.080 (2.03)	.115 (2.92)	.060 (1.52)	.040 (1.02)	.540 (13.72)	.060 (1.52)

CASE #	L	M	N	P	Q	R	S	T	WT. GRAM
CK2335	.100 (2.54)	.135 (3.43)	.135 (3.43)	.115 (2.92)	-- --	-- --	-- --	.080 (2.03)	1.0

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3Pl. ± .015


Notes:

1. Case material: Nickel-Silver alloy.
2. Base: Printed wiring laminate.
3. Termination finish:
   For RoHS Case Styles: 3-5 µ inch (.08-.13 microns) Gold over 120-240 µ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED
ALL NEW minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com
RF/IF MICROWAVE COMPONENTS

This document and its contents are the property of Mini-Circuits

Tape & Reel Packaging TR-F37

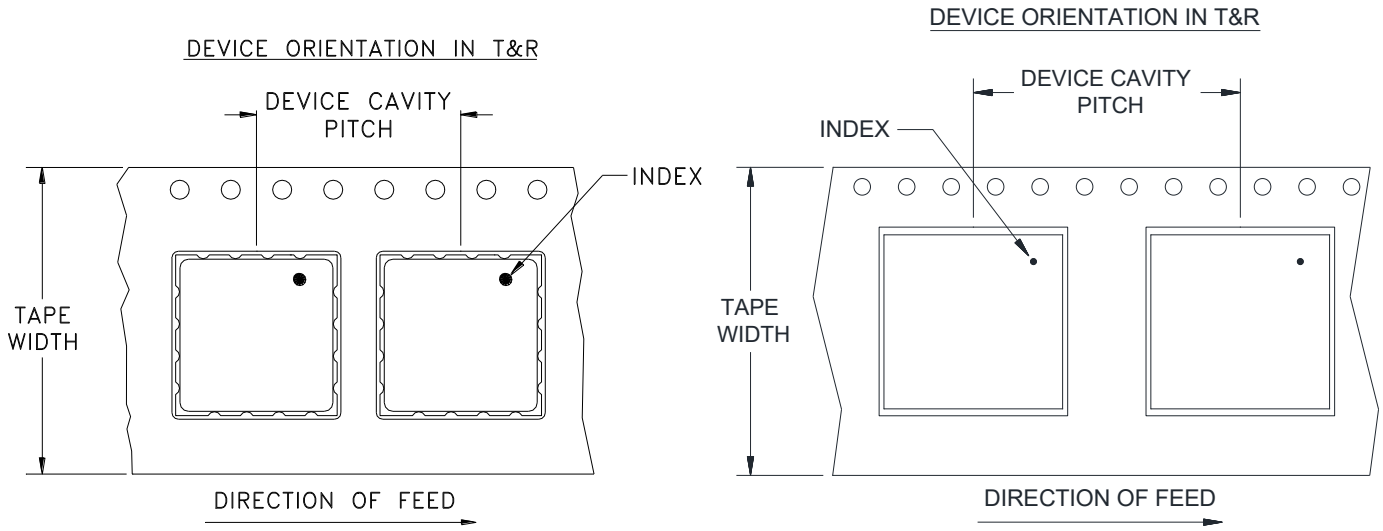

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	16	7	Small quantity standards (see note)	10
				20
				50
				100
		13	Standard	200
				500

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf


Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M164442	NEW RELEASE	12/14/17	ITG	TN

SUGGESTED MOUNTING CONFIGURATION FOR CK2335 CASE STYLE "16TD01" PIN CODE

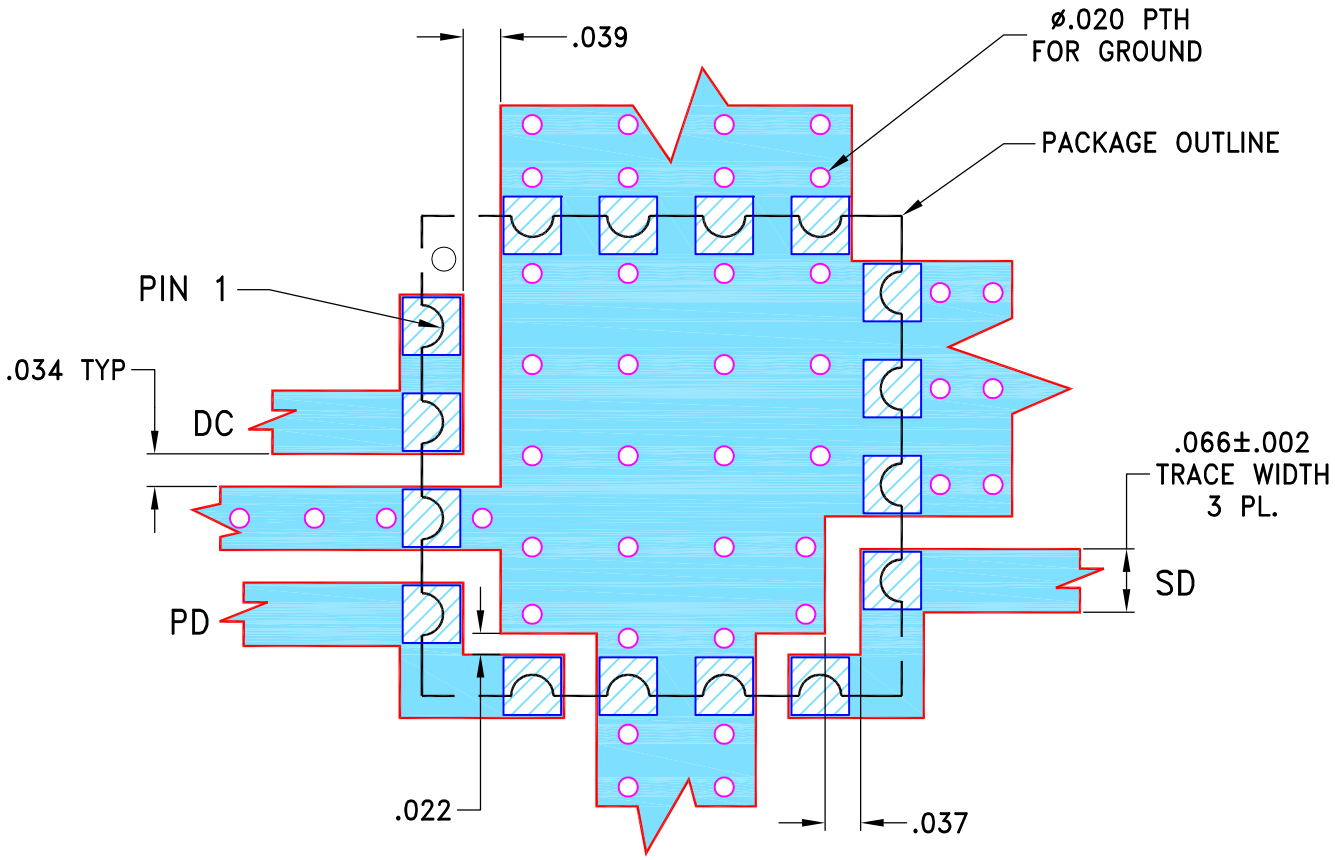

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B, WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 Oz. EACH SIDE.
   FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	ITG	12/14/17
TOLERANCES ON:	CHECKED	GF	12/14/17
2 PL DECIMALS ±	APPROVED	TN	12/14/17
3 PL DECIMALS ± .005"			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 16TD01, CK2335, TB-930+


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-533	OR

FILE:	SCALE:	SHEET:
98PL533	5:1	1 OF 1

Evaluation Board and Circuit

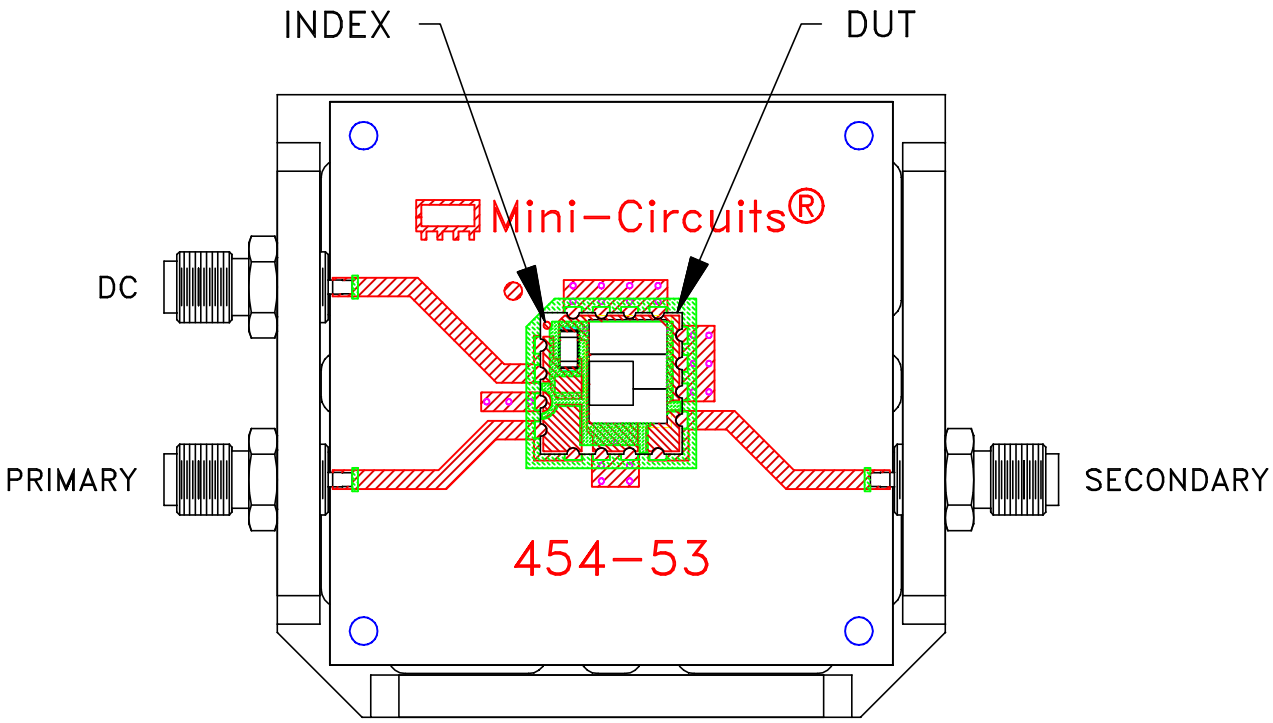

TB-SCTX432HP20W

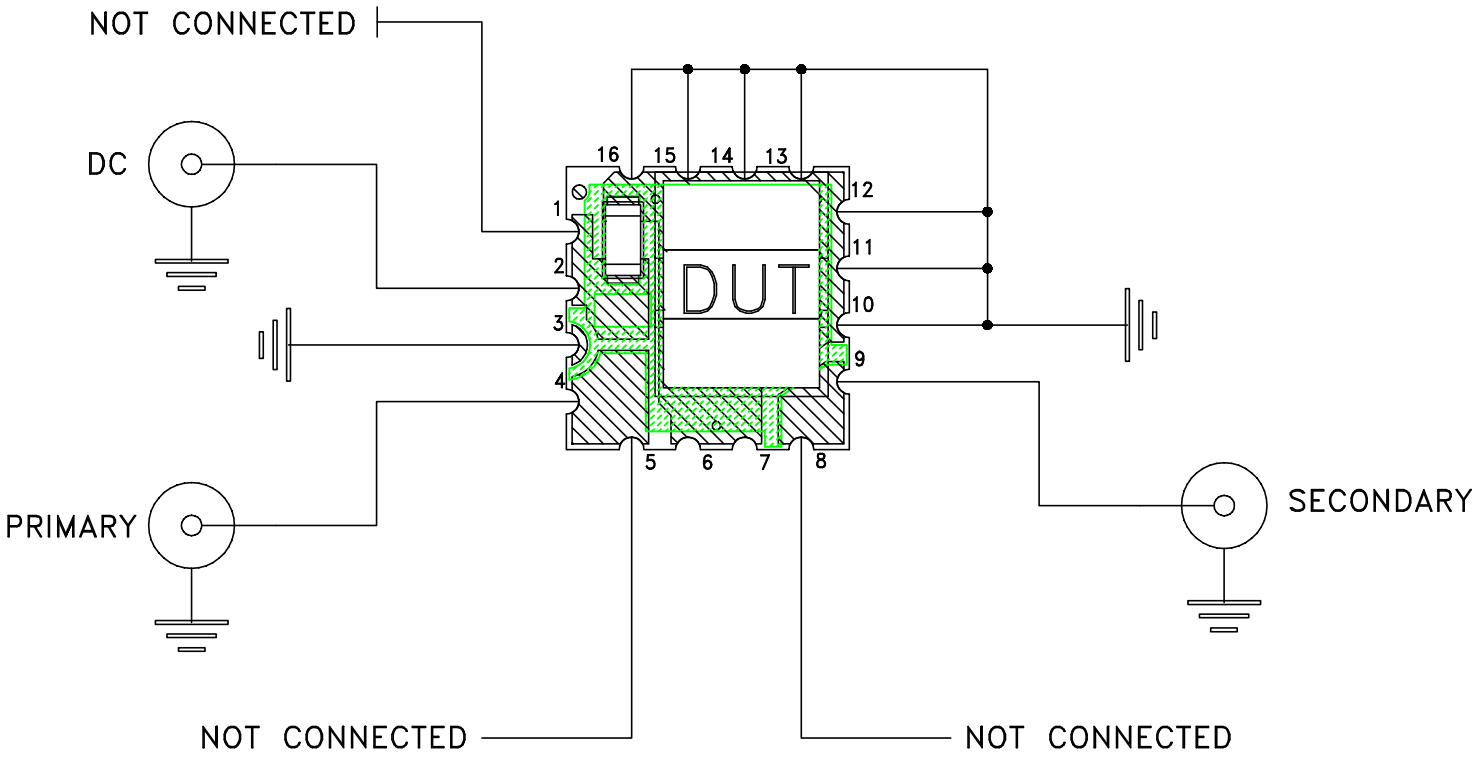

Notes:
1. 50 Ohm SMA Female connectors.
2. PCB Material: ROGERS (R04350) or Equivalent Dielectric Constant=3.48±.05, Thickness=.030 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications **ENV23T16**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 65° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C

This document and its contents are the property of Mini-Circuits.