

# Coaxial Matching Pad

## SFFF-5075+

50/75Ω DC to 3000 MHz

### The Big Deal

- Wideband coverage, DC to 3000 MHz
- Good return loss
- Good power handling, 1W



Generic photo used for illustration purposes only

CASE STYLE: FF1833

### Product Overview

Mini-Circuits' SFFF-5075+ is a coaxial 50/75Ω matching pad covering the DC to 3000 MHz frequency range, supporting impedance matching in a wide range of systems. Including CATV, broadband networks and more. This model is ideal for 50/75Ω impedance matching in systems where minimizing mismatch and signal reflections is a priority. The matching pad housed in a rugged unibody construction with SMA-female (50Ω) to F-female (75Ω) connectors.

### Key Features

Feature	Advantages
Wideband, DC to 3000 MHz	Supports a wide variety of applications including CATV systems and equipment.
Compact size, 0.67" x 2.26"	Accommodates tight space requirements for crowded system layouts.
Connectorized package	Easy to interface with other devices and well suited for test setups. Also supports connection between components with different connector types.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Matching Pad

50/75Ω

DC to 3000 MHz

SFFF-5075+



Generic photo used for illustration purposes only

CASE STYLE: FF1833

Connectors	Model
75Ω F-F	SFFF-5075+
50Ω F-SMA	

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Maximum Ratings


Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	1W

Permanent damage may occur if any of these limits are exceeded.

## Coaxial Connections

75 Ω	F-Female
50 Ω	SMA-Female

## Outline Drawing

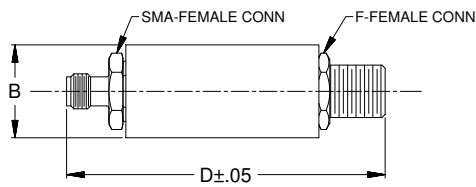


## Outline Dimensions (inch/mm)

A	B	C	D	E	Wt.
--	.67	--	2.26	--	grams
--	17.02	--	57.40	--	32.2

Note: Please refer to case style drawing for details

## Functional Schematic

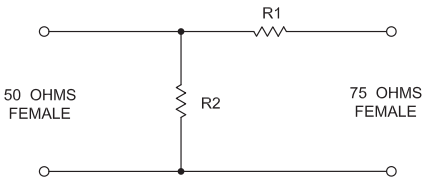

## Features

- Wideband coverage, DC to 3000 MHz
- Good return loss
- Rugged unibody construction
- Unidirectional only, 50-75Ω

## Applications

- Impedance matching
- CATV Systems

## Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC	--	3000	MHz
Attenuation	Nominal	DC - 3000	--	5.9	--
	Flatness <sup>1</sup>	DC - 3000	--	--	0.4
75 Ω Return Loss	DC - 100	35	50	--	--
	100 - 1200	--	22	--	--
50 Ω Return Loss	DC - 100	38	50	--	--
	100 - 1200	--	30	--	--
Input Power	1200 - 3000	--	15	--	--
	DC - 3000	--	--	1	W

1. Flatness= variation over band divided by 2


## Typical Performance Data at 25°C

Frequency (MHz)	Attenuation (dB)	Return Loss (dB)	
		75 Ω	50 Ω
1.00	5.75	52.05	57.19
25.75	5.76	50.74	58.76
50.50	5.76	47.04	60.39
75.25	5.77	44.66	62.19
100.00	5.78	42.98	63.95
375.00	5.84	33.48	51.80
650.00	5.87	29.74	46.25
925.00	5.91	28.29	43.91
1200.00	5.93	27.53	42.88
1400.00	5.96	27.49	43.40
1800.00	5.94	28.42	41.10
2200.00	5.91	33.31	31.52
2400.00	5.92	34.55	27.61
2600.00	5.90	29.99	24.17
2800.00	5.93	25.76	21.42
3000.00	5.93	22.91	19.09


SFFF-5075+ ATTENUATION

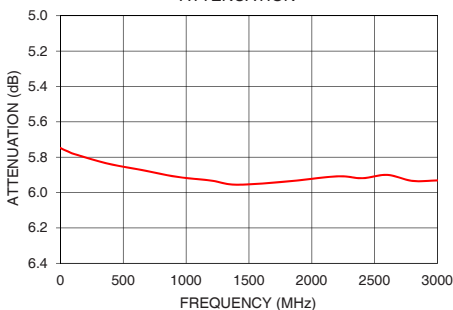

SFFF-5075+ RETURN LOSS (75-OHM PORT)

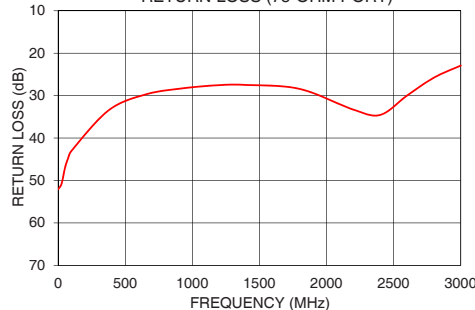

SFFF-5075+ RETURN LOSS (50-OHM PORT)

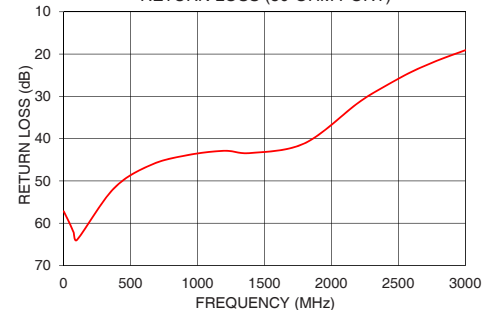

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
ECO-019964  
SFFF-5075+  
EDU4104  
URJ  
231115  
Page 2 of 2

## Typical Performance Data


FREQ.	INSERTION LOSS	INPUT RETURN LOSS (50Ω)	OUTPUT RETURN LOSS (75Ω)
(MHz)	(dB)	(dB)	(dB)
1.00	5.75	57.19	52.05
13.38	5.75	58.05	53.64
25.75	5.76	58.76	50.74
38.13	5.76	59.42	48.90
50.50	5.76	60.39	47.04
62.88	5.77	61.15	45.96
75.25	5.77	62.19	44.66
87.63	5.78	63.02	43.80
100.00	5.78	63.95	42.98
237.50	5.81	57.86	36.73
375.00	5.84	51.80	33.48
512.50	5.86	48.24	31.32
650.00	5.87	46.25	29.74
787.50	5.89	45.00	28.88
925.00	5.91	43.91	28.29
1062.50	5.92	43.42	27.80
1200.00	5.93	42.88	27.53
1400.00	5.96	43.40	27.49
1600.00	5.94	43.11	27.71
1800.00	5.94	41.10	28.42
2000.00	5.91	36.16	30.40
2200.00	5.91	31.52	33.31
2400.00	5.92	27.61	34.55
2600.00	5.90	24.17	29.99
2800.00	5.93	21.42	25.76
3000.00	5.93	19.09	22.91

## Typical Performance Curves

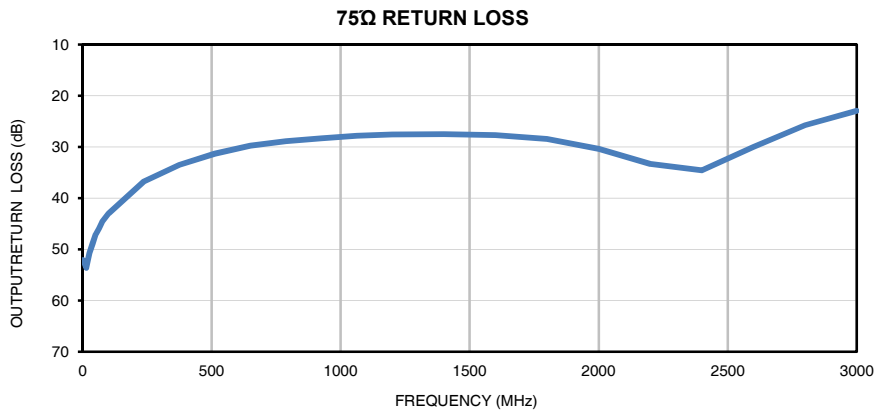

## Outline Dimensions

FF1833

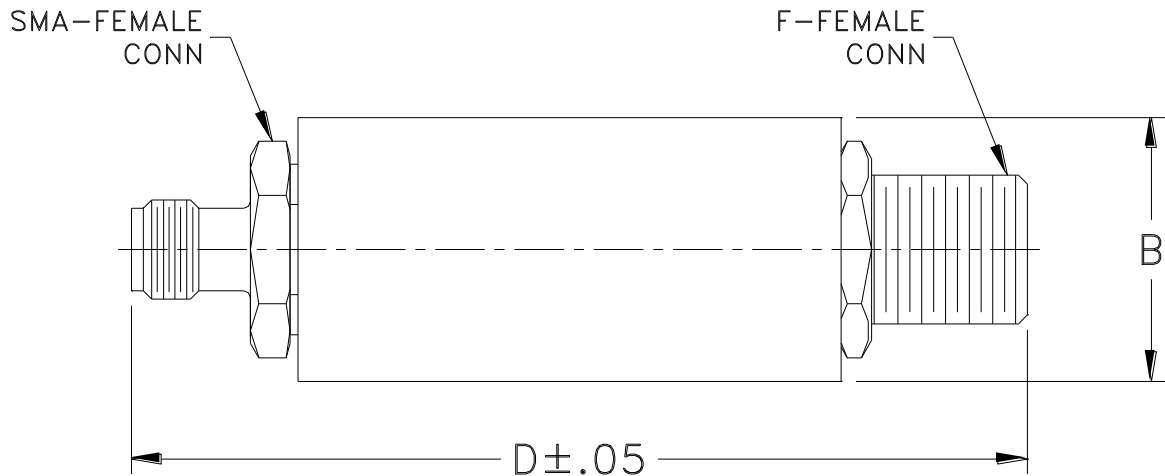

CASE #.	A	B	C	D	E	WT GRAMS
FF1833	--	.67 (17.02)	--	2.26 (57.40)	--	32.2

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

### Notes:

1. Case material: Brass.
2. Case Finish: Nickel plate.

 **Mini-Circuits**<sup>®</sup>  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
  


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I