

Frequency Mixer

SIM-ED12399/5D

Level 21 (LO Power + 21 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


CASE STYLE : HV1195

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	2060		6580	MHz
	RF (f _L to f _U)	2060		6580	MHz
	IF	10		1600	MHz
Conversion Loss	Total Range		7.6		dB
LO-RF Isolation			25		dB
LO-IF Isolation			21		dB
Input IP3			+25		dBm
1 dB Compression			+15		dBm

MAXIMUM RATINGS	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Electrical Schematics

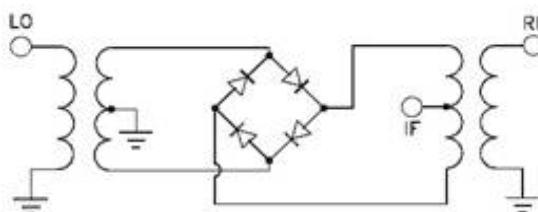

Frequency Mixer

SIM-ED12399/5D

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=1400MHz (dB)		
		@LO (dBm)		
		+19	+21	+23
1500.1	2900.1	8.55	8.21	7.94
1640.1	3040.1	7.77	7.51	7.29
1780.1	3180.1	7.48	7.25	7.05
1920.1	3320.1	7.34	7.05	6.87
2060.1	3460.1	7.37	7.08	6.91
2200.1	3600.1	6.76	6.63	6.61
2340.1	3740.1	7.05	6.98	6.97
2480.1	3880.1	7.04	6.98	6.98
2620.1	4020.1	7.23	7.17	7.14
2760.1	4160.1	7.33	7.29	7.29
2900.1	4300.1	7.51	7.50	7.53
3040.1	4440.1	7.74	7.60	7.56
3180.1	4580.1	7.81	7.62	7.50
3320.1	4720.1	8.08	7.88	7.70
3460.1	4860.1	8.19	7.91	7.90
3600.1	5000.1	8.57	8.21	8.13
3740.1	5140.1	8.28	7.91	7.78
3880.1	5280.1	8.36	7.93	7.74
4040.1	5440.1	9.13	8.37	7.94
4180.1	5580.1	9.62	8.80	8.24
4340.1	5740.1	9.65	8.84	8.22
4480.1	5880.1	9.37	8.67	8.06
4640.1	6040.1	8.89	8.33	7.85
4780.1	6180.1	8.48	8.03	7.67
4940.1	6340.1	8.11	7.80	7.57
5080.1	6480.1	7.60	7.38	7.26
5240.1	6640.1	7.33	7.13	7.00
5380.1	6780.1	7.08	6.91	6.82
5540.1	6940.1	7.04	6.86	6.78
5680.1	7080.1	6.99	6.74	6.61
5840.1	7240.1	7.39	7.06	6.86
5980.1	7380.1	7.56	7.21	7.02
6140.1	7540.1	7.79	7.30	7.14
6280.1	7680.1	8.14	7.48	7.17
6440.1	7840.1	9.01	7.71	7.21
6580.1	7980.1	9.85	8.30	7.49
6740.1	8140.1	10.73	9.67	8.72
6880.1	8280.1	11.90	10.85	9.84
7040.1	8440.1	13.64	11.88	11.22
7180.1	8580.1	12.91	13.38	12.73

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+19	+21	+23
1500.1	2900.1	22.19	22.20	22.94
1640.1	3040.1	18.74	19.35	19.92
1780.1	3180.1	18.25	19.09	19.84
1920.1	3320.1	18.44	19.56	20.39
2060.1	3460.1	20.56	21.53	21.64
2200.1	3600.1	23.94	23.21	22.52
2340.1	3740.1	26.08	25.25	24.07
2480.1	3880.1	26.75	26.50	25.58
2620.1	4020.1	28.03	28.91	28.56
2760.1	4160.1	26.75	27.42	26.37
2900.1	4300.1	24.78	24.72	24.37
3040.1	4440.1	27.58	27.69	26.64
3180.1	4580.1	25.35	26.10	26.30
3320.1	4720.1	24.33	25.43	25.85
3460.1	4860.1	23.97	25.46	25.77
3600.1	5000.1	24.14	25.44	26.35
3740.1	5140.1	23.05	24.51	25.20
3880.1	5280.1	22.76	25.08	26.74
4040.1	5440.1	24.00	23.28	24.79
4180.1	5580.1	23.97	22.59	22.88
4340.1	5740.1	22.97	23.36	22.80
4480.1	5880.1	22.61	23.40	22.57
4640.1	6040.1	23.62	24.68	24.03
4780.1	6180.1	23.98	24.99	25.15
4940.1	6340.1	24.99	25.46	25.43
5080.1	6480.1	25.53	25.37	24.94
5240.1	6640.1	26.00	25.68	24.18
5380.1	6780.1	24.59	24.08	21.95
5540.1	6940.1	23.62	23.25	22.51
5680.1	7080.1	22.61	23.09	24.09
5840.1	7240.1	25.56	25.84	25.01
5980.1	7380.1	25.31	26.89	25.80
6140.1	7540.1	23.70	27.85	27.71
6280.1	7680.1	22.05	26.49	26.92
6440.1	7840.1	21.40	23.55	25.87
6580.1	7980.1	17.52	24.59	23.81
6740.1	8140.1	14.85	20.01	24.37
6880.1	8280.1	13.35	19.47	23.12
7040.1	8440.1	14.55	22.27	23.39
7180.1	8580.1	14.33	21.47	16.20

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+15dBm (dB)		
		@LO (dBm)		
		+19	+21	+23
1500.1	2900.1	3.80	3.79	3.71
1640.1	3040.1	2.14	2.03	2.04
1780.1	3180.1	1.68	1.61	1.53
1920.1	3320.1	1.76	1.73	1.65
2060.1	3460.1	1.50	1.46	1.39
2200.1	3600.1	1.49	1.36	1.31
2340.1	3740.1	1.01	0.92	0.89
2480.1	3880.1	0.83	0.73	0.68
2620.1	4020.1	0.82	0.69	0.61
2760.1	4160.1	0.82	0.68	0.60
2900.1	4300.1	0.79	0.61	0.55
3040.1	4440.1	0.71	0.58	0.48
3180.1	4580.1	0.65	0.55	0.46
3320.1	4720.1	0.59	0.44	0.33
3460.1	4860.1	0.60	0.43	0.27
3600.1	5000.1	0.60	0.48	0.30
3740.1	5140.1	0.58	0.45	0.29
3880.1	5280.1	0.44	0.33	0.21
4040.1	5440.1	0.22	0.40	0.33
4180.1	5580.1	0.05	0.28	0.32
4340.1	5740.1	0.05	0.35	0.55
4480.1	5880.1	-0.06	0.19	0.48
4640.1	6040.1	0.13	0.28	0.52
4780.1	6180.1	0.13	0.18	0.38
4940.1	6340.1	0.29	0.23	0.32
5080.1	6480.1	0.54	0.52	0.61
5240.1	6640.1	0.46	0.47	0.58
5380.1	6780.1	0.56	0.46	0.46
5540.1	6940.1	0.62	0.39	0.33
5680.1	7080.1	1.07	0.60	0.43
5840.1	7240.1	1.20	0.78	0.63
5980.1	7380.1	1.29	0.83	0.67
6140.1	7540.1	1.43	0.85	0.64
6280.1	7680.1	1.43	1.06	0.72
6440.1	7840.1	1.07	1.23	1.00
6580.1	7980.1	0.54	0.92	1.04
6740.1	8140.1	0.48	0.28	0.90
6880.1	8280.1	0.99	0.56	0.96
7040.1	8440.1	0.48	0.71	0.28
7180.1	8580.1	2.02	-0.19	-0.61

REV. X2

SIM-ED12399/5D

101028

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4450.1001MHz (dB)
		@LO (dBm) +21
2690.0	1760.1	15.71
2556.0	1894.1	8.59
2422.0	2028.1	7.49
2288.0	2162.1	6.90
2154.0	2296.1	6.63
2020.0	2430.1	6.55
1886.0	2564.1	6.74
1752.0	2698.1	7.08
1618.0	2832.1	7.36
1484.0	2966.1	8.09
1350.0	3100.1	8.23
1216.0	3234.1	8.00
1082.0	3368.1	7.75
948.0	3502.1	7.15
814.0	3636.1	6.78
680.0	3770.1	6.58
546.0	3904.1	6.12
412.0	4038.1	5.93
278.0	4172.1	5.95
144.0	4306.1	5.92
10.0	4440.1	6.02
173.6	4623.7	5.69
360.6	4810.7	5.88
571.0	5021.1	6.70
758.0	5208.1	7.10
968.4	5418.5	7.53
1155.4	5605.5	8.42
1365.8	5815.9	8.74
1552.7	6002.8	8.79
1763.1	6213.2	9.04
1950.1	6400.2	8.97
2160.5	6610.6	8.86
2347.5	6797.6	8.71
2557.9	7008.0	8.29
2744.9	7195.0	8.21
2955.3	7405.4	8.31
3142.3	7592.4	8.57
3352.6	7802.7	9.06
3539.6	7989.7	9.79
3750.0	8200.1	12.70

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2900.1001MHz (dB)
		@LO (dBm) +21
10.0	2910.1	6.22
110.0	3010.1	5.84
210.0	3110.1	5.66
310.0	3210.1	5.60
410.0	3310.1	5.65
510.0	3410.1	5.64
610.0	3510.1	5.75
710.0	3610.1	5.73
810.0	3710.1	5.98
910.0	3810.1	6.30
1010.0	3910.1	6.76
1110.0	4010.1	7.36
1210.0	4110.1	7.35
1310.0	4210.1	7.50
1410.0	4310.1	7.50
1510.0	4410.1	7.42
1610.0	4510.1	7.46
1710.0	4610.1	7.56
1810.0	4710.1	7.73
1910.0	4810.1	7.71
2010.0	4910.1	7.91
2110.0	5010.1	7.73
2210.0	5110.1	7.72
2310.0	5210.1	7.91
2410.0	5310.1	7.84
2510.0	5410.1	7.96
2610.0	5510.1	8.15
2710.0	5610.1	8.35
2810.0	5710.1	8.42
2910.0	5810.1	8.39
3010.0	5910.1	8.29
3110.0	6010.1	8.00
3210.0	6110.1	7.95
3310.0	6210.1	8.04
3410.0	6310.1	8.33
3510.0	6410.1	8.90
3630.0	6530.1	9.78
3730.0	6630.1	10.80
3850.0	6750.1	12.05
3950.0	6850.1	13.15

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=6000.1001MHz (dB)
		@LO (dBm) +21
4050.0	1950.1	12.96
3950.0	2050.1	11.95
3850.0	2150.1	11.32
3750.0	2250.1	10.94
3650.0	2350.1	10.96
3550.0	2450.1	10.98
3450.0	2550.1	10.97
3350.0	2650.1	10.66
3250.0	2750.1	9.83
3150.0	2850.1	8.60
3050.0	2950.1	7.48
2950.0	3050.1	6.99
2850.0	3150.1	6.86
2750.0	3250.1	6.99
2650.0	3350.1	7.03
2550.0	3450.1	7.02
2450.0	3550.1	7.13
2350.0	3650.1	7.50
2250.0	3750.1	8.21
2150.0	3850.1	8.19
2050.0	3950.1	8.08
1950.0	4050.1	7.76
1850.0	4150.1	7.44
1750.0	4250.1	7.24
1650.0	4350.1	7.38
1550.0	4450.1	7.74
1430.0	4570.1	7.85
1330.0	4670.1	7.87
1210.0	4790.1	7.56
1110.0	4890.1	7.06
990.0	5010.1	6.64
890.0	5110.1	6.40
770.0	5230.1	5.97
670.0	5330.1	5.93
550.0	5450.1	5.83
450.0	5550.1	5.82
330.0	5670.1	5.80
230.0	5770.1	5.73
110.0	5890.1	5.79
10.0	5990.1	5.99

Frequency Mixer

SIM-ED12399/5D

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+19	+21	+23	+19	+21	+23
2900.1	33.67	32.79	32.44	22.45	22.64	22.42
3040.1	32.08	31.35	30.67	23.08	23.22	22.86
3180.1	30.77	30.35	29.88	23.76	23.37	22.52
3320.1	31.69	31.03	30.20	23.45	22.78	21.86
3460.1	31.86	31.12	30.50	24.04	23.24	22.43
3600.1	32.11	31.45	31.90	23.96	23.03	22.43
3740.1	32.09	31.69	31.73	24.16	23.31	22.83
3880.1	32.35	31.89	32.29	24.86	24.08	23.45
4020.1	32.10	31.73	31.80	26.12	25.70	25.27
4160.1	30.83	30.74	30.52	29.36	29.13	28.47
4300.1	30.44	27.71	25.39	33.18	32.30	31.65
4440.1	31.81	30.47	26.42	30.09	29.85	30.32
4580.1	30.70	30.42	27.96	23.84	23.24	22.63
4720.1	30.05	29.63	28.02	19.62	19.01	18.50
4860.1	29.60	28.74	26.95	17.26	16.59	16.22
5000.1	29.03	28.43	27.41	16.36	15.81	15.56
5140.1	28.59	28.19	27.21	16.24	15.99	15.64
5280.1	28.25	28.09	27.31	16.50	16.38	16.07
5440.1	27.65	26.94	25.77	17.20	16.89	16.75
5580.1	26.89	26.38	25.85	17.84	17.76	17.70
5740.1	26.34	25.53	24.93	18.89	18.74	18.74
5880.1	25.63	24.75	24.11	19.89	19.83	19.91
6040.1	24.67	23.97	23.40	21.15	21.27	21.39
6180.1	23.91	23.02	22.51	22.76	23.05	23.39
6340.1	23.06	22.56	21.94	25.49	26.50	27.25
6480.1	23.15	22.78	22.30	28.56	30.42	32.19
6640.1	23.42	23.24	22.98	30.95	32.93	34.88
6780.1	23.22	23.39	23.09	33.05	35.02	36.58
6940.1	23.02	23.37	23.19	29.66	30.18	30.37
7080.1	22.89	23.26	23.59	24.74	24.62	24.72
7240.1	23.03	23.46	23.53	21.63	21.76	21.73
7380.1	23.09	23.46	23.31	19.21	19.44	19.25
7540.1	24.07	24.33	23.98	17.53	17.76	18.31
7680.1	24.89	25.53	25.43	16.05	16.46	16.87
7840.1	26.00	26.53	26.72	15.08	15.13	15.44
7980.1	26.79	26.81	26.69	13.17	12.84	13.25
8140.1	27.78	26.45	25.47	11.02	10.23	10.21
8280.1	26.12	25.28	23.66	9.27	9.05	9.15
8440.1	20.75	20.74	21.18	8.01	8.46	8.70
8580.1	18.70	19.07	19.75	7.79	8.41	8.59

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+19	+21	+23
1500.1	2900.1	14.36	14.22	14.18
1640.1	3040.1	16.37	16.33	16.29
1780.1	3180.1	19.15	19.09	18.89
1920.1	3320.1	21.80	21.63	21.28
2060.1	3460.1	23.49	23.10	22.67
2200.1	3600.1	23.77	23.60	23.04
2340.1	3740.1	21.67	21.56	21.64
2480.1	3880.1	19.64	19.48	19.58
2620.1	4020.1	18.06	17.87	17.82
2760.1	4160.1	16.93	16.76	16.93
2900.1	4300.1	15.84	15.93	16.15
3040.1	4440.1	15.44	15.26	15.35
3180.1	4580.1	15.68	15.48	15.33
3320.1	4720.1	15.86	15.60	15.38
3460.1	4860.1	16.18	15.80	15.46
3600.1	5000.1	17.71	17.32	16.69
3740.1	5140.1	18.02	17.57	17.07
3880.1	5280.1	17.17	16.82	16.54
4040.1	5440.1	19.36	18.64	18.03
4180.1	5580.1	20.76	20.03	19.47
4340.1	5740.1	21.76	21.13	20.58
4480.1	5880.1	22.76	22.30	21.81
4640.1	6040.1	26.00	25.73	25.45
4780.1	6180.1	32.27	32.20	32.14
4940.1	6340.1	27.25	26.94	26.75
5080.1	6480.1	22.74	22.46	22.25
5240.1	6640.1	20.81	20.58	20.39
5380.1	6780.1	19.76	19.57	19.35
5540.1	6940.1	18.99	18.81	18.51
5680.1	7080.1	18.89	18.70	18.51
5840.1	7240.1	20.19	20.12	19.95
5980.1	7380.1	21.05	21.13	20.95
6140.1	7540.1	21.67	21.87	21.85
6280.1	7680.1	22.90	23.65	24.00
6440.1	7840.1	24.22	26.03	27.35
6580.1	7980.1	27.24	27.54	28.24
6740.1	8140.1	28.25	26.84	25.37
6880.1	8280.1	40.76	36.15	34.13
7040.1	8440.1	27.40	35.48	44.82
7180.1	8580.1	22.31	24.34	27.55

Frequency Mixer

SIM-ED12399/5D

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=7500MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+19	+21	+23		+19	+21	+23		+19	+21	+23
1500.1	2900.1	1.70	1.62	1.55	2900.1	2.10	2.46	2.90	10.1	1.17	1.04	1.07
1640.1	3040.1	1.21	1.14	1.08	3040.1	2.01	2.33	2.68	90.1	1.20	1.11	1.12
1780.1	3180.1	1.32	1.32	1.33	3180.1	2.03	2.39	2.80	170.1	1.28	1.20	1.19
1920.1	3320.1	1.60	1.61	1.64	3320.1	2.03	2.36	2.74	270.1	1.40	1.32	1.29
2060.1	3460.1	1.74	1.76	1.77	3460.1	2.07	2.39	2.74	350.1	1.55	1.44	1.39
2200.1	3600.1	1.88	1.89	1.90	3600.1	2.02	2.38	2.83	450.1	1.73	1.62	1.56
2340.1	3740.1	1.86	1.87	1.88	3740.1	1.94	2.28	2.62	530.1	1.90	1.78	1.70
2480.1	3880.1	1.81	1.81	1.82	3880.1	2.03	2.48	2.98	630.1	2.10	1.96	1.87
2620.1	4020.1	1.72	1.71	1.70	4020.1	1.98	2.38	2.78	710.1	2.21	2.07	1.97
2760.1	4160.1	1.68	1.66	1.65	4160.1	2.13	2.62	3.19	810.1	2.39	2.24	2.12
2900.1	4300.1	1.66	1.60	1.57	4300.1	2.21	2.71	3.13	890.1	2.50	2.33	2.20
3040.1	4440.1	1.72	1.65	1.58	4440.1	2.32	2.79	3.29	990.1	2.59	2.41	2.27
3180.1	4580.1	1.85	1.77	1.70	4580.1	2.41	2.88	3.41	1070.1	2.66	2.47	2.32
3320.1	4720.1	1.85	1.75	1.68	4720.1	2.50	2.89	3.31	1170.1	2.68	2.48	2.32
3460.1	4860.1	2.00	1.86	1.82	4860.1	2.69	3.09	3.62	1250.1	2.76	2.53	2.36
3600.1	5000.1	2.22	2.07	2.07	5000.1	2.61	2.91	3.24	1350.1	2.87	2.62	2.43
3740.1	5140.1	2.16	2.01	1.98	5140.1	2.94	3.21	3.53	1430.1	3.04	2.76	2.56
3880.1	5280.1	1.94	1.77	1.69	5280.1	3.19	3.34	3.61	1530.1	3.08	2.79	2.57
4040.1	5440.1	2.41	2.10	1.97	5440.1	3.23	3.30	3.50	1610.1	3.19	2.89	2.67
4180.1	5580.1	2.68	2.34	2.10	5580.1	3.34	3.34	3.45	1710.1	3.26	2.95	2.72
4340.1	5740.1	2.90	2.54	2.27	5740.1	3.12	3.03	3.06	1790.1	3.35	3.04	2.82
4480.1	5880.1	2.73	2.46	2.22	5880.1	2.92	2.79	2.78	1890.1	3.43	3.12	2.89
4640.1	6040.1	2.68	2.48	2.25	6040.1	2.60	2.40	2.37	1970.1	3.45	3.14	2.90
4780.1	6180.1	2.53	2.38	2.24	6180.1	2.21	1.98	1.91	2070.1	3.45	3.15	2.92
4940.1	6340.1	2.38	2.28	2.18	6340.1	1.83	1.59	1.52	2150.1	3.33	3.04	2.82
5080.1	6480.1	2.16	2.09	2.04	6480.1	1.52	1.26	1.20	2250.1	3.22	2.95	2.75
5240.1	6640.1	1.98	1.90	1.83	6640.1	1.21	1.04	1.23	2330.1	3.04	2.80	2.60
5380.1	6780.1	1.87	1.80	1.74	6780.1	1.02	1.22	1.45	2430.1	2.89	2.68	2.52
5540.1	6940.1	1.65	1.57	1.52	6940.1	1.29	1.55	1.83	2510.1	2.84	2.64	2.48
5680.1	7080.1	1.65	1.54	1.48	7080.1	1.67	1.89	2.17	2610.1	2.73	2.57	2.44
5840.1	7240.1	1.66	1.55	1.45	7240.1	2.19	2.42	2.68	2690.1	2.72	2.57	2.44
5980.1	7380.1	1.76	1.65	1.56	7380.1	2.66	2.84	3.08	2790.1	2.69	2.58	2.48
6140.1	7540.1	1.69	1.56	1.52	7540.1	3.25	3.29	3.42	2870.1	2.59	2.50	2.42
6280.1	7680.1	1.72	1.56	1.49	7680.1	3.93	3.81	3.87	2970.1	2.62	2.57	2.52
6440.1	7840.1	1.90	1.61	1.51	7840.1	4.93	4.43	4.30	3050.1	2.62	2.60	2.58
6580.1	7980.1	2.01	1.62	1.50	7980.1	5.41	4.73	4.42	3150.1	2.67	2.71	2.73
6740.1	8140.1	2.18	1.86	1.69	8140.1	5.38	4.83	4.52	3230.1	2.81	2.89	2.97
6880.1	8280.1	2.44	2.30	2.23	8280.1	4.77	4.36	4.18	3330.1	2.90	3.06	3.19
7040.1	8440.1	2.72	3.03	3.21	8440.1	3.60	3.69	3.68	3410.1	3.04	3.25	3.42
7180.1	8580.1	3.07	3.11	3.34	8580.1	2.82	3.05	3.20	3510.1	3.24	3.50	3.72

REV. X2

SIM-ED12399/5D

101028

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+10	18	13	44	---	---	---	---	---	---
1	-	13	+0	29	18	31	---	---	---	---	---	---
2	73	54	52	48	39	54	60	---	---	---	---	---
3	>90	57	54	60	63	63	80	79	---	---	---	---
4	>90	>81	>81	>81	80	>81	>81	>81	>81	---	---	---
5	>90	>81	>81	>81	>81	>81	>81	>81	>81	---	---	---
6	---	---	>81	>81	>81	>81	>81	>81	>81	>81	---	---
7	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81	---
8	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	---	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	---	---	---	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 4450.1 MHz; 0.00 dBm.
 LO IN: 5850.1 MHz; +21.00 dBm
 IF OUT: 1400 MHz; -8.71 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+0	29	25	54	---	---	---	---	---	---
1	-	13	+0	26	18	34	---	---	---	---	---	---
2	54	42	44	38	31	47	52	---	---	---	---	---
3	73	36	33	41	46	42	60	62	---	---	---	---
4	87	66	69	58	50	66	63	60	68	---	---	---
5	84	68	66	66	73	60	53	60	64	---	---	---
6	---	---	91	79	73	73	74	71	79	86	---	---
7	---	---	---	82	78	72	91	74	78	80	>91	---
8	---	---	---	>91	85	90	81	76	>91	86	>91	83
9	---	---	---	---	91	90	>91	>91	80	82	89	>91
10	---	---	---	---	---	>91	>91	86	91	91	85	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions:

RF IN: 4450.1 MHz; 10.00 dBm.
 LO IN: 5850.1 MHz; +21.00 dBm
 IF OUT: 1400 MHz; 1.3 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves


Conversion Loss @ IF=1400MHz

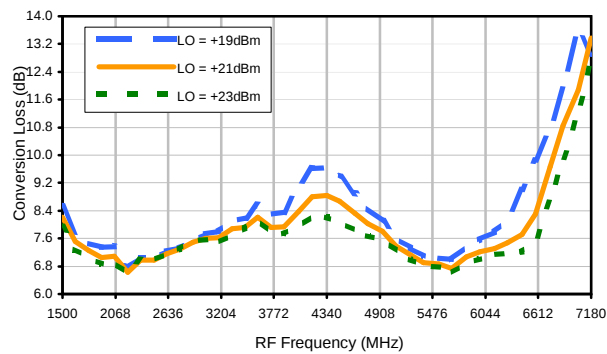


Conversion Loss vs. LO @ RF=4450.1001MHz

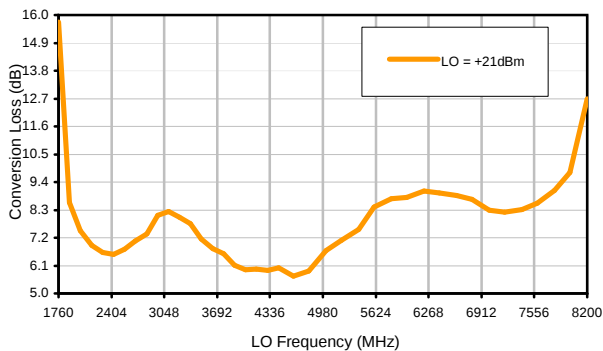


Conversion Loss vs. IF @ RF=4450.1001MHz

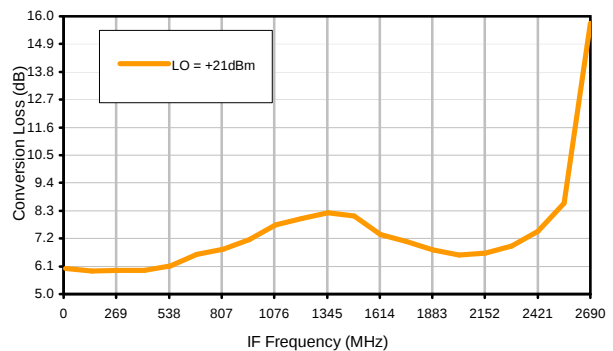


Conversion Loss vs. IF @ RF=2900.1001MHz

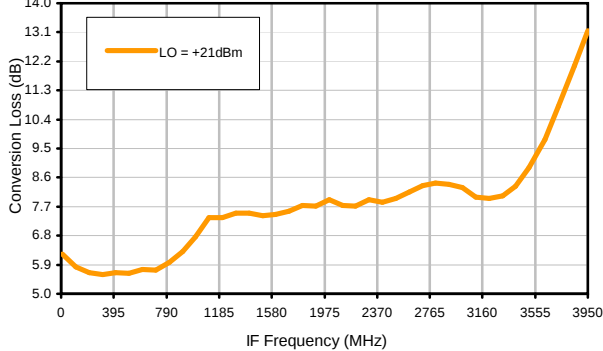


Conversion Loss vs. IF @ RF=6000.1001MHz

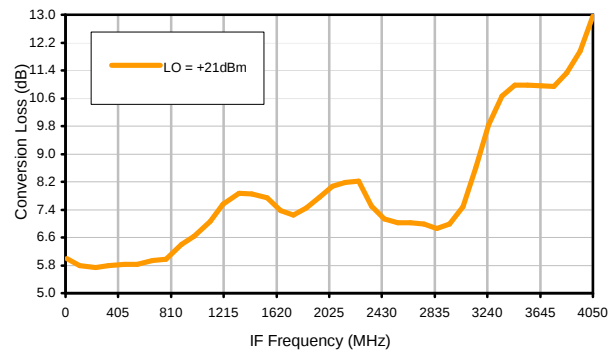

IP3 Input

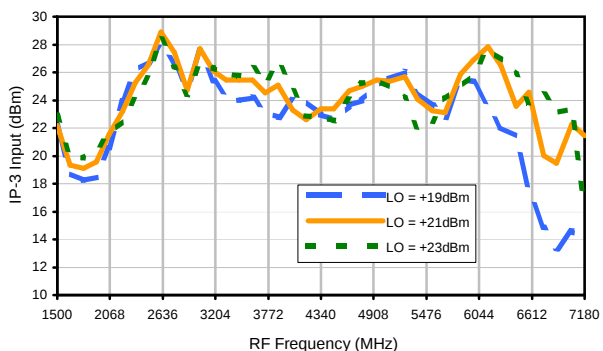


Compression @ RF IN=+15dBm

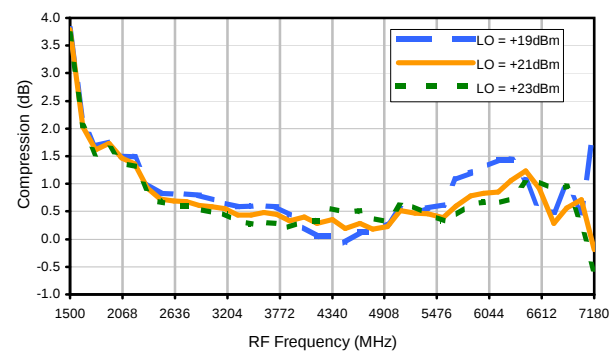


Typical Performance Curves


LO-RF Isolation

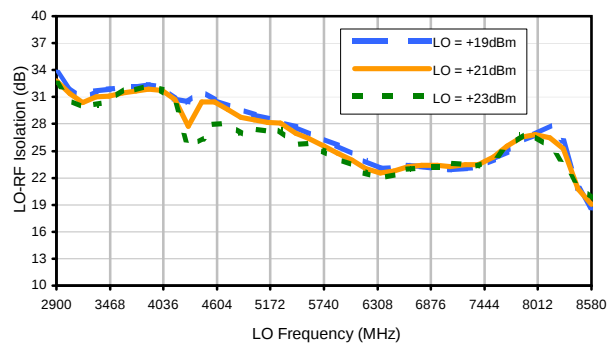


LO-IF Isolation

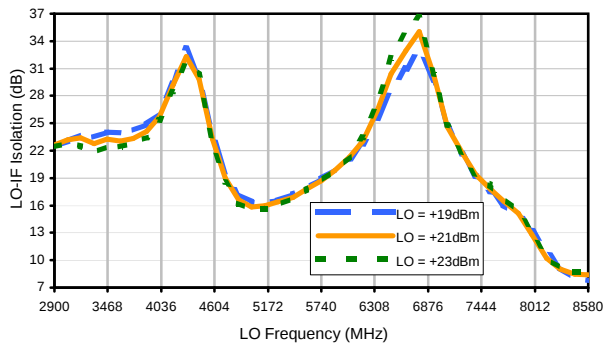


RF-IF Isolation

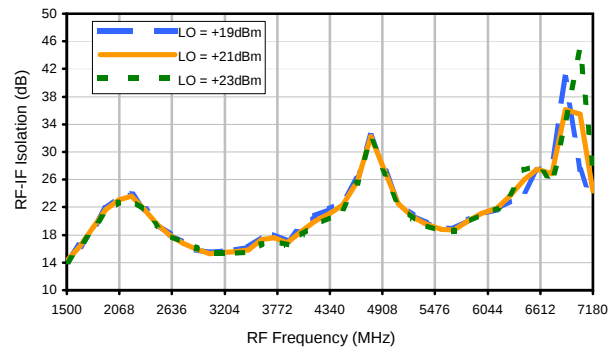


RF VSWR

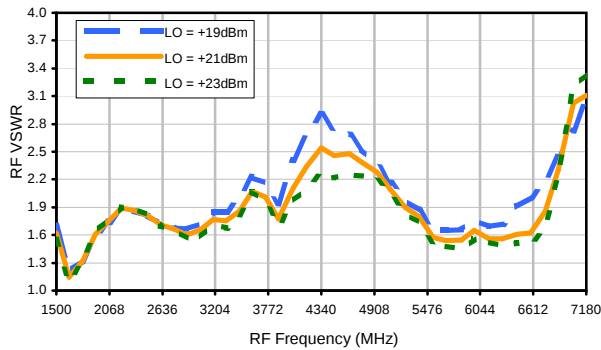

LO VSWR

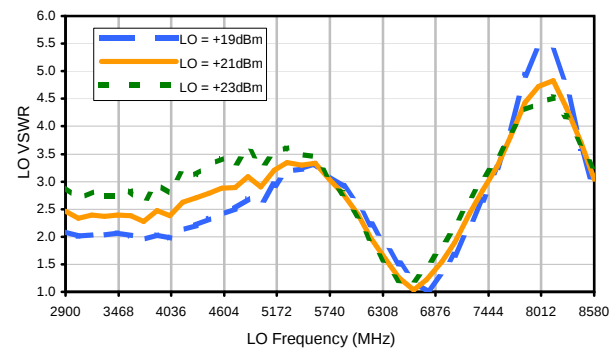

IF VSWR

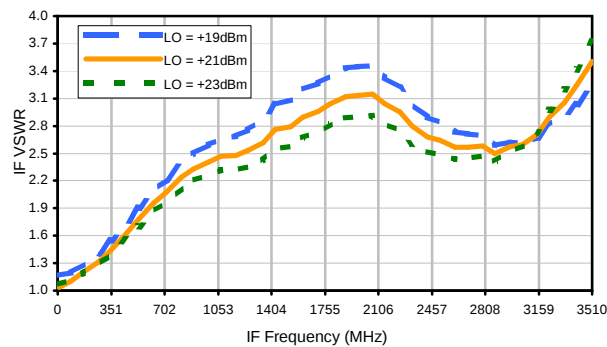

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+10	18	13	44	---	---	---	---	---	---
1	-	13	+0	29	18	31	---	---	---	---	---	---
2	73	54	52	48	39	54	60	---	---	---	---	---
3	>90	57	54	60	63	63	80	79	---	---	---	---
4	>90	>81	>81	>81	80	>81	>81	>81	>81	---	---	---
5	>90	>81	>81	>81	>81	>81	>81	>81	>81	---	---	---
6	---	---	>81	>81	>81	>81	>81	>81	>81	>81	---	---
7	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81	---
8	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	---	---	---	---	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	---	---	---	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 4450.1 MHz; 0.00 dBm.

LO IN: 5850.1 MHz; +21.00 dBm

IF OUT: 1400 MHz; -8.71 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+0	29	25	54	---	---	---	---	---	---
1	-	13	+0	26	18	34	---	---	---	---	---	---
2	54	42	44	38	31	47	52	---	---	---	---	---
3	73	36	33	41	46	42	60	62	---	---	---	---
4	87	66	69	58	50	66	63	60	68	---	---	---
5	84	68	66	66	73	60	53	60	64	---	---	---
6	---	---	91	79	73	73	74	71	79	86	---	---
7	---	---	---	82	78	72	91	74	78	80	>91	---
8	---	---	---	>91	85	90	81	76	>91	86	>91	83
9	---	---	---	---	91	90	>91	>91	80	82	89	>91
10	---	---	---	---	---	>91	>91	86	91	91	85	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 4450.1 MHz; 10.00 dBm.

LO IN: 5850.1 MHz; +21.00 dBm

IF OUT: 1400 MHz; 1.3 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

SIM-ED12399/5D

101028

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Outline Dimensions

HV1195

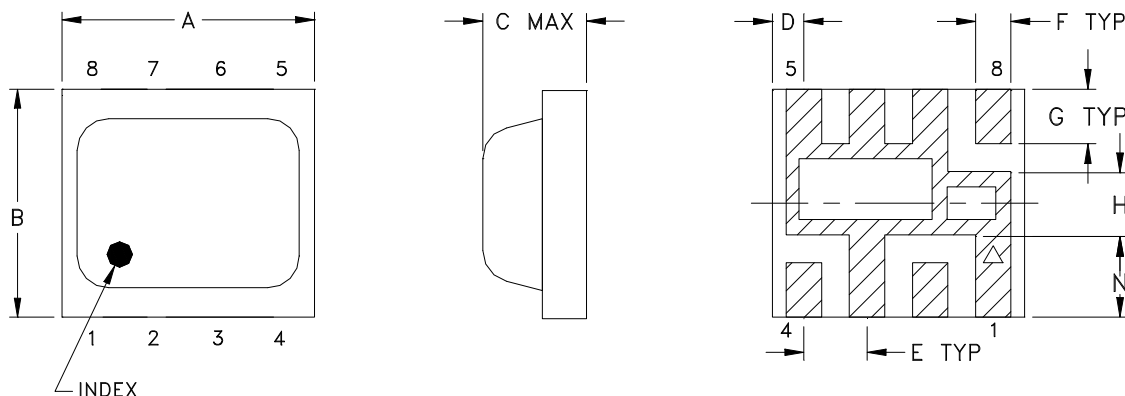

PCB Metal Land Pattern

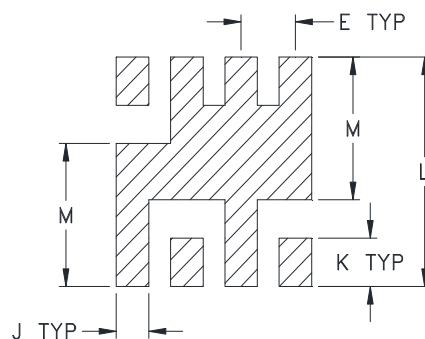

Suggested Layout,
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
HV1195	0.200 (5.08)	0.180 (4.57)	0.087 (2.21)	0.025 (0.64)	0.050 (1.27)	0.028 (0.71)	0.043 (1.09)	0.050 (1.27)	0.030 (0.76)	0.043 (1.09)	0.204 (5.18)	0.127 (3.23)	0.065 (1.65)

CASE#	WT, GRAM
HV1195	.08

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic encapsulation on Ceramic base.
2. Termination finish: Palladium Silver.




P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F82

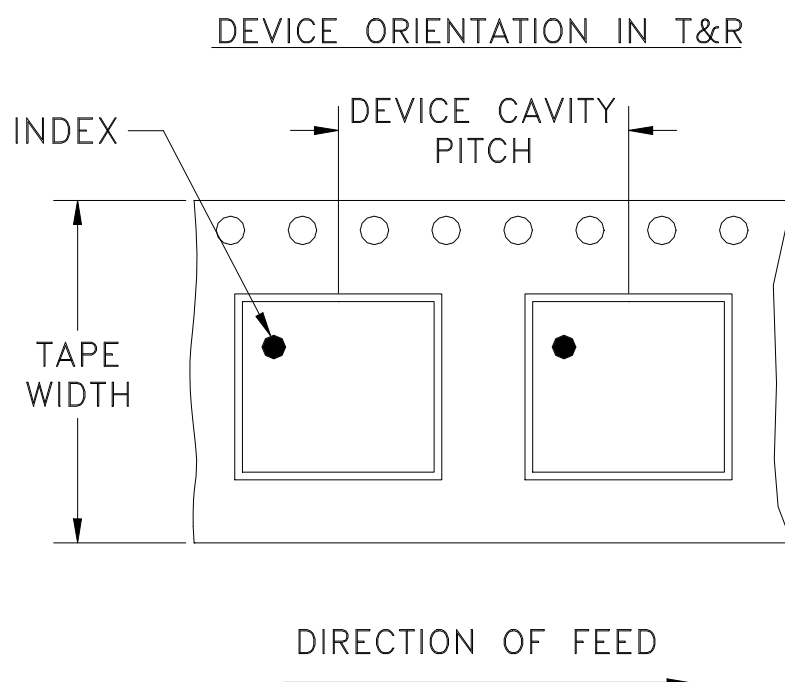

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
12	8	7	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M104559	NEW RELEASE	04/11/06	MMG	DJ
A	M109513	MODIFIED SMOBC AREA, REMOVED NOTE 3	01/31/07	PW	DJ
B	M176274	MODIFIED CASE STYLE	09/23/19	ITG	RB


SUGGESTED MOUNTING CONFIGURATION FOR HV1195 CASE STYLE, "rh" PIN CONNECTION

COPLANAR WAVEGUIDE
.038 LINE WIDTH,
.013 GAP, 2 PL.

Ø.013 PTH
FOR GROUND

PACKAGE
OUTLINE

PIN 1

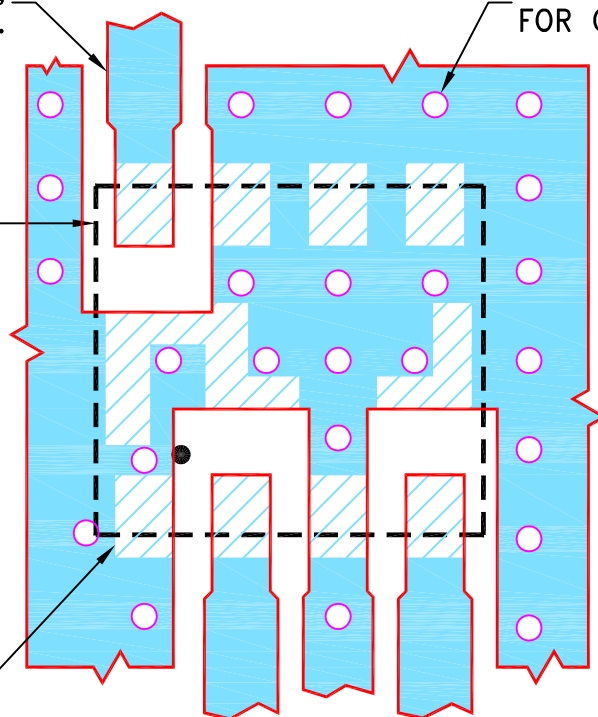


NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020"±.0015"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS ±

3 PL DECIMALS ± .005

ANGLES ±

FRACTIONS ±

DRAWN

MMG

04/10/06

CHECKED

IL

04/11/06

APPROVED

DJ

04/11/06



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, rh, HV1195, SIM, TB-382

SIZE

CODE IDENT

DRAWING NO:

REV:

A

15542

98-PL-239

B

FILE:

98PL239

SCALE:

10:1

SHEET:

1 OF 1



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

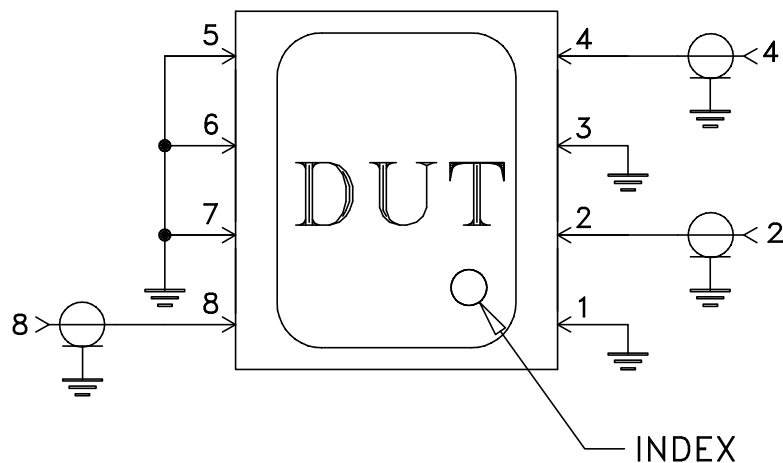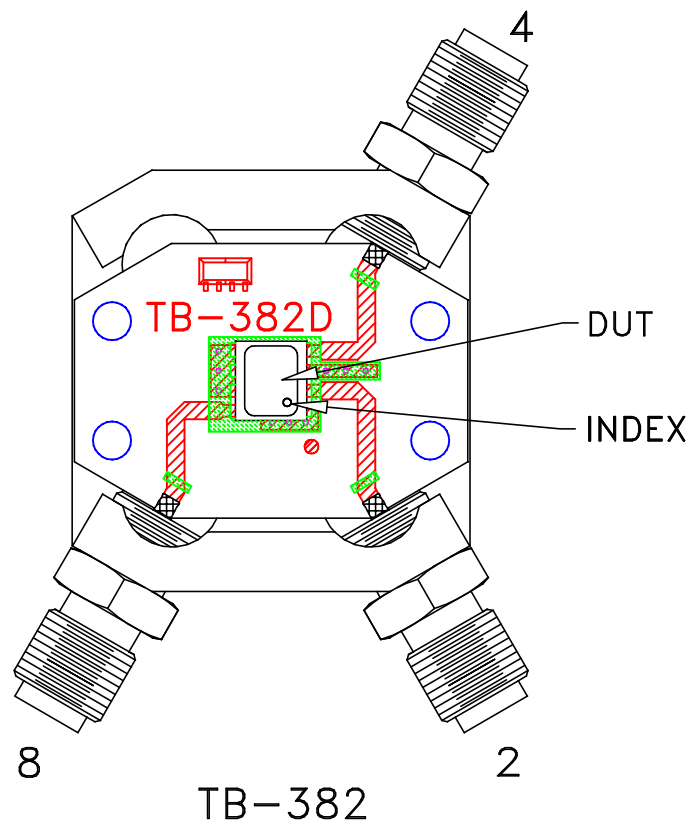

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215