

Frequency Mixer

SIM-ED12666/1

Level 6 (LO Power + 6 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


CASE STYLE : HV1195

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	4380		4380	MHz
	RF (f _L to f _U)	4380		4380	MHz
	IF	3200		4500	MHz
Conversion Loss	Total Range		6.9		dB
LO-RF Isolation			34		dB
LO-IF Isolation			19		dB
Input IP3			+13		dBm
1 dB Compression			+1		dBm

MAXIMUM RATINGS	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	2
RF	8
IF	4
GROUND	1,3,5,6,7

Electrical Schematics

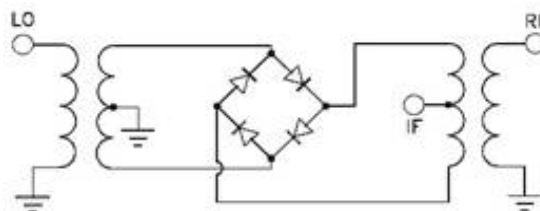

Frequency Mixer

SIM-ED12666/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=4300MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)						
		@LO (dBm)					@LO (dBm)					@LO (dBm)						
		+3	+6	+9			+3	+6	+9			+3	+6	+9				
4380.1	80.1	8.28	8.02	7.87	4380.1	80.1	10.69	12.01	13.43	4380.1	80.1	0.64	0.38	0.25				
4450.1	150.1	8.09	7.81	7.63	4450.1	150.1	10.29	12.93	14.43	4450.1	150.1	0.61	0.39	0.26				
4520.1	220.1	7.92	7.61	7.41	4520.1	220.1	10.82	12.83	15.35	4520.1	220.1	0.63	0.40	0.30				
4590.1	290.1	7.78	7.48	7.28	4590.1	290.1	10.53	12.66	14.74	4590.1	290.1	0.68	0.45	0.33				
4660.1	360.1	7.63	7.26	7.09	4660.1	360.1	10.23	12.03	14.11	4660.1	360.1	0.75	0.52	0.39				
4730.1	430.1	7.36	6.97	6.76	4730.1	430.1	10.46	11.08	15.89	4730.1	430.1	0.84	0.60	0.42				
4800.1	500.1	7.12	6.68	6.59	4800.1	500.1	9.79	12.69	15.35	4800.1	500.1	0.96	0.68	0.39				
4870.1	570.1	7.04	6.63	6.43	4870.1	570.1	9.85	12.54	15.34	4870.1	570.1	1.02	0.72	0.45				
4940.1	640.1	6.86	6.42	6.24	4940.1	640.1	8.95	12.57	13.96	4940.1	640.1	1.12	0.78	0.49				
5020.1	720.1	6.70	6.25	6.20	5020.1	720.1	10.29	13.32	19.21	5020.1	720.1	1.18	0.76	0.36				
5090.1	790.1	6.69	6.16	5.95	5090.1	790.1	10.86	13.18	15.15	5090.1	790.1	1.21	0.79	0.53				
5170.1	870.1	6.66	6.14	5.79	5170.1	870.1	10.57	12.96	15.32	5170.1	870.1	1.20	0.76	0.54				
5240.1	940.1	6.59	6.22	5.93	5240.1	940.1	11.03	12.81	14.97	5240.1	940.1	1.29	0.73	0.50				
5320.1	1020.1	6.61	6.35	6.18	5320.1	1020.1	11.08	13.00	14.59	5320.1	1020.1	1.25	0.60	0.36				
5390.1	1090.1	6.61	6.44	6.48	5390.1	1090.1	11.32	16.68	18.89	5390.1	1090.1	1.33	0.58	0.24				
5470.1	1170.1	6.57	6.27	6.28	5470.1	1170.1	10.85	14.24	14.80	5470.1	1170.1	1.48	0.77	0.48				
5540.1	1240.1	6.51	6.14	6.03	5540.1	1240.1	10.57	14.01	15.59	5540.1	1240.1	1.67	0.92	0.67				
5620.1	1320.1	6.54	6.02	5.85	5620.1	1320.1	10.34	13.72	14.87	5620.1	1320.1	1.84	1.11	0.80				
5690.1	1390.1	6.69	6.08	5.85	5690.1	1390.1	9.84	13.37	15.36	5690.1	1390.1	1.81	1.10	0.78				
5770.1	1470.1	6.85	6.11	5.82	5770.1	1470.1	9.43	12.00	13.47	5770.1	1470.1	1.90	1.24	0.88				
5840.1	1540.1	7.05	6.24	5.88	5840.1	1540.1	9.50	12.16	13.32	5840.1	1540.1	1.87	1.20	0.86				
5920.1	1620.1	7.34	6.58	6.12	5920.1	1620.1	10.33	13.02	13.78	5920.1	1620.1	1.88	1.18	0.94				
5990.1	1690.1	7.45	6.78	6.33	5990.1	1690.1	10.84	13.46	13.74	5990.1	1690.1	1.77	1.12	0.84				
6070.1	1770.1	7.63	6.99	6.56	6070.1	1770.1	10.25	13.85	13.40	6070.1	1770.1	1.82	1.16	0.89				
6140.1	1840.1	7.89	7.23	6.82	6140.1	1840.1	9.99	13.59	13.67	6140.1	1840.1	1.84	1.20	0.94				
6220.1	1920.1	8.09	7.49	7.08	6220.1	1920.1	10.27	12.38	13.03	6220.1	1920.1	1.68	1.12	0.86				
6290.1	1990.1	8.30	7.83	7.43	6290.1	1990.1	10.57	11.54	12.33	6290.1	1990.1	1.53	1.06	0.89				
6370.1	2070.1	8.67	8.52	8.27	6370.1	2070.1	11.61	12.22	12.56	6370.1	2070.1	1.29	0.75	0.64				
6440.1	2140.1	8.81	8.97	9.05	6440.1	2140.1	9.77	16.92	17.59	6440.1	2140.1	1.34	0.53	0.37				
6520.1	2220.1	8.90	9.18	9.53	6520.1	2220.1	9.61	13.00	14.59	6520.1	2220.1	1.35	0.49	0.26				
6590.1	2290.1	9.16	9.36	9.85	6590.1	2290.1	9.55	11.67	13.87	6590.1	2290.1	1.21	0.55	0.31				
6670.1	2370.1	9.23	9.24	9.73	6670.1	2370.1	9.81	11.77	13.29	6670.1	2370.1	1.21	0.69	0.44				
6740.1	2440.1	9.34	9.12	9.50	6740.1	2440.1	9.75	11.87	13.30	6740.1	2440.1	1.26	0.78	0.55				
6820.1	2520.1	9.62	9.27	9.58	6820.1	2520.1	10.63	11.77	13.21	6820.1	2520.1	1.13	0.72	0.53				
6890.1	2590.1	10.08	9.70	9.91	6890.1	2590.1	11.74	12.63	13.21	6890.1	2590.1	0.86	0.58	0.48				
6970.1	2670.1	10.41	10.03	10.18	6970.1	2670.1	12.63	13.36	13.30	6970.1	2670.1	0.78	0.55	0.48				
7040.1	2740.1	10.52	10.01	10.07	7040.1	2740.1	13.12	13.64	13.55	7040.1	2740.1	0.76	0.52	0.47				
7120.1	2820.1	10.59	10.10	10.17	7120.1	2820.1	13.72	14.07	14.28	7120.1	2820.1	0.71	0.46	0.39				
7190.1	2890.1	10.72	10.29	10.33	7190.1	2890.1	13.73	14.43	14.81	7190.1	2890.1	0.62	0.37	0.31				

REV. X2

SIM-ED12666/1

101031

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=5800.1001MHz (dB)
		@LO (dBm)
		+6
5790.0	10.1	7.80
5670.0	130.1	7.82
5550.0	250.1	8.08
5430.0	370.1	8.38
5310.0	490.1	8.59
5190.0	610.1	8.82
5070.0	730.1	8.76
4950.0	850.1	8.01
4830.0	970.1	7.30
4710.0	1090.1	7.00
4590.0	1210.1	6.56
4490.0	1310.1	6.31
4370.0	1430.1	6.24
4270.0	1530.1	6.34
4150.0	1650.1	6.61
4050.0	1750.1	6.97
3930.0	1870.1	7.72
3830.0	1970.1	8.22
3710.0	2090.1	7.60
3610.0	2190.1	7.26
3490.0	2310.1	7.19
3390.0	2410.1	7.04
3270.0	2530.1	6.62
3170.0	2630.1	6.48
3050.0	2750.1	6.45
2950.0	2850.1	6.53
2830.0	2970.1	6.59
2730.0	3070.1	6.69
2610.0	3190.1	6.79
2510.0	3290.1	6.88
2390.0	3410.1	7.07
2290.0	3510.1	7.24
2170.0	3630.1	7.35
2070.0	3730.1	7.40
1950.0	3850.1	7.57
1850.0	3950.1	7.83
1730.0	4070.1	8.36
1630.0	4170.1	9.09
1510.0	4290.1	10.29
1410.0	4390.1	11.38

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=5700.1001MHz (dB)
		@LO (dBm)
		+6
5690.0	10.1	7.70
5570.0	130.1	7.74
5450.0	250.1	8.08
5330.0	370.1	8.34
5210.0	490.1	8.61
5090.0	610.1	8.69
4970.0	730.1	8.39
4850.0	850.1	7.49
4730.0	970.1	6.93
4610.0	1090.1	6.70
4490.0	1210.1	6.36
4390.0	1310.1	6.23
4270.0	1430.1	6.18
4170.0	1530.1	6.31
4050.0	1650.1	6.67
3950.0	1750.1	7.13
3830.0	1870.1	7.92
3730.0	1970.1	8.15
3610.0	2090.1	7.45
3510.0	2190.1	7.22
3390.0	2310.1	7.10
3290.0	2410.1	6.97
3170.0	2530.1	6.62
3070.0	2630.1	6.44
2950.0	2750.1	6.52
2850.0	2850.1	6.56
2730.0	2970.1	6.72
2630.0	3070.1	6.84
2510.0	3190.1	6.92
2410.0	3290.1	7.04
2290.0	3410.1	7.25
2190.0	3510.1	7.39
2070.0	3630.1	7.51
1970.0	3730.1	7.60
1850.0	3850.1	7.83
1750.0	3950.1	8.30
1630.0	4070.1	8.93
1530.0	4170.1	9.80
1410.0	4290.1	11.07
1310.0	4390.1	12.36

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=5900.1001MHz (dB)
		@LO (dBm)
		+6
5890.0	10.1	7.93
5770.0	130.1	7.90
5650.0	250.1	8.15
5530.0	370.1	8.36
5410.0	490.1	8.54
5290.0	610.1	8.86
5170.0	730.1	8.99
5050.0	850.1	8.53
4930.0	970.1	7.67
4810.0	1090.1	7.38
4690.0	1210.1	6.82
4590.0	1310.1	6.54
4470.0	1430.1	6.38
4370.0	1530.1	6.41
4250.0	1650.1	6.64
4150.0	1750.1	6.88
4030.0	1870.1	7.48
3930.0	1970.1	8.20
3810.0	2090.1	7.82
3710.0	2190.1	7.35
3590.0	2310.1	7.23
3490.0	2410.1	7.13
3370.0	2530.1	6.73
3270.0	2630.1	6.52
3150.0	2750.1	6.44
3050.0	2850.1	6.50
2930.0	2970.1	6.54
2830.0	3070.1	6.61
2710.0	3190.1	6.68
2610.0	3290.1	6.76
2490.0	3410.1	6.95
2390.0	3510.1	7.08
2270.0	3630.1	7.26
2170.0	3730.1	7.25
2050.0	3850.1	7.36
1950.0	3950.1	7.45
1830.0	4070.1	7.91
1730.0	4170.1	8.47
1610.0	4290.1	9.52
1510.0	4390.1	10.58

Frequency Mixer

SIM-ED12666/1

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+3	+6	+9	+3	+6	+9
80.1	66.02	58.37	62.32	41.83	40.48	39.42
150.1	52.69	53.29	52.32	37.63	36.36	35.49
220.1	54.84	56.54	53.46	34.88	33.64	32.75
290.1	52.59	47.64	47.73	32.96	31.72	30.80
360.1	50.67	50.96	51.48	31.30	29.96	28.99
430.1	47.23	45.67	44.83	30.03	28.54	27.62
500.1	45.63	44.09	43.83	28.73	27.22	26.38
570.1	41.97	41.13	40.40	27.57	26.08	25.35
640.1	41.41	40.68	39.98	26.52	25.08	24.40
720.1	40.46	39.84	39.14	25.34	23.94	23.23
790.1	39.57	39.07	38.43	24.42	23.15	22.49
870.1	38.60	38.26	37.69	23.57	22.47	21.76
940.1	37.79	37.56	37.06	22.92	21.79	20.96
1020.1	36.75	36.71	36.38	22.17	20.85	20.00
1090.1	36.04	36.18	35.99	21.41	20.15	19.33
1170.1	35.28	35.61	35.55	20.71	19.50	18.70
1240.1	34.52	35.05	35.16	20.62	19.32	18.34
1320.1	33.75	34.51	34.82	20.24	18.85	17.76
1390.1	33.12	34.00	34.49	20.06	18.51	17.30
1470.1	32.36	33.37	34.07	19.94	18.10	16.69
1540.1	31.64	32.80	33.68	19.64	17.66	16.12
1620.1	30.93	32.20	33.29	19.11	16.98	15.46
1690.1	30.49	31.89	33.09	18.60	16.55	15.05
1770.1	29.92	31.44	32.82	18.06	16.00	14.51
1840.1	29.30	30.93	32.49	17.63	15.58	14.21
1920.1	28.77	30.43	32.17	17.14	15.42	14.22
1990.1	28.36	29.95	31.68	16.50	15.10	14.14
2070.1	27.98	29.64	31.40	15.86	14.88	14.19
2140.1	27.36	28.99	30.73	15.56	14.61	14.21
2220.1	26.94	28.67	30.45	15.49	14.86	14.65
2290.1	26.61	28.28	29.82	15.73	15.36	15.12
2370.1	26.27	27.87	29.34	16.13	15.79	15.64
2440.1	26.83	28.47	29.86	16.61	16.33	16.12
2520.1	25.49	27.13	28.43	16.71	16.39	16.10
2590.1	25.24	26.73	27.83	16.66	16.24	15.83
2670.1	24.94	26.31	27.26	16.46	15.94	15.51
2740.1	24.58	25.90	26.76	16.42	15.85	15.41
2820.1	24.23	25.38	26.14	16.49	16.10	15.80
2890.1	24.05	25.01	25.62	16.49	16.12	15.94

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+3	+6	+9
4380.1	80.1	40.71	40.03	39.70
4450.1	150.1	38.97	38.76	39.01
4520.1	220.1	38.04	37.68	37.51
4590.1	290.1	37.41	37.19	37.11
4660.1	360.1	38.00	37.37	36.94
4730.1	430.1	37.71	36.88	36.22
4800.1	500.1	38.92	38.20	37.66
4870.1	570.1	38.77	37.74	36.74
4940.1	640.1	39.32	38.41	38.05
5020.1	720.1	39.21	37.81	36.95
5090.1	790.1	38.86	37.32	36.00
5170.1	870.1	38.43	38.13	37.80
5240.1	940.1	38.22	38.73	39.06
5320.1	1020.1	37.76	38.15	39.01
5390.1	1090.1	36.84	37.06	37.54
5470.1	1170.1	35.06	34.94	34.94
5540.1	1240.1	34.02	33.53	33.35
5620.1	1320.1	33.66	33.35	32.97
5690.1	1390.1	33.03	32.70	32.42
5770.1	1470.1	32.98	32.65	32.31
5840.1	1540.1	32.80	32.48	32.20
5920.1	1620.1	32.34	32.07	31.91
5990.1	1690.1	32.62	32.22	32.05
6070.1	1770.1	32.91	32.42	32.12
6140.1	1840.1	32.76	32.30	31.98
6220.1	1920.1	33.68	33.44	33.34
6290.1	1990.1	34.15	34.30	34.31
6370.1	2070.1	33.75	34.21	34.49
6440.1	2140.1	33.33	33.50	33.88
6520.1	2220.1	32.42	32.48	32.79
6590.1	2290.1	31.70	31.61	31.98
6670.1	2370.1	31.73	31.63	31.89
6740.1	2440.1	31.49	31.41	31.64
6820.1	2520.1	31.66	31.84	32.30
6890.1	2590.1	31.78	31.86	32.18
6970.1	2670.1	32.02	32.16	32.62
7040.1	2740.1	32.34	32.72	33.07
7120.1	2820.1	32.80	33.30	34.11
7190.1	2890.1	32.80	33.58	34.39

REV. X2

SIM-ED12666/1

101031

Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SIM-ED12666/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1400MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+3	+6	+9		+3	+6	+9		+3	+6	+9
4380.1	80.1	2.23	2.47	2.67	80.1	1.35	2.15	3.42	2580.1	2.71	3.10	3.52
4450.1	150.1	2.20	2.46	2.66	150.1	1.37	2.08	3.07	2760.1	2.25	2.86	3.41
4520.1	220.1	2.22	2.46	2.65	220.1	1.39	2.01	2.91	2940.1	1.93	2.56	3.01
4590.1	290.1	2.21	2.41	2.57	290.1	1.38	1.91	2.69	3120.1	1.64	2.08	2.31
4660.1	360.1	2.15	2.34	2.48	360.1	1.42	1.93	2.71	3300.1	1.41	1.60	1.67
4730.1	430.1	2.08	2.24	2.35	430.1	1.47	1.92	2.66	3480.1	1.27	1.35	1.41
4800.1	500.1	2.03	2.14	2.22	500.1	1.46	1.85	2.55	3660.1	1.29	1.37	1.48
4870.1	570.1	1.96	2.03	2.07	570.1	1.47	1.81	2.47	3840.1	1.38	1.43	1.54
4940.1	640.1	1.88	1.89	1.90	640.1	1.51	1.81	2.45	4020.1	1.54	1.49	1.54
5020.1	720.1	1.83	1.79	1.78	720.1	1.49	1.73	2.36	4200.1	1.82	1.66	1.61
5090.1	790.1	1.76	1.68	1.65	790.1	1.51	1.67	2.26	4380.1	2.17	1.88	1.74
5170.1	870.1	1.64	1.55	1.50	870.1	1.57	1.64	2.18	4560.1	2.50	2.11	1.89
5240.1	940.1	1.51	1.41	1.36	940.1	1.61	1.61	2.12	4740.1	2.78	2.30	2.02
5320.1	1020.1	1.40	1.30	1.25	1020.1	1.73	1.61	2.04	4900.1	2.86	2.34	2.05
5390.1	1090.1	1.33	1.22	1.17	1090.1	1.80	1.58	1.95	5080.1	3.03	2.48	2.23
5470.1	1170.1	1.25	1.14	1.09	1170.1	1.86	1.54	1.87	5240.1	3.24	2.75	2.58
5540.1	1240.1	1.19	1.10	1.05	1240.1	1.96	1.53	1.79	5420.1	3.60	3.24	3.17
5620.1	1320.1	1.18	1.09	1.07	1320.1	2.05	1.51	1.68	5580.1	3.90	3.61	3.56
5690.1	1390.1	1.14	1.08	1.08	1390.1	2.12	1.50	1.60	5760.1	4.13	3.83	3.72
5770.1	1470.1	1.09	1.08	1.12	1470.1	2.22	1.51	1.52	5920.1	3.94	3.62	3.47
5840.1	1540.1	1.03	1.11	1.17	1540.1	2.33	1.50	1.45	6100.1	3.48	3.15	2.97
5920.1	1620.1	1.05	1.15	1.21	1620.1	2.36	1.48	1.35	6260.1	3.06	2.75	2.56
5990.1	1690.1	1.15	1.24	1.30	1690.1	2.34	1.45	1.27	6440.1	2.60	2.32	2.14
6070.1	1770.1	1.25	1.33	1.38	1770.1	2.39	1.44	1.18	6600.1	2.36	2.09	1.93
6140.1	1840.1	1.36	1.46	1.51	1840.1	2.48	1.44	1.11	6780.1	2.03	1.80	1.67
6220.1	1920.1	1.55	1.66	1.71	1920.1	2.51	1.45	1.06	6940.1	1.88	1.67	1.55
6290.1	1990.1	1.72	1.83	1.87	1990.1	2.44	1.44	1.08	7120.1	1.68	1.49	1.39
6370.1	2070.1	1.93	2.06	2.13	2070.1	2.41	1.44	1.14	7280.1	1.52	1.35	1.27
6440.1	2140.1	2.12	2.28	2.37	2140.1	2.48	1.47	1.20	7460.1	1.40	1.24	1.15
6520.1	2220.1	2.35	2.51	2.62	2220.1	2.47	1.48	1.29	7620.1	1.35	1.23	1.17
6590.1	2290.1	2.54	2.68	2.81	2290.1	2.32	1.47	1.36	7800.1	1.53	1.42	1.36
6670.1	2370.1	2.77	2.88	2.97	2370.1	2.23	1.47	1.43	7960.1	1.76	1.64	1.57
6740.1	2440.1	2.92	3.00	3.06	2440.1	2.26	1.49	1.49	8140.1	2.05	1.92	1.85
6820.1	2520.1	3.16	3.21	3.27	2520.1	2.19	1.51	1.58	8300.1	2.31	2.20	2.15
6890.1	2590.1	3.35	3.40	3.43	2590.1	2.07	1.52	1.66	8480.1	2.63	2.57	2.54
6970.1	2670.1	3.52	3.60	3.62	2670.1	2.02	1.57	1.74	8640.1	2.86	2.81	2.81
7040.1	2740.1	3.67	3.76	3.78	2740.1	2.05	1.64	1.82	8820.1	3.05	3.00	3.01
7120.1	2820.1	3.86	3.96	3.98	2820.1	2.07	1.71	1.92	8980.1	3.27	3.20	3.21
7190.1	2890.1	3.86	3.97	3.98	2890.1	2.02	1.76	2.01	9160.1	3.58	3.51	3.49

REV. X2

SIM-ED12666/1

101031

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	9.54	-19.96	-5.99	-22.97	-10.07	-30.28	-19.62	-30.19	-28.10	-52.07
1	---	-23.16	---	-41.10	-16.44	-54.42	-24.64	-48.74	-26.60	-50.34	-29.70	-62.88
2	-100.89	-65.78	-41.53	-61.88	-42.44	-57.26	-42.99	-61.04	-49.70	-77.73	-48.96	-61.40
3	-97.47	-87.64	-64.58	-83.80	-69.55	-86.86	-62.89	-76.05	-57.28	-72.62	-54.84	-74.06
4	-96.93	-88.26	-90.65	-92.01	-90.90	-91.87	-92.15	-88.91	-88.87	-91.96	-79.18	-97.34
5	-94.79	-62.00	-61.97	-87.81	-90.68	-91.43	-89.84	-91.41	-89.05	-90.73	-93.21	-91.44
6	-96.25	-62.06	-61.90	-62.26	-62.12	-61.88	-62.18	-88.71	-88.80	-89.56	-89.39	-93.47
7	-95.81	-62.03	-62.14	-62.05	-62.30	-62.12	-62.26	-62.17	-61.49	-61.84	-61.59	-87.19
8	-94.79	-61.96	-61.81	-62.05	-62.18	-62.30	-62.07	-61.98	-61.68	-61.80	-61.36	-61.62
9	-94.44	-62.06	-62.21	-61.90	-62.37	-62.10	-62.43	-61.81	-61.46	-61.53	-61.41	-61.68
10	-94.27	-61.91	-62.03	-61.91	-61.89	-61.92	-62.45	-61.90	-61.44	-61.54	-61.47	-61.63
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 0 MHz; -14 dBm.
 LO IN: 0 MHz; +6 dBm
 IF OUT: 0 MHz; -20.47 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	---	---	-0.82	-28.43	-19.51	-35.59	-20.12	-39.81	-30.48	-41.23	-43.42	-51.09
1	---	-23.10	---	-44.58	-16.91	-57.86	-24.05	-56.73	-33.03	-67.15	-33.56	-56.96
2	-92.07	-55.04	-30.85	-53.38	-32.40	-50.03	-35.70	-58.37	-40.01	-70.44	-40.67	-61.68
3	-107.57	-72.10	-42.94	-64.78	-48.00	-70.19	-44.10	-57.48	-40.63	-61.88	-42.00	-69.70
4	-105.75	-83.87	-75.05	-84.59	-59.06	-90.48	-70.37	-63.15	-61.86	-70.15	-54.54	-67.08
5	-104.18	-77.76	-77.62	-93.74	-84.91	-87.59	-76.29	-83.56	-64.87	-82.04	-60.64	-68.50
6	-104.37	-77.36	-77.21	-77.48	-77.34	-77.95	-77.32	-95.19	-88.37	-89.12	-76.61	-82.92
7	-105.18	-77.49	-77.29	-77.79	-77.51	-77.41	-77.55	-77.49	-77.21	-77.52	-77.82	-97.71
8	-105.37	-77.56	-77.79	-77.81	-77.59	-77.43	-77.39	-77.76	-77.89	-78.01	-77.60	-77.76
9	-105.13	-77.43	-77.28	-77.98	-77.28	-77.32	-77.63	-77.66	-77.60	-77.45	-78.04	-77.64
10	-104.76	-77.64	-77.49	-77.44	-77.64	-77.38	-77.39	-77.52	-78.07	-77.56	-77.52	-77.28
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 0 MHz; -4 dBm.
 LO IN: 0 MHz; +6 dBm
 IF OUT: 0 MHz; -10.58 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.


3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


SIM-ED12666/1

Typical Performance Curves


Conversion Loss @ IF=4300MHz

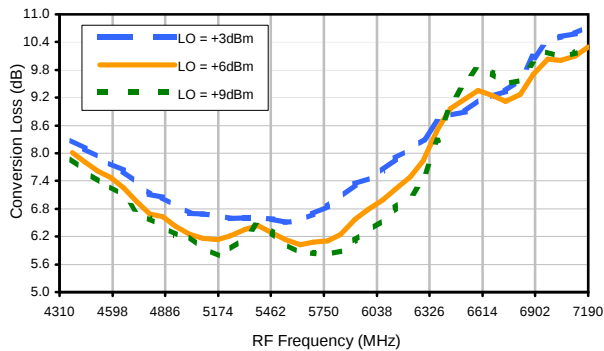


Conversion Loss vs. IF @ RF=5800.1001MHz

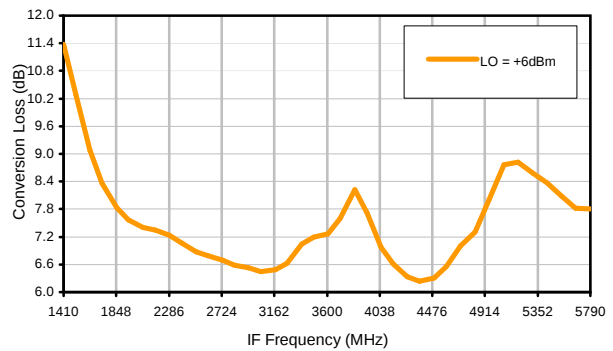


Conversion Loss vs. IF @ RF=5700.1001MHz

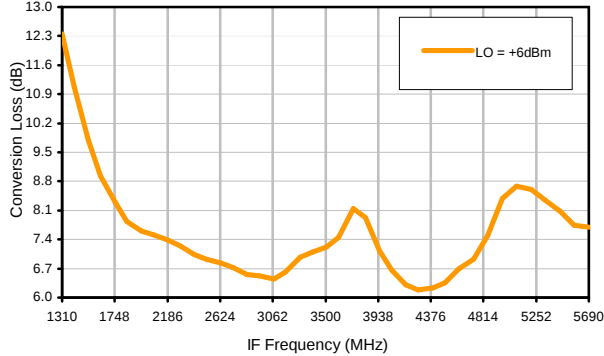


Conversion Loss vs. IF @ RF=5900.1001MHz

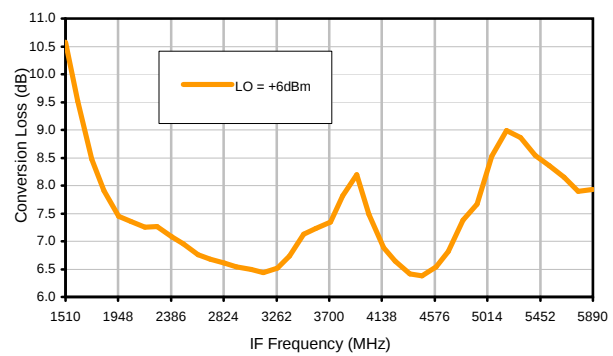

IP3 Input

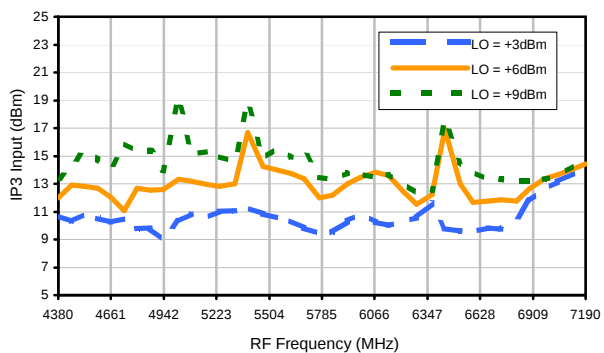


Compression @ RF IN=+1dBm

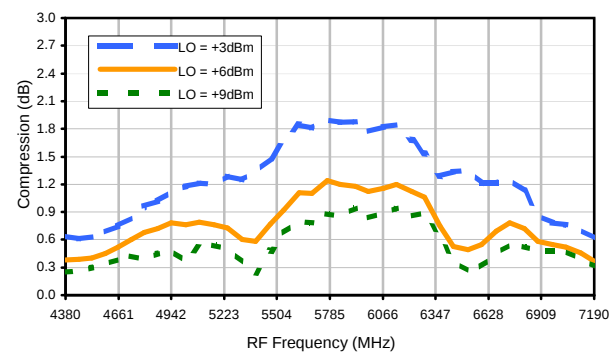


Typical Performance Curves


LO-RF Isolation

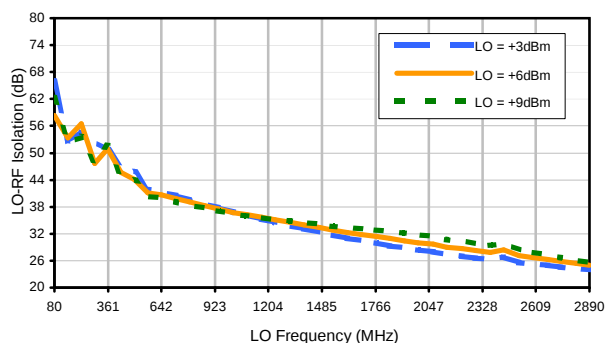


LO-IF Isolation

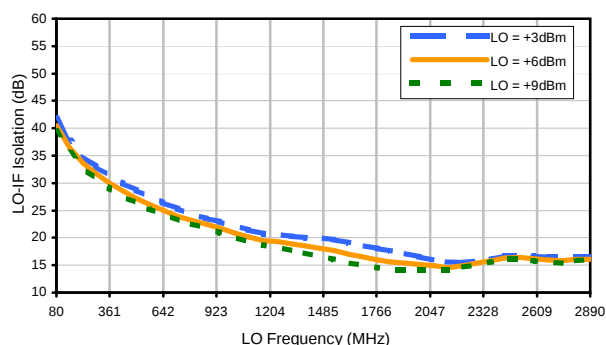


RF-IF Isolation

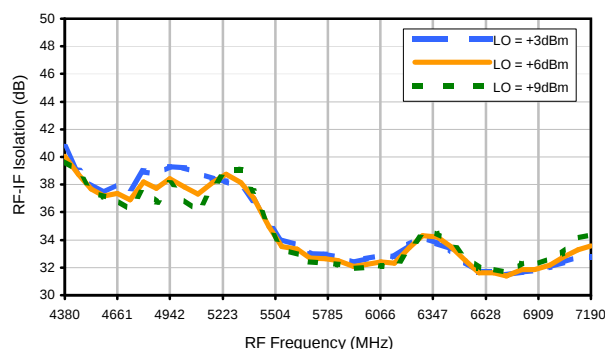


RF VSWR

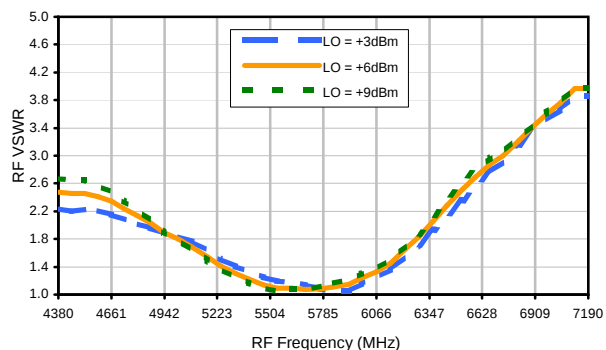

LO VSWR

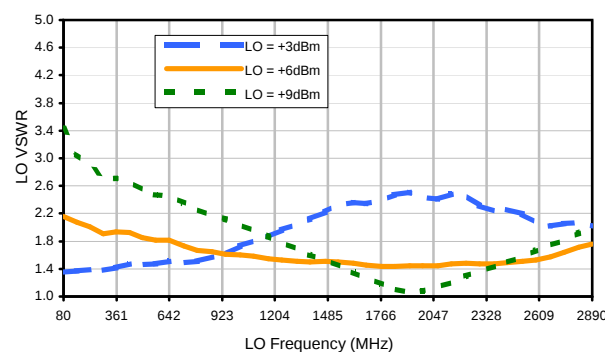

IF VSWR

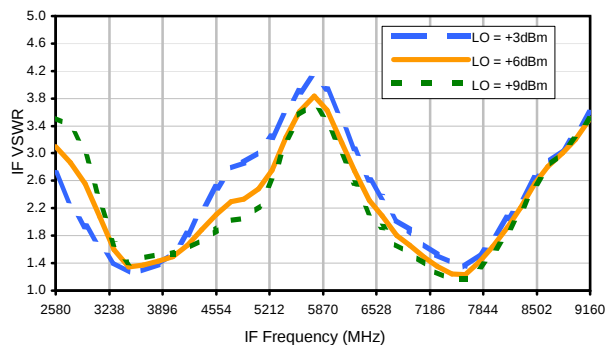

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(dBc)										
0	---	---	9.54	-19.96	-5.99	-22.97	-10.07	-30.28	-19.62	-30.19	-28.10	-52.07
1	---	-23.16	---	-41.10	-16.44	-54.42	-24.64	-48.74	-26.60	-50.34	-29.70	-62.88
2	-100.89	-65.78	-41.53	-61.88	-42.44	-57.26	-42.99	-61.04	-49.70	-77.73	-48.96	-61.40
3	-97.47	-87.64	-64.58	-83.80	-69.55	-86.86	-62.89	-76.05	-57.28	-72.62	-54.84	-74.06
4	-96.93	-88.26	-90.65	-92.01	-90.90	-91.87	-92.15	-88.91	-88.87	-91.96	-79.18	-97.34
5	-94.79	-62.00	-61.97	-87.81	-90.68	-91.43	-89.84	-91.41	-89.05	-90.73	-93.21	-91.44
6	-96.25	-62.06	-61.90	-62.26	-62.12	-61.88	-62.18	-88.71	-88.80	-89.56	-89.39	-93.47
7	-95.81	-62.03	-62.14	-62.05	-62.30	-62.12	-62.26	-62.17	-61.49	-61.84	-61.59	-87.19
8	-94.79	-61.96	-61.81	-62.05	-62.18	-62.30	-62.07	-61.98	-61.68	-61.80	-61.36	-61.62
9	-94.44	-62.06	-62.21	-61.90	-62.37	-62.10	-62.43	-61.81	-61.46	-61.53	-61.41	-61.68
10	-94.27	-61.91	-62.03	-61.91	-61.89	-61.92	-62.45	-61.90	-61.44	-61.54	-61.47	-61.63
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 0 MHz; -14 dBm.
 LO IN: 0 MHz; +6 dBm
 IF OUT: 0 MHz; -20.47 dBm

RF HARMONICS ORDER

	(-dBm)	(dBc)										
0	---	---	-0.82	-28.43	-19.51	-35.59	-20.12	-39.81	-30.48	-41.23	-43.42	-51.09
1	---	-23.10	---	-44.58	-16.91	-57.86	-24.05	-56.73	-33.03	-67.15	-33.56	-56.96
2	-92.07	-55.04	-30.85	-53.38	-32.40	-50.03	-35.70	-58.37	-40.01	-70.44	-40.67	-61.68
3	-107.57	-72.10	-42.94	-64.78	-48.00	-70.19	-44.10	-57.48	-40.63	-61.88	-42.00	-69.70
4	-105.75	-83.87	-75.05	-84.59	-59.06	-90.48	-70.37	-63.15	-61.86	-70.15	-54.54	-67.08
5	-104.18	-77.76	-77.62	-93.74	-84.91	-87.59	-76.29	-83.56	-64.87	-82.04	-60.64	-68.50
6	-104.37	-77.36	-77.21	-77.48	-77.34	-77.95	-77.32	-95.19	-88.37	-89.12	-76.61	-82.92
7	-105.18	-77.49	-77.29	-77.79	-77.51	-77.41	-77.55	-77.49	-77.21	-77.52	-77.82	-97.71
8	-105.37	-77.56	-77.79	-77.81	-77.59	-77.43	-77.39	-77.76	-77.89	-78.01	-77.60	-77.76
9	-105.13	-77.43	-77.28	-77.98	-77.28	-77.32	-77.63	-77.66	-77.60	-77.45	-78.04	-77.64
10	-104.76	-77.64	-77.49	-77.44	-77.64	-77.38	-77.39	-77.52	-78.07	-77.56	-77.52	-77.28
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 0 MHz; -4 dBm.
 LO IN: 0 MHz; +6 dBm
 IF OUT: 0 MHz; -10.58 dBm


Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.


3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

HV1195

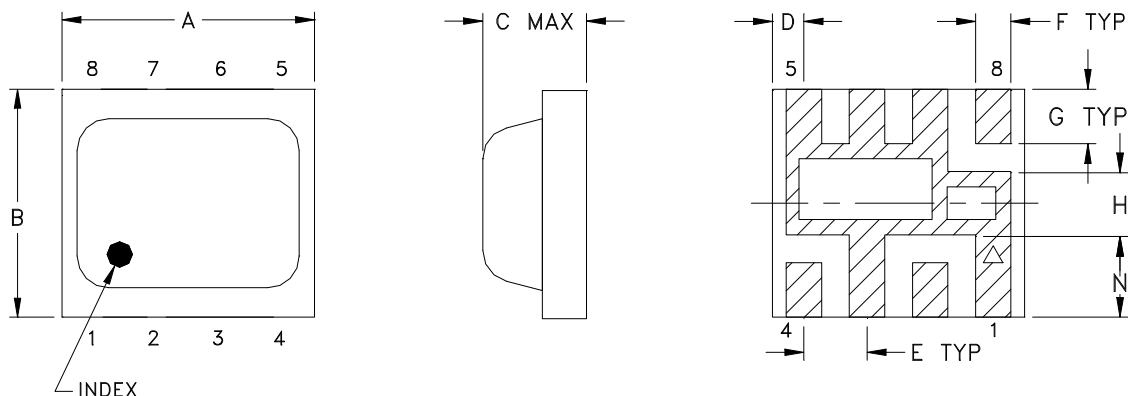

PCB Metal Land Pattern

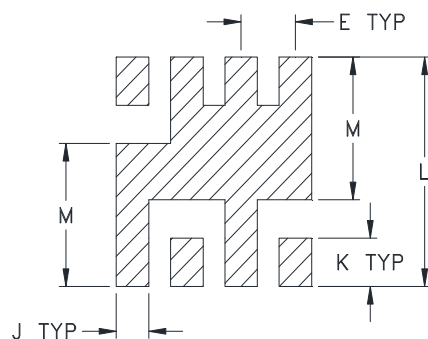

Suggested Layout,
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
HV1195	0.200 (5.08)	0.180 (4.57)	0.087 (2.21)	0.025 (0.64)	0.050 (1.27)	0.028 (0.71)	0.043 (1.09)	0.050 (1.27)	0.030 (0.76)	0.043 (1.09)	0.204 (5.18)	0.127 (3.23)	0.065 (1.65)

CASE#	WT, GRAM
HV1195	.08

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic encapsulation on Ceramic base.
2. Termination finish: Palladium Silver.




P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F82

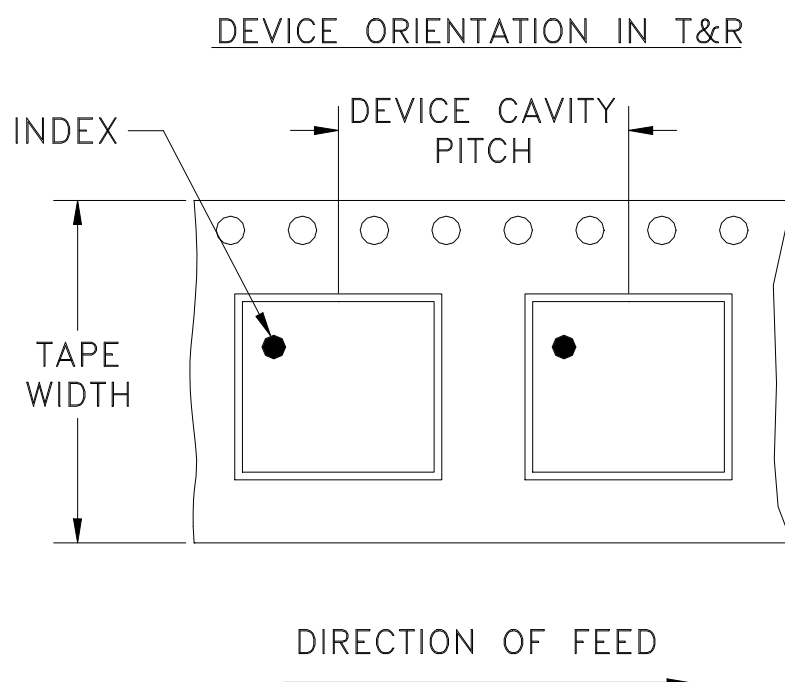

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
12	8	7	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215