

CASE STYLE: A06


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	8
IF	3
GROUND	2,5,6,7
CASE GROUND	2,5,6,7
NOT USED	4

Outline Drawing

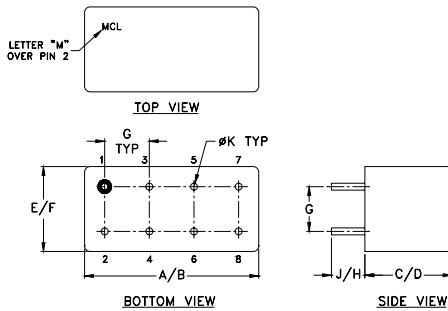

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.285	.310	.370	.400
19.56	20.32	7.24	7.87	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- excellent conversion loss, 7.28 dB typ.
- good L-R isolation, 30 dB typ. L-I isolation, 20 dB typ.
- rugged welded construction
- hermetically sealed

Applications

- satellite distribution
- MMDS
- GSM/ISM
- defense radar

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS* (dB)				LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)	
		Mid-Band m		Total Range Max.		Typ.	Min.	Typ.	Min.
500-3500	DC-1000	$\bar{X}$	σ	Max.	Max.				
		7.28	.31	9.5	9.5	30	17	20	8

1 dB COMP.: +1 dBm typ.
 *conversion loss 10 dBm at IF=1000 MHz
 m= mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
500.00	530.00	5.49	44.57	34.18	1.82	2.52
676.47	646.47	4.86	45.01	32.12	1.20	2.56
852.94	822.94	5.14	44.31	30.77	1.33	2.66
1000.00	970.00	5.49	43.00	30.12	1.64	2.80
1117.65	1087.65	6.31	41.48	29.93	1.89	2.68
1294.12	1264.12	6.71	38.60	28.62	2.32	2.35
1382.35	1352.35	6.65	38.54	29.04	2.85	2.17
1500.00	1470.00	6.73	37.52	28.95	3.54	2.01
1647.06	1617.06	6.75	35.53	26.47	4.67	1.68
1823.53	1793.53	7.16	34.94	23.92	5.54	1.27
2000.00	1970.00	7.35	34.78	22.93	6.01	1.26
2088.24	2058.24	7.33	34.08	22.73	5.25	1.36
2264.71	2234.71	7.35	33.58	22.82	5.33	1.55
2500.00	2470.00	7.31	35.10	23.41	5.23	1.61
2617.65	2587.65	7.08	34.51	23.33	5.56	2.09
2882.35	2852.35	7.51	34.73	23.28	6.46	2.31
3000.00	2970.00	7.49	35.30	23.26	5.30	2.36
3147.06	3117.06	7.27	36.75	23.89	5.28	2.34
3323.53	3293.53	7.09	43.96	25.30	4.27	2.29
3500.00	3470.00	6.45	40.55	26.12	2.39	2.15







Electrical Schematic

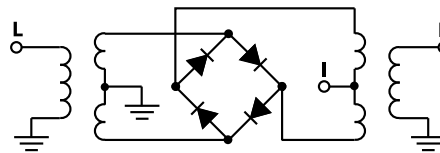

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



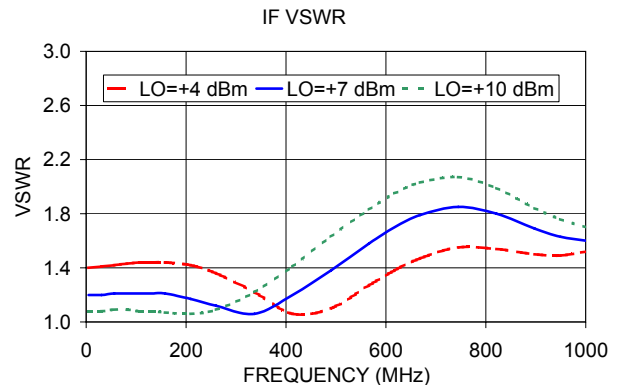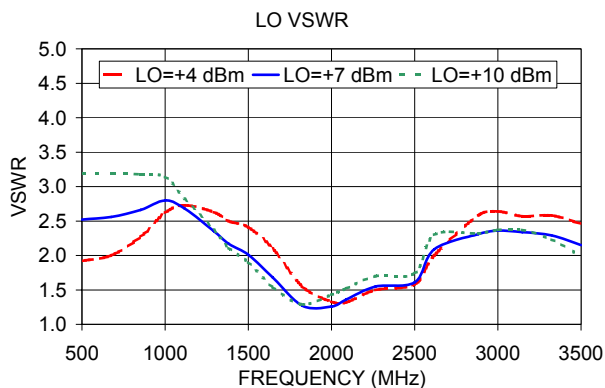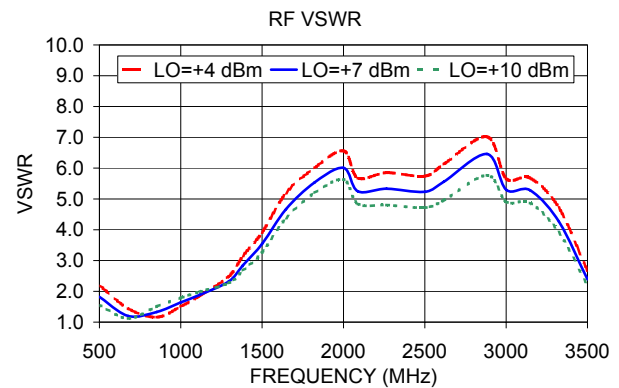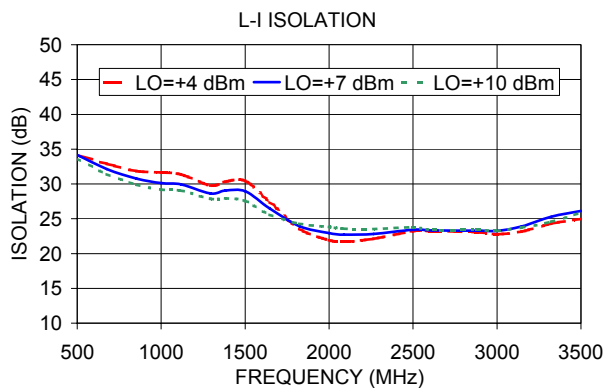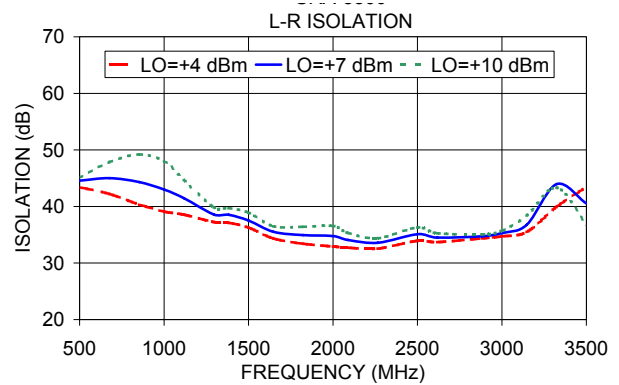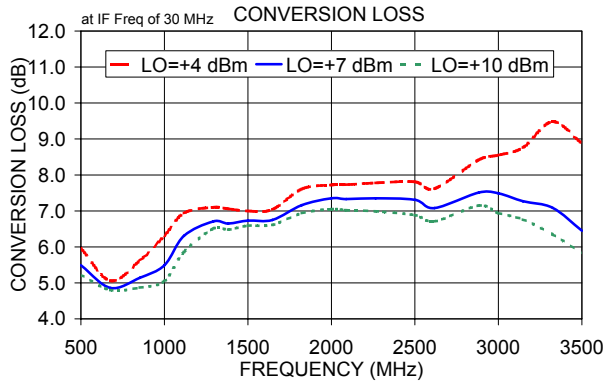

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SRA-3500+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
169.1	199.1	22.54	16.02	13.50
269.6	299.6	11.86	10.27	9.80
370.1	400.1	8.64	7.98	7.68
470.5	500.5	6.90	6.45	6.20
571.0	601.0	5.85	5.53	5.36
671.5	701.5	5.63	5.37	5.22
772.0	802.0	5.80	5.59	5.46
872.4	902.4	5.83	5.47	5.26
972.9	1002.9	5.73	5.25	4.94
1073.4	1103.4	6.36	5.81	5.46
1173.9	1203.9	6.97	6.53	6.11
1274.4	1304.4	6.73	6.52	6.36
1394.9	1424.9	6.49	6.34	6.23
1495.4	1525.4	6.52	6.43	6.35
1616.0	1646.0	6.63	6.49	6.48
1716.5	1746.5	7.03	6.72	6.57
1837.0	1867.0	7.02	6.72	6.57
1937.5	1967.5	6.89	6.64	6.52
2058.1	2088.1	6.94	6.64	6.45
2158.6	2188.6	7.22	6.90	6.69
2279.1	2309.1	7.85	7.36	7.06
2379.6	2409.6	8.42	7.80	7.43
2500.2	2530.2	8.78	8.04	7.68
2600.7	2630.7	8.86	8.22	7.78
2721.3	2751.3	8.63	8.13	7.95
2821.7	2851.7	9.11	7.71	7.29
2942.3	2972.3	9.73	8.03	7.32
3042.8	3072.8	9.92	8.10	7.27
3163.4	3193.4	11.23	8.19	7.35
3263.8	3293.8	13.16	8.49	7.37
3384.4	3414.4	14.50	8.96	7.41
3484.9	3514.9	14.62	8.82	7.23
3605.5	3635.5	13.47	8.26	6.83
3705.9	3735.9	12.69	7.81	6.58
3826.5	3856.5	12.40	7.72	6.51
3927.0	3957.0	11.30	7.73	6.90
4047.6	4077.6	10.08	7.69	7.06
4148.0	4178.0	9.77	7.89	7.34
4268.6	4298.6	10.44	8.98	8.45
4369.1	4399.1	11.12	9.81	9.37

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
169.1	199.1	2.89	10.66	17.25
269.6	299.6	10.20	16.11	16.36
370.1	400.1	13.41	14.94	14.63
470.5	500.5	7.58	8.29	8.89
571.0	601.0	6.69	7.51	8.61
671.5	701.5	8.14	8.92	10.00
772.0	802.0	21.10	19.39	15.02
872.4	902.4	9.49	9.93	10.10
972.9	1002.9	5.13	6.28	7.75
1073.4	1103.4	4.77	6.32	7.27
1173.9	1203.9	3.47	5.03	7.32
1274.4	1304.4	5.65	5.51	6.09
1394.9	1424.9	8.73	8.85	10.10
1495.4	1525.4	10.42	9.42	11.07
1616.0	1646.0	11.25	14.71	13.72
1716.5	1746.5	12.17	14.64	16.35
1837.0	1867.0	14.68	14.34	15.46
1937.5	1967.5	14.73	14.91	14.94
2058.1	2088.1	13.19	14.25	14.19
2158.6	2188.6	12.37	15.76	17.68
2279.1	2309.1	15.14	16.05	17.49
2379.6	2409.6	12.63	15.08	17.58
2500.2	2530.2	10.96	11.54	11.63
2600.7	2630.7	10.79	10.33	11.37
2721.3	2751.3	11.83	11.85	10.43
2821.7	2851.7	11.79	12.70	13.60
2942.3	2972.3	7.68	17.44	17.38
3042.8	3072.8	6.39	10.89	16.65
3163.4	3193.4	4.20	7.24	11.02
3263.8	3293.8	0.27	7.01	10.10
3384.4	3414.4	-1.21	6.60	9.35
3484.9	3514.9	-1.94	6.61	7.72
3605.5	3635.5	-1.12	7.77	7.53
3705.9	3735.9	-1.20	8.57	7.85
3826.5	3856.5	-1.23	10.11	15.67
3927.0	3957.0	0.90	10.43	11.97
4047.6	4077.6	4.56	10.00	13.00
4148.0	4178.0	5.05	7.78	10.71
4268.6	4298.6	8.90	10.82	11.57
4369.1	4399.1	7.93	11.61	12.11

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
169.1	199.1	-2.43	-0.49	-0.10
269.6	299.6	-0.24	-0.04	-0.03
370.1	400.1	0.67	0.52	0.39
470.5	500.5	1.46	1.22	1.02
571.0	601.0	1.99	1.66	1.39
671.5	701.5	1.84	1.52	1.24
772.0	802.0	1.90	1.55	1.28
872.4	902.4	3.11	2.71	2.38
972.9	1002.9	3.40	3.12	2.83
1073.4	1103.4	2.49	2.30	2.09
1173.9	1203.9	1.72	1.53	1.41
1274.4	1304.4	1.53	1.23	0.98
1394.9	1424.9	1.19	0.88	0.70
1495.4	1525.4	0.96	0.65	0.52
1616.0	1646.0	0.81	0.54	0.42
1716.5	1746.5	0.61	0.45	0.35
1837.0	1867.0	0.62	0.38	0.26
1937.5	1967.5	0.73	0.44	0.28
2058.1	2088.1	0.90	0.59	0.42
2158.6	2188.6	1.08	0.71	0.47
2279.1	2309.1	1.01	0.73	0.51
2379.6	2409.6	0.84	0.57	0.42
2500.2	2530.2	0.94	0.64	0.45
2600.7	2630.7	1.03	0.66	0.51
2721.3	2751.3	1.34	0.66	0.46
2821.7	2851.7	1.02	0.74	0.60
2942.3	2972.3	0.85	0.51	0.47
3042.8	3072.8	1.08	0.70	0.56
3163.4	3193.4	0.53	1.08	0.59
3263.8	3293.8	-0.46	1.11	0.63
3384.4	3414.4	-1.38	0.79	0.47
3484.9	3514.9	-1.78	0.85	0.51
3605.5	3635.5	-1.20	1.01	0.61
3705.9	3735.9	-0.75	1.14	0.61
3826.5	3856.5	-0.86	0.94	0.74
3927.0	3957.0	-0.03	0.95	0.54
4047.6	4077.6	0.92	1.15	0.63
4148.0	4178.0	1.60	1.42	0.89
4268.6	4298.6	1.75	1.20	0.85
4369.1	4399.1	1.75	1.11	0.72

REV. X3

SRA-3500+

101031

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2000MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=490MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3510.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
1799.9	200.1	13.01	10.1	500.1	6.50	1710.0	1800.1	9.99
1717.6	282.4	9.97	50.5	540.5	6.19	1670.0	1840.1	9.18
1635.3	364.7	8.98	91.0	581.0	6.25	1630.0	1880.1	8.63
1532.4	467.6	8.74	131.4	621.4	6.16	1590.0	1920.1	8.37
1450.1	549.9	8.87	171.9	661.9	6.05	1550.0	1960.1	8.31
1347.3	652.7	8.79	212.3	702.3	5.95	1510.0	2000.1	8.39
1265.0	735.0	8.62	252.8	742.8	5.98	1470.0	2040.1	8.75
1162.1	837.9	8.21	293.2	783.2	5.95	1430.0	2080.1	8.91
1079.8	920.2	7.85	333.7	823.7	5.88	1390.0	2120.1	8.80
977.0	1023.0	7.60	374.1	864.1	5.68	1350.0	2160.1	8.78
894.7	1105.3	7.60	414.6	904.6	5.62	1310.0	2200.1	8.57
791.8	1208.2	7.14	455.0	945.0	5.61	1270.0	2240.1	8.48
709.5	1290.5	6.90	495.5	985.5	5.78	1230.0	2280.1	8.15
606.6	1393.4	7.03	535.9	1025.9	6.06	1190.0	2320.1	7.95
524.3	1475.7	6.76	576.4	1066.4	6.17	1150.0	2360.1	7.75
421.5	1578.5	6.30	616.8	1106.8	6.39	1110.0	2400.1	7.42
339.2	1660.8	6.78	657.3	1147.3	6.63	1070.0	2440.1	7.49
236.3	1763.7	6.76	697.7	1187.7	6.87	1030.0	2480.1	7.37
154.0	1846.0	6.67	738.2	1228.2	7.16	990.0	2520.1	7.37
51.1	1948.9	6.63	798.9	1288.9	7.54	950.0	2560.1	7.55
29.4	2029.4	6.77	839.3	1329.3	7.60	910.0	2600.1	7.57
126.6	2126.6	6.58	900.0	1390.0	7.49	870.0	2640.1	7.57
204.3	2204.3	6.50	940.4	1430.4	7.27	830.0	2680.1	7.47
301.4	2301.4	6.52	1001.1	1491.1	6.98	790.0	2720.1	7.59
379.1	2379.1	6.71	1041.6	1531.6	6.93	750.0	2760.1	7.42
476.2	2476.2	7.19	1102.2	1592.2	6.70	710.0	2800.1	7.53
553.9	2553.9	7.77	1142.7	1632.7	6.63	670.0	2840.1	7.60
651.1	2651.1	7.92	1203.4	1693.4	6.41	610.0	2900.1	7.69
728.8	2728.8	8.19	1243.8	1733.8	6.29	570.0	2940.1	7.79
825.9	2825.9	8.57	1304.5	1794.5	6.08	510.0	3000.1	7.79
903.6	2903.6	8.79	1344.9	1834.9	6.09	470.0	3040.1	7.63
1000.7	3000.7	8.97	1405.6	1895.6	5.82	410.0	3100.1	7.66
1078.5	3078.5	9.08	1446.1	1936.1	5.94	370.0	3140.1	7.52
1175.6	3175.6	8.81	1506.7	1996.7	5.85	310.0	3200.1	7.82
1253.3	3253.3	8.96	1547.2	2037.2	5.92	270.0	3240.1	7.64
1350.4	3350.4	9.58	1607.9	2097.9	6.11	210.0	3300.1	8.13
1428.1	3428.1	9.98	1648.3	2138.3	6.50	170.0	3340.1	7.91
1525.3	3525.3	9.83	1709.0	2199.0	7.41	110.0	3400.1	8.32
1603.0	3603.0	10.30	1749.4	2239.4	8.32	70.0	3440.1	7.99
1700.1	3700.1	10.81	1810.1	2300.1	10.38	10.0	3500.1	9.05

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
199.1	54.86	55.17	57.37	35.73	33.92	33.62
299.6	65.21	79.80	63.79	30.55	31.82	33.43
400.1	52.92	53.81	54.35	29.26	31.44	33.31
500.5	46.22	47.55	48.89	28.58	30.78	32.54
601.0	42.97	44.88	46.34	29.02	30.77	31.95
701.5	40.52	42.07	43.46	29.20	31.10	32.26
802.0	39.60	41.56	43.16	29.45	30.76	31.48
902.4	37.40	39.75	41.84	29.99	30.41	30.50
1002.9	38.45	40.12	41.43	30.08	29.80	29.29
1103.4	39.04	40.57	41.75	30.25	29.06	28.32
1203.9	37.36	38.93	40.13	30.64	28.89	27.71
1304.4	36.68	38.16	39.25	32.04	29.40	27.65
1424.9	38.12	39.44	40.20	36.16	31.99	29.28
1525.4	36.51	37.64	38.69	38.96	45.70	34.59
1646.0	34.92	36.48	37.76	26.97	29.15	29.86
1746.5	35.22	36.80	38.13	22.28	23.66	24.64
1867.0	35.63	37.05	37.84	19.78	21.25	22.45
1967.5	35.68	36.65	37.18	19.11	20.70	22.08
2088.1	35.81	36.92	37.60	19.09	20.60	22.09
2188.6	34.35	35.35	36.02	19.37	20.74	21.90
2309.1	34.91	35.76	36.40	19.59	20.65	21.46
2409.6	35.97	36.17	36.75	20.24	20.62	21.15
2530.2	37.05	36.71	36.74	20.87	20.53	20.58
2630.7	37.82	37.51	37.01	21.20	20.66	20.13
2751.3	38.81	38.39	37.91	21.04	20.32	19.50
2851.7	39.46	37.36	36.64	21.17	20.13	19.42
2972.3	42.64	38.63	36.89	22.06	21.18	20.49
3072.8	44.87	39.10	36.13	22.50	22.48	21.74
3193.4	48.23	39.79	35.86	22.51	23.28	23.01
3293.8	47.48	40.41	35.96	22.33	23.26	23.32
3414.4	42.49	41.12	36.29	21.69	22.66	23.13
3514.9	36.94	37.92	36.29	20.94	21.63	22.47
3635.5	31.26	31.33	30.80	21.32	22.32	23.14
3735.9	30.75	31.10	30.69	19.79	20.80	21.62
3856.5	32.46	32.84	32.38	18.20	19.31	20.47
3957.0	34.85	35.91	35.56	17.80	19.18	20.76
4077.6	32.30	36.65	39.57	18.36	19.57	20.68
4178.0	32.14	37.87	47.64	18.53	19.31	20.12
4298.6	33.72	38.60	42.94	17.89	18.63	19.54
4399.1	35.60	36.69	36.55	17.53	18.58	19.71

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
169.1	199.1	36.58	31.47	28.96
269.6	299.6	28.89	27.28	26.57
370.1	400.1	26.40	25.64	25.13
470.5	500.5	24.07	23.77	23.43
571.0	601.0	22.76	22.44	22.36
671.5	701.5	22.31	22.32	22.22
772.0	802.0	20.76	20.48	20.33
872.4	902.4	19.80	19.54	19.52
972.9	1002.9	24.21	23.33	22.65
1073.4	1103.4	34.09	32.49	30.58
1173.9	1203.9	31.49	31.74	31.61
1274.4	1304.4	26.91	26.83	26.92
1394.9	1424.9	24.83	24.08	23.77
1495.4	1525.4	24.37	22.90	22.15
1616.0	1646.0	24.17	23.06	22.20
1716.5	1746.5	25.13	24.69	24.15
1837.0	1867.0	28.56	28.39	27.95
1937.5	1967.5	33.34	33.06	32.89
2058.1	2088.1	39.08	39.39	39.31
2158.6	2188.6	39.83	40.07	40.39
2279.1	2309.1	41.67	41.40	41.29
2379.6	2409.6	44.25	43.52	43.18
2500.2	2530.2	48.11	47.35	46.31
2600.7	2630.7	64.39	63.04	54.51
2721.3	2751.3	38.85	38.50	38.08
2821.7	2851.7	33.57	32.03	30.87
2942.3	2972.3	27.59	26.80	26.07
3042.8	3072.8	25.07	23.61	22.80
3163.4	3193.4	23.27	21.90	20.67
3263.8	3293.8	21.87	20.68	19.31
3384.4	3414.4	20.30	19.07	17.44
3484.9	3514.9	18.84	17.68	15.97
3605.5	3635.5	17.88	17.14	15.45
3705.9	3735.9	16.87	16.24	14.39
3826.5	3856.5	15.03	14.89	13.55
3927.0	3957.0	13.16	13.33	12.18
4047.6	4077.6	11.95	12.70	12.26
4148.0	4178.0	11.88	13.08	13.11
4268.6	4298.6	11.05	11.84	12.12
4369.1	4399.1	9.42	9.77	9.84

Frequency Mixer

SRA-3500+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=3500MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
169.1	199.1	28.03	20.22	16.89	199.1	15.81	12.80	9.18	10.0	3.05	1.47	1.06
269.6	299.6	10.50	8.90	8.39	299.6	7.25	5.58	5.44	70.3	3.05	1.47	1.07
370.1	400.1	5.83	5.38	5.16	400.1	3.92	3.91	4.53	130.6	3.06	1.49	1.18
470.5	500.5	3.54	3.34	3.21	500.5	2.85	3.32	4.10	190.9	3.00	1.47	1.24
571.0	601.0	2.18	2.07	2.02	601.0	2.34	2.96	3.77	231.1	2.98	1.49	1.25
671.5	701.5	1.60	1.59	1.60	701.5	2.06	2.72	3.48	291.4	2.92	1.49	1.32
772.0	802.0	1.49	1.50	1.53	802.0	1.90	2.51	3.19	331.6	2.86	1.47	1.31
872.4	902.4	1.51	1.40	1.32	902.4	1.81	2.35	2.93	391.9	2.76	1.45	1.36
972.9	1002.9	1.85	1.70	1.60	1002.9	1.79	2.23	2.74	432.1	2.63	1.39	1.33
1073.4	1103.4	2.36	2.23	2.14	1103.4	1.74	2.12	2.56	492.4	2.52	1.35	1.35
1173.9	1203.9	2.87	2.85	2.75	1203.9	1.65	1.97	2.37	532.6	2.37	1.27	1.35
1274.4	1304.4	3.16	3.27	3.31	1304.4	1.51	1.78	2.14	592.9	2.27	1.22	1.33
1394.9	1424.9	3.30	3.42	3.47	1424.9	1.35	1.59	1.93	633.1	2.12	1.13	1.39
1495.4	1525.4	3.36	3.47	3.53	1525.4	1.30	1.54	1.87	693.4	2.04	1.07	1.37
1616.0	1646.0	3.33	3.37	3.44	1646.0	1.28	1.57	1.93	733.6	1.94	1.01	1.45
1716.5	1746.5	3.72	3.69	3.66	1746.5	1.35	1.68	2.06	793.9	1.88	1.09	1.48
1837.0	1867.0	3.94	3.89	3.85	1867.0	1.49	1.85	2.25	834.1	1.84	1.15	1.54
1937.5	1967.5	3.87	3.79	3.73	1967.5	1.65	2.03	2.43	894.4	1.88	1.24	1.59
2058.1	2088.1	3.62	3.44	3.31	2088.1	1.87	2.26	2.69	934.6	1.89	1.31	1.66
2158.6	2188.6	3.71	3.49	3.31	2188.6	2.02	2.39	2.82	994.9	1.97	1.40	1.73
2279.1	2309.1	4.33	4.09	3.90	2309.1	2.30	2.61	3.01	1035.2	2.04	1.47	1.81
2379.6	2409.6	5.16	4.86	4.63	2409.6	2.66	2.87	3.22	1095.5	2.18	1.55	1.83
2500.2	2530.2	6.11	5.63	5.34	2530.2	3.18	3.26	3.52	1135.7	2.29	1.63	1.87
2600.7	2630.7	6.15	5.72	5.44	2630.7	3.73	3.68	3.85	1196.0	2.42	1.69	1.86
2721.3	2751.3	5.44	4.91	4.70	2751.3	4.50	4.26	4.33	1236.2	2.57	1.78	1.89
2821.7	2851.7	5.91	4.87	4.33	2851.7	5.02	4.61	4.61	1296.5	2.65	1.80	1.86
2942.3	2972.3	6.21	5.20	4.60	2972.3	5.75	5.04	4.86	1336.7	2.78	1.86	1.86
3042.8	3072.8	6.19	5.13	4.54	3072.8	6.32	5.41	5.03	1397.0	2.80	1.84	1.77
3163.4	3193.4	6.53	4.78	4.25	3193.4	6.78	5.74	5.09	1437.2	2.92	1.89	1.74
3263.8	3293.8	6.30	4.18	3.57	3293.8	7.00	6.01	5.14	1497.5	2.87	1.81	1.57
3384.4	3414.4	5.19	3.43	2.81	3414.4	7.00	6.11	5.14	1537.7	2.94	1.83	1.52
3484.9	3514.9	4.54	2.85	2.34	3514.9	6.71	5.95	4.98	1598.0	2.73	1.68	1.30
3605.5	3635.5	3.67	2.41	1.91	3635.5	6.26	5.54	4.68	1638.2	2.69	1.65	1.24
3705.9	3735.9	3.07	2.00	1.60	3735.9	5.85	5.17	4.34	1698.5	2.25	1.48	1.24
3826.5	3856.5	2.48	1.67	1.34	3856.5	5.00	4.44	3.73	1738.7	2.05	1.50	1.43
3927.0	3957.0	2.01	1.43	1.31	3957.0	4.35	3.90	3.34	1799.0	1.61	1.65	1.79
4047.6	4077.6	1.72	1.42	1.41	4077.6	3.68	3.39	3.03	1839.2	1.60	1.92	2.11
4148.0	4178.0	1.73	1.56	1.55	4178.0	3.26	3.11	2.94	1899.5	1.94	2.35	2.55
4268.6	4298.6	2.13	2.03	2.02	4298.6	2.74	2.83	2.94	1939.7	2.38	2.72	2.91
4369.1	4399.1	2.25	2.25	2.30	4399.1	2.47	2.73	2.99	2000.0	2.93	3.13	3.25

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+8	20	6	28	22	50	34	40	63	>69
1	-	29	+0	45	16	39	38	47	49	53	42	>69
2	87	66	53	53	56	68	49	>69	54	>69	60	64
3	>90	>69	68	>69	65	>69	64	>69	>69	>69	>69	>69
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 2000 MHz; -14.00 dBm.

LO IN: 2030 MHz; +7.00 dBm

IF OUT: 30 MHz; -21 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	31	17	39	36	67	49	61	77	78
1	-	29	+0	45	16	41	40	48	54	59	49	>79
2	66	68	46	46	50	55	42	63	50	>79	58	67
3	>90	58	46	66	43	73	45	63	58	67	66	72
4	>90	76	65	69	62	69	68	72	62	73	67	>79
5	>90	>79	>79	>79	>79	>79	>79	>79	68	>79	72	>79
6	>90	>79	>79	>79	78	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 2000 MHz; -4.00 dBm.

LO IN: 2030 MHz; +7.00 dBm

IF OUT: 30 MHz; -11.03 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.


3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


SRA-3500+

Typical Performance Curves


Conversion Loss @ IF=30MHz

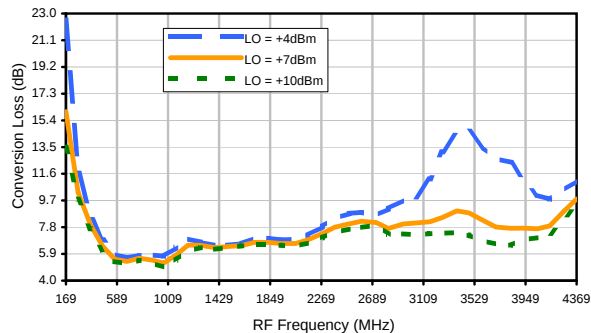


Conversion Loss vs. LO @ RF=2000MHz

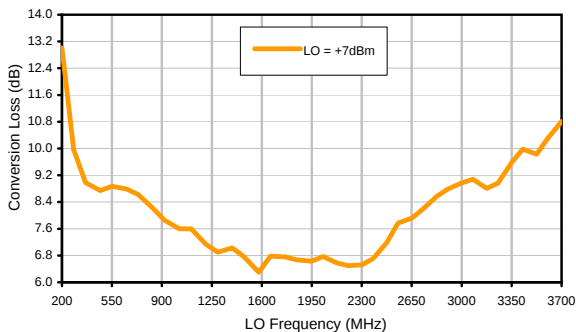


Conversion Loss vs. IF @ RF=2000MHz

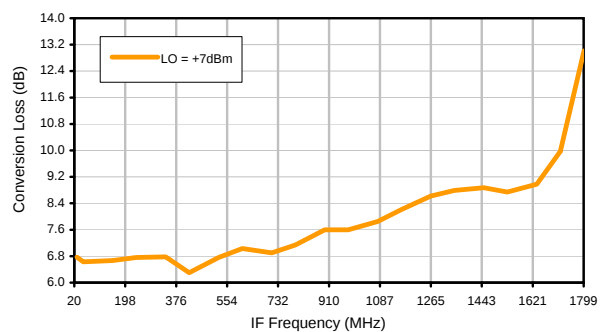


Conversion Loss vs. IF @ RF=490MHz

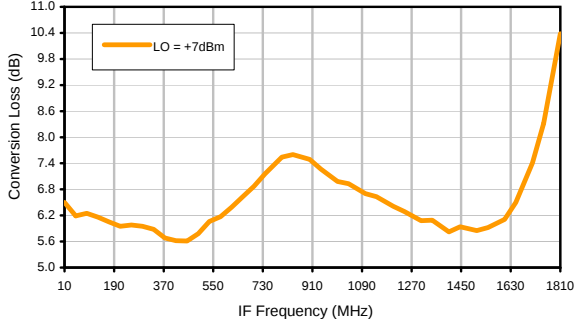


Conversion Loss vs. IF @ RF=3510.1MHz

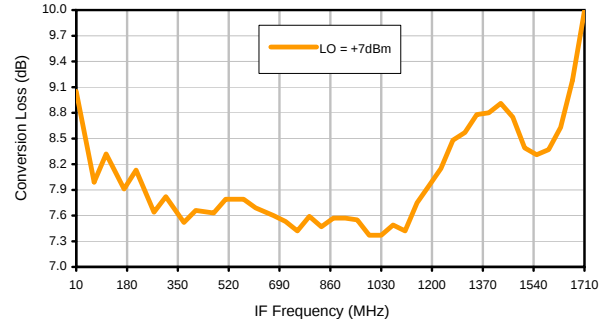

IP3 Input

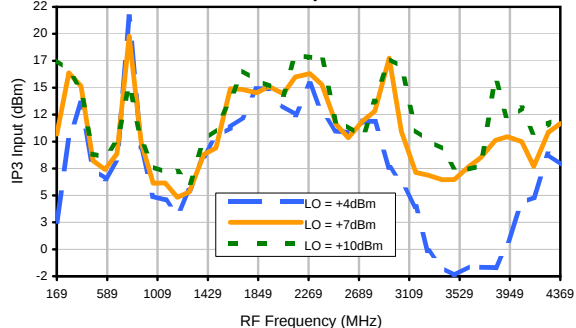


Compression @ RF IN=+1dBm

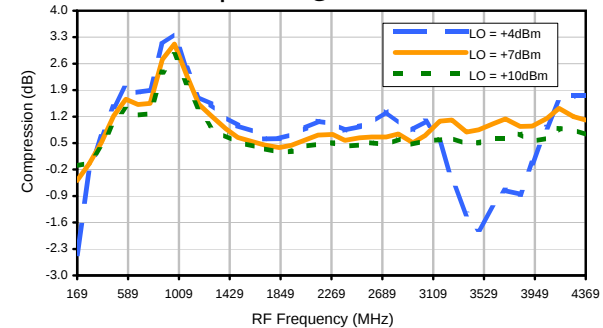

Frequency Mixer

SRA-3500+

Typical Performance Curves

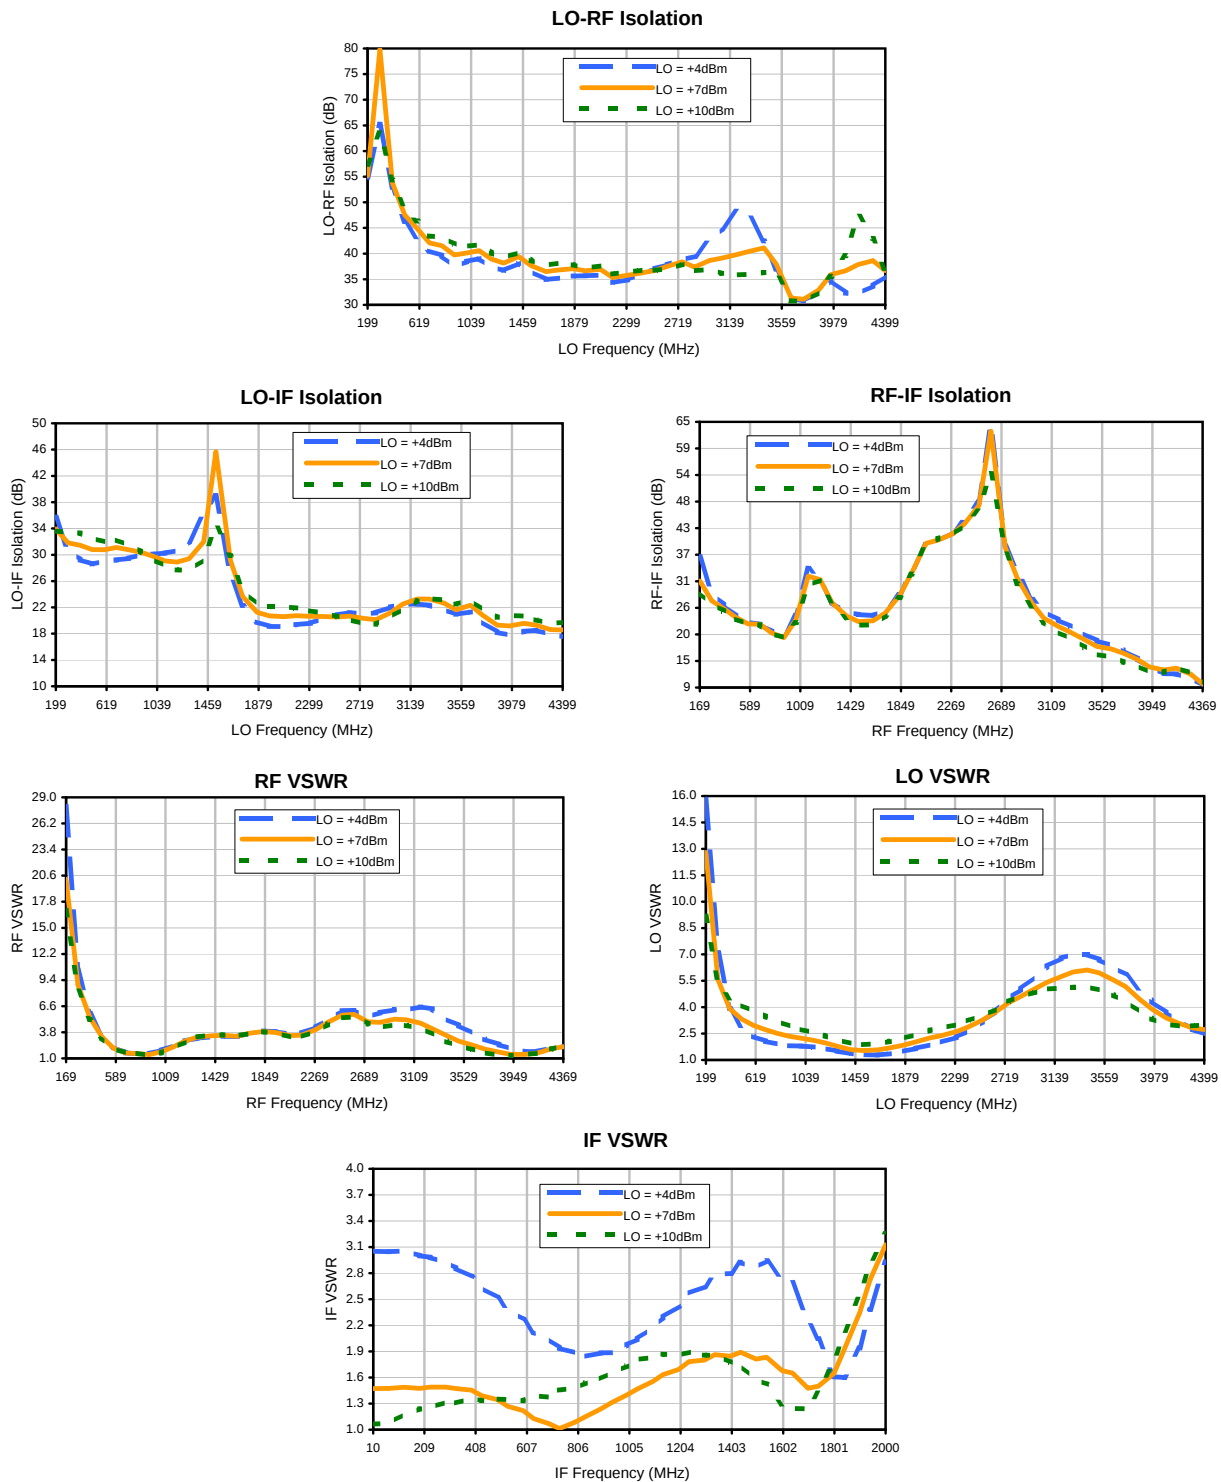

REV. X3
SRA-3500+
101031
Page 2 of 3



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

minicircuits.com

Frequency Mixer

SRA-3500+

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+8	20	6	28	22	50	34	40	63	>69
1	-	29	+0	45	16	39	38	47	49	53	42	>69
2	87	66	53	53	56	68	49	>69	54	>69	60	64
3	>90	>69	68	>69	65	>69	64	>69	>69	>69	>69	>69
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69

RF CAL 0 1 2 3 4 5 6 7 8 9 10

Test conditions: RF IN: 2000 MHz; -14.00 dBm.
 LO IN: 2030 MHz; +7.00 dBm
 IF OUT: 30 MHz; -21 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	31	17	39	36	67	49	61	77	78
1	-	29	+0	45	16	41	40	48	54	59	49	>79
2	66	68	46	46	50	55	42	63	50	>79	58	67
3	>90	58	46	66	43	73	45	63	58	67	66	72
4	>90	76	65	69	62	69	68	72	62	73	67	>79
5	>90	>79	>79	>79	>79	>79	>79	>79	68	>79	72	>79
6	>90	>79	>79	>79	78	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79

RF CAL 0 1 2 3 4 5 6 7 8 9 10

LO HARMONICS ORDER

Test conditions: RF IN: 2000 MHz; -4.00 dBm.
 LO IN: 2030 MHz; +7.00 dBm
 IF OUT: 30 MHz; -11.03 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
 SRA-3500+
 101031
 Page 3 of 3



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see


Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

minicircuits.com

A01
A04
A05
A06

Outline Dimensions

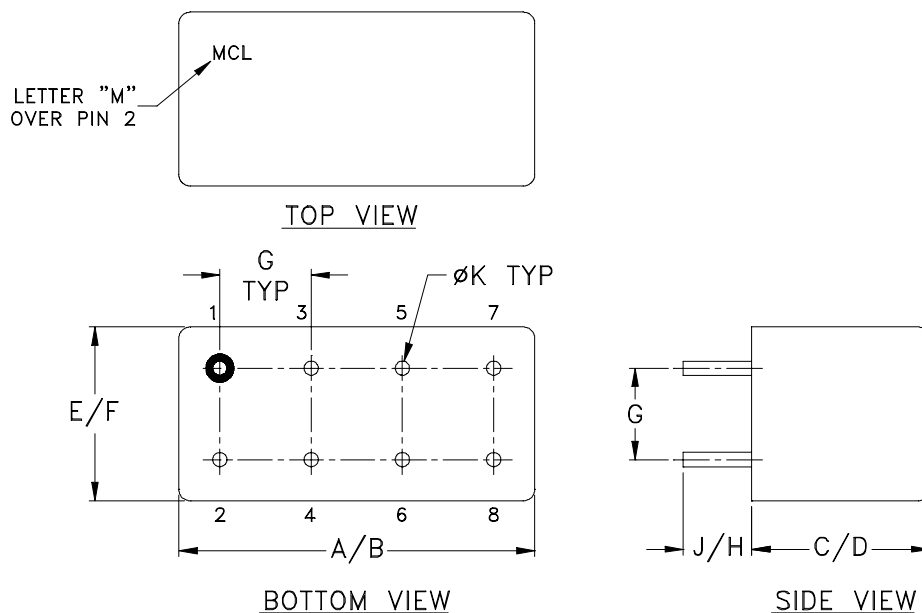

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D