

Non-Catalog Model

Frequency Mixer

Level 7 (LO Power +7 dBm)

SYM-860

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : TTT166


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	800		1050	MHz
	RF (fL to fU)	800		1050	MHz
	IF	0		250	MHz
Conversion Loss			5.6	7.0	dB
LO-RF Isolation		25	39		dB
LO-IF Isolation		20	37		dB
1 dB Comp. Input Power			+1		dBm

Note: Units are non-hermetic.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	2
RF	1
IF	3
GROUND	4, 5, 6

Electrical Schematics

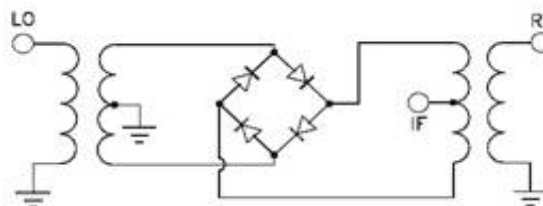

Frequency Mixer

SYM-860

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
130.1	160.1	10.69	10.12	9.88
170.3	200.3	8.96	8.55	8.36
210.6	240.6	7.90	7.56	7.39
250.8	280.8	7.23	6.93	6.77
291.1	321.1	6.74	6.47	6.31
331.3	361.3	6.46	6.18	6.04
371.5	401.5	6.22	5.96	5.82
411.8	441.8	6.08	5.80	5.65
452.0	482.0	5.97	5.72	5.58
492.3	522.3	5.89	5.62	5.47
532.5	562.5	5.87	5.58	5.40
572.8	602.8	5.86	5.59	5.41
613.0	643.0	5.83	5.57	5.40
653.2	683.2	5.80	5.52	5.37
693.5	723.5	5.78	5.49	5.33
733.7	763.7	5.82	5.52	5.34
774.0	804.0	5.89	5.58	5.40
814.2	844.2	5.96	5.67	5.49
854.4	884.4	6.03	5.74	5.56
894.7	924.7	6.07	5.78	5.60
934.9	964.9	6.14	5.83	5.66
975.2	1005.2	6.25	5.88	5.71
1015.4	1045.4	6.40	5.99	5.79
1055.6	1085.6	6.57	6.13	5.89
1095.9	1125.9	6.74	6.28	6.03
1136.1	1166.1	6.92	6.41	6.14
1176.4	1206.4	7.16	6.57	6.27
1216.6	1246.6	7.47	6.88	6.51
1256.8	1286.8	7.69	7.12	6.75
1297.1	1327.1	7.95	7.37	7.01
1337.3	1367.3	8.22	7.69	7.30
1397.7	1427.7	8.69	8.23	7.87
1437.9	1467.9	8.93	8.56	8.24
1498.3	1528.3	9.18	8.91	8.73
1538.5	1568.5	9.25	9.07	8.96
1598.9	1628.9	9.18	9.06	9.01
1639.1	1669.1	9.19	9.08	9.04
1699.5	1729.5	9.51	9.36	9.29
1739.7	1769.7	9.80	9.64	9.58
1800.1	1830.1	10.27	10.13	10.03

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
130.1	160.1	14.32	13.77	15.85
170.3	200.3	11.99	12.90	14.09
210.6	240.6	10.96	12.40	13.88
250.8	280.8	10.38	12.08	13.49
291.1	321.1	10.43	11.78	13.34
331.3	361.3	10.49	11.91	13.44
371.5	401.5	10.91	12.01	12.94
411.8	441.8	11.58	12.35	14.15
452.0	482.0	12.33	13.35	14.10
492.3	522.3	11.43	12.57	12.42
532.5	562.5	11.38	12.22	12.77
572.8	602.8	11.40	12.26	13.20
613.0	643.0	10.79	10.97	11.77
653.2	683.2	10.75	11.16	11.64
693.5	723.5	11.87	12.28	12.48
733.7	763.7	12.51	13.67	12.98
774.0	804.0	14.74	14.32	14.20
814.2	844.2	17.18	15.53	14.78
854.4	884.4	17.03	15.61	14.70
894.7	924.7	18.40	14.01	12.92
934.9	964.9	17.28	12.87	12.35
975.2	1005.2	17.86	15.07	14.82
1015.4	1045.4	16.32	15.81	14.19
1055.6	1085.6	14.66	14.51	14.90
1095.9	1125.9	13.36	13.15	13.84
1136.1	1166.1	12.11	12.42	12.65
1176.4	1206.4	10.65	11.09	11.52
1216.6	1246.6	9.77	11.45	11.89
1256.8	1286.8	9.84	12.62	14.43
1297.1	1327.1	10.06	13.06	16.41
1337.3	1367.3	10.35	13.97	17.47
1397.7	1427.7	10.23	12.85	17.68
1437.9	1467.9	10.24	12.23	16.27
1498.3	1528.3	10.54	11.98	12.89
1538.5	1568.5	10.89	11.19	14.05
1598.9	1628.9	11.84	13.00	14.74
1639.1	1669.1	16.07	15.53	16.57
1699.5	1729.5	17.94	21.79	18.42
1739.7	1769.7	17.44	22.63	20.93
1800.1	1830.1	16.65	23.94	20.53

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
130.1	160.1	0.01	0.00	0.00
170.3	200.3	0.10	0.05	0.00
210.6	240.6	0.25	0.10	0.05
250.8	280.8	0.51	0.30	0.18
291.1	321.1	0.67	0.43	0.29
331.3	361.3	0.81	0.56	0.40
371.5	401.5	0.92	0.66	0.48
411.8	441.8	1.05	0.72	0.58
452.0	482.0	1.10	0.81	0.61
492.3	522.3	1.14	0.87	0.67
532.5	562.5	1.27	0.98	0.80
572.8	602.8	1.36	1.02	0.86
613.0	643.0	1.41	1.10	0.88
653.2	683.2	1.43	1.15	0.93
693.5	723.5	1.56	1.25	1.04
733.7	763.7	1.64	1.35	1.11
774.0	804.0	1.63	1.34	1.10
814.2	844.2	1.69	1.38	1.15
854.4	884.4	1.75	1.44	1.18
894.7	924.7	1.75	1.38	1.12
934.9	964.9	1.81	1.42	1.15
975.2	1005.2	1.83	1.46	1.17
1015.4	1045.4	1.86	1.51	1.22
1055.6	1085.6	1.80	1.47	1.19
1095.9	1125.9	1.72	1.39	1.14
1136.1	1166.1	1.61	1.35	1.11
1176.4	1206.4	1.51	1.29	1.09
1216.6	1246.6	1.31	1.11	0.98
1256.8	1286.8	1.20	1.01	0.85
1297.1	1327.1	1.07	0.89	0.75
1337.3	1367.3	0.89	0.73	0.62
1397.7	1427.7	0.72	0.56	0.51
1437.9	1467.9	0.60	0.48	0.46
1498.3	1528.3	0.47	0.37	0.31
1538.5	1568.5	0.39	0.26	0.22
1598.9	1628.9	0.34	0.22	0.15
1639.1	1669.1	0.31	0.18	0.14
1699.5	1729.5	0.24	0.13	0.11
1739.7	1769.7	0.21	0.11	0.09
1800.1	1830.1	0.20	0.06	0.06

REV. X2

SYM-860

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SYM-860

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=925.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=800.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1050.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
125.0	800.1	5.84	10.0	810.1	5.79	250.0	800.1	6.21
118.9	806.2	5.86	16.2	816.3	5.69	243.8	806.3	6.23
112.9	812.2	5.86	22.3	822.4	5.66	237.7	812.4	6.23
106.8	818.3	5.86	28.5	828.6	5.63	231.5	818.6	6.22
100.8	824.3	5.87	34.6	834.7	5.64	225.4	824.7	6.23
94.7	830.4	5.87	40.8	840.9	5.64	219.2	830.9	6.23
88.7	836.4	5.88	46.9	847.0	5.64	213.1	837.0	6.24
82.6	842.5	5.90	53.1	853.2	5.64	206.9	843.2	6.25
76.6	848.5	5.90	59.2	859.3	5.65	200.8	849.3	6.25
70.5	854.6	5.90	65.4	865.5	5.65	194.6	855.5	6.26
64.5	860.6	5.88	71.5	871.6	5.66	188.5	861.6	6.25
58.4	866.7	5.89	77.7	877.8	5.65	182.3	867.8	6.26
52.4	872.7	5.90	83.8	883.9	5.64	176.2	873.9	6.27
46.3	878.8	5.90	90.0	890.1	5.65	170.0	880.1	6.28
40.3	884.8	5.91	96.2	896.3	5.64	163.8	886.3	6.29
34.2	890.9	5.88	102.3	902.4	5.63	157.7	892.4	6.29
28.2	896.9	5.88	108.5	908.6	5.62	151.5	898.6	6.29
22.1	903.0	5.91	114.6	914.7	5.62	145.4	904.7	6.28
16.1	909.0	5.93	120.8	920.9	5.62	139.2	910.9	6.26
10.0	915.1	6.00	126.9	927.0	5.63	133.1	917.0	6.25
10.0	935.1	5.96	133.1	933.2	5.62	126.9	923.2	6.22
16.1	941.2	5.87	139.2	939.3	5.61	120.8	929.3	6.20
22.1	947.2	5.84	145.4	945.5	5.62	114.6	935.5	6.18
28.2	953.3	5.79	151.5	951.6	5.60	108.5	941.6	6.17
34.2	959.3	5.80	157.7	957.8	5.58	102.3	947.8	6.16
40.3	965.4	5.80	163.8	963.9	5.55	96.2	953.9	6.15
46.3	971.4	5.76	170.0	970.1	5.53	90.0	960.1	6.17
52.4	977.5	5.75	176.2	976.3	5.52	83.8	966.3	6.16
58.4	983.5	5.74	182.3	982.4	5.50	77.7	972.4	6.16
64.5	989.6	5.72	188.5	988.6	5.47	71.5	978.6	6.16
70.5	995.6	5.72	194.6	994.7	5.46	65.4	984.7	6.15
76.6	1001.7	5.71	200.8	1000.9	5.46	59.2	990.9	6.17
82.6	1007.7	5.72	206.9	1007.0	5.45	53.1	997.0	6.15
88.7	1013.8	5.70	213.1	1013.2	5.44	46.9	1003.2	6.16
94.7	1019.8	5.69	219.2	1019.3	5.43	40.8	1009.3	6.14
100.8	1025.9	5.68	225.4	1025.5	5.42	34.6	1015.5	6.15
106.8	1031.9	5.67	231.5	1031.6	5.43	28.5	1021.6	6.16
112.9	1038.0	5.68	237.7	1037.8	5.44	22.3	1027.8	6.17
118.9	1044.0	5.68	243.8	1043.9	5.43	16.2	1033.9	6.18
125.0	1050.1	5.67	250.0	1050.1	5.42	10.0	1040.1	6.22

REV. X2
SYM-860
100818
Page 2 of 5

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
130.1	56.20	54.46	53.26	53.60	54.19	55.60
170.3	53.52	52.22	51.41	54.31	56.25	57.92
210.6	51.69	50.86	49.94	56.60	60.15	61.33
250.8	51.04	49.64	48.96	58.06	63.32	63.95
291.1	50.16	48.92	48.14	56.52	60.64	63.48
331.3	49.29	48.28	47.34	53.30	56.81	60.03
371.5	48.85	47.42	46.66	50.24	53.01	56.21
411.8	48.35	46.87	45.81	48.47	51.55	55.52
452.0	47.86	46.52	45.61	46.74	49.91	53.36
492.3	46.62	45.65	44.76	45.33	48.95	53.15
532.5	45.08	44.48	44.00	43.73	46.80	50.69
572.8	43.84	42.85	42.32	42.90	45.24	47.65
613.0	43.31	42.36	41.68	42.24	45.39	48.25
653.2	43.78	42.33	41.30	41.26	44.22	46.53
693.5	44.96	44.10	42.83	40.75	43.62	45.05
733.7	44.50	43.35	42.33	39.92	42.44	43.79
774.0	44.35	42.84	41.79	39.17	41.49	43.04
814.2	43.36	42.19	40.98	37.92	41.06	43.33
854.4	41.88	41.37	40.24	35.96	38.38	40.39
894.7	40.71	40.37	39.23	34.57	36.01	37.11
934.9	39.63	40.10	39.43	33.19	34.02	34.53
975.2	37.44	38.72	39.03	32.15	32.46	32.59
1015.4	36.35	37.46	37.87	31.72	31.74	31.48
1055.6	35.67	36.51	36.92	31.15	31.08	30.41
1095.9	35.24	35.89	36.26	30.62	30.44	29.42
1136.1	34.92	35.41	35.61	29.94	29.99	28.86
1176.4	35.01	35.26	35.20	29.49	30.09	29.25
1216.6	35.01	35.16	34.83	29.80	31.05	30.76
1256.8	34.87	35.10	34.66	31.07	32.55	32.25
1297.1	34.66	35.06	34.66	31.62	32.70	31.76
1337.3	34.38	34.93	34.70	31.40	31.76	30.35
1397.7	33.61	34.09	34.08	29.96	29.40	27.98
1437.9	33.09	33.39	33.37	28.37	27.62	26.41
1498.3	32.52	32.33	32.27	25.99	24.86	23.98
1538.5	32.47	31.96	31.70	24.56	23.26	22.39
1598.9	33.82	32.90	32.23	22.94	21.58	20.81
1639.1	34.90	33.67	32.57	22.34	20.88	19.99
1699.5	34.70	33.28	31.87	22.08	20.35	19.10
1739.7	34.38	33.04	31.51	21.91	20.01	18.63
1800.1	33.96	32.32	30.74	21.52	19.35	17.93

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
130.1	160.1	34.36	34.04	33.74
170.3	200.3	30.48	30.31	30.16
210.6	240.6	27.79	27.69	27.62
250.8	280.8	25.80	25.81	25.83
291.1	321.1	24.38	24.44	24.48
331.3	361.3	23.53	23.59	23.69
371.5	401.5	22.93	23.18	23.33
411.8	441.8	22.79	23.04	23.22
452.0	482.0	22.67	23.08	23.41
492.3	522.3	22.77	23.11	23.35
532.5	562.5	23.42	23.77	24.01
572.8	602.8	24.57	25.11	25.44
613.0	643.0	26.42	26.93	27.45
653.2	683.2	28.66	29.23	29.84
693.5	723.5	29.95	30.92	31.36
733.7	763.7	26.93	27.64	28.06
774.0	804.0	23.75	23.96	24.23
814.2	844.2	21.37	21.24	21.40
854.4	884.4	19.74	19.39	19.26
894.7	924.7	18.41	18.12	17.73
934.9	964.9	17.39	17.09	16.89
975.2	1005.2	16.57	16.35	16.15
1015.4	1045.4	15.84	15.79	15.66
1055.6	1085.6	15.32	15.37	15.37
1095.9	1125.9	14.77	14.91	14.96
1136.1	1166.1	14.51	14.72	14.84
1176.4	1206.4	14.42	14.79	15.04
1216.6	1246.6	14.57	15.08	15.53
1256.8	1286.8	14.92	15.53	16.00
1297.1	1327.1	15.30	15.89	16.43
1337.3	1367.3	15.63	16.23	16.72
1397.7	1427.7	15.76	16.42	16.86
1437.9	1467.9	15.55	16.18	16.69
1498.3	1528.3	15.12	15.46	15.85
1538.5	1568.5	14.84	15.05	15.18
1598.9	1628.9	14.60	14.44	14.26
1639.1	1669.1	14.10	13.90	13.43
1699.5	1729.5	13.19	12.75	12.36
1739.7	1769.7	12.54	12.03	11.66
1800.1	1830.1	11.61	11.03	10.63

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1050.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
130.1	160.1	12.26	11.24	10.62	130.1	3.63	3.74	4.44	10.1	2.20	1.90	1.83
170.3	200.3	7.76	7.22	6.91	170.3	2.83	3.23	4.08	16.3	2.02	1.84	1.81
210.6	240.6	5.49	5.17	5.00	210.6	2.44	3.02	3.93	22.4	2.39	2.01	1.84
250.8	280.8	4.23	4.03	3.91	250.8	2.27	2.93	3.91	28.6	2.15	1.86	1.75
291.1	321.1	3.41	3.29	3.21	291.1	2.11	2.81	3.77	34.7	2.15	1.89	1.73
331.3	361.3	2.88	2.80	2.75	331.3	2.07	2.83	3.82	40.9	2.08	1.84	1.70
371.5	401.5	2.49	2.44	2.41	371.5	2.00	2.77	3.76	47.0	2.09	1.78	1.64
411.8	441.8	2.19	2.17	2.17	411.8	1.98	2.77	3.76	53.2	2.07	1.79	1.64
452.0	482.0	1.98	1.97	1.97	452.0	1.97	2.77	3.76	59.3	2.07	1.80	1.68
492.3	522.3	1.79	1.80	1.81	492.3	1.95	2.73	3.71	65.5	2.05	1.78	1.65
532.5	562.5	1.63	1.65	1.68	532.5	1.97	2.76	3.74	71.6	2.05	1.80	1.65
572.8	602.8	1.51	1.54	1.58	572.8	1.96	2.74	3.70	77.8	2.06	1.82	1.66
613.0	643.0	1.40	1.44	1.49	613.0	1.99	2.77	3.73	83.9	2.09	1.83	1.69
653.2	683.2	1.32	1.39	1.46	653.2	2.00	2.77	3.72	90.1	2.12	1.86	1.70
693.5	723.5	1.27	1.37	1.45	693.5	2.01	2.76	3.69	96.3	2.10	1.85	1.70
733.7	763.7	1.24	1.35	1.44	733.7	2.04	2.79	3.71	102.4	2.11	1.86	1.72
774.0	804.0	1.26	1.37	1.46	774.0	2.05	2.78	3.69	108.6	2.16	1.90	1.76
814.2	844.2	1.28	1.38	1.47	814.2	2.08	2.81	3.72	114.7	2.16	1.88	1.74
854.4	884.4	1.30	1.40	1.48	854.4	2.10	2.81	3.70	120.9	2.14	1.88	1.73
894.7	924.7	1.36	1.45	1.53	894.7	2.10	2.79	3.65	127.0	2.10	1.84	1.70
934.9	964.9	1.42	1.51	1.59	934.9	2.13	2.79	3.65	133.2	2.10	1.84	1.70
975.2	1005.2	1.52	1.59	1.66	975.2	2.15	2.79	3.62	139.3	2.07	1.83	1.69
1015.4	1045.4	1.64	1.70	1.76	1015.4	2.19	2.82	3.64	145.5	2.07	1.81	1.68
1055.6	1085.6	1.79	1.83	1.88	1055.6	2.23	2.85	3.66	151.6	2.06	1.81	1.67
1095.9	1125.9	1.98	2.01	2.05	1095.9	2.24	2.84	3.61	157.8	2.06	1.82	1.68
1136.1	1166.1	2.20	2.22	2.25	1136.1	2.26	2.86	3.63	163.9	2.07	1.83	1.69
1176.4	1206.4	2.44	2.44	2.47	1176.4	2.28	2.85	3.60	170.1	2.09	1.84	1.71
1216.6	1246.6	2.75	2.73	2.73	1216.6	2.30	2.85	3.58	176.3	2.08	1.85	1.71
1256.8	1286.8	3.05	3.02	3.02	1256.8	2.34	2.89	3.62	182.4	2.10	1.86	1.73
1297.1	1327.1	3.35	3.33	3.31	1297.1	2.32	2.85	3.56	188.6	2.10	1.87	1.74
1337.3	1367.3	3.67	3.64	3.61	1337.3	2.35	2.86	3.57	194.7	2.11	1.87	1.74
1397.7	1427.7	4.03	4.06	4.02	1397.7	2.38	2.86	3.54	200.9	2.13	1.88	1.76
1437.9	1467.9	4.22	4.28	4.27	1437.9	2.41	2.87	3.54	207.0	2.13	1.89	1.77
1498.3	1528.3	4.37	4.47	4.51	1498.3	2.38	2.80	3.44	213.2	2.14	1.90	1.77
1538.5	1568.5	4.46	4.60	4.66	1538.5	2.35	2.75	3.38	219.3	2.16	1.91	1.78
1598.9	1628.9	4.50	4.63	4.72	1598.9	2.30	2.66	3.26	225.5	2.15	1.92	1.78
1639.1	1669.1	4.56	4.64	4.73	1639.1	2.36	2.69	3.29	231.6	2.15	1.91	1.78
1699.5	1729.5	4.70	4.72	4.74	1699.5	2.49	2.75	3.28	237.8	2.14	1.91	1.77
1739.7	1769.7	4.78	4.77	4.75	1739.7	2.60	2.82	3.33	243.9	2.14	1.90	1.77
1800.1	1830.1	4.83	4.78	4.75	1800.1	2.71	2.86	3.31	250.1	2.11	1.88	1.76

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	14	1	25	17	35	35	44	54	39
1	-	12	+0	28	11	46	31	26	47	46	66	54
2	>100	53	46	55	48	54	44	70	54	59	65	71
3	>100	75	65	64	69	62	66	80	62	61	80	>80
4	>100	>80	>80	>80	80	78	>80	>80	79	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -14.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.96 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	24	11	33	28	57	49	60	62	52
1	-	12	+0	30	12	46	36	33	50	54	66	75
2	90	41	40	48	44	60	38	55	48	55	62	66
3	>100	55	45	55	44	45	38	63	48	43	62	63
4	>100	59	76	57	54	57	54	56	53	74	66	68
5	>100	59	66	77	59	56	52	56	57	69	58	60
6	>100	83	71	80	86	81	>90	66	>90	66	68	77
7	>100	>90	>90	81	82	82	73	77	70	71	65	82
8	>100	>90	>90	>90	89	85	>90	82	83	84	83	76
9	>100	>90	>90	>90	>90	84	88	89	77	78	75	80
10	>100	>90	>90	>90	>90	>90	89	>90	>90	>90	>90	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -4.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.11 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
SYM-860
100818
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

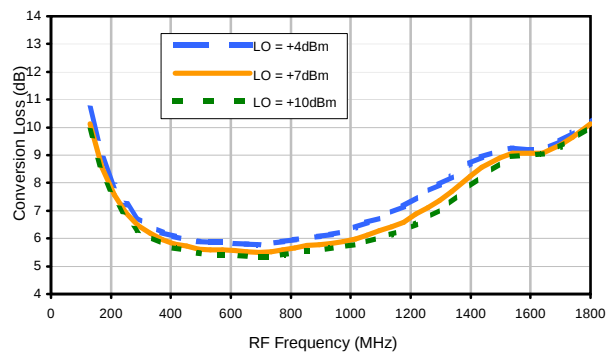


Conversion Loss vs. LO @ RF=925.1MHz

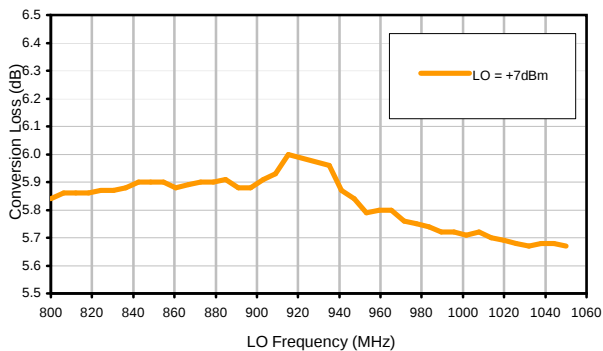


Conversion Loss vs. IF @ RF=925.1MHz

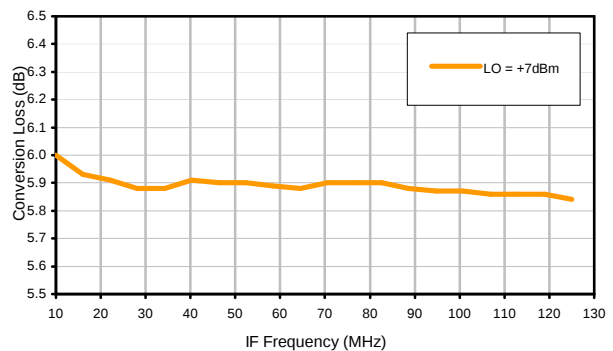


Conversion Loss vs. IF @ RF=800.1MHz

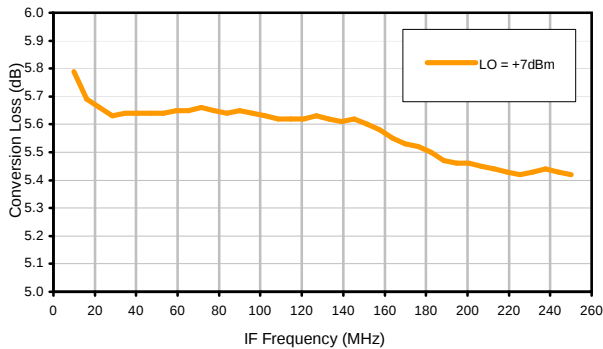


Conversion Loss vs. IF @ RF=1050.1MHz

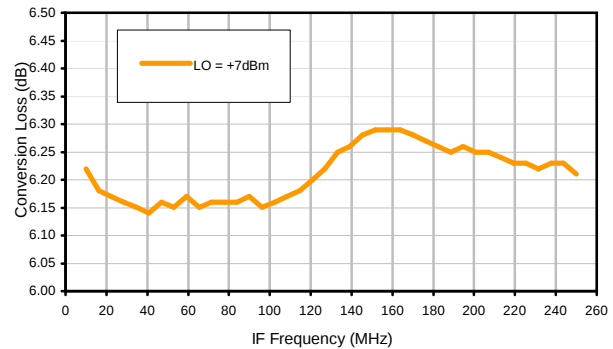

IP3 Input

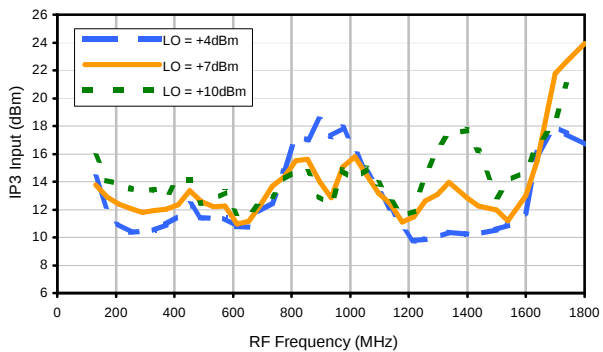


Compression @ RF IN=+1dBm

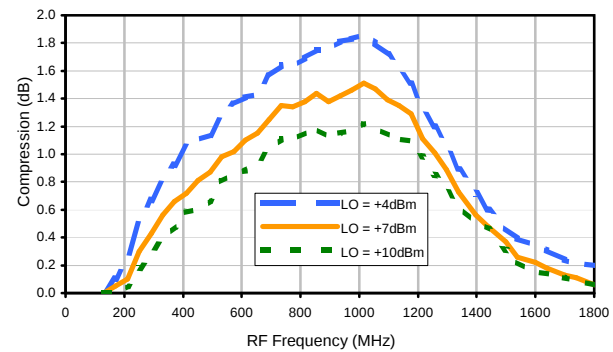


Typical Performance Curves


LO-RF Isolation

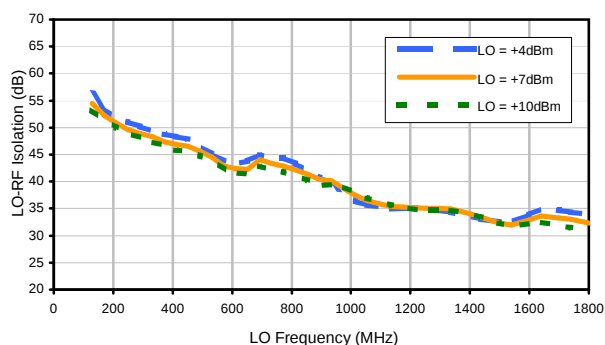


LO-IF Isolation

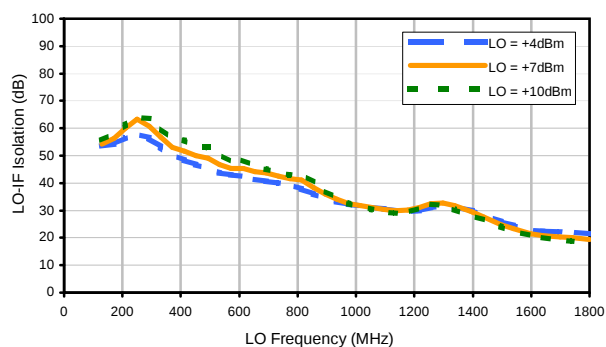


RF-IF Isolation

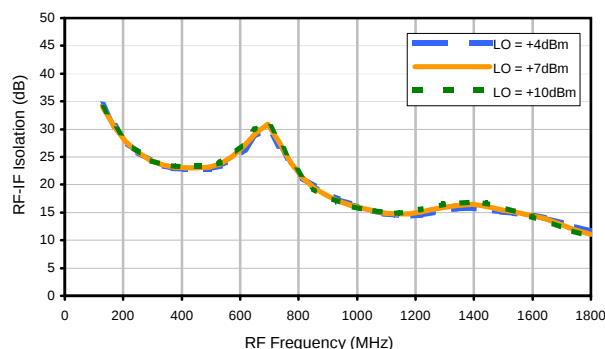


RF VSWR

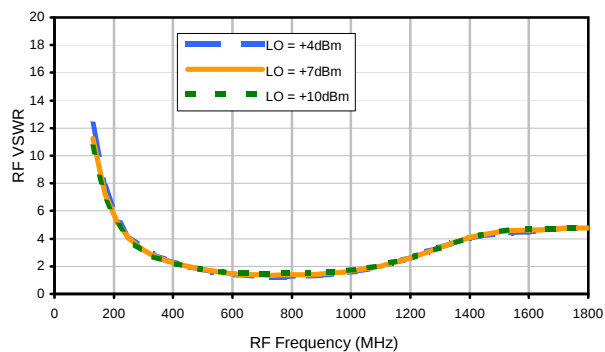

LO VSWR

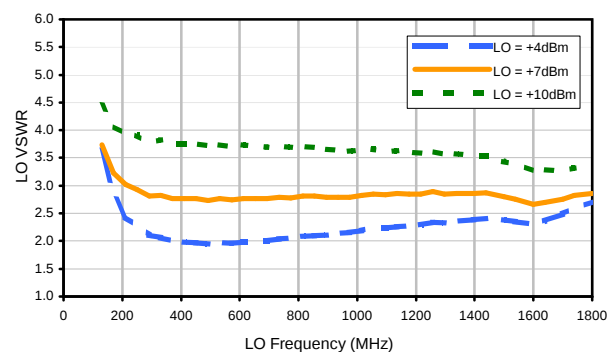

IF VSWR

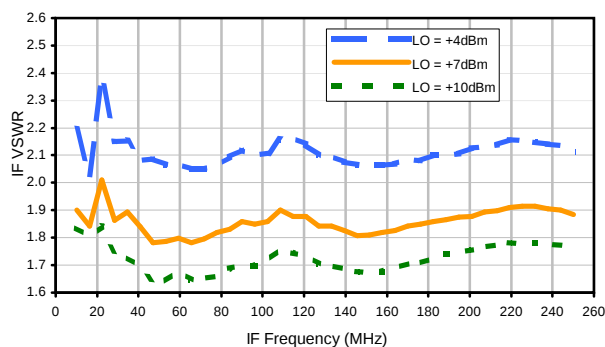

REV. X2

SYM-860

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	14	1	25	17	35	35	44	54	39
1	-	12	+0	28	11	46	31	26	47	46	66	54
2	>100	53	46	55	48	54	44	70	54	59	65	71
3	>100	75	65	64	69	62	66	80	62	61	80	>80
4	>100	>80	>80	>80	80	78	>80	>80	79	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -14.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.96 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	24	11	33	28	57	49	60	62	52
1	-	12	+0	30	12	46	36	33	50	54	66	75
2	90	41	40	48	44	60	38	55	48	55	62	66
3	>100	55	45	55	44	45	38	63	48	43	62	63
4	>100	59	76	57	54	57	54	56	53	74	66	68
5	>100	59	66	77	59	56	52	56	57	69	58	60
6	>100	83	71	80	86	81	>90	66	>90	66	68	77
7	>100	>90	>90	81	82	82	73	77	70	71	65	82
8	>100	>90	>90	>90	89	85	>90	82	83	84	83	76
9	>100	>90	>90	>90	>90	84	88	89	77	78	75	80
10	>100	>90	>90	>90	>90	>90	89	>90	>90	>90	>90	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -4.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.11 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
SYM-860
100818
Page 3 of 3



Outline Dimensions

TTT166
TTT167



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
TTT166	.38 (9.65)	.50 (12.70)	.15 (3.81)	.020 (0.51)	.075 (1.91)	.250 (6.35)	.425 (10.80)	.187 (4.75)	.050 (1.27)	.050 (1.27)	.070 (1.78)	.270 (6.86)	.540 (13.72)
TTT167			.23 (5.84)										

CASE #	P	Q	R	S	T	WT. GRAM
TTT166	.060 (1.52)	.095 (2.41)	.445 (11.30)	.208 (5.28)	.415 (10.54)	.8
TTT167						.8

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Note:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Tape & Reel Packaging TR-F12



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	12	7	Small quantity standards (see note)	10
				20
				50
				100
				200
		13	Standard	500

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M86762	ADDED CONNECTIONS "lp & lq"	05/23/03	MMG	WL
B	M94598	ADDED CONNECTION "hk"	10/08/04	MMG	HY
C	M102713	UPDATED NOTES & DESCRIPTION	01/14/06	GF	IL
D	M132989	UPDATED NOTE 2	08/24/11	GF	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR
TTT166/167 CASE STYLE, "hk"/"lp"/"lq"
"x"/"ck"/"ec" PIN CONNECTIONS**

**NOTE:**

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

INITIALS

DATE

DRAWN

GF

03/18/03

CHECKED

IL

04/15/03

APPROVED

DJ

04/15/03



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, hk/lp/lq/x/ck/ec, TTT166/167,
SYM/HJK/SYAS/SYPD, TB-12

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-079

REV:
D

FILE: 98PL079

SCALE: 5:1

SHEET: 1 OF 1

Evaluation Board and Circuit

For Pin Connections Refer to Data Sheet of the DUT



Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**