Engineering Development Model

Frequency Mixer SYM-ED7061/1

Level 17 (LO Power +17 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.
At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : TTT167

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		**Min.**	**Typ.**	**Max.**	**Units**
Frequency	**LO** (f_L to f_U)	70		2520	MHz
	RF (f_L to f_U)	70		2520	MHz
	IF	1		1400	MHz
Conversion Loss	**mid band**		6.0		dB
	Total Range		6.5		dB
LO-RF Isolation	**Low Range**		38		dB
	Mid Range		40		dB
	Upper Range		32		dB
LO-IF Isolation	**Low Range**		47		dB
	Mid Range		39		dB
	Upper Range		36		dB

Note: Low Range = [f_L to $10f_L$] Mid Range = [$10f_L$ to $f_U/2$] Upper Range = [$f_U/2$ to f_U]
mid band = [$2f_L$ to $f_U/2$]

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
LO	2
RF	1
IF	3
GROUND	4, 5, 6

Frequency Mixer SYM-ED7061/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	6.78	5.98	5.53
90.6	120.6	6.41	5.88	5.59
171.1	201.1	6.40	5.86	5.63
251.6	281.6	6.55	6.06	5.76
332.1	362.1	6.85	6.25	5.84
412.6	442.6	7.08	6.32	5.92
493.0	523.0	7.19	6.32	5.88
573.5	603.5	7.17	6.22	5.87
654.0	684.0	7.03	6.22	5.92
734.5	764.5	6.85	6.20	5.92
815.0	845.0	6.75	6.19	5.95
895.5	925.5	6.57	6.12	5.92
976.0	1006.0	6.50	6.11	5.91
1056.5	1086.5	6.49	6.14	5.95
1137.0	1167.0	6.49	6.15	5.98
1217.5	1247.5	6.47	6.14	5.98
1298.0	1328.0	6.39	6.07	5.95
1378.4	1408.4	6.44	6.08	5.96
1458.9	1488.9	6.61	6.13	5.99
1539.4	1569.4	6.91	6.27	6.05
1619.9	1649.9	7.22	6.51	6.24
1700.4	1730.4	7.58	6.82	6.49
1780.9	1810.9	7.91	7.14	6.70
1861.4	1891.4	8.21	7.36	6.94
1941.9	1971.9	8.40	7.50	7.03
2022.4	2052.4	8.34	7.48	7.01
2102.9	2132.9	8.17	7.39	6.98
2203.5	2233.5	8.19	7.42	7.06
2284.0	2314.0	8.08	7.38	7.07
2384.6	2414.6	8.16	7.57	7.25
2465.1	2495.1	8.23	7.71	7.43
2565.7	2595.7	8.35	7.83	7.58
2646.2	2676.2	8.56	8.00	7.74
2746.8	2776.8	8.82	8.18	7.90
2827.3	2857.3	9.16	8.48	8.14
2927.9	2957.9	9.30	8.66	8.31
3008.4	3038.4	9.64	8.95	8.54
3109.0	3139.0	10.08	9.30	8.84
3189.5	3219.5	10.51	9.66	9.14
3290.1	3320.1	11.20	10.19	9.58

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+14	+17	+20
10.1	40.1	22.98	31.86	26.41
90.6	120.6	22.52	26.17	24.05
171.1	201.1	22.67	22.76	29.76
251.6	281.6	20.81	26.99	28.32
332.1	362.1	22.96	25.88	28.18
412.6	442.6	23.42	27.52	29.83
493.0	523.0	21.61	27.02	31.56
573.5	603.5	21.18	30.17	32.96
654.0	684.0	25.02	30.17	32.05
734.5	764.5	28.26	34.40	30.17
815.0	845.0	27.47	30.11	28.23
895.5	925.5	28.04	29.50	28.23
976.0	1006.0	29.14	27.40	28.29
1056.5	1086.5	28.75	26.06	26.29
1137.0	1167.0	25.47	27.66	26.12
1217.5	1247.5	24.66	25.17	26.05
1298.0	1328.0	23.99	25.59	26.33
1378.4	1408.4	25.58	26.05	26.24
1458.9	1488.9	20.93	27.28	28.09
1539.4	1569.4	21.93	23.73	32.98
1619.9	1649.9	22.38	34.24	33.76
1700.4	1730.4	22.17	30.04	34.26
1780.9	1810.9	20.77	25.41	32.94
1861.4	1891.4	20.71	25.80	33.98
1941.9	1971.9	21.69	29.58	31.25
2022.4	2052.4	24.75	28.97	28.58
2102.9	2132.9	27.31	32.20	26.51
2203.5	2233.5	25.75	29.11	25.98
2284.0	2314.0	25.12	26.91	26.49
2384.6	2414.6	24.24	28.05	27.55
2465.1	2495.1	23.43	26.77	28.06
2565.7	2595.7	24.39	25.33	28.20
2646.2	2676.2	26.00	24.63	28.72
2746.8	2776.8	26.61	24.22	27.11
2827.3	2857.3	25.57	25.31	25.71
2927.9	2957.9	24.88	26.85	25.35
3008.4	3038.4	24.80	28.70	26.34
3109.0	3139.0	25.46	29.26	28.81
3189.5	3219.5	25.61	29.91	30.66
3290.1	3320.1	27.22	29.93	32.71

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	0.08	0.06	0.33
90.6	120.6	0.03	0.02	0.00
171.1	201.1	0.06	-0.01	0.00
251.6	281.6	-0.01	-0.06	-0.03
332.1	362.1	-0.11	-0.10	-0.03
412.6	442.6	-0.14	-0.05	0.00
493.0	523.0	-0.22	-0.05	0.00
573.5	603.5	-0.21	-0.01	0.00
654.0	684.0	-0.08	0.01	0.00
734.5	764.5	0.05	0.01	0.00
815.0	845.0	0.09	0.02	0.00
895.5	925.5	0.16	0.05	0.03
976.0	1006.0	0.16	0.06	0.03
1056.5	1086.5	0.16	0.05	0.03
1137.0	1167.0	0.17	0.06	0.04
1217.5	1247.5	0.20	0.07	0.04
1298.0	1328.0	0.26	0.09	0.05
1378.4	1408.4	0.29	0.10	0.05
1458.9	1488.9	0.26	0.11	0.04
1539.4	1569.4	0.11	0.08	0.05
1619.9	1649.9	0.05	0.07	0.04
1700.4	1730.4	0.00	0.01	0.02
1780.9	1810.9	-0.06	-0.02	0.01
1861.4	1891.4	-0.12	-0.04	-0.01
1941.9	1971.9	-0.15	-0.07	-0.01
2022.4	2052.4	-0.12	-0.06	-0.01
2102.9	2132.9	-0.04	-0.01	0.01
2203.5	2233.5	0.03	0.02	0.03
2284.0	2314.0	0.16	0.08	0.06
2384.6	2414.6	0.20	0.08	0.07
2465.1	2495.1	0.22	0.10	0.07
2565.7	2595.7	0.23	0.11	0.06
2646.2	2676.2	0.22	0.07	0.06
2746.8	2776.8	0.20	0.11	0.07
2827.3	2857.3	0.20	0.11	0.08
2927.9	2957.9	0.26	0.12	0.07
3008.4	3038.4	0.23	0.11	0.06
3109.0	3139.0	0.21	0.12	0.06
3189.5	3219.5	0.22	0.07	0.05
3290.1	3320.1	0.14	0.07	0.02

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1270.1MHz (dB) @LO (dBm) +17
1250.1	20.0	7.34
1209.4	60.7	7.24
1168.8	101.3	7.18
1128.1	142.0	7.08
1087.5	182.6	7.02
1046.8	223.3	6.95
1006.2	263.9	6.89
985.8	284.3	6.85
945.2	324.9	6.79
924.9	345.2	6.76
884.2	385.9	6.69
863.9	406.2	6.68
823.2	446.9	6.62
802.9	467.2	6.53
762.2	507.9	6.52
741.9	528.2	6.51
701.2	568.9	6.40
680.9	589.2	6.50
640.3	629.8	6.48
619.9	650.2	6.30
579.3	690.8	6.37
559.0	711.1	6.31
518.3	751.8	6.25
498.0	772.1	6.31
457.3	812.8	6.23
437.0	833.1	6.21
396.3	873.8	6.25
376.0	894.1	6.16
335.3	934.8	6.17
315.0	955.1	6.10
274.4	995.7	6.11
254.0	1016.1	6.15
213.4	1056.7	6.05
193.1	1077.0	6.07
152.4	1117.7	6.09
132.1	1138.0	6.02
91.4	1178.7	6.08
71.1	1199.0	6.09
30.4	1239.7	6.04
10.1	1260.0	6.43

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=59.9MHz (dB) @LO (dBm) +17
10.1	70.0	6.29
110.6	170.5	5.97
211.1	271.0	5.88
311.6	371.5	5.92
412.1	472.0	5.93
512.5	572.4	6.00
613.0	672.9	6.06
713.5	773.4	6.14
814.0	873.9	6.23
914.5	974.4	6.37
1015.0	1074.9	6.47
1115.5	1175.4	6.61
1216.0	1275.9	6.72
1316.4	1376.3	6.79
1416.9	1476.8	6.84
1517.4	1577.3	6.96
1617.9	1677.8	7.15
1718.4	1778.3	7.16
1818.9	1878.8	7.35
1919.4	1979.3	7.72
2040.0	2099.9	8.06
2140.4	2200.3	8.31
2261.0	2320.9	8.23
2361.5	2421.4	8.24
2482.1	2542.0	8.12
2582.6	2642.5	8.09
2703.2	2763.1	8.05
2803.7	2863.6	7.89
2924.2	2984.1	7.58
3024.7	3084.6	7.50
3145.3	3205.2	7.25
3245.8	3305.7	7.37
3366.4	3426.3	7.56
3466.9	3526.8	7.84
3587.5	3647.4	8.38
3688.0	3747.9	8.79
3808.5	3868.4	9.36
3909.0	3968.9	9.98
4029.6	4089.5	10.46
4130.1	4190.0	10.99

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2530.1MHz (dB) @LO (dBm) +17
2510.1	20.0	9.75
2450.1	80.0	9.73
2390.1	140.0	9.76
2330.1	200.0	9.74
2270.1	260.0	9.74
2210.1	320.0	9.56
2150.1	380.0	9.46
2090.1	440.0	9.44
2030.1	500.0	9.26
1970.1	560.0	9.31
1910.1	620.0	9.26
1850.1	680.0	9.17
1790.1	740.0	9.09
1730.1	800.0	9.01
1670.1	860.0	8.92
1610.1	920.0	8.93
1550.1	980.0	8.95
1490.1	1040.0	8.91
1430.1	1100.0	8.90
1370.1	1160.0	8.88
1310.1	1220.0	8.74
1250.1	1280.0	8.65
1190.1	1340.0	8.57
1130.1	1400.0	8.59
1050.1	1480.0	8.59
990.1	1540.0	8.60
910.1	1620.0	8.60
850.1	1680.0	8.61
770.1	1760.0	8.53
710.1	1820.0	8.45
630.1	1900.0	8.32
570.1	1960.0	8.27
490.1	2040.0	8.21
430.1	2100.0	8.04
350.1	2180.0	8.13
290.1	2240.0	8.07
210.1	2320.0	7.90
150.1	2380.0	7.94
70.1	2460.0	7.92
10.1	2520.0	8.29

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+14	+17	+20	+14	+17	+20
40.1	30.76	34.28	37.80	43.49	47.91	51.74
120.6	33.76	37.25	41.01	44.19	48.31	50.55
201.1	34.44	37.98	41.66	46.01	49.49	48.48
281.6	35.02	38.73	42.75	48.23	49.31	45.70
362.1	35.23	39.04	43.19	52.97	47.68	43.47
442.6	35.56	39.72	44.42	60.53	45.92	42.09
523.0	35.38	39.47	44.79	61.56	44.57	40.95
603.5	35.59	39.91	45.89	53.70	43.30	40.22
684.0	36.17	40.71	47.38	50.67	42.55	39.19
764.5	36.74	41.20	46.97	48.10	41.94	38.77
845.0	36.81	40.64	45.13	45.91	41.23	38.59
925.5	36.83	40.03	43.08	44.74	40.99	38.25
1006.0	36.89	39.88	42.29	42.42	40.26	37.93
1086.5	36.45	39.15	41.23	39.89	39.47	37.73
1167.0	36.41	39.01	40.89	38.23	38.99	37.75
1247.5	35.78	37.75	39.46	37.30	38.55	37.72
1328.0	35.23	37.22	39.15	35.99	38.06	37.80
1408.4	34.96	36.83	38.43	34.66	37.37	37.63
1488.9	33.99	36.49	38.45	33.83	36.97	38.15
1569.4	32.71	35.31	38.20	33.29	36.73	38.72
1649.9	31.60	33.56	36.37	32.94	36.31	39.23
1730.4	30.79	32.49	34.71	32.36	35.50	38.94
1810.9	30.38	31.61	33.36	31.69	34.68	38.40
1891.4	30.13	31.12	32.54	32.04	34.36	37.92
1971.9	29.86	30.68	32.05	32.67	35.01	38.13
2052.4	29.54	30.55	31.69	32.99	35.36	38.88
2132.9	29.50	30.78	32.24	33.31	35.58	38.89
2233.5	29.69	30.98	32.86	33.61	36.47	40.13
2314.0	29.60	31.03	33.26	33.37	35.94	39.20
2414.6	29.83	31.16	32.80	33.41	35.86	38.19
2495.1	29.80	31.43	33.07	33.70	35.58	36.73
2595.7	29.39	31.45	33.54	33.61	34.80	34.87
2676.2	29.10	31.06	33.19	33.21	34.10	34.04
2776.8	29.40	30.91	32.50	32.68	32.57	32.13
2857.3	29.54	30.72	31.89	32.09	31.54	30.92
2957.9	29.20	30.71	31.89	31.31	30.38	29.25
3038.4	29.17	30.68	32.11	30.95	29.93	28.79
3139.0	29.18	30.85	32.49	30.14	29.32	28.72
3219.5	29.33	31.15	32.94	29.70	28.87	28.53
3320.1	29.45	31.46	33.48	29.35	28.86	28.55

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	35.75	36.38	35.47
90.6	120.6	36.69	36.83	37.49
171.1	201.1	36.93	37.00	38.20
251.6	281.6	37.84	38.44	38.58
332.1	362.1	39.19	39.97	40.60
412.6	442.6	41.03	41.12	41.85
493.0	523.0	44.60	42.64	42.49
573.5	603.5	54.33	46.99	45.82
654.0	684.0	53.85	48.11	44.78
734.5	764.5	46.55	45.55	46.24
815.0	845.0	43.61	45.97	43.31
895.5	925.5	42.18	42.52	42.82
976.0	1006.0	39.82	40.84	39.80
1056.5	1086.5	37.30	37.83	38.29
1137.0	1167.0	35.95	36.69	37.06
1217.5	1247.5	34.91	36.12	35.98
1298.0	1328.0	34.73	35.67	36.43
1378.4	1408.4	33.93	35.44	36.81
1458.9	1488.9	33.17	34.46	35.28
1539.4	1569.4	32.95	33.90	34.47
1619.9	1649.9	32.29	33.73	35.07
1700.4	1730.4	32.13	33.15	33.91
1780.9	1810.9	32.16	32.91	33.62
1861.4	1891.4	32.25	33.53	34.04
1941.9	1971.9	33.49	34.54	35.38
2022.4	2052.4	34.37	35.90	36.59
2102.9	2132.9	36.14	37.45	38.76
2203.5	2233.5	40.13	41.01	41.82
2284.0	2314.0	42.10	42.29	43.45
2384.6	2414.6	44.04	44.30	42.85
2465.1	2495.1	49.43	45.81	43.21
2565.7	2595.7	45.58	43.05	41.27
2646.2	2676.2	41.50	38.74	37.18
2746.8	2776.8	39.45	36.87	35.61
2827.3	2857.3	39.14	37.94	36.99
2927.9	2957.9	35.63	35.96	35.54
3008.4	3038.4	34.17	34.56	34.68
3109.0	3139.0	33.02	33.05	33.70
3189.5	3219.5	32.26	32.64	32.95
3290.1	3320.1	30.94	31.62	31.74

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+14	+17	+20
10.1	40.1	1.51	1.43	1.32
90.6	120.6	1.36	1.17	1.08
171.1	201.1	1.39	1.22	1.14
251.6	281.6	1.46	1.32	1.23
332.1	362.1	1.60	1.44	1.33
412.6	442.6	1.76	1.56	1.45
493.0	523.0	1.93	1.70	1.56
573.5	603.5	2.03	1.77	1.64
654.0	684.0	2.06	1.82	1.70
734.5	764.5	2.02	1.81	1.70
815.0	845.0	1.98	1.80	1.70
895.5	925.5	1.88	1.73	1.64
976.0	1006.0	1.80	1.67	1.60
1056.5	1086.5	1.73	1.60	1.53
1137.0	1167.0	1.66	1.54	1.47
1217.5	1247.5	1.58	1.44	1.37
1298.0	1328.0	1.48	1.33	1.27
1378.4	1408.4	1.46	1.28	1.20
1458.9	1488.9	1.47	1.25	1.15
1539.4	1569.4	1.47	1.28	1.16
1619.9	1649.9	1.44	1.25	1.15
1700.4	1730.4	1.41	1.24	1.15
1780.9	1810.9	1.39	1.25	1.15
1861.4	1891.4	1.38	1.23	1.15
1941.9	1971.9	1.38	1.25	1.19
2022.4	2052.4	1.40	1.31	1.27
2102.9	2132.9	1.47	1.41	1.40
2203.5	2233.5	1.61	1.58	1.57
2284.0	2314.0	1.77	1.75	1.75
2384.6	2414.6	2.00	1.99	1.98
2465.1	2495.1	2.16	2.16	2.15
2565.7	2595.7	2.40	2.36	2.33
2646.2	2676.2	2.58	2.50	2.45
2746.8	2776.8	2.77	2.62	2.54
2827.3	2857.3	2.89	2.71	2.59
2927.9	2957.9	3.00	2.80	2.65
3008.4	3038.4	3.03	2.81	2.63
3109.0	3139.0	3.14	2.92	2.74
3189.5	3219.5	3.30	3.07	2.90
3290.1	3320.1	3.48	3.25	3.07

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+14	+17	+20
40.1	1.15	1.69	2.57
120.6	1.07	1.60	2.40
201.1	1.05	1.53	2.29
281.6	1.06	1.51	2.23
362.1	1.09	1.50	2.22
442.6	1.12	1.49	2.19
523.0	1.11	1.49	2.18
603.5	1.10	1.46	2.15
684.0	1.12	1.44	2.12
764.5	1.14	1.42	2.07
845.0	1.14	1.41	2.04
925.5	1.17	1.41	2.02
1006.0	1.21	1.41	2.02
1086.5	1.27	1.43	2.00
1167.0	1.31	1.42	1.96
1247.5	1.36	1.41	1.92
1328.0	1.42	1.41	1.90
1408.4	1.50	1.42	1.89
1488.9	1.56	1.42	1.85
1569.4	1.57	1.41	1.80
1649.9	1.56	1.38	1.75
1730.4	1.55	1.34	1.70
1810.9	1.53	1.30	1.66
1891.4	1.51	1.25	1.62
1971.9	1.48	1.19	1.59
2052.4	1.44	1.13	1.56
2132.9	1.41	1.10	1.53
2233.5	1.39	1.10	1.54
2314.0	1.35	1.11	1.53
2414.6	1.29	1.15	1.56
2495.1	1.23	1.17	1.56
2595.7	1.17	1.21	1.59
2676.2	1.12	1.24	1.59
2776.8	1.07	1.27	1.60
2857.3	1.03	1.29	1.60
2957.9	1.03	1.33	1.61
3038.4	1.08	1.36	1.64
3139.0	1.14	1.42	1.68
3219.5	1.21	1.48	1.74
3320.1	1.30	1.55	1.79

IF (OUT) (MHz)	IF VSWR @LO=2520MHz (:1) @LO (dBm)		
	+14	+17	+20
10.0	1.48	1.22	1.08
70.0	1.42	1.19	1.06
130.0	1.40	1.17	1.04
190.0	1.42	1.19	1.07
250.0	1.38	1.16	1.07
310.0	1.35	1.14	1.07
370.0	1.33	1.13	1.10
430.0	1.28	1.11	1.13
490.0	1.24	1.10	1.16
550.0	1.21	1.11	1.20
610.0	1.16	1.14	1.26
670.0	1.14	1.15	1.28
730.0	1.13	1.19	1.31
790.0	1.11	1.22	1.36
850.0	1.09	1.20	1.34
910.0	1.08	1.21	1.36
970.0	1.04	1.21	1.36
1030.0	1.02	1.17	1.32
1090.0	1.04	1.19	1.33
1150.0	1.11	1.20	1.33
1210.0	1.20	1.24	1.35
1270.0	1.25	1.28	1.38
1330.0	1.35	1.35	1.42
1390.0	1.44	1.41	1.46
1470.0	1.56	1.48	1.49
1530.0	1.67	1.57	1.56
1610.0	1.83	1.71	1.67
1670.0	1.96	1.83	1.78
1750.0	2.08	1.94	1.88
1810.0	2.22	2.08	2.01
1890.0	2.39	2.24	2.17
1950.0	2.52	2.36	2.28
2030.0	2.66	2.50	2.42
2090.0	2.77	2.60	2.52
2170.0	2.95	2.79	2.71
2230.0	3.00	2.83	2.74
2310.0	3.11	2.93	2.83
2370.0	3.21	3.03	2.92
2450.0	3.22	3.05	2.94
2510.0	3.30	3.15	3.04

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	8	10	16	22	13	32	34	42	22	67
1	-	28	+0	45	15	47	21	44	47	38	46	41
2	64	73	63	>76	62	75	64	72	58	>76	74	>76
3	>90	>76	74	>76	75	>76	>76	>76	>76	>76	>76	>76
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: **RF IN: 1295 MHz; -5.00 dBm.**
LO IN: 1325 MHz; +17.00 dBm
IF OUT: 30 MHz; -13.53 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	21	30	37	26	46	48	54	37	75
1	-	29	+0	45	14	44	22	46	47	40	49	44
2	45	64	52	69	50	63	53	62	48	70	66	70
3	>90	82	56	70	53	69	63	67	59	76	75	63
4	>90	>88	>88	>88	84	>88	82	>88	80	>88	78	>88
5	>90	>88	>88	>88	83	>88	87	>88	87	>88	87	>88
6	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
7	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
8	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
9	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
10	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 1295 MHz; 5.00 dBm.**
LO IN: 1325 MHz; +17.00 dBm
IF OUT: 30 MHz; -1.88 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Frequency Mixer SYM-ED7061/1

Typical Performance Curves

Conversion Loss @ IF=30MHz

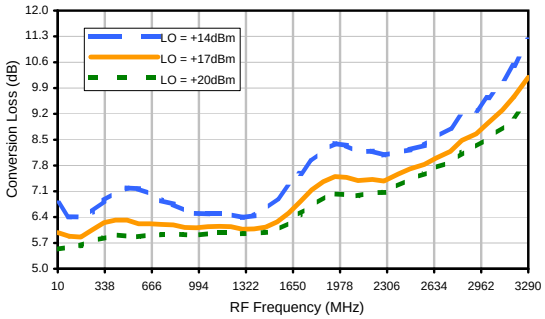

Conversion Loss vs. IF @ RF=1270.1MHz

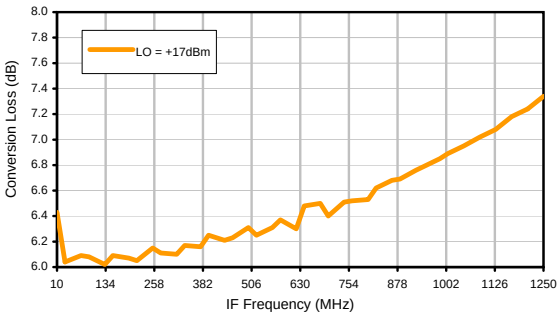

Conversion Loss vs. IF @ RF=59.9MHz

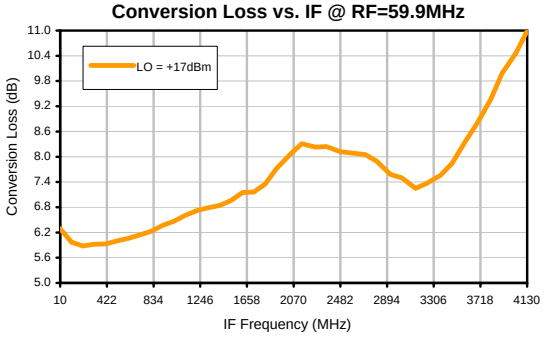

Conversion Loss vs. IF @ RF=2530.1MHz

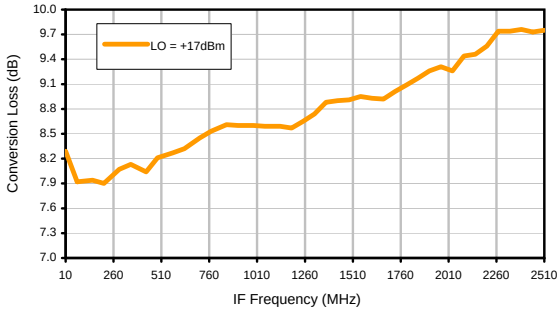

IP3 Input

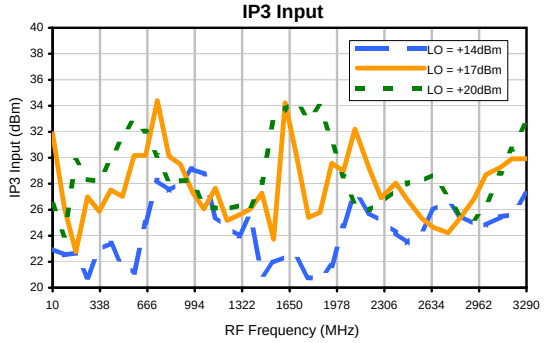

Compression @ RF IN=+10dBm

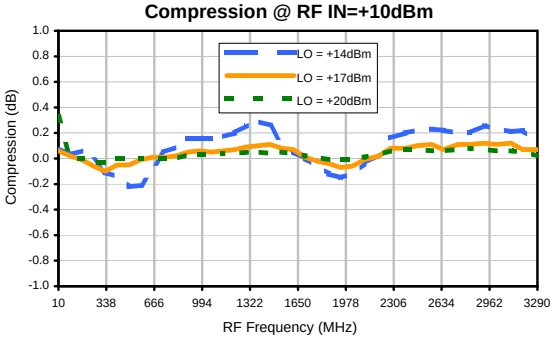

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

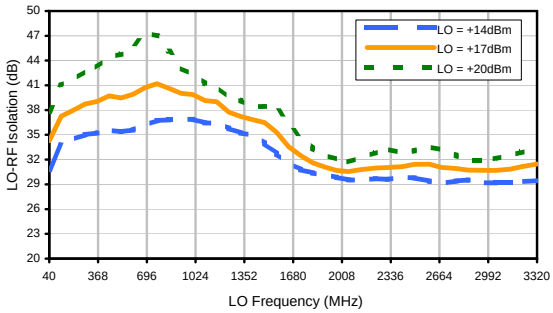

LO-IF Isolation

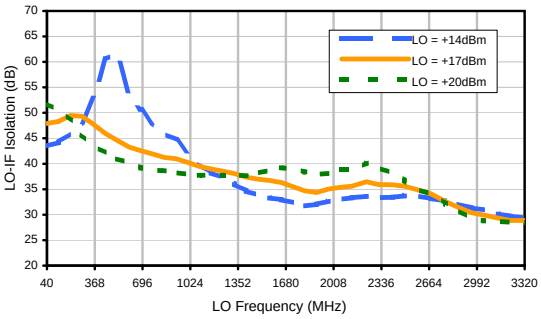

RF-IF Isolation

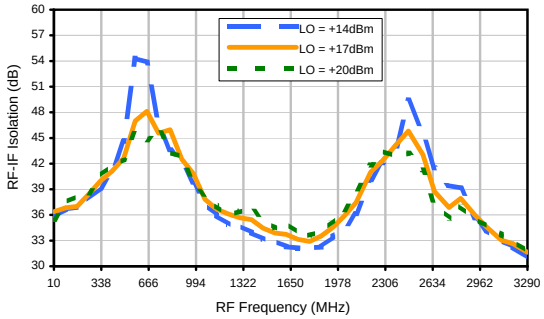

RF VSWR

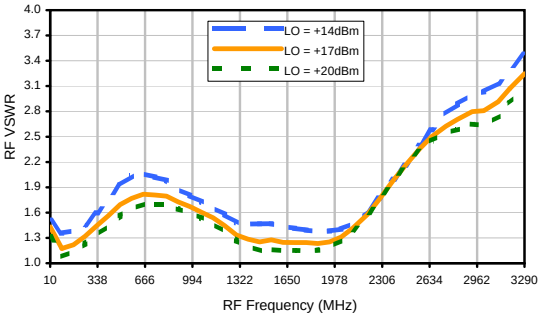

LO VSWR

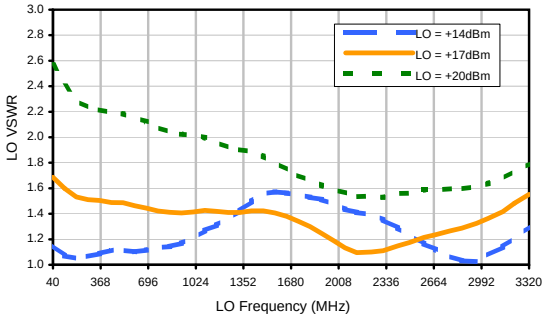

IF VSWR

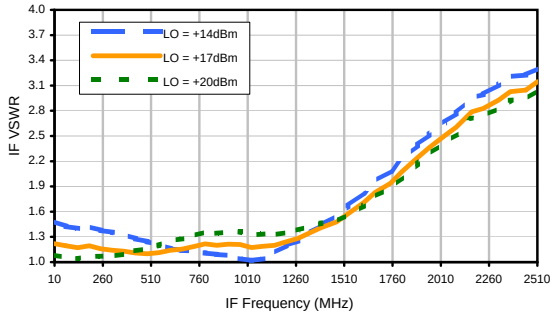

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	8	10	16	22	13	32	34	42	22	67
1	-	28	+0	45	15	47	21	44	47	38	46	41
2	64	73	63	>76	62	75	64	72	58	>76	74	>76
3	>90	>76	74	>76	75	>76	>76	>76	>76	>76	>76	>76
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 1295 MHz; -5.00 dBm.
LO IN: 1325 MHz; +17.00 dBm
IF OUT: 30 MHz; -13.53 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	20	21	30	37	26	46	48	54	37	75
1	-	29	+0	45	14	44	22	46	47	40	49	44
2	45	64	52	69	50	63	53	62	48	70	66	70
3	>90	82	56	70	53	69	63	67	59	76	75	63
4	>90	>88	>88	>88	84	>88	82	>88	80	>88	78	>88
5	>90	>88	>88	>88	83	>88	87	>88	87	>88	87	>88
6	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
7	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
8	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
9	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
10	>90	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88	>88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1295 MHz; 5.00 dBm.
LO IN: 1325 MHz; +17.00 dBm
IF OUT: 30 MHz; -1.88 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style TTT

Outline Dimensions

TTT166
TTT167

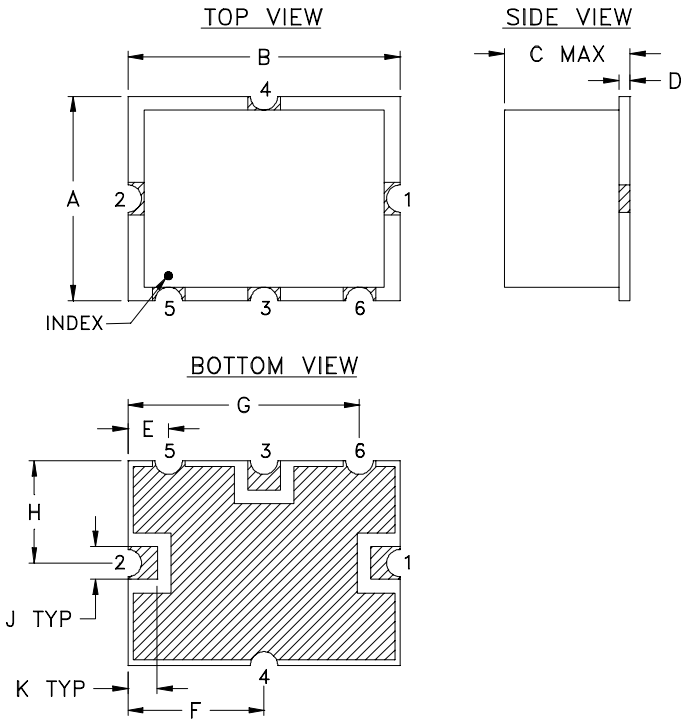

PCB Land Pattern

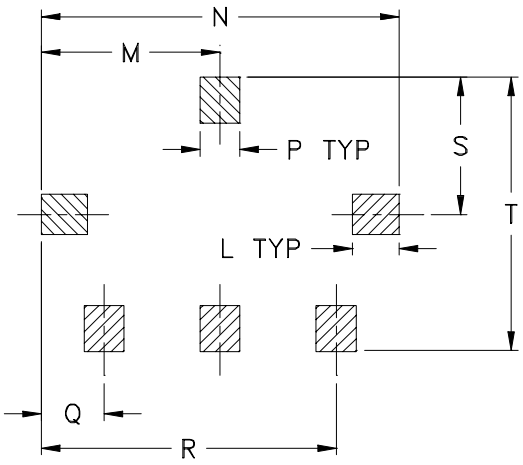

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
TTT166	.38 (9.65)	.50 (12.70)	.15 (3.81)	.020 (0.51)	.075 (1.91)	.250 (6.35)	.425 (10.80)	.187 (4.75)	.050 (1.27)	.050 (1.27)	.070 (1.78)	.270 (6.86)	.540 (13.72)
TTT167			.23 (5.84)										

CASE #	P	Q	R	S	T	WT. GRAM
TTT166	.060 (1.52)	.095 (2.41)	.445 (11.30)	.208 (5.28)	.415 (10.54)	.8
TTT167						.8

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Note:

1. Case material: Plastic.
2. Base material: Printed wiring laminate.
3. Termination finish:
   For RoHS Case Styles: 3-5 µ inch (.08-.13 microns) Gold over 120-240 µ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F12

DEVICE ORIENTATION IN T&R

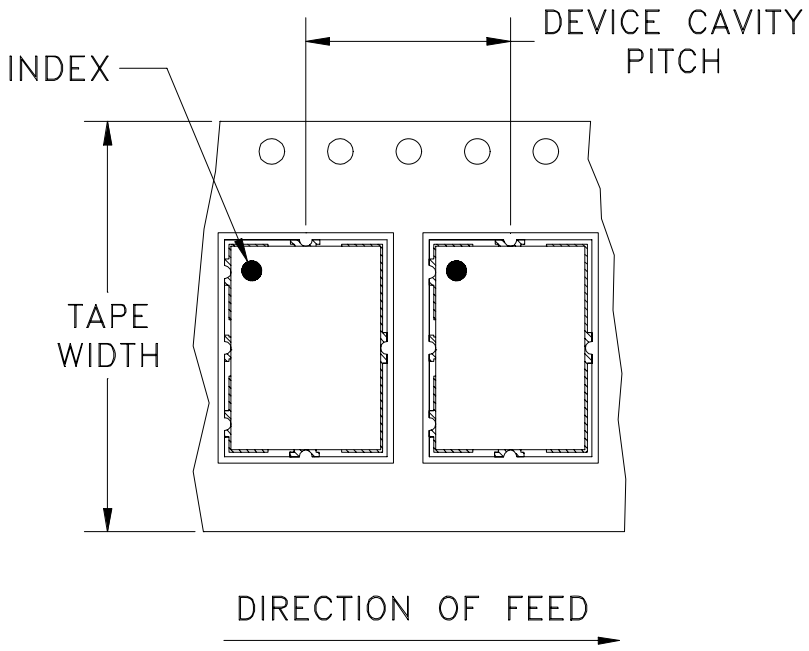

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	12	7	Small quantity standards (see note)	10
				20
				50
				100
				200
		13	Standard	500

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.1

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M86762	ADDED CONNECTIONS "lp & lq"	05/23/03	MMG	WL
B	M94598	ADDED CONNECTION "hk"	10/08/04	MMG	HY
C	M102713	UPDATED NOTES & DESCRIPTION	01/14/06	GF	IL
D	M132989	UPDATED NOTE 2	08/24/11	GF	DJ

SUGGESTED MOUNTING CONFIGURATION FOR TTT166/167 CASE STYLE, "hk"/"lp"/"lq" "x"/"ck"/"ec" PIN CONNECTIONS

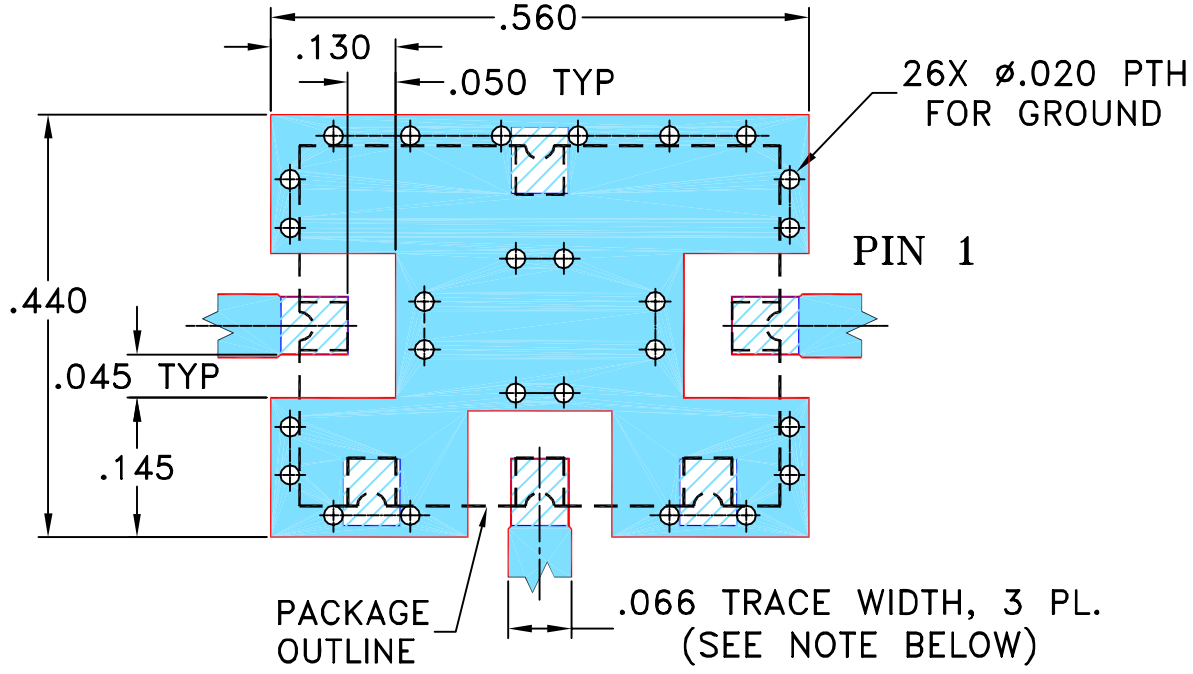

NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	GF	03/18/03
TOLERANCES ON:	CHECKED	IL	04/15/03
2 PL DECIMALS ±	APPROVED	DJ	04/15/03
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, hk/lp/lq/x/ck/ec, TTT166/167, SYM/HJK/SYAS/SYPD, TB-12

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-079	D

FILE:	SCALE:	SHEET:
98PL079	5:1	1 OF 1

Evaluation Board and Circuit

For Pin Connections Refer to Data Sheet of the DUT

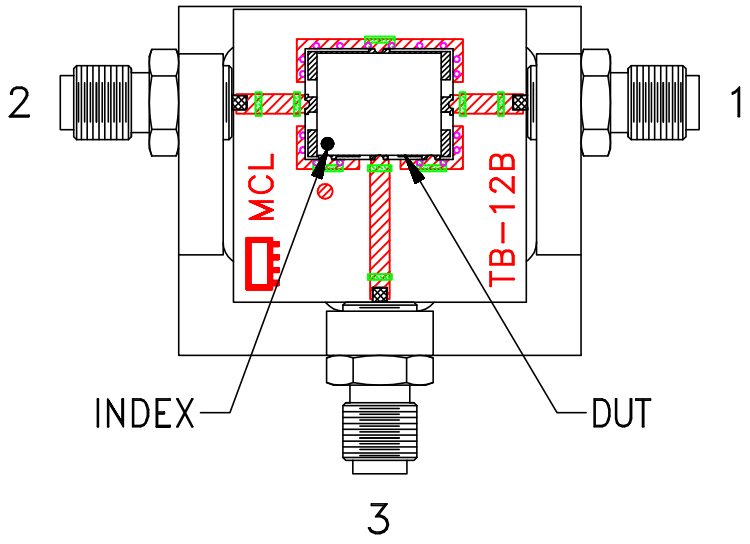

TB-12

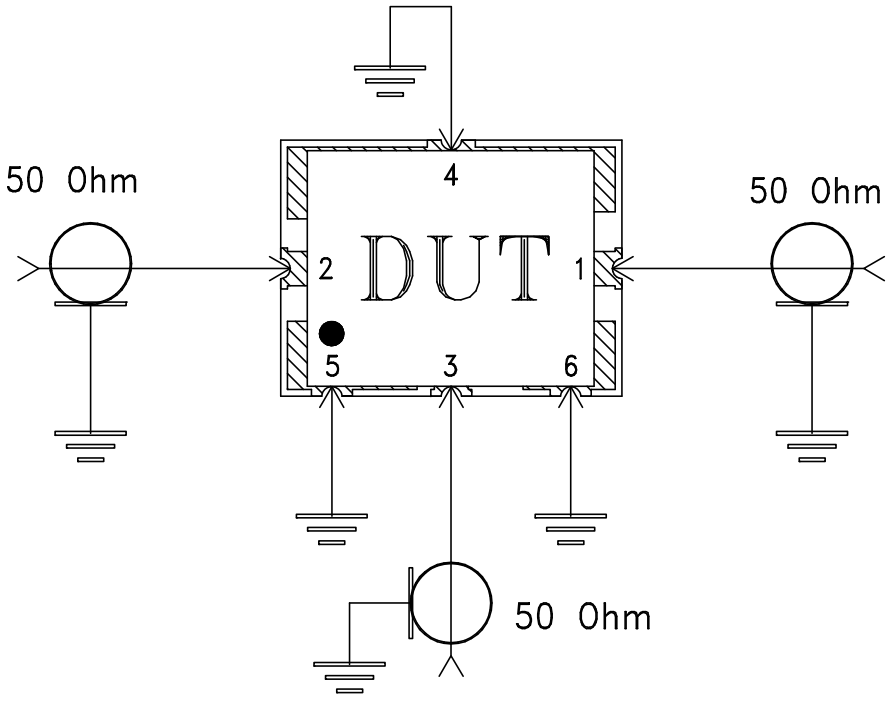

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.