

Level 7 (LO Power +7 dBm) 0.01 to 250 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	1
IF	3,4 [^]
GROUND	2,5,6,7
CASE GROUND	2

[^] pins must be connected together externally

Outline Drawing

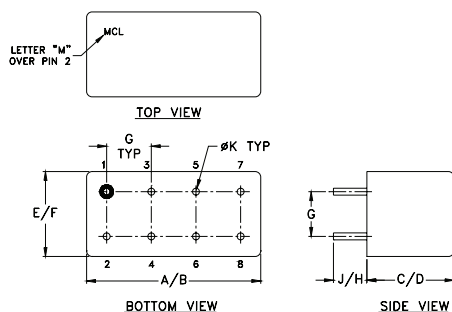

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.200	.210	.370	.400
19.56	20.32	5.08	5.33	9.40	10.16

G	H	J	K	wt
.200	.20	.14	.031	grams
5.08	5.08	3.56	0.79	3.7

Features

- low conversion loss, 4.65 dB typ.
- high isolation, 50 dB typ. L-R, 45 dB typ. L-I
- rugged welded construction
- hermetically sealed

Applications

- VHF
- FM radio
- instrumentation



Generic photo used for illustration purposes only

CASE STYLE: A04

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U	
		$\overline{X}$	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.01-250	DC-250	4.65	0.02	7.0	8.5	60	50	50	35	40	35	55	45	45	30	35	25


1 dB COMP.: +1 dBm typ.

* Conversion loss, 9.5 dB max.
from 0.01 to 0.015 MHzL = low range [f_L to $10 f_L$]M = mid range [$10 f_L$ to $f_U/2$]U = upper range [$f_U/2$ to f_U]

Typical Performance Data







Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.01	30.01	7.11	58.08	53.36	1.07	2.97
0.20	30.20	4.71	59.34	52.17	1.07	2.78
1.00	31.00	4.56	59.46	51.84	1.07	2.59
5.00	35.00	4.60	59.26	51.76	1.07	2.67
19.24	49.24	4.71	56.47	52.25	1.05	2.72
28.86	58.86	4.65	54.43	52.12	1.04	2.71
48.09	78.09	4.63	50.19	50.36	1.03	2.56
67.32	97.32	4.60	47.74	48.07	1.04	2.55
86.55	56.55	4.59	44.68	45.40	1.06	2.50
100.00	70.00	4.63	43.92	43.20	1.07	2.51
115.39	85.39	4.75	43.05	42.22	1.09	2.56
134.62	104.62	4.85	38.26	40.16	1.15	2.60
144.24	114.24	5.02	37.90	39.27	1.21	2.62
163.47	133.47	5.14	38.05	37.81	1.27	2.64
182.70	152.70	5.30	38.71	34.70	1.29	2.67
200.00	170.00	5.38	39.71	33.53	1.30	2.72
221.16	191.16	5.36	40.42	32.38	1.29	2.78
230.77	200.77	5.32	40.93	31.70	1.27	2.90
240.39	210.39	5.38	40.98	31.63	1.22	3.00
250.00	220.00	5.61	40.47	31.55	1.20	3.02

Electrical Schematic

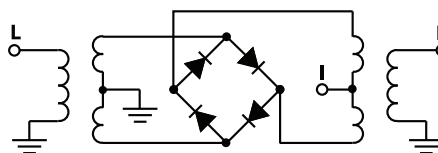

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp

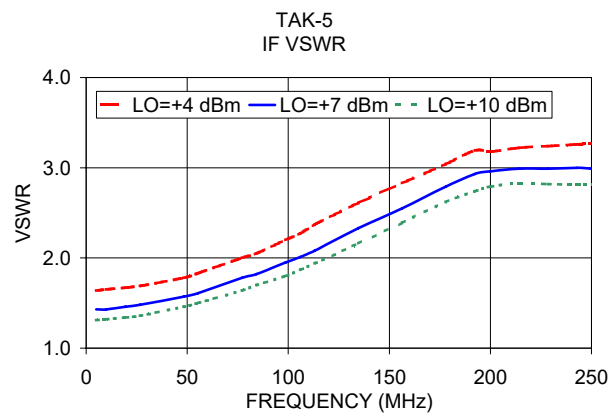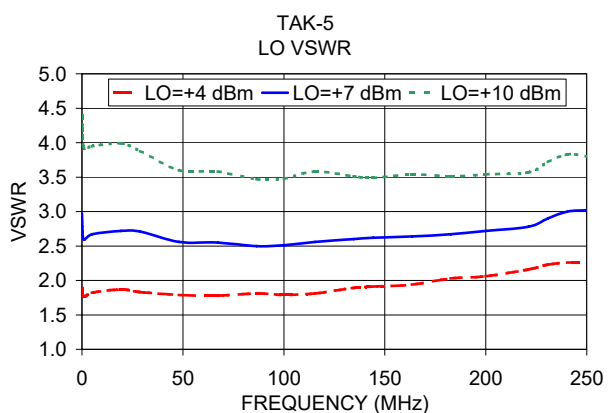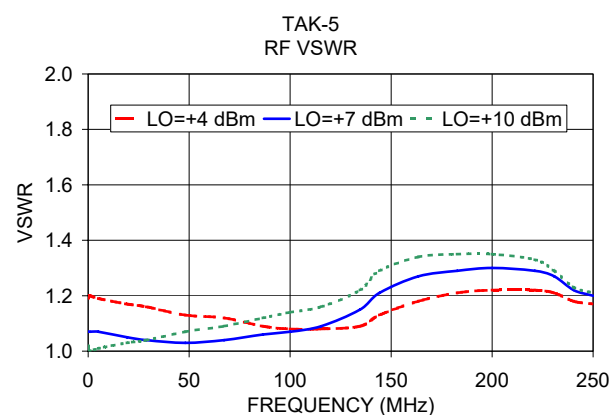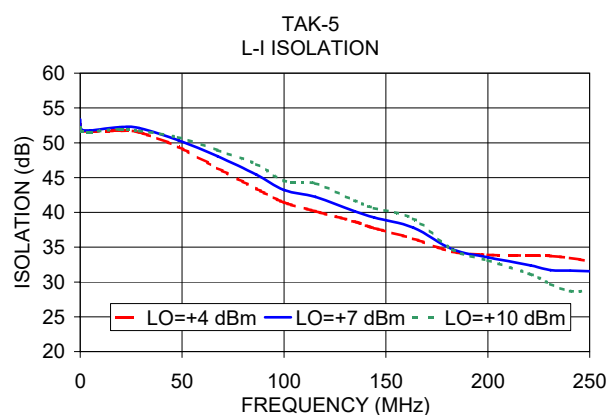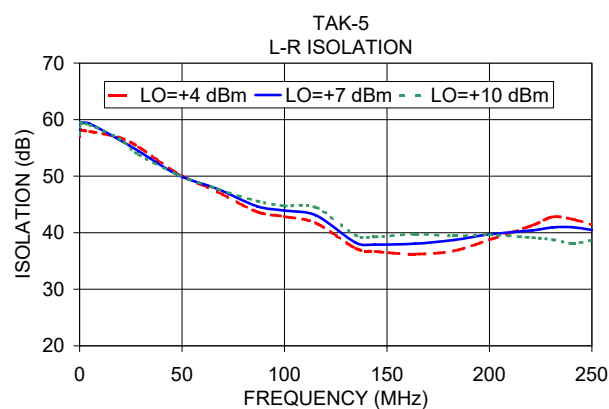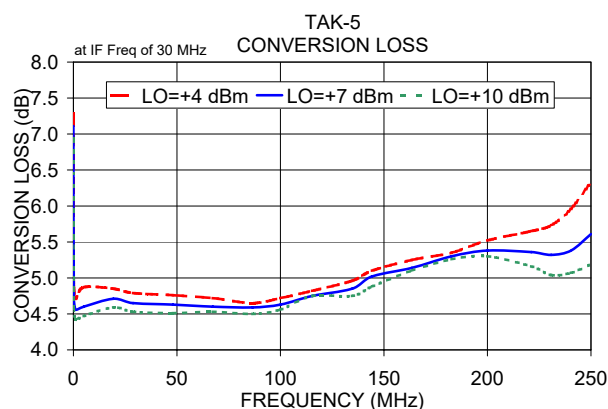

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

TAK-5+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
0.01	30.0	7.28	7.11	6.93	10.1	40.1	19.18	19.80	21.53	10.1	40.1	1.83	1.43	1.12
0.2	30.2	4.89	4.71	4.57	20.1	50.1	20.03	17.51	20.51	20.1	50.1	1.76	1.29	0.98
1.0	31.0	4.71	4.56	4.42	30.1	60.1	20.18	21.52	24.35	30.1	60.1	1.58	1.24	0.99
5.0	35.0	4.87	4.60	4.47	40.1	70.1	17.90	21.11	22.61	40.1	70.1	1.55	1.20	0.96
10.1	40.1	4.50	4.31	4.22	50.1	80.1	18.36	26.29	22.45	50.1	80.1	1.53	1.13	0.89
20.1	50.1	4.83	4.63	4.53	60.1	90.1	19.23	26.61	21.15	60.1	90.1	1.43	1.06	0.84
30.1	60.1	4.85	4.73	4.58	70.1	100.1	21.05	26.60	22.66	70.1	100.1	1.39	1.03	0.86
40.1	70.1	4.93	4.76	4.60	80.1	110.1	19.20	18.32	16.52	80.1	110.1	1.39	1.05	0.78
50.1	80.1	4.94	4.75	4.62	90.1	120.1	20.89	18.17	17.20	90.1	120.1	1.26	0.98	0.79
60.1	90.1	4.95	4.78	4.64	100.1	130.1	23.07	21.24	19.10	100.1	130.1	1.20	0.96	0.76
70.1	100.1	4.96	4.81	4.66	110.1	140.1	19.70	19.27	19.56	110.1	140.1	1.21	0.95	0.76
80.1	110.1	4.88	4.76	4.65	120.1	150.1	18.87	17.64	15.26	120.1	150.1	1.29	1.03	0.81
90.1	120.1	4.88	4.75	4.64	130.1	160.1	20.07	17.00	16.63	130.1	160.1	1.42	1.05	0.86
100.1	130.1	4.95	4.77	4.62	140.1	170.1	18.92	16.33	15.72	140.1	170.1	1.54	1.13	0.88
120.1	150.1	5.16	4.98	4.83	150.1	180.1	15.77	15.63	17.66	150.1	180.1	1.74	1.21	0.92
130.1	160.1	5.19	5.02	4.91	160.1	190.1	15.22	16.17	18.76	160.1	190.1	1.90	1.33	1.02
140.1	170.1	5.24	5.06	4.97	170.1	200.1	15.37	16.03	23.04	170.1	200.1	2.10	1.50	1.11
150.1	180.1	5.32	5.15	5.10	180.1	210.1	12.21	18.05	19.42	180.1	210.1	2.19	1.65	1.24
160.1	190.1	5.46	5.22	5.15	190.1	220.1	10.11	12.58	18.82	190.1	220.1	2.26	1.74	1.34
170.1	200.1	5.60	5.34	5.25	200.1	230.1	8.82	10.26	14.17	200.1	230.1	2.29	1.88	1.60
180.1	210.1	5.93	5.53	5.30	210.1	240.1	9.02	9.98	11.63	210.1	240.1	2.35	1.99	1.74
190.1	220.1	6.05	5.70	5.36	220.1	250.1	8.87	10.16	11.75	220.1	250.1	2.21	1.95	1.75
200.1	230.1	6.30	5.99	5.54	230.1	260.1	9.56	10.60	12.34	230.1	260.1	2.19	1.85	1.65
220.1	250.1	6.68	6.34	5.97	240.1	270.1	9.87	10.85	13.16	240.1	270.1	2.20	1.86	1.62
230.1	260.1	6.57	6.31	6.07	250.1	280.1	10.49	12.22	13.87	250.1	280.1	2.14	1.67	1.46
240.1	270.1	6.70	6.48	6.24	260.1	290.1	11.33	13.65	16.52	260.1	290.1	2.10	1.67	1.52
250.1	280.1	6.69	6.52	6.40	270.1	300.1	12.55	16.03	24.05	270.1	300.1	1.95	1.56	1.41
260.1	290.1	6.78	6.56	6.38	280.1	310.1	13.97	19.54	20.88	280.1	310.1	2.15	1.71	1.56
270.1	300.1	6.78	6.62	6.51	290.1	320.1	15.71	19.93	18.13	290.1	320.1	2.12	1.62	1.40
280.1	310.1	6.71	6.57	6.44	300.1	330.1	15.11	18.53	16.68	300.1	330.1	2.22	1.67	1.36
290.1	320.1	6.85	6.75	6.70	310.1	340.1	16.70	16.48	19.57	310.1	340.1	2.16	1.53	1.20
300.1	330.1	6.90	6.82	6.81	320.1	350.1	16.41	15.36	17.58	320.1	350.1	2.09	1.41	1.07
320.1	350.1	8.40	9.06	7.39	330.1	360.1	15.20	15.35	16.11	330.1	360.1	1.99	1.35	1.01
330.1	360.1	7.74	7.81	7.88	340.1	370.1	13.62	13.99	14.50	340.1	370.1	1.83	1.16	0.88
340.1	370.1	8.22	8.29	8.39	350.1	380.1	12.30	12.36	14.00	350.1	380.1	1.82	1.15	0.96
350.1	380.1	8.60	9.26	9.10	360.1	390.1	13.71	12.40	13.95	360.1	390.1	1.72	1.08	0.98
360.1	390.1	9.15	9.21	9.27	370.1	400.1	15.16	13.42	12.64	370.1	400.1	1.92	1.31	1.28
370.1	400.1	9.45	9.57	9.71	380.1	410.1	16.26	14.35	12.28	380.1	410.1	2.16	1.59	1.50
380.1	410.1	10.98	12.01	14.27	390.1	420.1	16.46	15.32	14.98	390.1	420.1	2.53	1.93	1.80
400.1	430.1	11.27	11.07	11.22	400.1	430.1	14.22	15.32	15.24	400.1	430.1	2.78	2.13	1.98

REV. X2

TAK-5+

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

TAK-5+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=125.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
115.0	10.1	5.34	10.0	20.1	4.52	240.0	10.1	7.87
112.3	12.8	5.30	15.9	26.0	4.38	234.1	16.0	7.82
109.6	15.5	5.26	21.8	31.9	4.35	228.2	21.9	7.69
106.9	18.2	5.23	27.7	37.8	4.33	222.3	27.8	7.58
104.2	20.9	5.18	33.6	43.7	4.38	216.4	33.7	7.50
101.5	23.6	5.14	39.5	49.6	4.40	210.5	39.6	7.43
98.8	26.3	5.12	45.4	55.5	4.45	204.6	45.5	7.39
96.2	28.9	5.10	51.3	61.4	4.47	198.7	51.4	7.30
93.5	31.6	5.07	57.2	67.3	4.47	192.8	57.3	7.22
90.8	34.3	5.07	63.1	73.2	4.49	186.9	63.2	7.18
88.1	37.0	5.07	69.0	79.1	4.51	181.0	69.1	7.17
85.4	39.7	5.06	74.9	85.0	4.57	175.1	75.0	7.18
82.7	42.4	5.07	80.8	90.9	4.61	169.2	80.9	7.11
80.0	45.1	5.05	86.7	96.8	4.61	163.3	86.8	7.09
77.3	47.8	5.04	92.6	102.7	4.63	157.4	92.7	7.06
74.6	50.5	5.03	98.5	108.6	4.64	151.5	98.6	7.08
71.9	53.2	5.03	104.4	114.5	4.62	145.6	104.5	7.03
69.2	55.9	5.01	110.3	120.4	4.61	139.7	110.4	6.99
66.5	58.6	4.98	116.2	126.3	4.68	133.8	116.3	6.93
63.8	61.3	4.96	122.1	132.2	4.73	127.9	122.2	6.84
61.2	63.9	4.97	127.9	138.0	4.84	122.1	128.0	6.87
58.5	66.6	5.00	133.8	143.9	5.01	116.2	133.9	6.83
55.8	69.3	5.01	139.7	149.8	5.17	110.3	139.8	6.77
53.1	72.0	5.00	145.6	155.7	5.28	104.4	145.7	6.72
50.4	74.7	4.99	151.5	161.6	5.27	98.5	151.6	6.62
47.7	77.4	4.98	157.4	167.5	5.33	92.6	157.5	6.57
45.0	80.1	4.95	163.3	173.4	5.31	86.7	163.4	6.52
42.3	82.8	4.95	169.2	179.3	5.37	80.8	169.3	6.42
39.6	85.5	4.94	175.1	185.2	5.39	74.9	175.2	6.31
36.9	88.2	4.93	181.0	191.1	5.33	69.0	181.1	6.20
34.2	90.9	4.93	186.9	197.0	5.43	63.1	187.0	6.16
31.5	93.6	4.92	192.8	202.9	5.36	57.2	192.9	6.06
28.8	96.3	4.93	198.7	208.8	5.46	51.3	198.8	6.01
26.2	98.9	4.93	204.6	214.7	5.45	45.4	204.7	5.95
23.5	101.6	4.95	210.5	220.6	5.47	39.5	210.6	5.98
20.8	104.3	4.95	216.4	226.5	5.51	33.6	216.5	6.12
18.1	107.0	4.95	222.3	232.4	5.49	27.7	222.4	6.27
15.4	109.7	4.96	228.2	238.3	5.51	21.8	228.3	6.46
12.7	112.4	5.01	234.1	244.2	5.45	15.9	234.2	6.57
10.0	115.1	5.06	240.0	250.1	5.50	10.0	240.1	6.71

REV. X2

TAK-5+

100818

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
0.01	56.97	58.08	57.43	52.65	53.36	52.26
0.2	58.23	59.34	59.43	51.70	52.17	51.68
1.0	58.08	59.46	59.35	51.73	51.84	51.63
5.0	57.90	59.26	59.05	51.61	51.76	51.55
10.1	70.19	71.47	73.53	64.35	74.69	69.95
20.1	69.48	71.93	74.91	67.39	78.82	75.35
30.1	68.68	72.32	75.08	64.74	73.37	77.53
40.1	68.11	71.97	75.68	61.71	65.34	73.90
50.1	66.62	71.84	76.30	57.28	62.11	66.95
60.1	65.68	70.35	74.83	54.23	58.43	61.93
70.1	65.83	71.72	72.13	51.83	54.98	57.75
80.1	59.99	64.10	69.19	52.36	56.26	59.50
90.1	61.41	64.37	68.18	50.06	53.88	55.71
100.1	71.73	71.02	68.09	46.97	49.22	50.84
120.1	56.18	56.84	56.06	50.51	51.11	50.02
130.1	53.74	55.75	55.36	48.39	49.38	48.31
140.1	51.11	54.42	57.06	47.18	46.40	44.98
150.1	49.39	52.49	55.44	44.63	43.51	42.43
160.1	49.67	53.03	55.10	43.18	41.82	40.59
170.1	51.17	55.67	52.81	43.42	40.52	38.04
180.1	54.39	54.18	48.36	42.19	37.79	34.94
190.1	58.34	51.15	46.72	41.40	36.29	33.51
200.1	59.95	49.25	45.43	42.27	35.99	32.80
220.1	50.42	46.68	43.52	37.67	34.57	31.48
230.1	49.94	47.05	43.95	36.20	33.76	30.79
240.1	52.01	48.35	44.67	34.74	32.49	29.82
250.1	49.42	45.30	41.78	32.96	31.00	28.65
260.1	48.68	43.47	39.47	32.29	29.89	27.01
270.1	46.68	41.47	37.08	31.20	28.48	24.92
280.1	42.78	38.02	33.97	29.25	26.24	22.63
290.1	39.53	34.75	30.88	27.83	24.20	20.57
300.1	37.20	32.38	28.80	26.04	22.19	18.84
320.1	32.46	28.88	25.96	23.15	19.92	17.04
330.1	30.03	27.04	24.43	22.04	19.06	16.34
340.1	27.79	25.31	23.03	20.62	18.01	15.54
350.1	25.44	23.48	21.57	19.15	16.81	14.65
360.1	23.79	22.40	20.78	17.96	16.11	14.17
370.1	22.27	21.14	19.77	17.06	15.40	13.68
380.1	21.25	20.18	18.95	16.54	14.95	13.37
400.1	19.92	18.78	17.62	16.05	14.27	12.76

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	34.78	34.18	34.25
20.1	50.1	30.88	30.56	30.27
30.1	60.1	27.70	27.73	27.64
40.1	70.1	25.80	26.22	26.31
50.1	80.1	25.17	25.43	25.76
60.1	90.1	24.56	25.12	25.53
70.1	100.1	24.13	24.86	25.46
80.1	110.1	24.16	25.10	25.74
90.1	120.1	24.42	25.11	25.70
100.1	130.1	24.20	24.95	25.82
110.1	140.1	24.90	25.84	26.59
120.1	150.1	25.44	26.33	27.11
130.1	160.1	25.13	26.14	26.94
140.1	170.1	23.89	24.61	25.26
150.1	180.1	21.46	21.87	22.04
160.1	190.1	19.43	19.56	19.59
170.1	200.1	18.08	18.14	18.11
180.1	210.1	16.95	17.13	17.07
190.1	220.1	16.16	16.32	16.47
200.1	230.1	15.82	16.12	16.65
210.1	240.1	15.46	15.71	16.32
220.1	250.1	15.38	15.70	16.36
230.1	260.1	15.52	15.81	16.35
240.1	270.1	15.53	15.84	16.20
250.1	280.1	15.40	15.53	15.63
260.1	290.1	15.46	15.51	15.46
270.1	300.1	15.09	14.82	14.51
280.1	310.1	14.61	14.18	13.73
290.1	320.1	13.90	13.25	12.61
300.1	330.1	13.14	12.39	11.57
310.1	340.1	12.22	11.35	10.47
320.1	350.1	11.07	10.19	9.39
330.1	360.1	9.97	9.26	8.63
340.1	370.1	8.90	8.36	7.95
350.1	380.1	8.24	7.71	7.42
360.1	390.1	7.68	7.25	6.95
370.1	400.1	7.31	6.89	6.62
380.1	410.1	6.99	6.60	6.34
390.1	420.1	6.78	6.39	6.15
400.1	430.1	6.59	6.22	5.97

REV. X2

TAK-5+

100818

Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

TAK-5+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=250.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
5.0	35.0	1.19	1.07	1.02	5.0	1.89	2.97	4.39	5.0	1.64	1.43	1.31
10.0	40.0	1.20	1.07	1.01	10.0	1.86	2.78	4.21	10.0	1.65	1.43	1.32
20.1	50.1	1.29	1.19	1.12	20.1	1.68	2.40	3.42	16.2	2.32	2.04	1.73
30.1	60.1	1.27	1.19	1.13	30.1	1.74	2.52	3.50	22.3	2.25	2.00	1.73
40.1	70.1	1.29	1.17	1.11	40.1	1.74	2.51	3.44	28.5	2.31	2.04	1.77
50.1	80.1	1.23	1.14	1.08	50.1	1.71	2.43	3.31	34.6	2.28	2.07	1.79
60.1	90.1	1.21	1.11	1.06	60.1	1.68	2.35	3.17	40.8	2.24	2.04	1.80
70.1	100.1	1.17	1.09	1.03	70.1	1.66	2.29	3.08	46.9	2.21	2.03	1.81
80.1	110.1	1.14	1.06	1.02	80.1	1.63	2.30	3.13	53.1	2.18	2.01	1.83
90.1	120.1	1.12	1.04	1.02	90.1	1.66	2.35	3.17	59.2	2.21	2.06	1.86
100.1	130.1	1.10	1.01	1.06	100.1	1.70	2.32	3.12	65.4	2.24	2.06	1.86
110.1	140.1	1.08	1.01	1.07	110.1	1.73	2.41	3.22	71.5	2.31	2.13	1.92
120.1	150.1	1.07	1.00	1.06	120.1	1.77	2.45	3.28	77.7	2.38	2.20	1.99
130.1	160.1	1.02	1.04	1.09	130.1	1.82	2.48	3.28	83.8	2.46	2.27	2.06
140.1	170.1	1.03	1.11	1.17	140.1	1.83	2.48	3.26	90.0	2.52	2.32	2.10
150.1	180.1	1.08	1.16	1.23	150.1	1.82	2.46	3.22	96.2	2.57	2.37	2.16
160.1	190.1	1.12	1.18	1.24	160.1	1.82	2.43	3.18	102.3	2.61	2.42	2.21
170.1	200.1	1.17	1.21	1.25	170.1	1.83	2.48	3.26	108.5	2.63	2.44	2.23
180.1	210.1	1.20	1.19	1.20	180.1	1.86	2.50	3.29	114.6	2.57	2.40	2.22
190.1	220.1	1.22	1.18	1.18	190.1	1.92	2.51	3.27	120.8	2.54	2.39	2.21
200.1	230.1	1.29	1.23	1.18	200.1	2.00	2.62	3.37	126.9	2.50	2.37	2.21
210.1	240.1	1.30	1.24	1.19	210.1	2.07	2.71	3.45	133.1	2.48	2.35	2.21
220.1	250.1	1.38	1.31	1.22	220.1	2.12	2.80	3.56	139.2	2.51	2.36	2.23
230.1	260.1	1.31	1.22	1.13	230.1	2.14	2.78	3.53	145.4	2.54	2.40	2.26
240.1	270.1	1.35	1.26	1.19	240.1	2.15	2.79	3.52	151.5	2.58	2.44	2.29
250.1	280.1	1.31	1.23	1.18	250.1	2.15	2.78	3.51	157.7	2.61	2.48	2.33
260.1	290.1	1.35	1.28	1.25	260.1	2.19	2.90	3.64	163.8	2.62	2.48	2.34
270.1	300.1	1.34	1.30	1.28	270.1	2.21	2.89	3.62	170.0	2.60	2.45	2.32
280.1	310.1	1.36	1.33	1.31	280.1	2.24	2.89	3.59	176.2	2.61	2.45	2.31
290.1	320.1	1.44	1.42	1.43	290.1	2.29	2.92	3.58	182.3	2.61	2.43	2.29
300.1	330.1	1.45	1.45	1.47	300.1	2.31	2.92	3.55	188.5	2.61	2.44	2.28
310.1	340.1	1.55	1.56	1.58	310.1	2.32	2.92	3.52	194.6	2.64	2.45	2.27
320.1	350.1	1.55	1.58	1.62	320.1	2.32	2.85	3.42	200.8	2.66	2.46	2.28
330.1	360.1	1.63	1.65	1.68	330.1	2.32	2.83	3.36	206.9	2.65	2.46	2.27
340.1	370.1	1.66	1.69	1.72	340.1	2.33	2.82	3.32	213.1	2.65	2.46	2.26
350.1	380.1	1.71	1.72	1.74	350.1	2.36	2.84	3.31	219.2	2.69	2.48	2.28
360.1	390.1	1.75	1.75	1.76	360.1	2.38	2.80	3.24	225.4	2.73	2.50	2.28
370.1	400.1	1.75	1.72	1.73	370.1	2.44	2.84	3.25	231.5	2.77	2.54	2.28
380.1	410.1	1.78	1.74	1.73	380.1	2.50	2.87	3.25	237.7	2.76	2.52	2.27
390.1	420.1	1.79	1.74	1.72	390.1	2.54	2.89	3.25	243.8	2.74	2.50	2.24
400.1	430.1	1.83	1.77	1.74	400.1	2.59	2.93	3.26	250.0	2.66	2.42	2.14

REV. X2

TAK-5+

100818

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	22	12	45	19	44	34	47	44	45
1	-	20	+0	29	12	34	29	43	37	46	34	46
2	>100	53	43	54	44	54	51	64	58	77	78	71
3	>100	64	53	59	54	64	62	67	63	69	64	72
4	>100	>80	71	>80	66	78	70	>80	77	>80	>80	>80
5	>100	>80	>80	>80	>80	76	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 120.1 MHz; -14.00 dBm.

LO IN: 150.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -19.72 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	25	35	24	50	31	54	50	57	58	68
1	-	22	+0	29	14	35	31	53	41	55	41	72
2	100	49	43	52	43	50	53	64	52	63	62	62
3	>100	53	37	49	39	61	42	53	55	64	54	62
4	>100	81	55	78	53	69	54	61	61	74	69	76
5	>100	72	62	62	57	48	56	62	60	68	65	70
6	>100	83	76	77	66	80	65	90	66	80	75	82
7	>100	90	77	89	74	71	73	69	69	71	79	78
8	>100	88	>91	87	84	81	80	85	78	82	80	>91
9	>100	>91	90	>91	>91	>91	79	84	79	80	82	90
10	>100	>91	>91	>91	>91	>91	89	90	>91	55	>91	90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 120.1 MHz; -4.00 dBm.

LO IN: 150.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -9 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

TAK-5+

100818

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

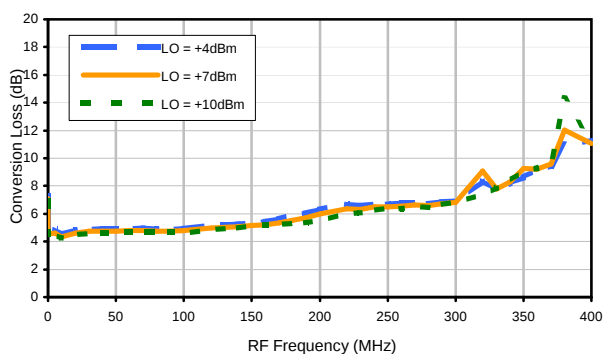


Conversion Loss vs. IF @ RF=125.1MHz

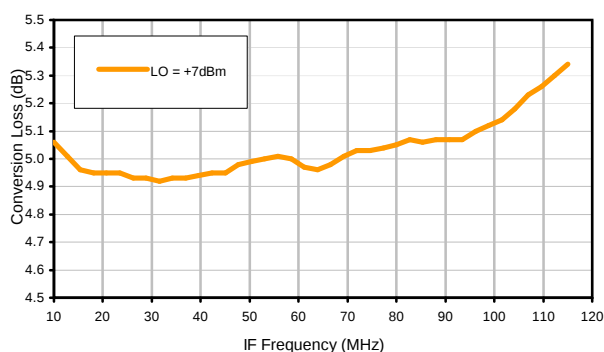


Conversion Loss vs. IF @ RF=10.1MHz

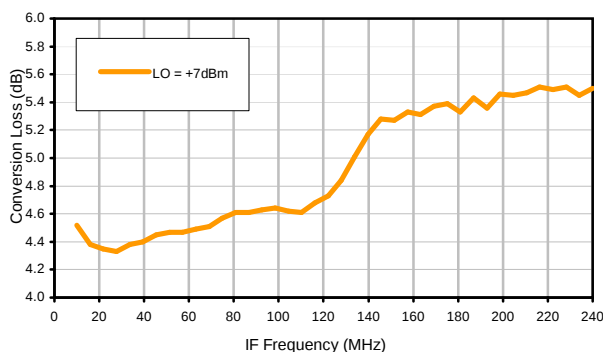


Conversion Loss vs. IF @ RF=250.1MHz

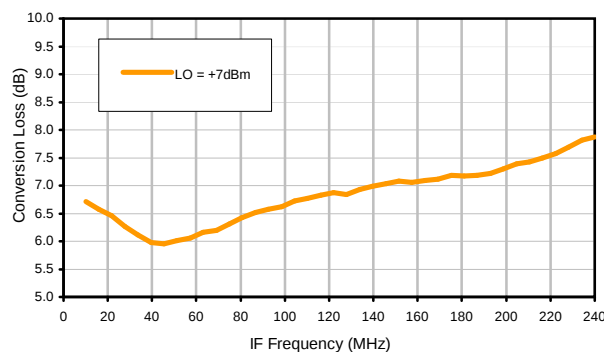

IP3 Input

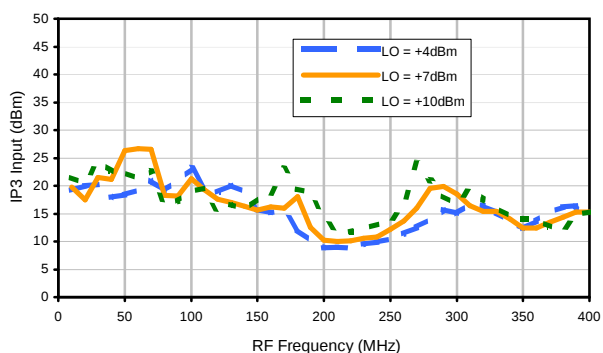


Compression @ RF IN=+1dBm

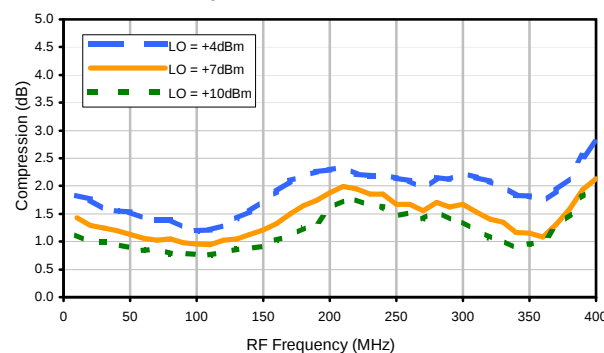


Typical Performance Curves


LO-RF Isolation

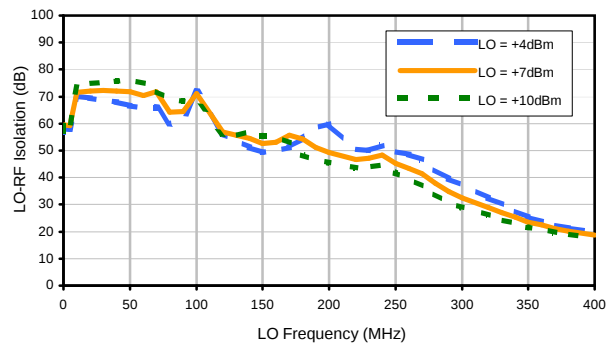


LO-IF Isolation

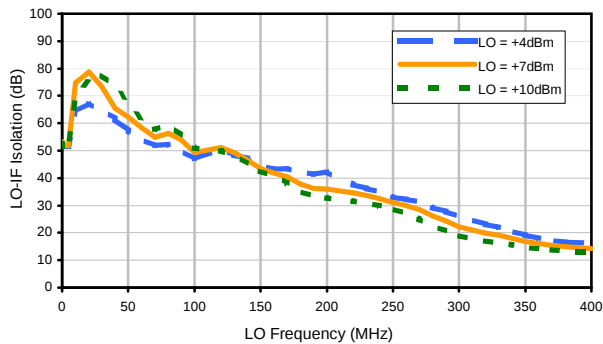


RF-IF Isolation

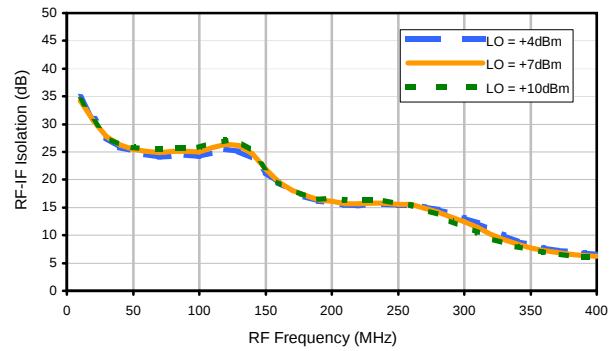


RF VSWR

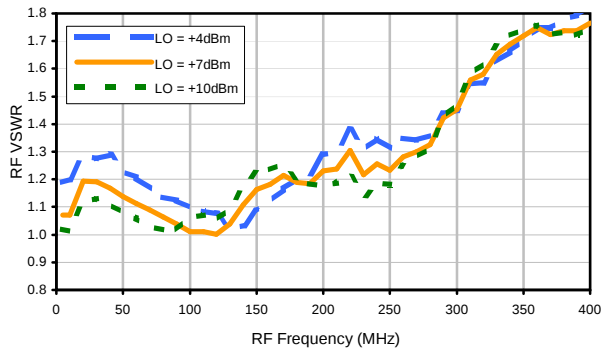

LO VSWR

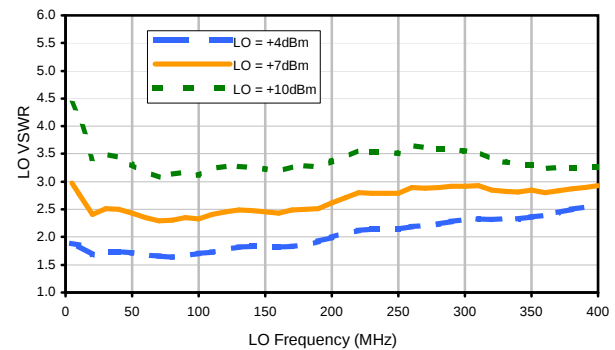

IF VSWR

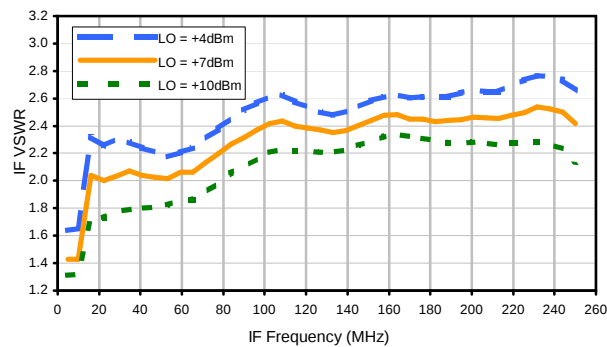

REV. X2

TAK-5+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	22	12	45	19	44	34	47	44	45
1	-	20	+0	29	12	34	29	43	37	46	34	46
2	>100	53	43	54	44	54	51	64	58	77	78	71
3	>100	64	53	59	54	64	62	67	63	69	64	72
4	>100	>80	71	>80	66	78	70	>80	77	>80	>80	>80
5	>100	>80	>80	>80	>80	76	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 120.1 MHz; -14.00 dBm.

LO IN: 150.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -19.72 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	25	35	24	50	31	54	50	57	58	68
1	-	22	+0	29	14	35	31	53	41	55	41	72
2	100	49	43	52	43	50	53	64	52	63	62	62
3	>100	53	37	49	39	61	42	53	55	64	54	62
4	>100	81	55	78	53	69	54	61	61	74	69	76
5	>100	72	62	62	57	48	56	62	60	68	65	70
6	>100	83	76	77	66	80	65	90	66	80	75	82
7	>100	90	77	89	74	71	73	69	69	71	79	78
8	>100	88	>91	87	84	81	80	85	78	82	80	>91
9	>100	>91	90	>91	>91	>91	79	84	79	80	82	90
10	>100	>91	>91	>91	>91	>91	89	90	>91	55	>91	90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 120.1 MHz; -4.00 dBm.

LO IN: 150.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -9 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

TAK-5+

100818

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



A01
A04
A05
A06

Outline Dimensions

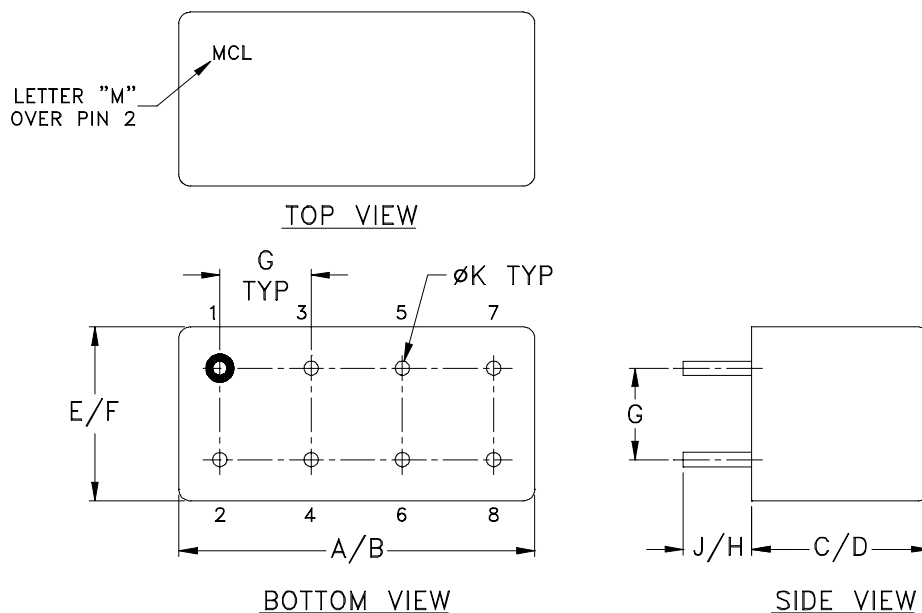

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D