


Evaluation Board and Circuit

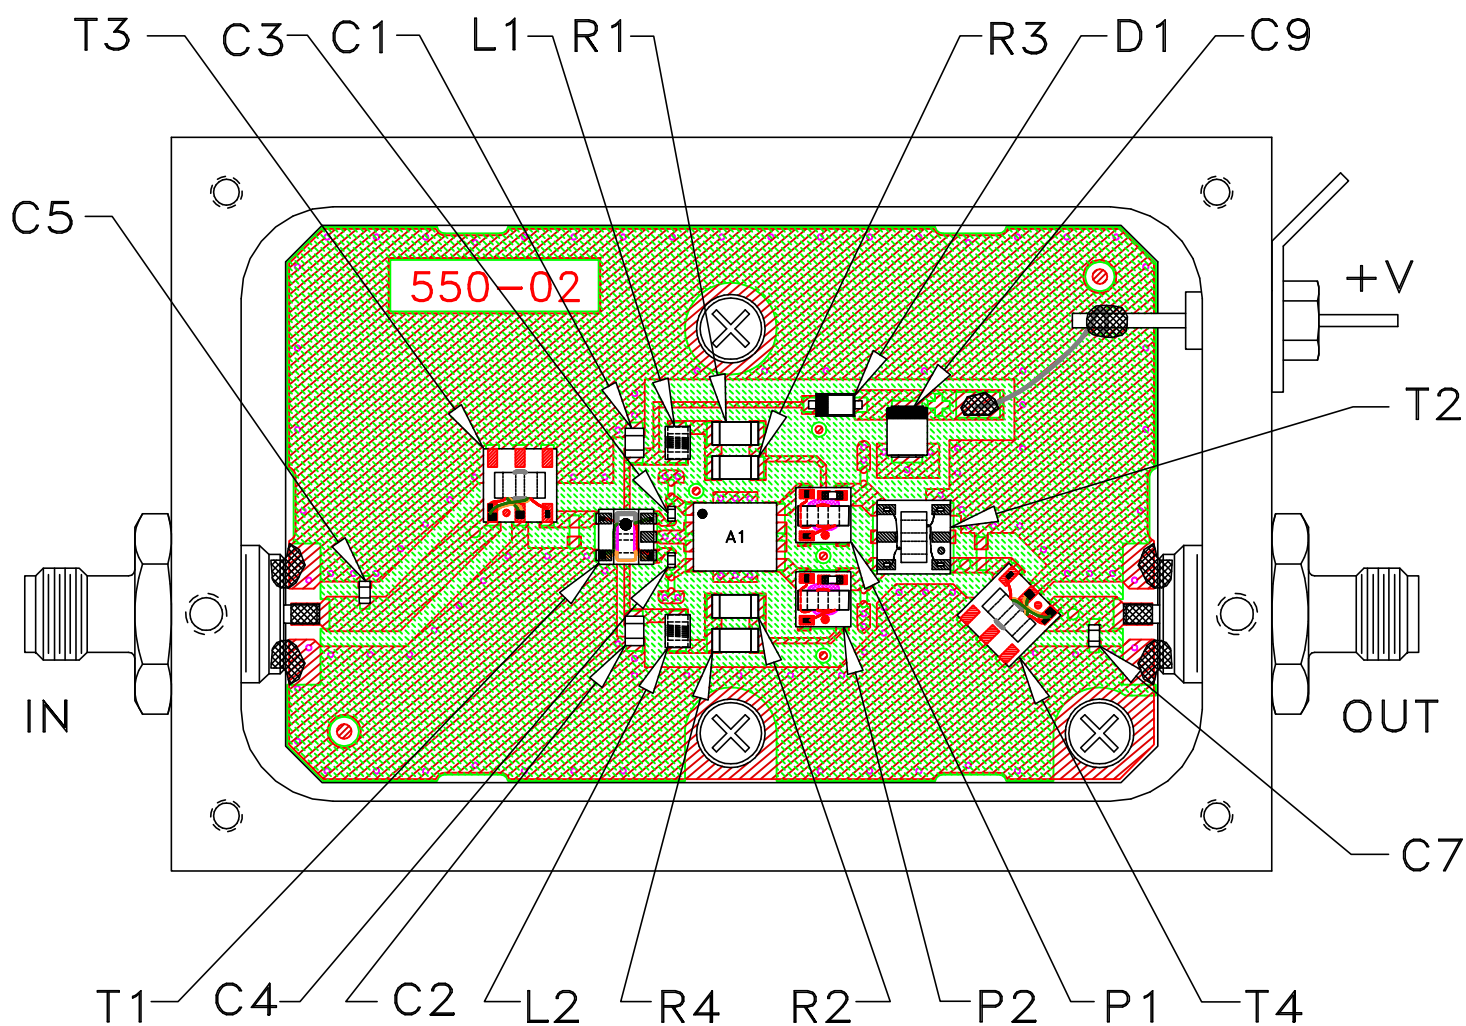

TB-566H-50+


Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: FR4.

Dielectric Constant=4.7, Thickness=.059 inch.

 **Mini-Circuits®**

Evaluation Board and Circuit

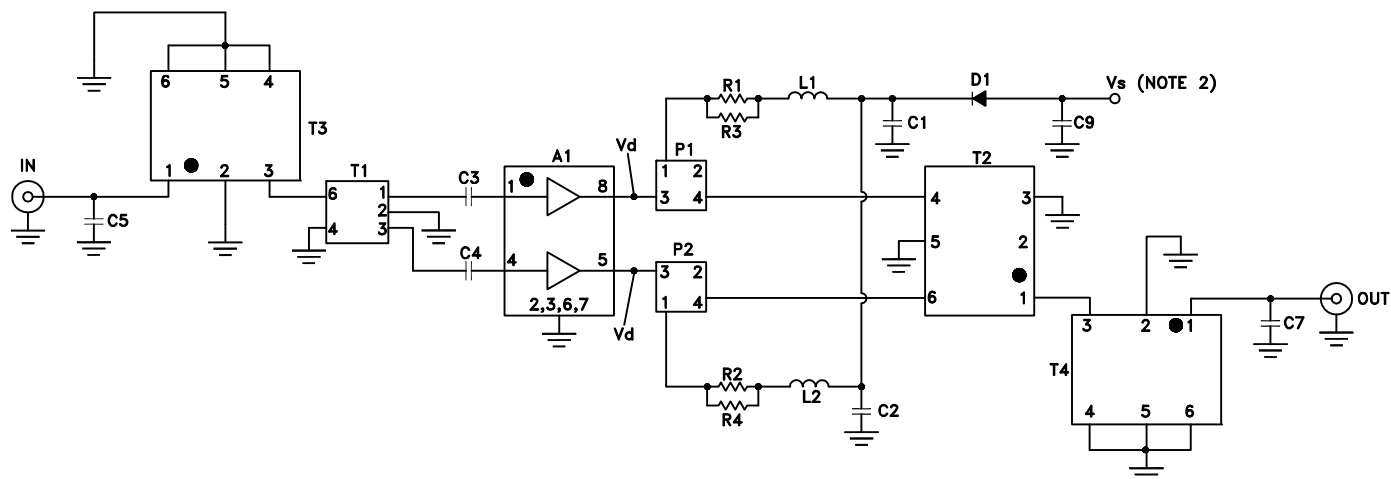

Note:


1. Numbers inside the boxes indicate Pin Numbers.
2. Set V_s to obtain $V_d=5V$.

COMPONENT	VALUE
A1	Mini-Circuits PHA-22H+
C1,C2	.039 μF
C3,C4	1000 pF
C5	0.8 pF
C7	1.1 pF
C9	1.0 μF
D1	ON Semiconductor: MBR0520LT1G
L1,L2	680 nH
P1,P2	Mini-Circuits TCBT-6G+
R1,R2	11.5 Ohm
R3,R4	7.50 Ohm
T1	Mini-Circuits TC1.33-282+
T2	Mini-Circuits TRS1-23-75+
T3,T4	Mini-Circuits TRS2-252+

Schematic Diagram

 Mini-Circuits®

Outline Dimensions

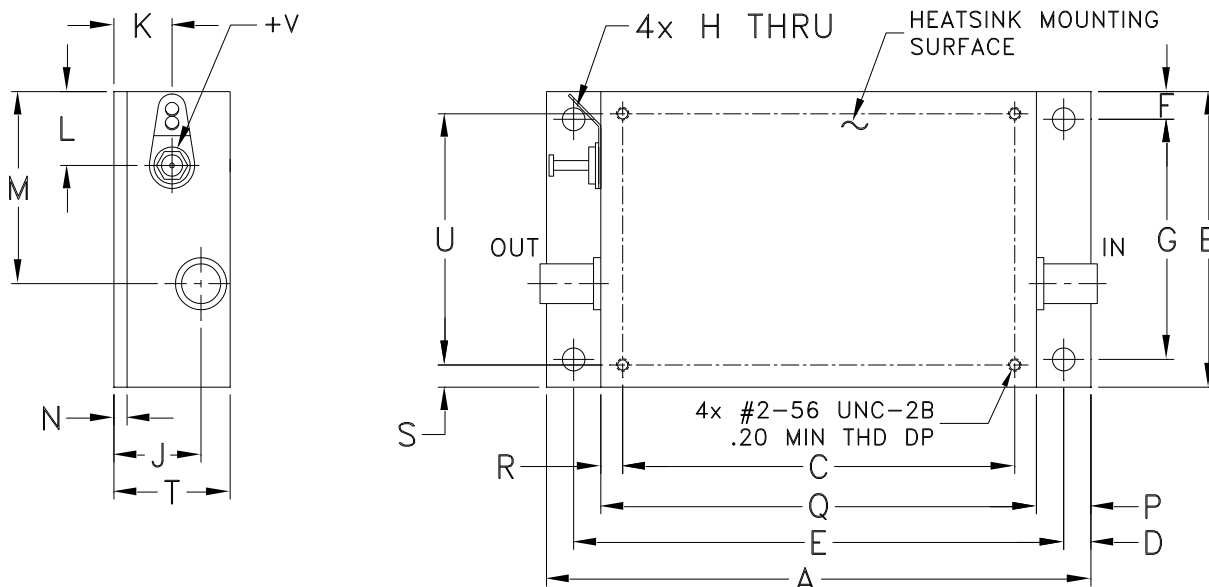

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
S860	3.75 (95.25)	2.00 (50.80)	2.700 (68.58)	.19 (4.83)	3.375 (85.73)	.19 (4.83)	1.625 (41.28)	.144 (3.66)	.54 (13.72)	.40 (10.16)	.50 (12.70)	1.30 (33.02)	.10 (2.54)

CASE#	P	Q	R	S	T	U	WT. GRAMS
S860	.38 (9.65)	3.00 (76.20)	.15 (3.81)	.15 (3.81)	.84 (21.34)	1.700 (43.18)	150.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:

For RoHS Case Styles:

Clear chemical conversion coating, non-chrome or trivalent chrome based.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS