

Mini-Circuits®

SURFACE MOUNT

RF Transformer

TC1-33-75-5+

75Ω 5 to 3000 MHz

THE BIG DEAL

- Suitable for Tin/Lead and RoHS Solder Systems
- Wideband, 5 to 3000 MHz
- Balanced Transmission Line
- Good Return Loss, 20 dB Typ. at 1 dB Band
- Excellent Amplitude Unbalance, 0.3 dB typ. and Phase Unbalance, 3 deg Typ. in 1 dB Bandwidth
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced to Unbalanced Transformation
- Push-Pull Amplifiers
- PCS/DCS
- Cable TV
- Cellular

ELECTRICAL SPECIFICATIONS AT +25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		5		3000	MHz
Insertion Loss ¹	5-1200			1	dB
	1200-2000			2	
	2000-3000			3	
Phase Unbalance	5-1200		3		Deg.
	1200-2000		4		
Amplitude Unbalance	5-1200		0.3		dB
	1200-2000		1		

1. Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power	0.25 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

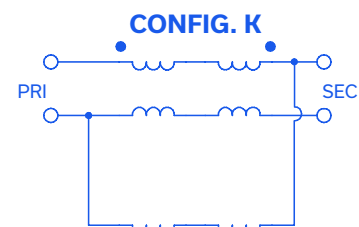


Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-025349
TC1-33-75-5+
MCL NY
250428

PAGE 1 OF 3




PIN CONNECTIONS


PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

PRODUCT MARKING: N/A

OUTLINE DRAWING

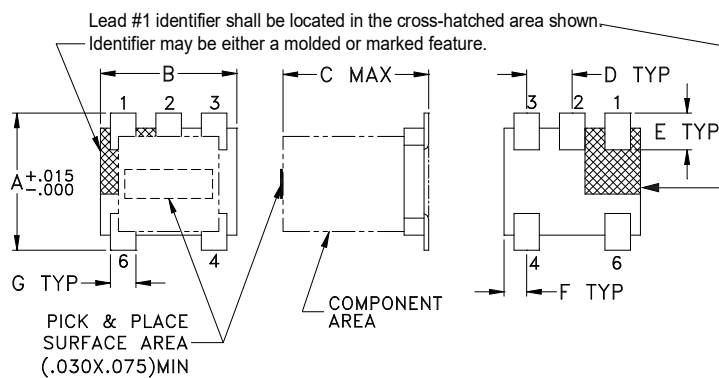


PCB Land Pattern

Suggested Layout,
Tolerance to be within $\pm .002$ OUTLINE DIMENSIONS (Inch
mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

TAPE & REEL INFORMATION: F17



SURFACE MOUNT





RF Transformer

TC1-33-75-5+

Mini-Circuits

75Ω 5 to 3000 MHz

TYPICAL PERFORMANCE GRAPHS

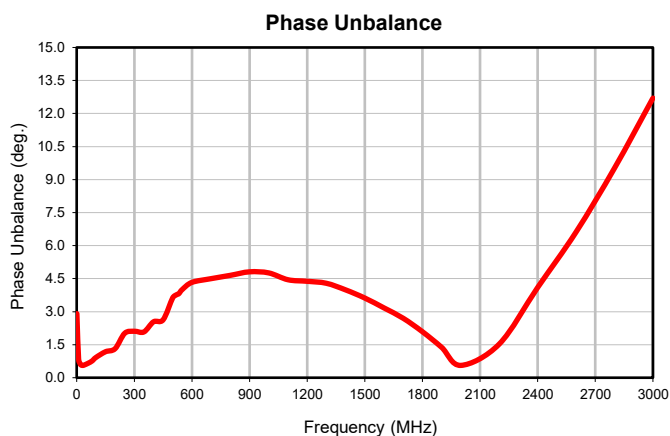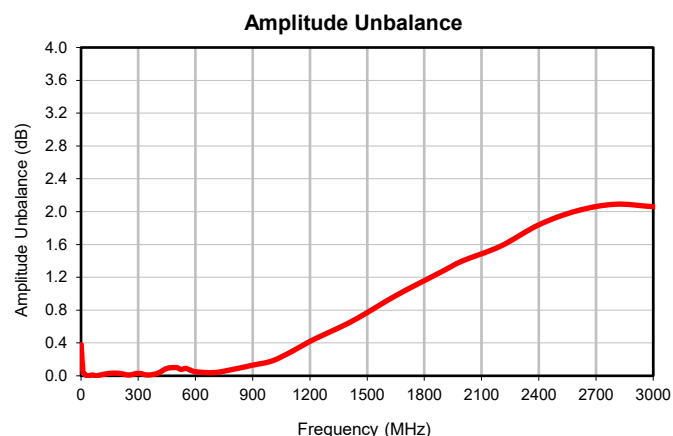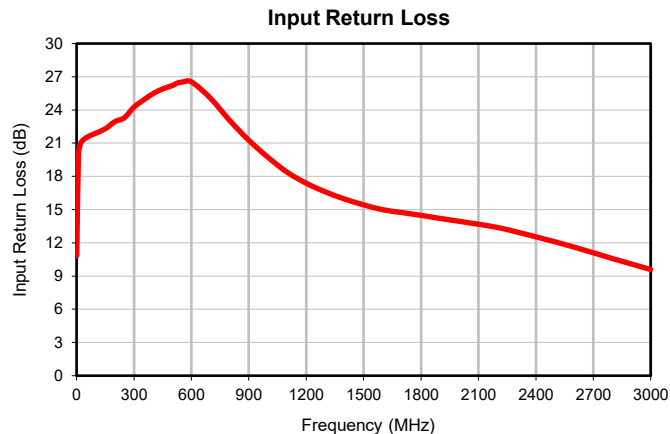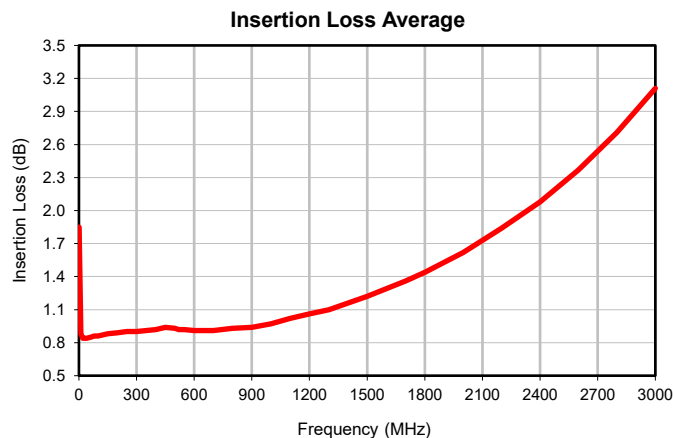

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



RF Transformer


TC1-33-75-5+

Typical Performance Data


FREQUENCY (MHz)	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
1.00	1.85	10.86	0.38	2.91
10.00	0.88	20.01	0.04	0.84
20.00	0.84	20.94	0.02	0.60
30.00	0.84	21.21	0.00	0.56
40.00	0.84	21.37	0.00	0.58
60.00	0.85	21.59	0.01	0.66
80.00	0.86	21.75	0.00	0.76
100.00	0.86	21.90	0.01	0.92
150.00	0.88	22.30	0.03	1.18
200.00	0.89	22.94	0.03	1.32
250.00	0.90	23.30	0.01	2.02
300.00	0.90	24.26	0.03	2.11
350.00	0.91	24.90	0.01	2.08
400.00	0.92	25.48	0.03	2.54
450.00	0.94	25.90	0.09	2.63
500.00	0.93	26.20	0.10	3.63
520.00	0.92	26.38	0.08	3.77
532.00	0.92	26.46	0.08	3.82
550.00	0.92	26.51	0.09	4.01
600.00	0.91	26.54	0.05	4.33
700.00	0.91	25.05	0.04	4.50
800.00	0.93	23.05	0.08	4.65
900.00	0.94	21.26	0.13	4.81
1000.00	0.97	19.72	0.18	4.76
1100.00	1.02	18.38	0.29	4.45
1200.00	1.06	17.38	0.42	4.38
1300.00	1.10	16.60	0.53	4.29
1400.00	1.16	15.96	0.64	3.99
1500.00	1.22	15.43	0.77	3.62
1600.00	1.29	14.99	0.91	3.17
1700.00	1.36	14.73	1.04	2.70
1800.00	1.44	14.48	1.16	2.09
1900.00	1.53	14.20	1.28	1.38
2000.00	1.62	13.94	1.40	0.56
2200.00	1.84	13.38	1.58	1.53
2400.00	2.08	12.54	1.84	4.10
2600.00	2.37	11.61	2.01	6.62
2800.00	2.71	10.58	2.09	9.52
3000.00	3.11	9.59	2.06	12.70

Typical Performance Data


Insertion Loss Average

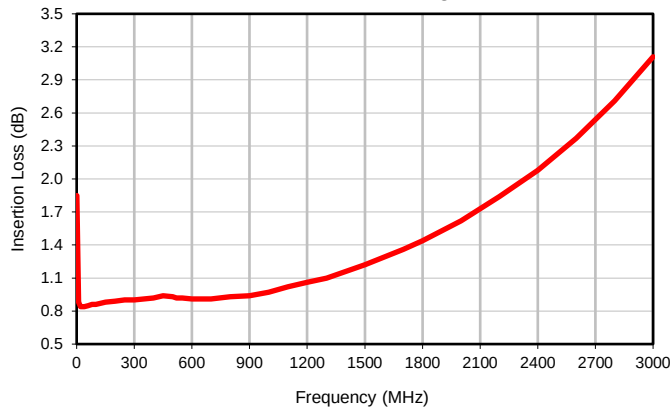


Input Return Loss

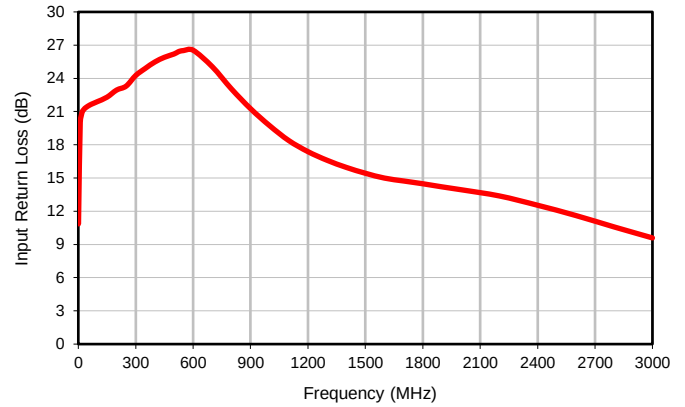

Amplitude Unbalance

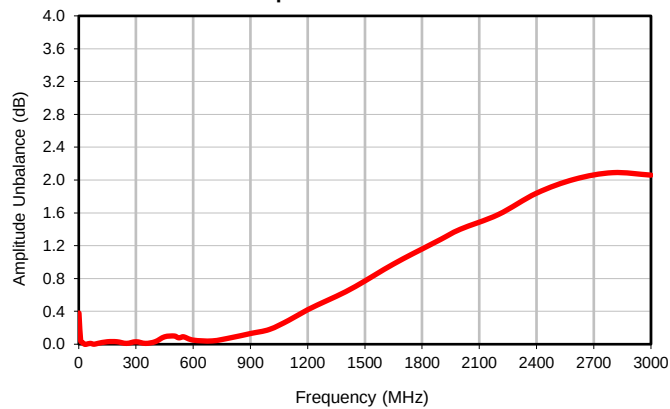


Phase Unbalance

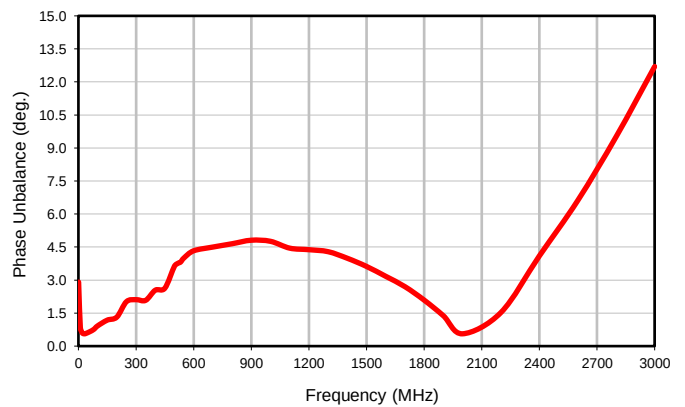


Outline Dimensions

AT224-1A

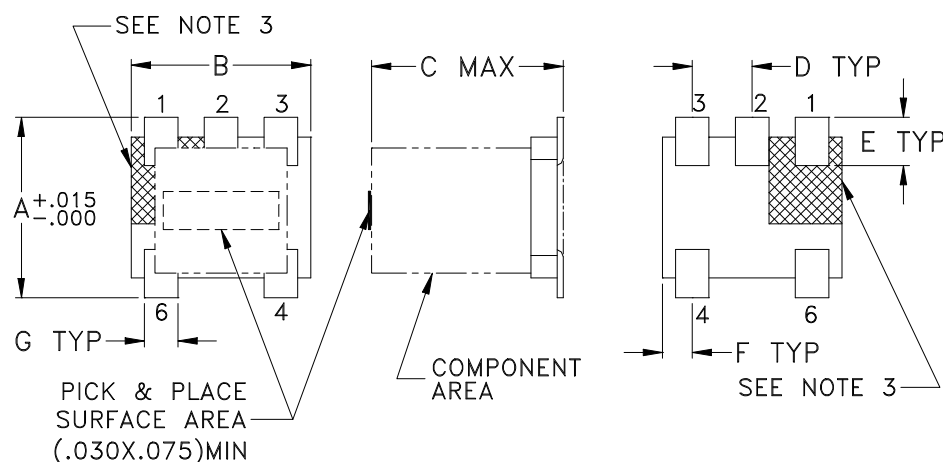

PCB Land Pattern

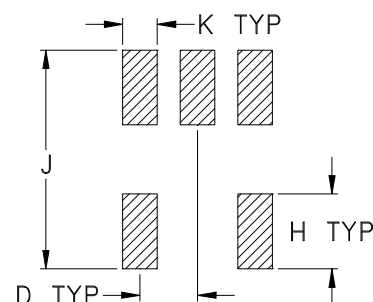

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAMS
AT224-1A	.150 (3.81)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (0.64)	.028 (0.71)	.065 (1.65)	.190 (4.83)	.030 (0.76)	.15

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
- Lead #1 identifier shall be located in the cross-hatched area shown.
Identifier may be either a molded or marked feature.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F17

DEVICE ORIENTATION IN T&R

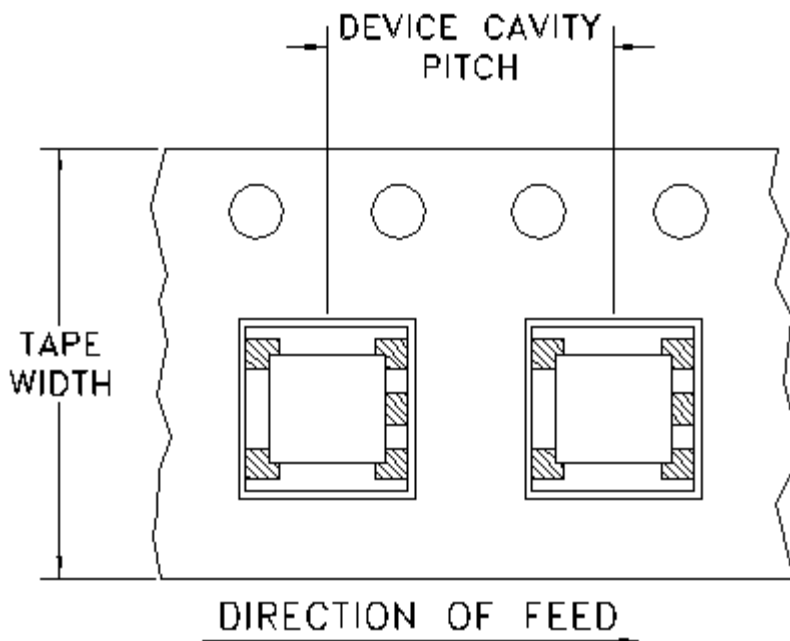

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standards (see note)	20
				50
				100
				200
				500
		13	Standard	1000
				2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215