

Balanced to Unbalanced

# RF Transformer

TC1.33-282+

100 to 75Ω      5 to 2800 MHz

## The Big Deal

- Very wide bandwidth, 5 to 2800 MHz
- Very good return loss over entire band
- Convenient 100/75Ω matching over a wide range of frequencies



CASE STYLE: AT224-1

## Product Overview

The TC1.33-282+ is a mini wideband tri-filar transformer, measuring approximately 4 mm on all sides. The plastic substrate, 5-pad design is aqueous washable and RoHS compliant, featuring a square core and all welded wire construction for repeatability and reliability in balanced-to-unbalanced 100/75Ω implementations.

Feature	Advantages
Very wide bandwidth	5-2800 MHz bandwidth useful for CATV (forward & return), medical wireless and D2A/A2D, and communications applications
Excellent amplitude and phase unbalance	0.3 dB amplitude and 6° phase unbalance aid rejection of even harmonics (in push-pull amplifiers) and common mode signals (when used as a balun)
Good return loss	Efficient signal path across 100/75Ω transitions
Low and flat insertion loss	Flatness ±0.1 dB across 50-1000 MHz CATV bands preserves gain flatness after impedance transformation

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Balanced to Unbalanced RF Transformer

100 to 75Ω      5 to 2800 MHz

TC1.33-282+

TC1.33-282X+  
Upgraded Version\*



Generic photo used for illustration purposes only

CASE STYLE: AT224-1

**\*Addition of Top hat™ feature**

- Benefits**
- Allows faster pick-and-place
  - Enables visual identification marking

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

## Features

- suitable for tin/lead and RoHS solder systems
- wideband, 5 to 2800 MHz
- balanced transmission line
- good return loss, 20 dB typ. at 1 dB band
- excellent amplitude unbalance, 0.3 dB typ.
- aqueous washable

## Applications


- balanced to unbalanced transformation
- push-pull amplifiers
- PCS/DCS
- cable TV
- cellular

## Electrical Specifications at 25°C, 75Ω


Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
1.33	5-2800	5-2800	30-2000	50-1500	6	6	0.3	1.0

\*Insertion Loss is referenced to mid-band loss, 1.0 dB typ. Measured in 75Ω system.

## Outline Drawing AT224-1

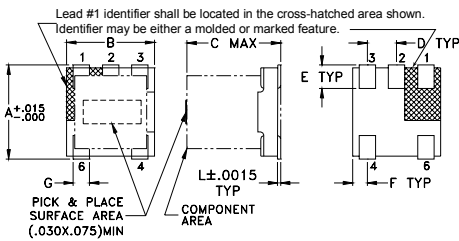


### PCB Land Pattern



## Outline Dimensions (inch/mm)


A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	L	wt
.028	.065	.190	.030	.007	grams
0.71	1.65	4.83	0.76	0.18	0.15

## Config. K

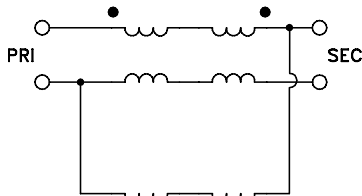

## Typical Performance Data, 75Ω

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5.00	1.48	17.72	0.38	3.28
10.00	1.20	21.95	0.21	2.17
30.00	1.08	27.05	0.11	0.55
50.00	1.08	28.04	0.09	0.06
100.00	1.09	28.09	0.08	1.09
500.00	0.99	24.29	0.21	5.00
1000.00	0.97	22.66	0.07	6.34
1500.00	1.20	22.41	0.71	5.18
2000.00	1.64	21.22	1.49	1.64
2400.00	2.13	17.79	2.00	3.40
2800.00	2.76	13.83	2.31	10.70

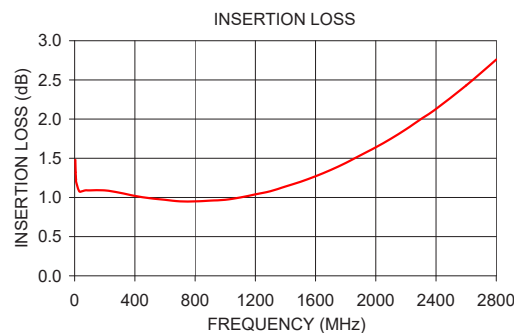

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# RF Transformer





# TC1.33-282+

## Typical Performance Data

FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
5.0	1.48	17.72	0.38	3.28
7.0	1.32	19.74	0.30	2.77
9.0	1.23	21.31	0.23	2.35
10.0	1.20	21.95	0.21	2.17
30.0	1.08	27.05	0.11	0.55
50.0	1.08	28.04	0.09	0.06
70.0	1.09	28.26	0.08	0.51
90.0	1.09	28.18	0.08	0.92
100.0	1.09	28.09	0.08	1.09
200.0	1.09	27.01	0.12	2.56
300.0	1.06	25.91	0.17	3.66
400.0	1.02	24.91	0.21	4.42
500.0	0.99	24.29	0.21	5.00
600.0	0.97	23.79	0.19	5.45
700.0	0.95	23.34	0.15	5.84
800.0	0.95	23.03	0.10	6.12
900.0	0.96	22.82	0.02	6.27
1000.0	0.97	22.66	0.07	6.34
1100.0	1.00	22.54	0.18	6.30
1200.0	1.04	22.44	0.30	6.17
1300.0	1.08	22.44	0.43	5.91
1400.0	1.14	22.41	0.57	5.57
1500.0	1.20	22.41	0.71	5.18
1600.0	1.27	22.36	0.86	4.62
1700.0	1.35	22.25	1.02	4.06
1800.0	1.44	22.05	1.18	3.35
1900.0	1.54	21.71	1.34	2.55
2000.0	1.64	21.22	1.49	1.64
2100.0	1.75	20.56	1.63	0.61
2200.0	1.87	19.76	1.76	0.56
2300.0	2.00	18.80	1.89	1.90
2400.0	2.13	17.79	2.00	3.40
2600.0	2.43	15.72	2.20	6.79
2800.0	2.76	13.83	2.31	10.70




## Typical Performance Data

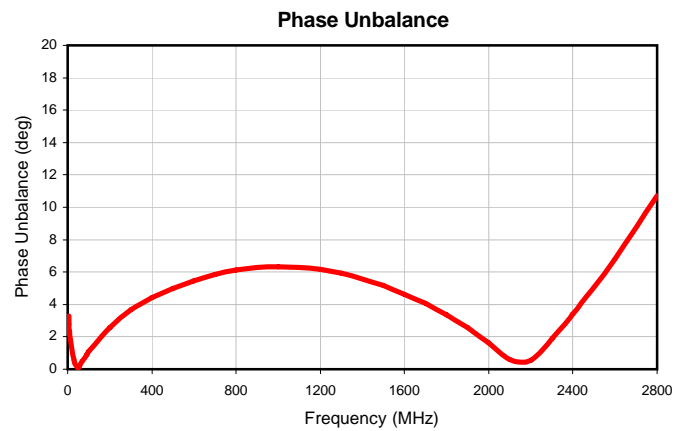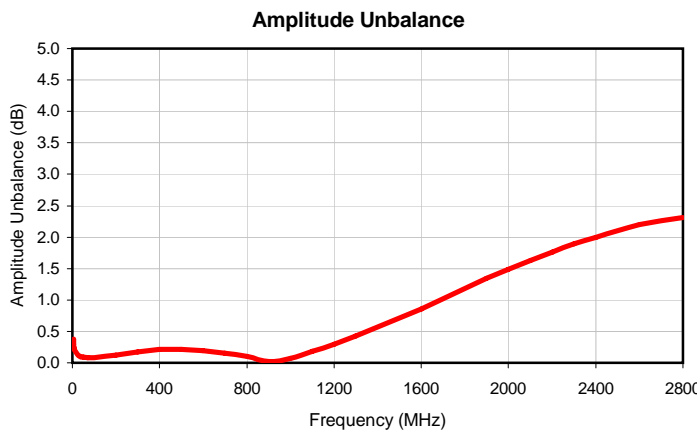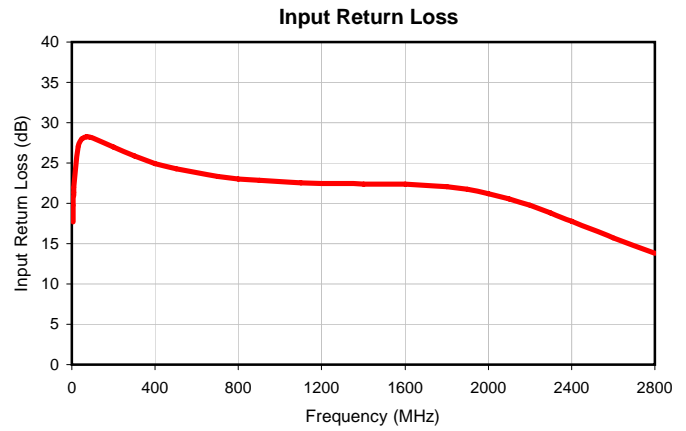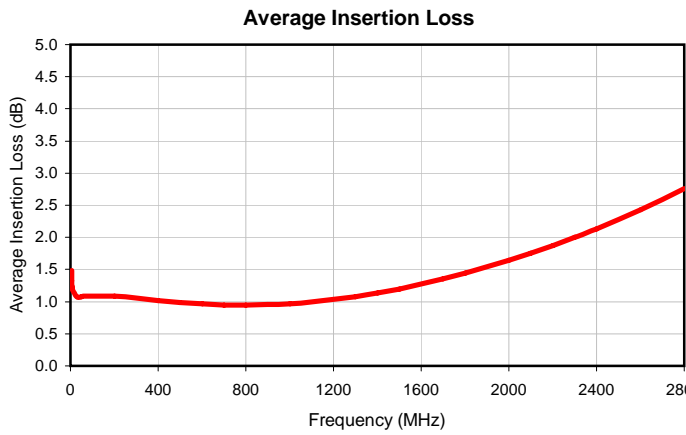


## Outline Dimensions

AT224-1A

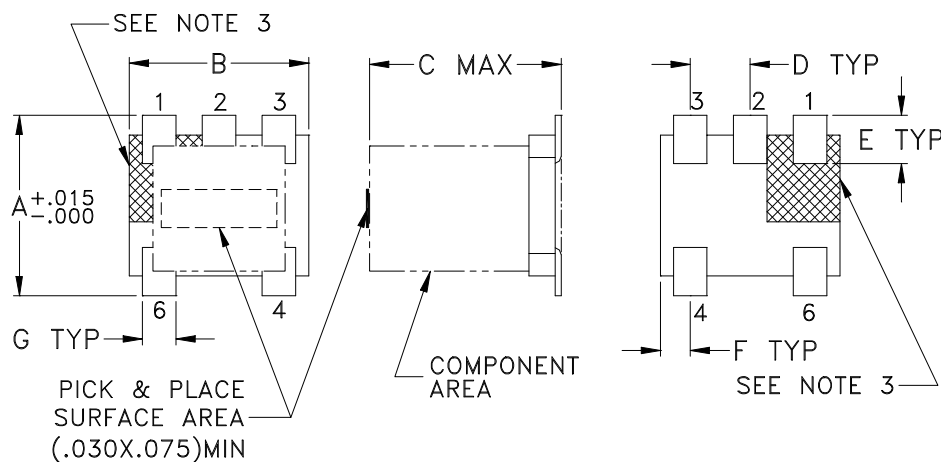

## PCB Land Pattern

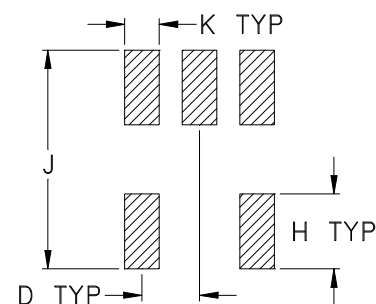

Suggested Layout,  
Tolerance to be within  $\pm.002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAMS
AT224-1A	.150 (3.81)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (0.64)	.028 (0.71)	.065 (1.65)	.190 (4.83)	.030 (0.76)	.15

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Termination finish:  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
- Lead #1 identifier shall be located in the cross-hatched area shown.  
Identifier may be either a molded or marked feature.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F17

## DEVICE ORIENTATION IN T&R



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standards (see note)	20
				50
				100
				200
				500
		13	Standard	1000
			2000	

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215