

SURFACE MOUNT

# RF Transformer

**TC4-1W-7ALN+**

Mini-Circuits

50Ω 5 to 500 MHz

**FEATURES**

- Good Return Loss
- Impedance Matching
- Plastic Base with Leads
- Aqueous Washable

*Generic photo used for illustration purposes only*

CASE STYLE: AT224-1A

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

**APPLICATIONS**

- Wireless Infrastructure
- Impedance Matching

**ELECTRICAL SPECIFICATIONS AT +25°C**

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)			4		Ohms
Frequency Range		5		500	MHz
Insertion Loss	5-500		3		dB
Phase Unbalance	10-300		2		Deg.
Amplitude Unbalance	25-200		1		dB


Note: Electrical specifications defined with DC current at secondary and secondary dot equal. For DC imbalance of up to 7.5 mA, the insertion loss degrades less than 1 dB.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
RF Power	0.25 W
DC Current <sup>1</sup>	150 mA

1. Applied through center tap, equal current to secondary dot & secondary.

Permanent damage may occur if any of these limits are exceeded.


**CONFIG. A**

REV. D  
ECO-025349  
TC4-1W-7ALN+  
MCL NY  
250428

**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

PAGE 1 OF 3



SURFACE MOUNT

## RF Transformer

TC4-1W-7ALN+



50Ω 5 to 500 MHz

## PIN CONNECTIONS

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2
NOT USED	5

PRODUCT MARKING: N/A

## OUTLINE DRAWING

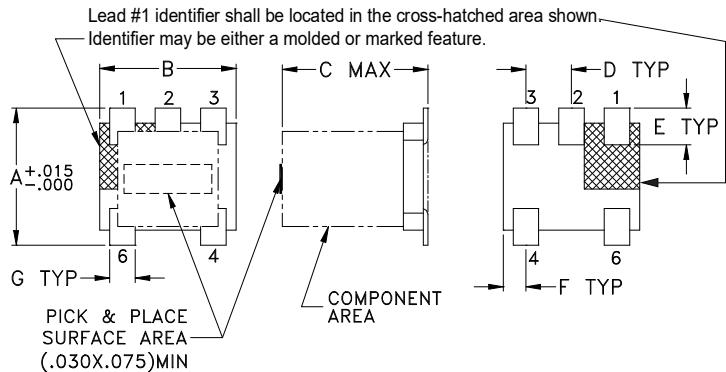


Suggested Layout,  
Tolerance to be within  $\pm .002$

## OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

## TAPE &amp; REEL INFORMATION: F17



SURFACE MOUNT

## RF Transformer



TC4-1W-7ALN+

50Ω 5 to 500 MHz

Mini-Circuits

## TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
5.0	0.38	28.17
10.0	0.32	31.57
20.0	0.31	34.24
40.0	0.33	35.27
80.0	0.37	33.01
140.0	0.43	28.01
200.0	0.49	23.35
300.0	0.66	17.23
400.0	1.02	12.75
500.0	1.62	9.57

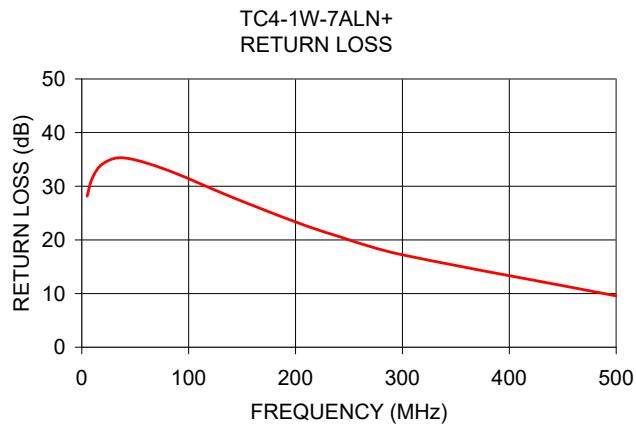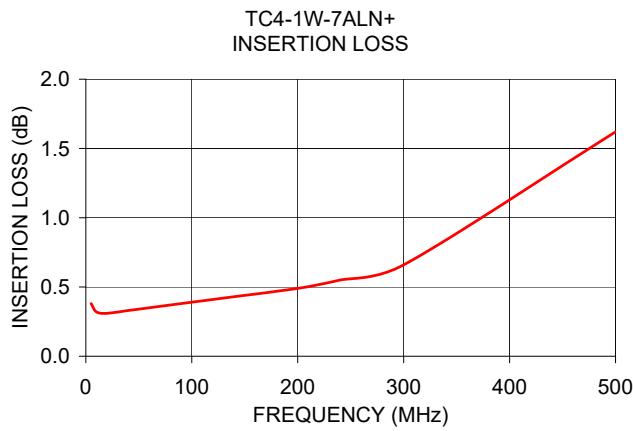

## NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

Mini-Circuits®

# RF Transformer

# TC4-1W-7ALN+

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
1.0	0.56	22.23
1.5	0.53	23.63
2.0	0.50	24.53
3.0	0.45	25.93
4.0	0.40	27.12
5.0	0.38	28.17
10.0	0.32	31.57
20.0	0.31	34.24
30.0	0.32	35.15
40.0	0.33	35.27
50.0	0.35	34.98
60.0	0.35	34.44
70.0	0.36	33.80
80.0	0.37	33.01
90.0	0.38	32.21
100.0	0.39	31.40
120.0	0.41	29.68
140.0	0.43	28.01
160.0	0.44	26.37
180.0	0.47	24.81
200.0	0.49	23.35
220.0	0.51	21.97
240.0	0.55	20.67
260.0	0.58	19.47
280.0	0.61	18.30
300.0	0.66	17.23
350.0	0.80	14.82
400.0	1.02	12.75
450.0	1.27	11.01
500.0	1.62	9.57
550.0	2.02	8.43
600.0	2.48	7.64
650.0	2.91	7.26
700.0	3.14	7.42



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350168, Brooklyn, New York 11235-0000 (718) 934-6500 Fax (718) 932-4651 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS





REV. X2  
TC4-1W-7ALN+  
11/19/2009  
Page 1 of 1

# RF Transformer

---

## Typical Performance Data

TC4-1W-7ALN+

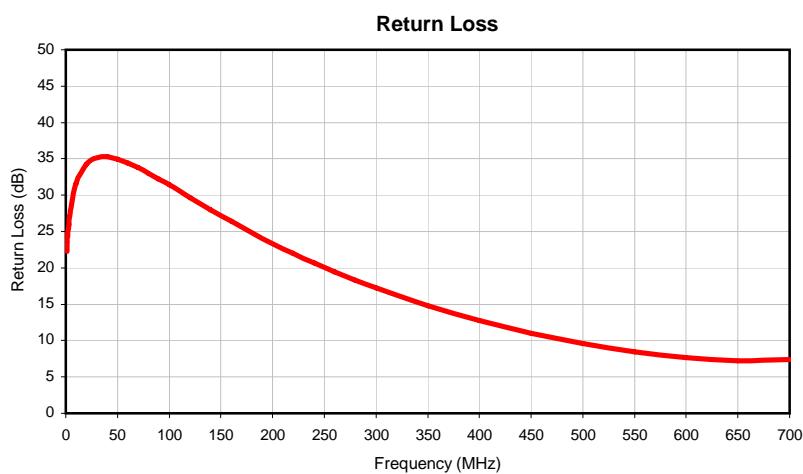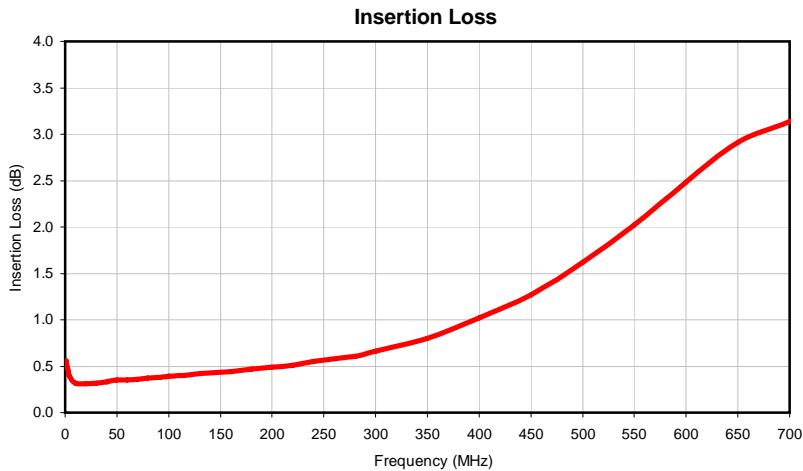


# Case Style


AT

## Outline Dimensions

AT224-1A

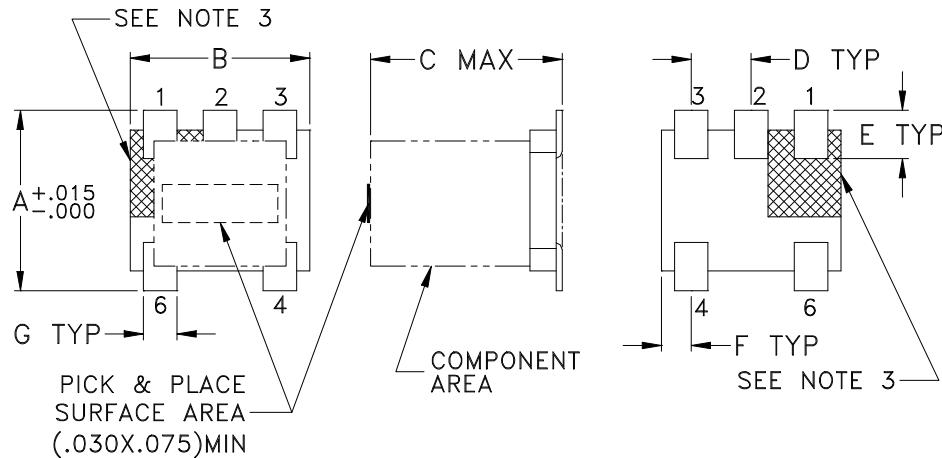

## PCB Land Pattern

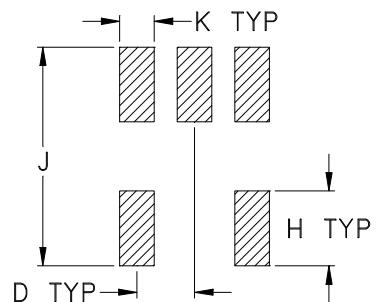

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAMS
AT224-1A	.150 (3.81)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (0.64)	.028 (0.71)	.065 (1.65)	.190 (4.83)	.030 (0.76)	.15

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

1. Case material: Plastic.
2. Termination finish:  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
3. Lead #1 identifier shall be located in the cross-hatched area shown.  
Identifier may be either a molded or marked feature.

 **Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4681 For detailed performance specs & shopping online see Mini-Circuits web site


The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)



RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F17

## DEVICE ORIENTATION IN T&R

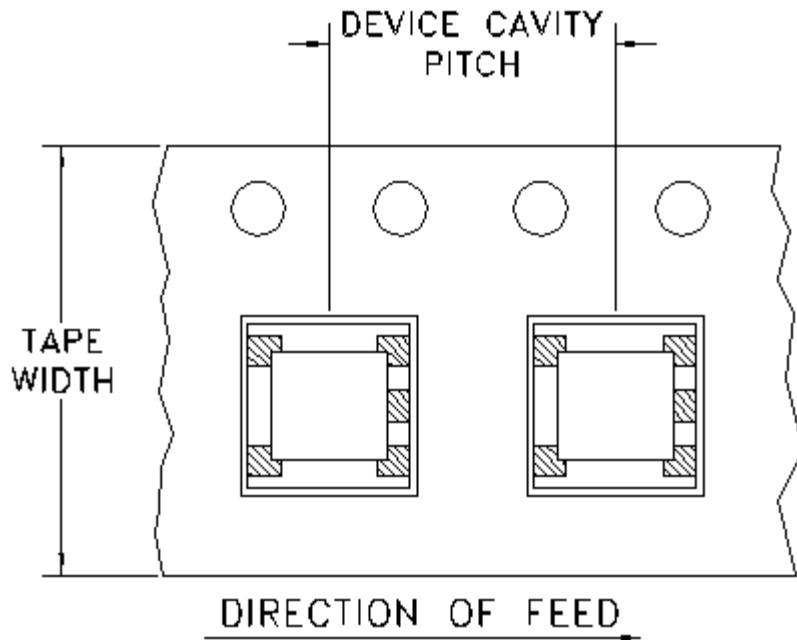

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standards (see note)	20
				50
				100
				200
				500
		13	Standard	1000
				2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

98-TR- Rev.: D (20 SEP 25) ECO-027008 File: 98-TR-F17 1

This document and its contents are the property of Mini-Circuits.





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215