



Mini-Circuits®


SURFACE MOUNT 

Power Splitter/Combiner TCP-2-10X+

50Ω 2 Way-0° 5 to 1000 MHz

FEATURES

- Low insertion, 0.5 dB typ.
- Excellent amplitude unbalance, 0.1 dB typ.
- Very good phase unbalance, 1.0 deg. typ.
- External resistor & capacitor required
- Aqueous washable
- Leads for excellent solderability
- Low cost



Generic photo used for illustration purposes only

CASE STYLE: DB1627

APPLICATIONS

- Cellular
- VHF/UHF
- Communications systems

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1000	MHz
Insertion Loss, above 3.0 dB	5 - 50	—	0.3	0.9	dB
	50 - 500	—	0.5	0.9	
	500 - 1000	—	0.5	1.4	
Isolation	5 - 50	17	25	—	dB
	50 - 500	16	25	—	
	500 - 1000	16	21	—	
Phase Unbalance	5 - 50	—	—	4.0	Degree
	50 - 500	—	—	4.0	
	500 - 1000	—	—	6.0	
Amplitude Unbalance	5 - 50	—	—	0.6	dB
	50 - 500	—	—	0.6	
	500 - 1000	—	—	0.3	

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-55°C to 100°C
RF Power Input (as splitter)	0.5 W max.

Permanent damage may occur if any of these limits are exceeded.

FUNCTIONAL SCHEMATIC

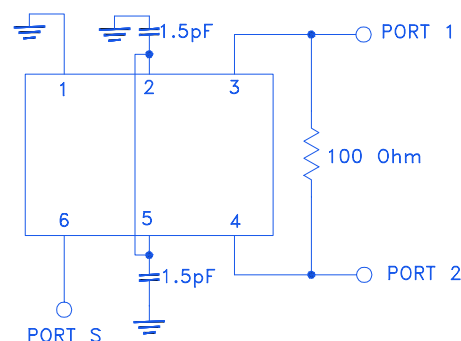

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-012587
TCP-2-10X+
ED-8261/1
DY/CP/AM
230919

PAGE 1 OF 3



Mini-Circuits

SURFACE MOUNT 


Power Splitter/Combiner **TCP-2-10X+**

PIN CONNECTIONS

SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1
CONNECT	2,5
EXT. RESISTOR 100Ω	3,4
EXT. CAPACITOR 1.5pF	both 2 and 5 to GND

PRODUCT MARKING: PC

DEMO BOARD MCL P/N: TB-232
SUGGESTED PCB LAYOUT (PL-001)

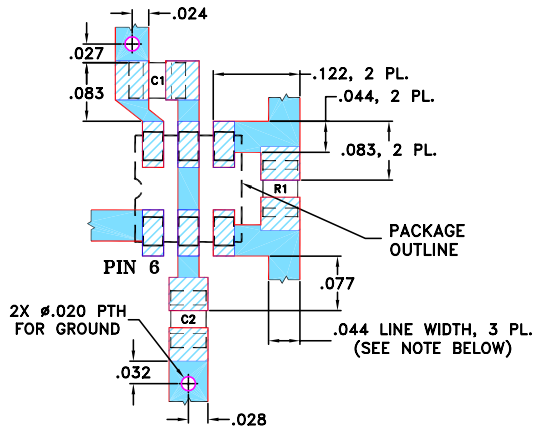

RESISTOR R1: 100 Ohm, 0805 SIZE


CAPACITORS C1 & C2: 1.5 pF, 0805 SIZE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

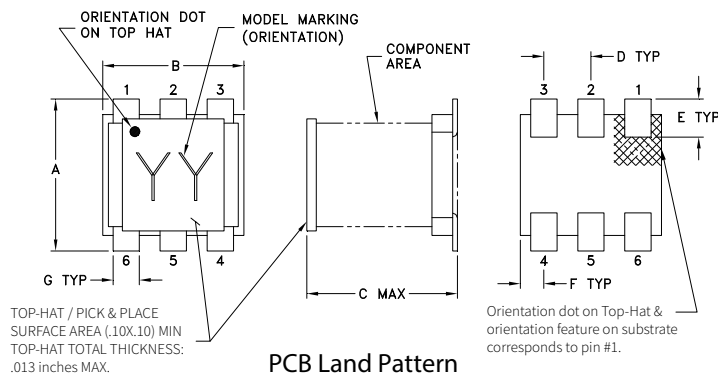

PCB Land Pattern



SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ±.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

TAPE & REEL INFORMATION: F47



Mini-Circuits




SURFACE MOUNT 

Power Splitter/Combiner TCP-2-10X+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
5.00	3.10	3.24	0.14	32.43	0.15	1.02	1.11	1.14
6.00	3.10	3.24	0.14	32.64	0.15	1.02	1.11	1.14
8.00	3.10	3.24	0.14	32.81	0.09	1.02	1.10	1.14
10.00	3.11	3.24	0.13	32.85	0.09	1.02	1.10	1.14
25.00	3.12	3.25	0.14	32.38	0.01	1.02	1.10	1.14
40.00	3.13	3.27	0.14	31.84	0.06	1.02	1.10	1.14
60.00	3.13	3.28	0.14	31.23	0.09	1.03	1.10	1.13
90.00	3.15	3.29	0.14	30.38	0.10	1.03	1.10	1.13
120.00	3.16	3.30	0.14	29.54	0.11	1.04	1.09	1.13
200.00	3.19	3.33	0.14	27.50	0.24	1.05	1.09	1.11
400.00	3.27	3.40	0.13	23.84	0.45	1.07	1.06	1.06
600.00	3.37	3.48	0.11	21.78	0.71	1.09	1.05	1.02
800.00	3.49	3.58	0.09	20.95	0.98	1.09	1.08	1.09
900.00	3.55	3.63	0.08	21.06	1.15	1.09	1.12	1.14
1000.00	3.63	3.70	0.07	21.68	1.29	1.08	1.16	1.20

1. Total Loss = Insertion Loss + 3dB splitter loss.

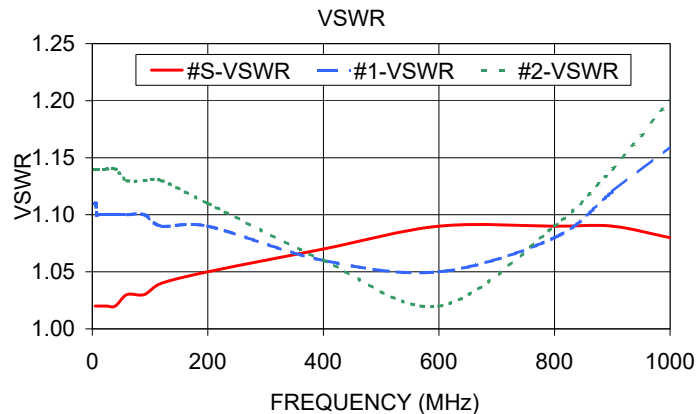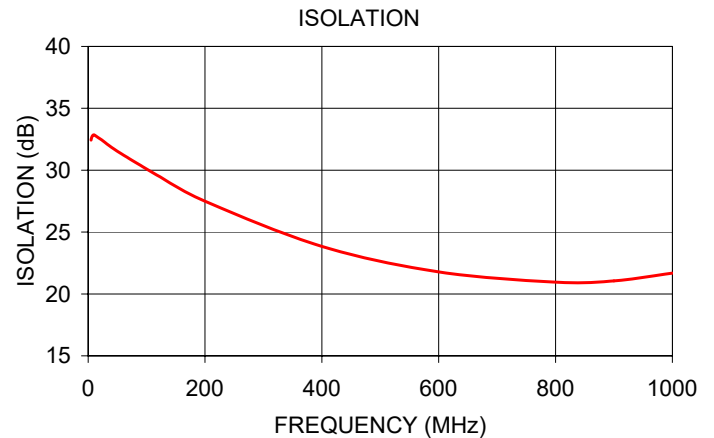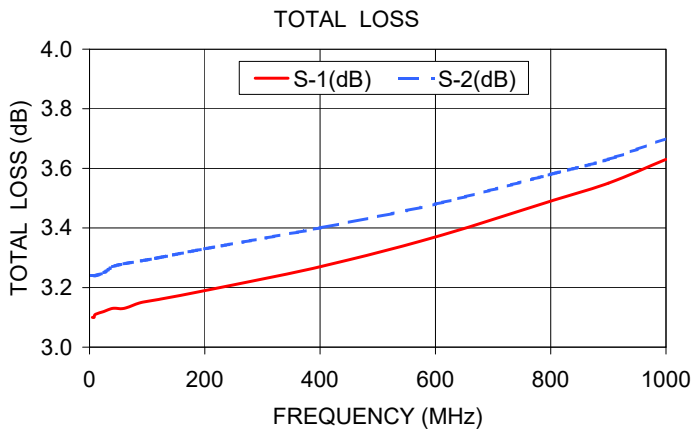

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



2 Way-0° Power Splitter/Combiner

TCP-2-10X+

Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = +25°C

FREQUENCY (MHz)	TOTAL LOSS ¹ (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
5.0	3.26	3.11	0.15	30.06	0.37	5.0	1.03	1.17	1.14
6.0	3.26	3.11	0.14	30.60	0.32	6.0	1.03	1.17	1.13
7.0	3.26	3.11	0.14	31.14	0.27	7.0	1.03	1.16	1.13
8.0	3.26	3.12	0.14	31.69	0.22	8.0	1.02	1.15	1.12
9.0	3.26	3.12	0.14	32.23	0.17	9.0	1.02	1.15	1.12
10.0	3.26	3.12	0.14	32.49	0.14	10.0	1.02	1.14	1.12
20.0	3.26	3.12	0.14	33.17	0.01	20.0	1.02	1.13	1.11
30.0	3.26	3.12	0.14	32.77	0.01	30.0	1.02	1.13	1.11
40.0	3.27	3.13	0.14	32.17	0.01	40.0	1.03	1.13	1.11
50.0	3.28	3.14	0.14	31.71	0.05	50.0	1.03	1.13	1.11
60.0	3.29	3.15	0.14	31.24	0.07	60.0	1.03	1.13	1.11
70.0	3.29	3.15	0.14	30.82	0.08	70.0	1.03	1.13	1.11
80.0	3.30	3.16	0.15	30.43	0.08	80.0	1.03	1.13	1.10
90.0	3.31	3.16	0.15	30.07	0.06	90.0	1.03	1.13	1.10
100.0	3.31	3.17	0.14	29.74	0.08	100.0	1.04	1.13	1.10
150.0	3.34	3.20	0.13	28.20	0.17	150.0	1.04	1.12	1.10
200.0	3.36	3.22	0.13	26.90	0.24	200.0	1.05	1.11	1.09
250.0	3.38	3.24	0.13	25.86	0.29	250.0	1.05	1.10	1.08
300.0	3.39	3.26	0.13	24.89	0.38	300.0	1.05	1.09	1.08
350.0	3.41	3.27	0.14	24.11	0.42	350.0	1.06	1.08	1.07
400.0	3.43	3.29	0.14	23.38	0.46	400.0	1.06	1.07	1.07
450.0	3.45	3.31	0.14	22.76	0.52	450.0	1.06	1.05	1.07
500.0	3.47	3.33	0.14	22.24	0.56	500.0	1.07	1.04	1.07
550.0	3.49	3.35	0.14	21.82	0.64	550.0	1.07	1.04	1.07
600.0	3.51	3.37	0.14	21.44	0.71	600.0	1.07	1.04	1.08
650.0	3.54	3.40	0.14	21.14	0.75	650.0	1.07	1.05	1.09
700.0	3.56	3.43	0.13	20.95	0.86	700.0	1.07	1.07	1.10
750.0	3.59	3.45	0.14	20.79	0.92	750.0	1.07	1.08	1.11
800.0	3.62	3.48	0.14	20.68	0.98	800.0	1.07	1.10	1.12
850.0	3.65	3.51	0.14	20.63	1.05	850.0	1.07	1.12	1.14
900.0	3.68	3.55	0.14	20.64	1.16	900.0	1.07	1.14	1.15
950.0	3.72	3.58	0.14	20.64	1.29	950.0	1.07	1.16	1.17
1000.0	3.76	3.63	0.13	20.64	1.38	1000.0	1.07	1.19	1.18

¹Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS



REV. X1
TCP-2-10X+
9/29/2011
Page 1 of 3

2 Way-0° Power Splitter/Combiner

TCP-2-10X+

Typical Performance Data

TEST CONDITIONS: INPUT POWER = 0 dBm @ Temperature = -40°C

FREQUENCY (MHz)	TOTAL LOSS ¹ (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
5.0	3.30	3.13	0.17	25.32	1.43	5.0	1.05	1.26	1.20
6.0	3.28	3.13	0.15	26.23	1.30	6.0	1.05	1.24	1.18
7.0	3.27	3.12	0.14	27.13	1.16	7.0	1.04	1.22	1.17
8.0	3.25	3.12	0.13	28.04	1.03	8.0	1.04	1.20	1.16
9.0	3.23	3.12	0.11	28.95	0.89	9.0	1.03	1.18	1.15
10.0	3.23	3.12	0.11	29.65	0.80	10.0	1.03	1.17	1.14
20.0	3.20	3.10	0.09	34.69	0.35	20.0	1.02	1.12	1.11
30.0	3.19	3.10	0.09	37.26	0.24	30.0	1.03	1.11	1.10
40.0	3.19	3.10	0.09	38.23	0.19	40.0	1.03	1.10	1.09
50.0	3.19	3.11	0.09	38.00	0.14	50.0	1.03	1.10	1.09
60.0	3.20	3.11	0.08	36.78	0.12	60.0	1.04	1.09	1.08
70.0	3.20	3.12	0.08	35.28	0.08	70.0	1.04	1.09	1.08
80.0	3.21	3.12	0.09	33.92	0.07	80.0	1.05	1.08	1.08
90.0	3.21	3.13	0.09	32.77	0.08	90.0	1.05	1.08	1.07
100.0	3.21	3.13	0.08	31.89	0.08	100.0	1.06	1.08	1.07
150.0	3.23	3.15	0.08	30.11	0.01	150.0	1.06	1.08	1.08
200.0	3.25	3.17	0.08	28.13	0.09	200.0	1.07	1.10	1.07
250.0	3.26	3.18	0.08	26.22	0.07	250.0	1.08	1.08	1.05
300.0	3.28	3.19	0.08	25.26	0.10	300.0	1.08	1.07	1.06
350.0	3.29	3.21	0.08	24.09	0.13	350.0	1.09	1.06	1.06
400.0	3.30	3.22	0.09	23.38	0.13	400.0	1.09	1.05	1.04
450.0	3.32	3.23	0.09	22.69	0.11	450.0	1.10	1.04	1.04
500.0	3.33	3.24	0.09	22.16	0.12	500.0	1.10	1.03	1.05
550.0	3.34	3.26	0.08	21.83	0.14	550.0	1.09	1.03	1.06
600.0	3.36	3.28	0.08	21.42	0.18	600.0	1.09	1.04	1.07
650.0	3.37	3.29	0.08	21.22	0.19	650.0	1.08	1.05	1.09
700.0	3.39	3.32	0.07	20.82	0.30	700.0	1.09	1.06	1.10
750.0	3.41	3.34	0.08	20.63	0.28	750.0	1.08	1.09	1.11
800.0	3.44	3.36	0.07	20.58	0.32	800.0	1.07	1.11	1.13
850.0	3.46	3.39	0.07	20.43	0.33	850.0	1.08	1.13	1.14
900.0	3.49	3.42	0.07	20.46	0.42	900.0	1.07	1.15	1.15
950.0	3.52	3.45	0.07	20.28	0.47	950.0	1.08	1.16	1.17
1000.0	3.56	3.49	0.07	20.30	0.55	1000.0	1.07	1.19	1.18

¹Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS



REV. X1
TCP-2-10X+
9/29/2011
Page 2 of 3

2 Way-0° Power Splitter/Combiner

TCP-2-10X+

Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = +85°C

FREQUENCY (MHz)	TOTAL LOSS ¹ (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (Deg)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
5.0	3.33	3.14	0.19	28.68	0.34	5.0	1.03	1.20	1.15
6.0	3.33	3.14	0.19	28.89	0.29	6.0	1.03	1.20	1.15
7.0	3.33	3.14	0.19	29.11	0.24	7.0	1.03	1.19	1.15
8.0	3.34	3.15	0.19	29.32	0.20	8.0	1.02	1.19	1.15
9.0	3.34	3.15	0.19	29.54	0.15	9.0	1.02	1.19	1.15
10.0	3.34	3.15	0.19	29.60	0.12	10.0	1.02	1.18	1.14
20.0	3.35	3.16	0.19	29.37	0.00	20.0	1.03	1.18	1.14
30.0	3.35	3.16	0.19	28.79	0.02	30.0	1.03	1.18	1.15
40.0	3.36	3.17	0.19	28.19	0.05	40.0	1.04	1.18	1.15
50.0	3.37	3.18	0.19	27.78	0.08	50.0	1.04	1.18	1.15
60.0	3.37	3.19	0.19	27.49	0.09	60.0	1.03	1.18	1.15
70.0	3.38	3.20	0.19	27.36	0.12	70.0	1.02	1.18	1.15
80.0	3.39	3.20	0.19	27.34	0.16	80.0	1.02	1.18	1.15
90.0	3.40	3.21	0.19	27.40	0.16	90.0	1.01	1.18	1.15
100.0	3.40	3.21	0.19	27.48	0.17	100.0	1.02	1.18	1.15
150.0	3.42	3.24	0.18	26.66	0.26	150.0	1.03	1.17	1.13
200.0	3.45	3.27	0.17	25.39	0.35	200.0	1.02	1.14	1.11
250.0	3.46	3.30	0.16	25.22	0.51	250.0	1.02	1.13	1.12
300.0	3.48	3.31	0.17	24.21	0.67	300.0	1.03	1.13	1.11
350.0	3.50	3.33	0.18	23.58	0.75	350.0	1.02	1.11	1.10
400.0	3.52	3.35	0.17	23.15	0.83	400.0	1.03	1.09	1.10
450.0	3.54	3.38	0.16	22.51	0.97	450.0	1.03	1.07	1.09
500.0	3.57	3.40	0.17	22.15	1.07	500.0	1.04	1.06	1.09
550.0	3.59	3.42	0.17	21.80	1.20	550.0	1.04	1.05	1.09
600.0	3.62	3.45	0.16	21.46	1.32	600.0	1.04	1.05	1.09
650.0	3.64	3.48	0.16	21.20	1.41	650.0	1.05	1.06	1.10
700.0	3.67	3.51	0.16	21.04	1.56	700.0	1.05	1.07	1.10
750.0	3.70	3.54	0.16	20.92	1.67	750.0	1.05	1.09	1.11
800.0	3.74	3.59	0.15	20.76	1.82	800.0	1.06	1.10	1.12
850.0	3.77	3.62	0.15	20.72	1.93	850.0	1.06	1.12	1.13
900.0	3.81	3.67	0.15	20.68	2.13	900.0	1.06	1.14	1.15
950.0	3.85	3.71	0.15	20.62	2.29	950.0	1.07	1.16	1.16
1000.0	3.91	3.76	0.14	20.62	2.47	1000.0	1.07	1.18	1.17

¹Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS




REV. X1
TCP-2-10X+
9/29/2011
Page 3 of 3

2 Way-0° Power Splitter/Combiner


TCP-2-10X+

Typical Performance Curves


Total Loss

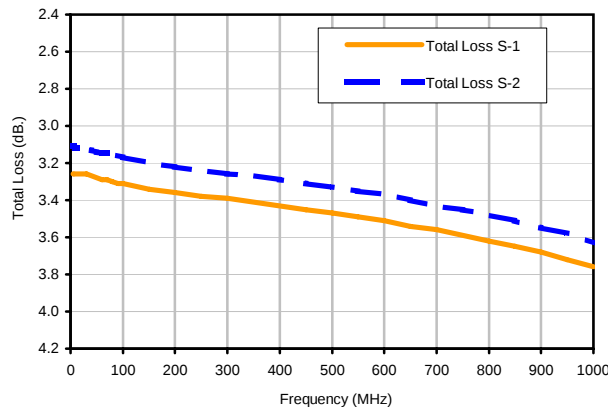


Total Loss S-1 vs. TEMPERATURE

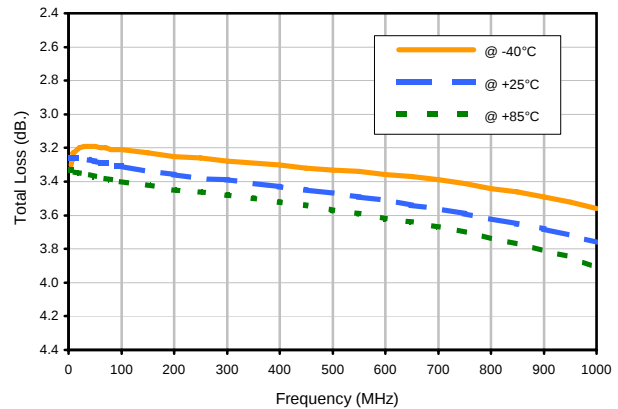


Amplitude Unbalance vs. TEMPERATURE

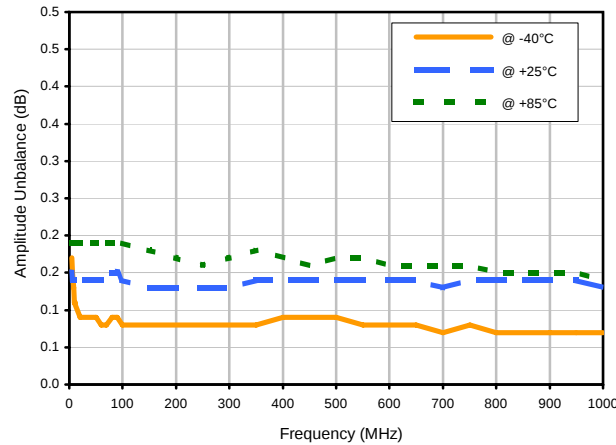

Phase Unbalance vs. TEMPERATURE

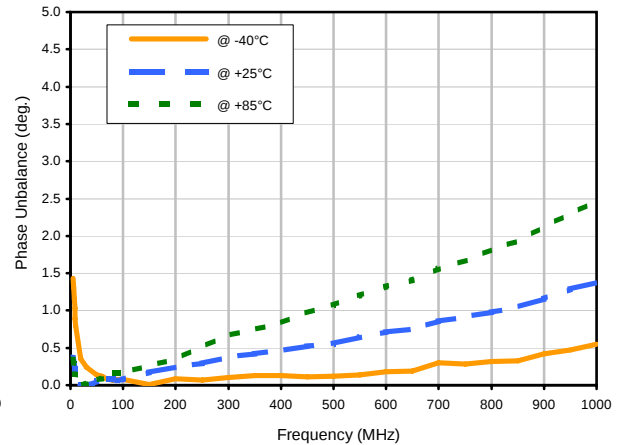

Isolation 1-2 vs. TEMPERATURE

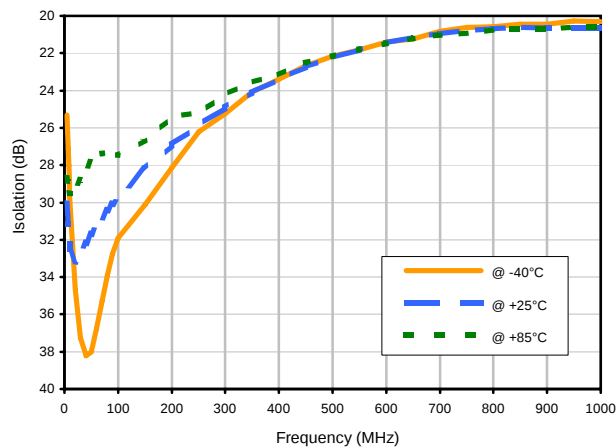

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 • Fax (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS


minicircuits.com

REV. X1
TCP-2-10X+
9/29/2011
Page 1 of 2

2 Way-0° Power Splitter/Combiner

TCP-2-10X+

Typical Performance Curves

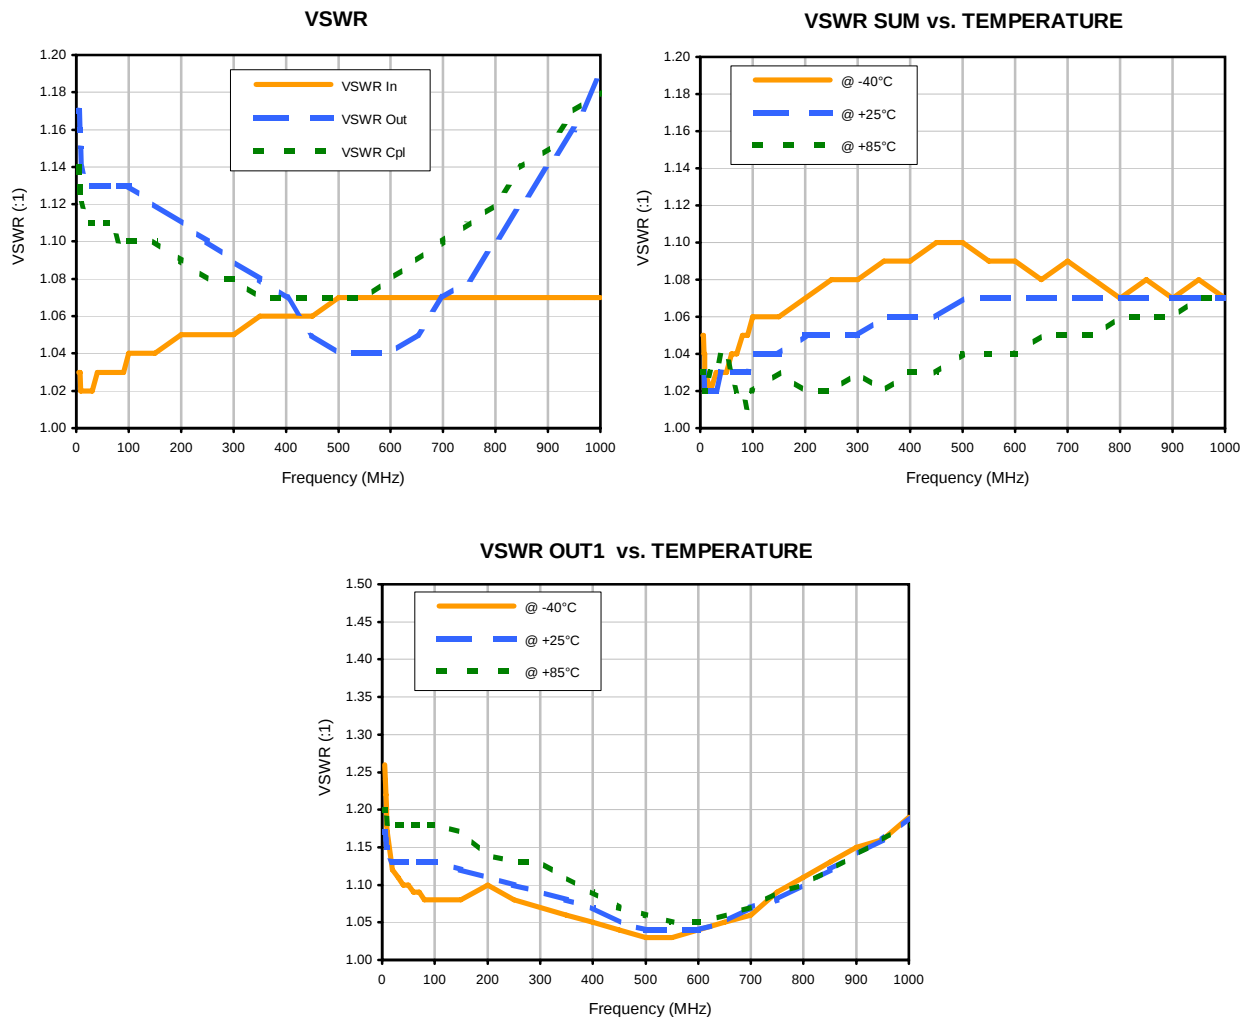

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS




REV. X1
TCP-2-10X+
9/29/2011
Page 2 of 2

Outline Dimensions

DB1627

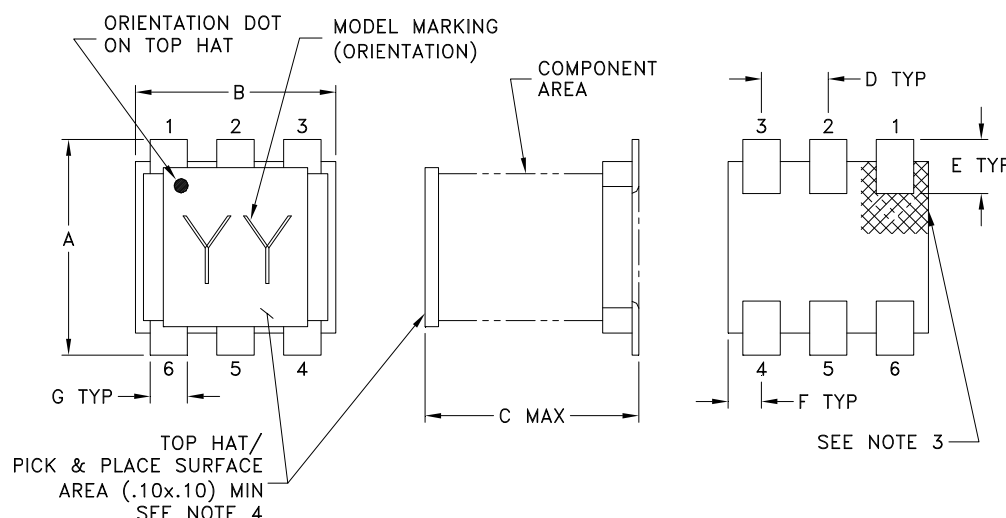

PCB Land Pattern

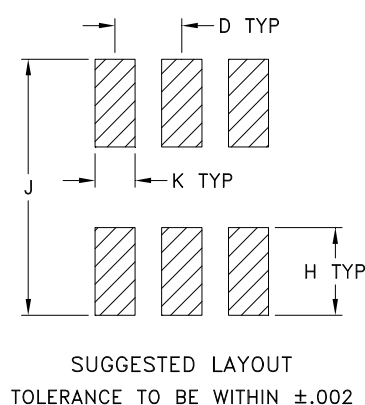

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
DB1627	.160 (4.06)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (0.64)	.028 (0.71)	.065 (1.65)	.190 (4.83)	.030 (0.76)	.15

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
- Orientation dot on top hat & orientation feature on substrate correspondence to pin #1.
- Top-Hat total thickness: .013 inches MAX.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



Tape & Reel Packaging TR-F47

DEVICE ORIENTATION IN T&R

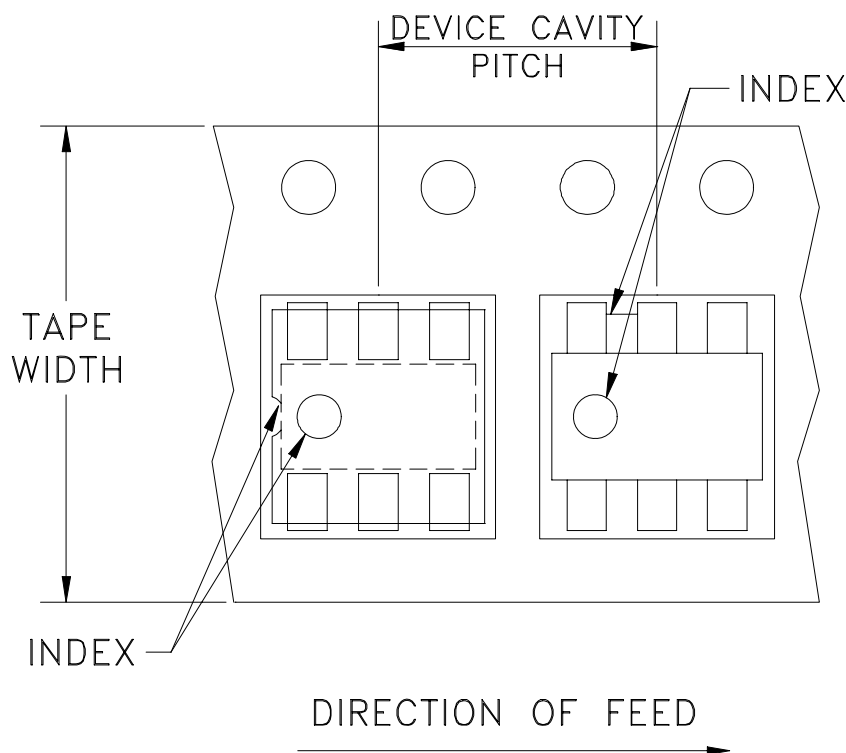

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note
12	8	13	1000, 2000
		7	20, 50, 100, 200, 500

Note: Please consult individual model data sheet to determine device per reel availability.


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M71500	ADDED SOLDER MASK & LEGEND	04/00	IL	DB
B	M82377	UPDATED DRAWING	08/06/02	GF	HY
C	M83081	UPDATED DRAWING	06/24/03	MMG	DY
D	M102713	ADDED "...WITH SMOBC", CRCTD MATL	01/12/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR
DB714 CASE STYLE, "mt" PIN CONNECTION

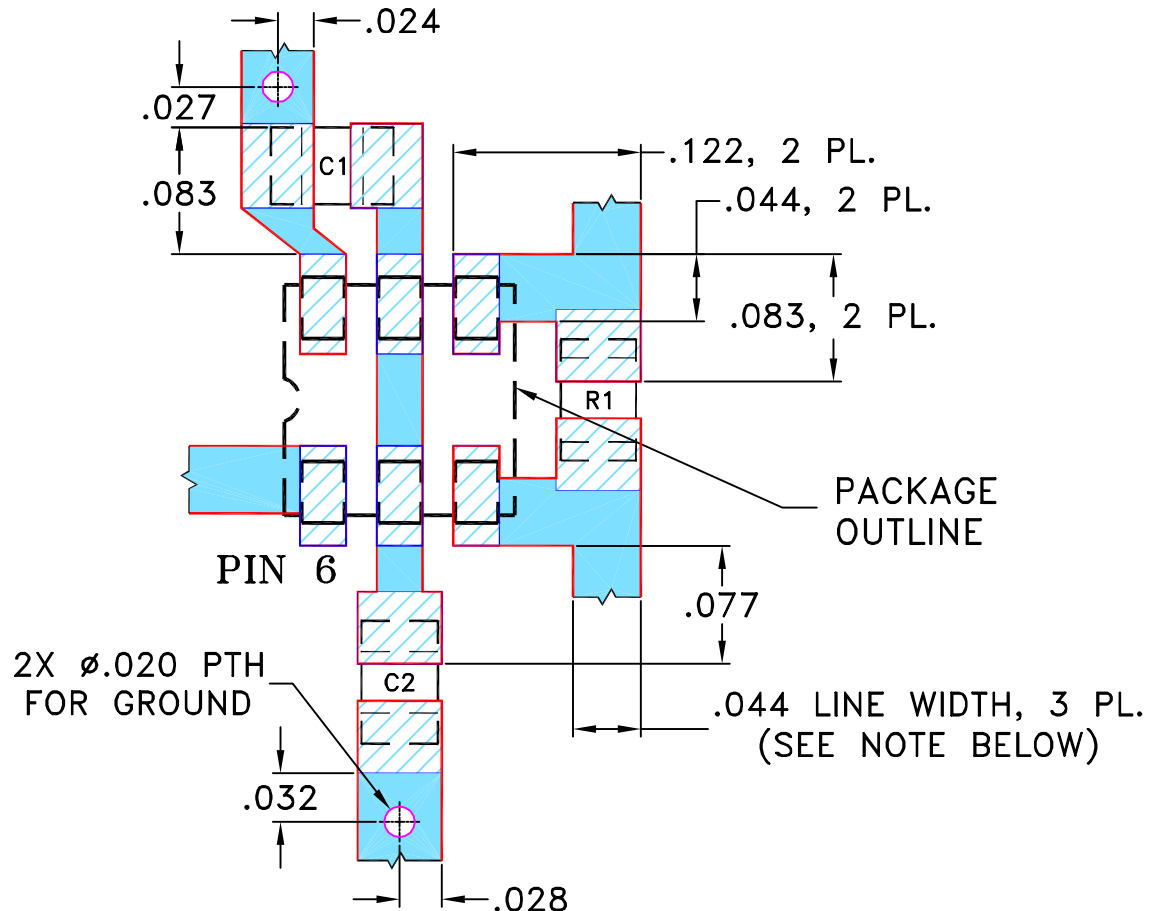


RESISTOR R1: 100 Ohm, 0805 SIZE

CAPACITORS C1 & C2: 1.5 pF, 0805 SIZE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $0.020'' \pm 0.0015''$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN IL	02/24/00
TOLERANCES ON:	CHECKED DY	02/29/00
2 PL DECIMALS $\pm$	APPROVED DB	02/29/00
3 PL DECIMALS $\pm$.005		
ANGLES $\pm$		
FRACTIONS $\pm$		

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VEEDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95





Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, mt, DB714, TCP, TB-232

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-001	D
FILE:	98PL001	SCALE: 8:1	SHEET: 1 OF 1

Evaluation Board and Circuit

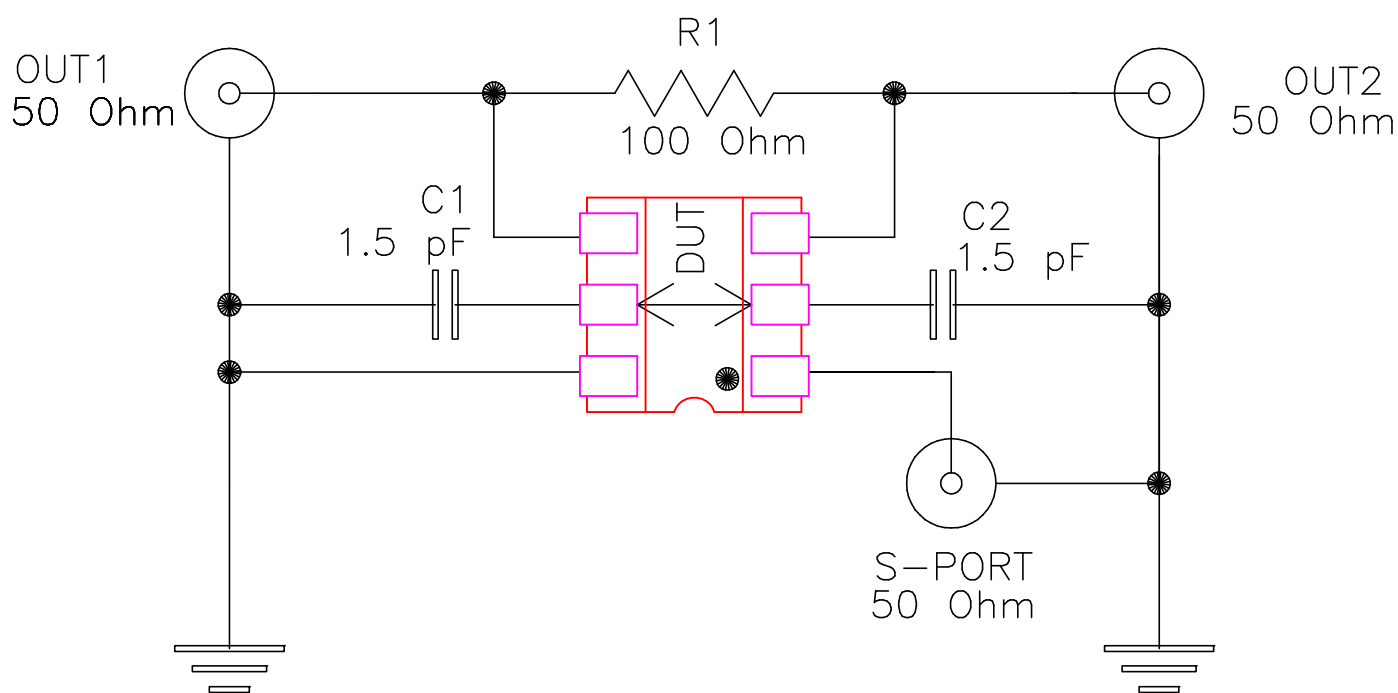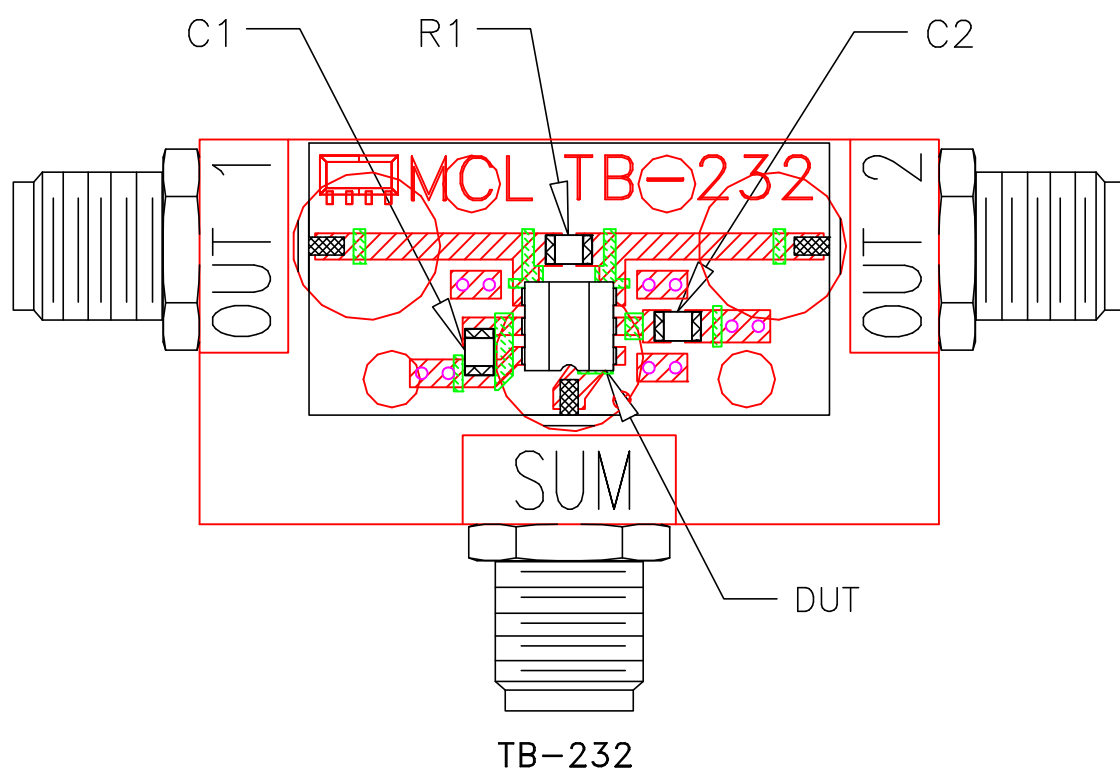

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215