



## CERAMIC BALUN

# RF Transformer

# TCW2-272+

50Ω 2100 to 2700 MHz 1:2 Ratio

### FEATURES

- Wideband, 2100 to 2700 MHz
- Low Phase Unbalance, 4 Deg. and Amplitude Unbalance, 0.6 dB Typ.
- Miniature Size 0603 (1.6x0.8 mm)
- LTCC Construction
- Low Cost
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

### APPLICATIONS

- WLAN
- WiMAX/WiBRO
- ISM
- Radar

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)			2		
Frequency Range		2100		2700	MHz
Avg. Insertion Loss <sup>1</sup>	2400-2500 2100-2700		1.1 1.3	1.4	dB
Amplitude Unbalance	2400-2500 2100-2700		0.6 0.8	1.4	dB
Phase Unbalance <sup>2</sup>	2400-2500 2100-2700		4 8	10	Degree

1. Reference demo board TB-TCW2-272+.

2. Relative to 180°.


### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input <sup>3</sup>	2 W at +25°C

3. Passband rating. Derate linearly to 1 W at +100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

### CONFIGURATION J

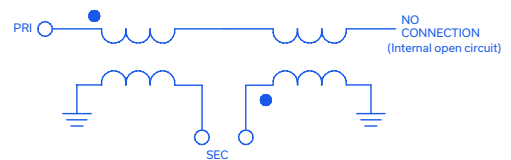




### PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	1
RF GROUND (GND)	3
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	2,5



PRODUCT MARKING: N/A
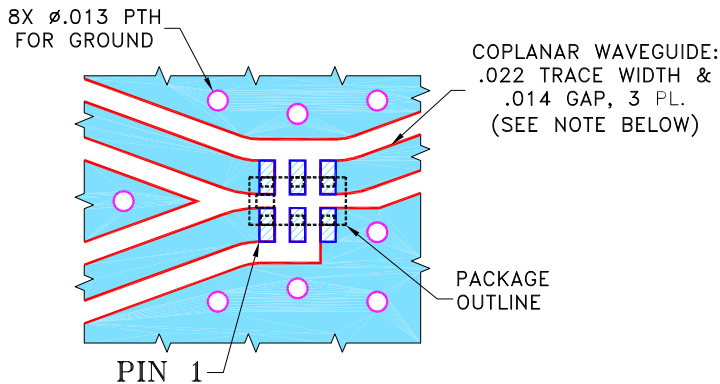
### DEMO BOARD MCL P/N: TB-TCW2-272+ SUGGESTED PCB LAYOUT (PL-430)




NOTES:


1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### OUTLINE DRAWING

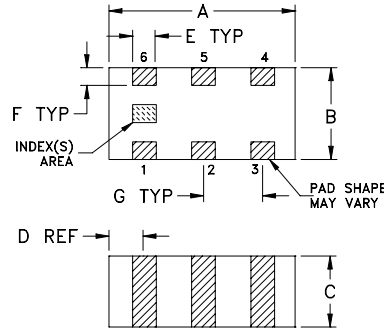

### PCB Land Pattern

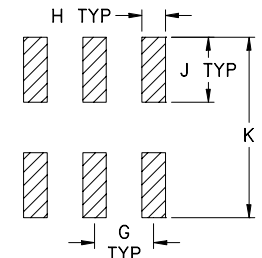

Suggested Layout,  
Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15
G	H	J	K	wt	
.020	.010	.022	.053	grams	
0.51	0.25	0.56	1.35	0.005	

### TAPE & REEL INFORMATION: F114






### TYPICAL PERFORMANCE DATA<sup>4</sup>

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance <sup>5</sup> (deg)
2100	1.21	12.69	0.40	10.88
2200	1.15	13.35	0.28	8.73
2300	1.13	13.65	0.20	6.32
2400	1.14	13.52	0.10	3.73
2475	1.16	13.17	0.06	1.68
2500	1.17	13.01	0.04	0.97
2550	1.20	12.68	0.01	0.35
2575	1.22	12.51	0.01	1.01
2600	1.24	12.32	0.01	1.64
2700	1.34	11.34	0.04	4.47

4. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

5. Relative to 180°.

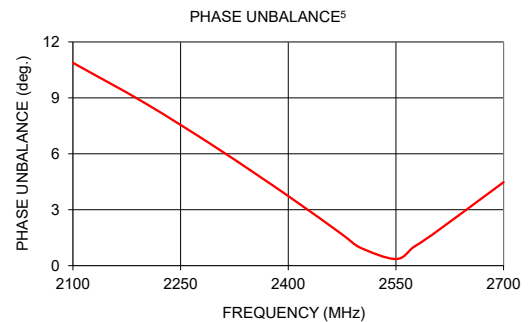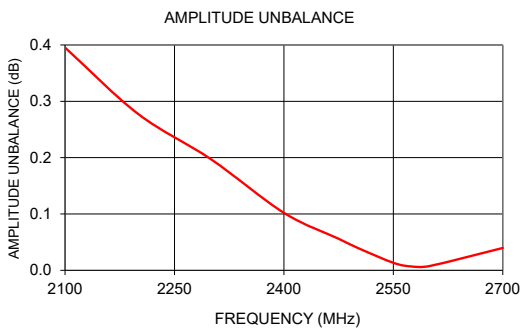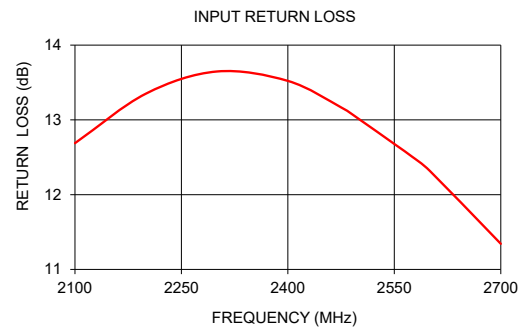

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)







## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS* (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE** (deg)
1500	3.07	5.01	1.49	14.66
1600	2.46	6.27	1.20	15.22
1700	2.00	7.61	0.95	15.31
1800	1.68	9.03	0.79	14.93
1900	1.46	10.40	0.63	14.05
2000	1.30	11.66	0.51	12.65
2050	1.25	12.20	0.45	11.81
2100	1.21	12.69	0.40	10.88
2120	1.21	12.69	0.40	10.88
2140	1.21	12.69	0.40	10.88
2160	1.18	13.07	0.34	9.79
2180	1.18	13.07	0.34	9.79
2200	1.15	13.35	0.28	8.73
2220	1.15	13.35	0.28	8.73
2240	1.15	13.35	0.28	8.73
2260	1.14	13.56	0.23	7.63
2280	1.14	13.56	0.23	7.63
2300	1.13	13.65	0.20	6.32
2320	1.13	13.65	0.17	5.79
2340	1.13	13.63	0.15	5.26
2360	1.13	13.61	0.13	4.76
2380	1.13	13.57	0.12	4.25
2400	1.14	13.52	0.10	3.73
2410	1.14	13.49	0.09	3.49
2420	1.14	13.45	0.09	3.22
2430	1.14	13.41	0.08	2.94
2440	1.15	13.37	0.08	2.69
2450	1.15	13.32	0.07	2.39
2460	1.16	13.26	0.07	2.11
2470	1.16	13.20	0.06	1.82
2480	1.17	13.14	0.05	1.54
2490	1.17	13.07	0.05	1.26
2500	1.17	13.01	0.04	0.97
2500	1.17	13.01	0.04	0.97
2520	1.19	12.87	0.03	0.43
2540	1.20	12.74	0.02	0.10
2560	1.21	12.61	0.01	0.61
2580	1.22	12.47	0.01	1.12
2600	1.24	12.32	0.01	1.64
2620	1.24	12.32	0.01	1.64
2640	1.24	12.32	0.01	1.64
2660	1.24	12.32	0.01	1.64
2680	1.24	12.32	0.01	1.64
2700	1.34	11.34	0.04	4.47
2750	1.34	11.34	0.04	4.47
2800	1.47	10.43	0.14	7.21
2850	1.47	10.43	0.14	7.21
2900	1.63	9.50	0.30	9.98
2950	1.63	9.50	0.30	9.98
3000	1.83	8.60	0.62	12.85

\* Reference Demo Board TB-793+

\*\*Phase Unbalance is relative to 180°

## Typical Performance Data

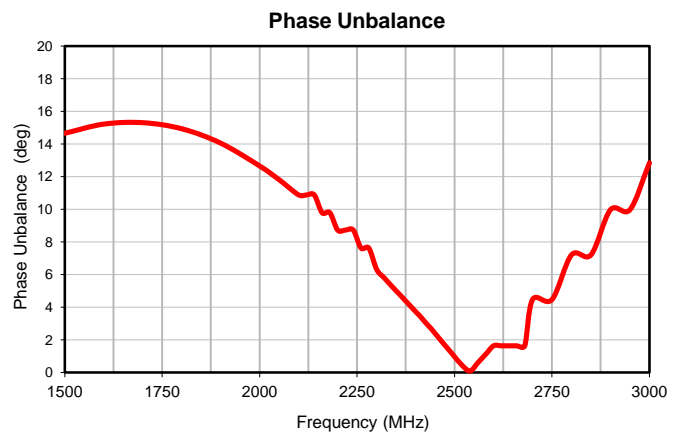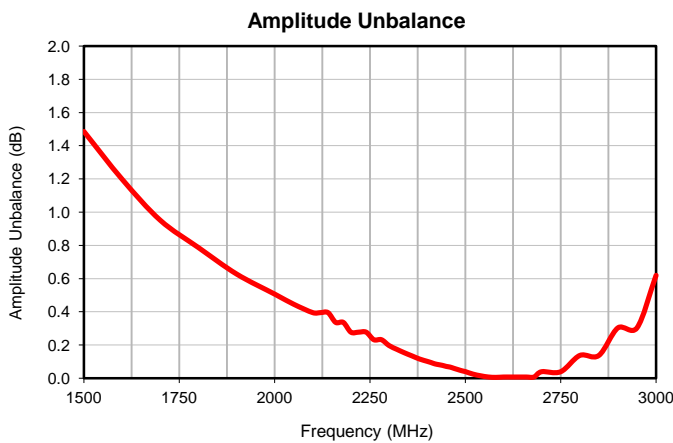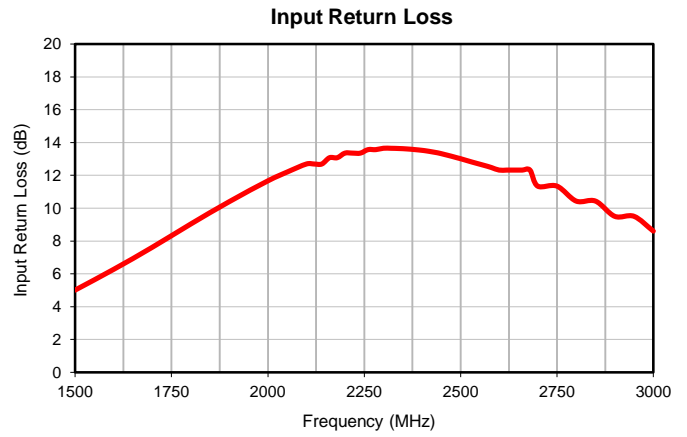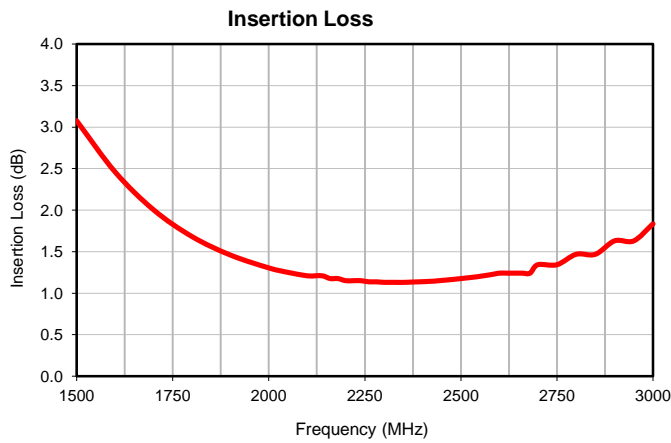


# Case Style

JC

## Outline Dimensions

JC0603C

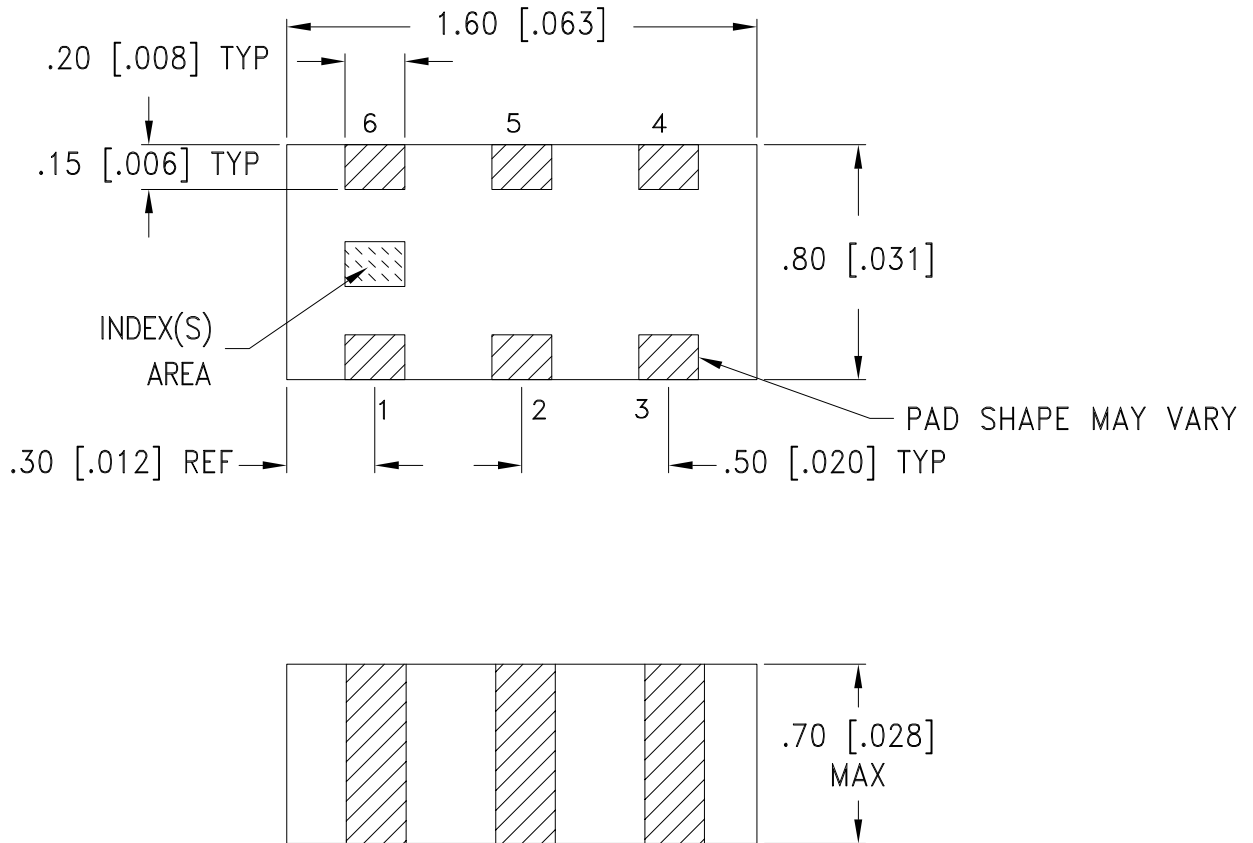

 METALLIZATION

Weight: .005 grams

Dimensions are in mm [inch]. Tolerances:  $\pm 0.13$  mm

### Notes:

1. Open style, ceramic base.
2. Termination finish:

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F114

## DEVICE ORIENTATION IN T&R



ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	



ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
			Standard	1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

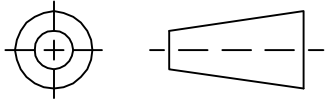


REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148526	NEW RELEASE	10/09/14	GF	MY

SUGGESTED MOUNTING CONFIGURATION  
FOR JC0603C CASE STYLE, "06TJ06" PIN CODE

8X  $\phi$ .013 PTH  
 FOR GROUND

COPLANAR WAVEGUIDE:  
 .022 TRACE WIDTH &  
 .014 GAP, 3 PL.  
 (SEE NOTE BELOW)

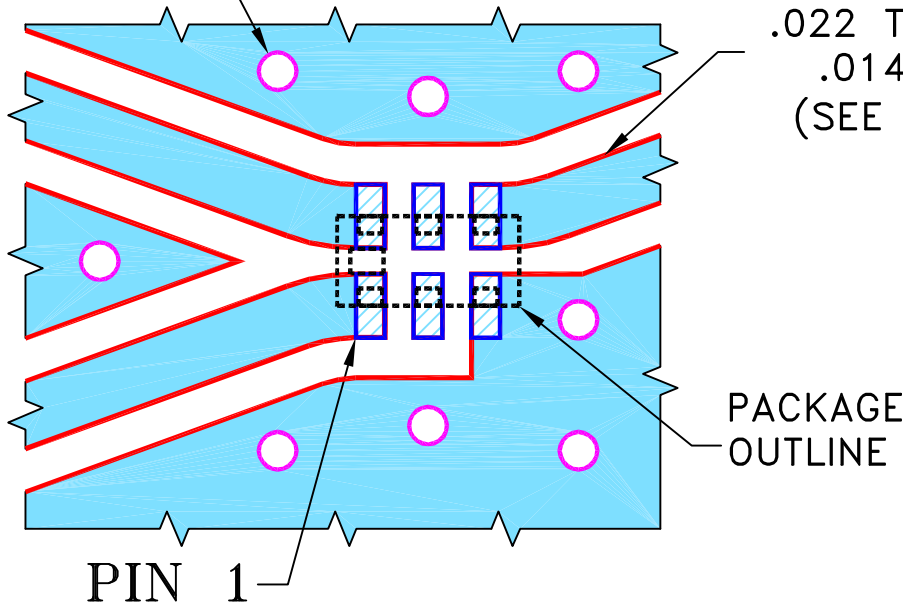


NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010"  $\pm$  .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$ .005 ANGLES $\pm$ FRACTIONS $\pm$	DRAWN	GF 10/08/14
	CHECKED	AV 10/09/14
	APPROVED	MY 10/09/14



**Mini-Circuits<sup>®</sup>**


13 Neptune Avenue  
 Brooklyn NY 11235

PL, 06TJ06, JC0603C, TB-793+


THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-430	REV: OR
FILE: 98PL430	SCALE: 15:1	SHEET: 1 OF 1	

# Evaluation Board and Circuit

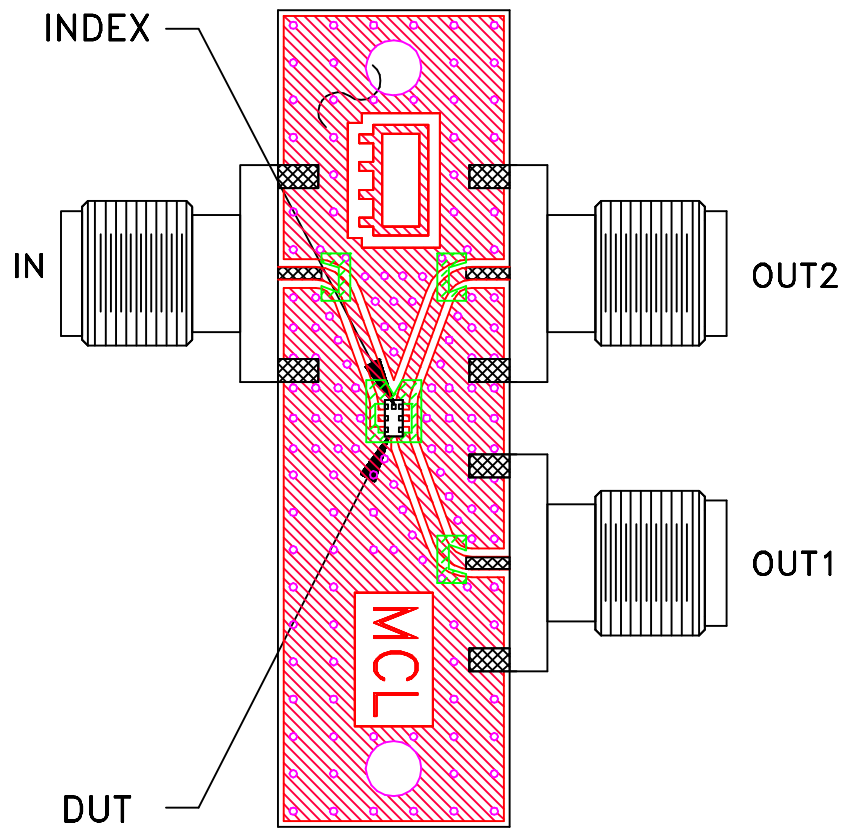


TB-793+

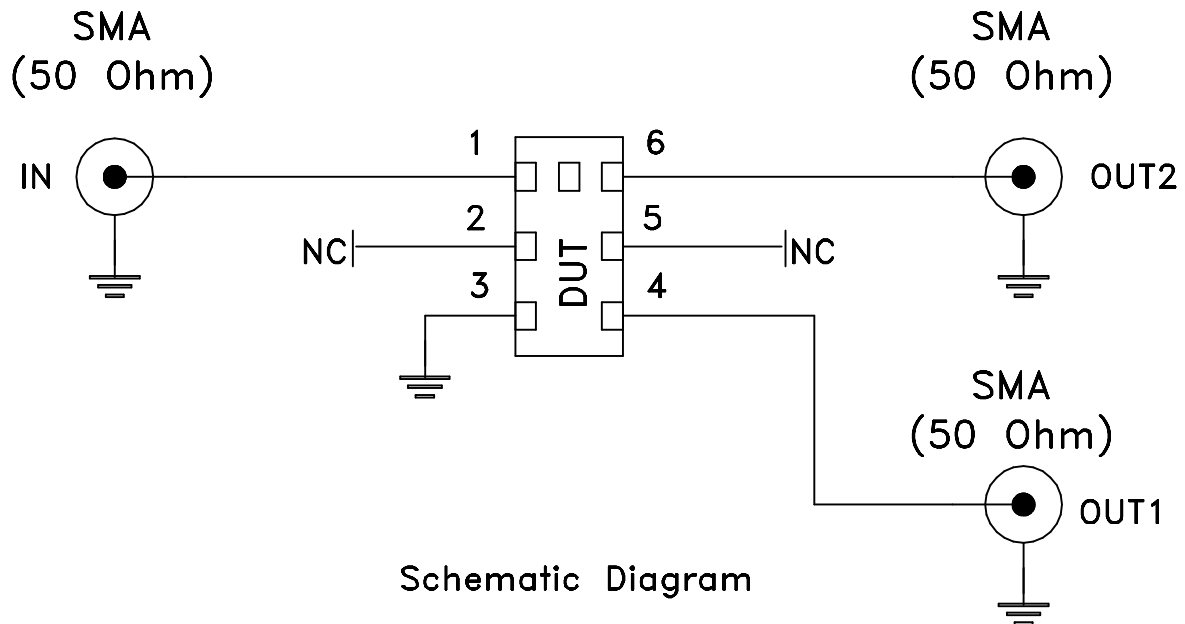

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A