

Frequency Mixer

Level 7 (LO Power +7 dBm) 1 to 1000 MHz

TFM-2+



Generic photo used for illustration purposes only

CASE STYLE: B02


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Outline Drawing

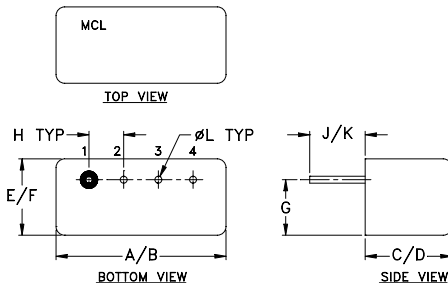

Outline Dimensions (inch)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84
G	H	J	K	L	wt
.16	.100	.14	.20	.020	grams
4.06	2.54	3.56	5.08	0.51	1.9

Features

- low conversion loss, 5.74 dB typ.
- wideband, 1 to 1000 MHz
- good L-R isolation, 40 dB typ.
- rugged welded construction
- hermetically sealed

Applications

- VHF/UHF
- aviation
- cellular
- ISM/GSM

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U	
f_L - f_U		$\overline{X}$	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
1-1000	DC-1000	5.74	0.07	7.5	8.5	50	45	40	25	30	25	45	40	35	25	25	18

1 dB COMP.: +1 dBm typ.


L = low range [f_L to $10 f_L$]
m = mid band [$2f_L$ to $f_U/2$]

M = mid range [$10 f_L$ to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1.00	31.00	7.23	>67.00	>67.00	1.30	2.70
2.00	32.00	6.50	>67.00	>67.00	1.15	2.63
5.00	35.00	5.80	>67.00	>67.00	1.07	2.77
10.00	40.00	5.62	>67.00	>67.00	1.06	2.55
20.00	50.00	5.68	>67.00	>67.00	1.07	2.41
50.00	80.00	5.58	61.94	63.74	1.09	2.37
100.00	70.00	5.53	54.33	54.76	1.11	2.29
167.34	137.34	5.57	48.65	47.61	1.16	2.20
233.87	203.87	5.72	45.10	43.03	1.18	2.16
300.40	270.40	5.45	42.56	40.00	1.20	2.13
366.94	336.94	5.73	40.45	37.57	1.22	2.06
466.74	436.74	5.82	38.33	34.32	1.23	2.13
500.00	470.00	5.72	38.80	34.10	1.26	2.09
599.81	569.81	6.02	37.43	32.81	1.29	2.09
666.34	636.34	6.11	37.94	31.57	1.34	2.04
799.41	769.41	6.27	36.06	29.67	1.40	2.13
832.68	802.68	6.46	35.22	28.79	1.47	2.19
899.21	869.21	7.00	33.77	26.14	1.55	2.24
932.48	902.48	7.37	33.17	25.03	1.66	2.28
1000.00	969.00	7.63	32.49	23.59	1.72	2.30







Electrical Schematic

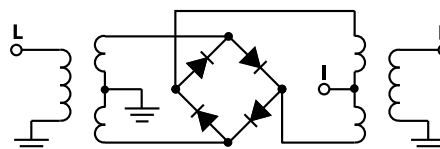

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



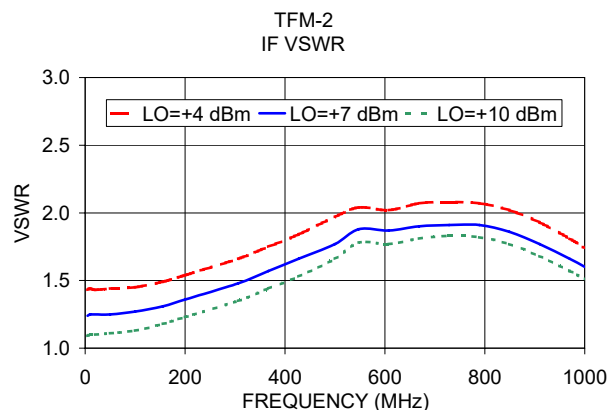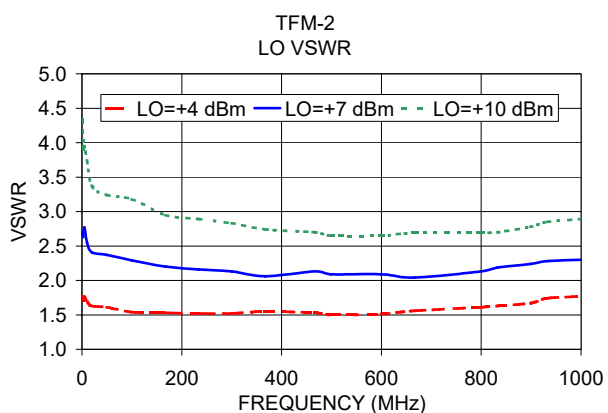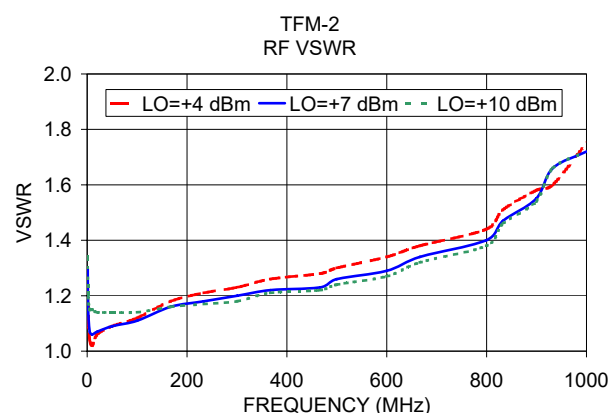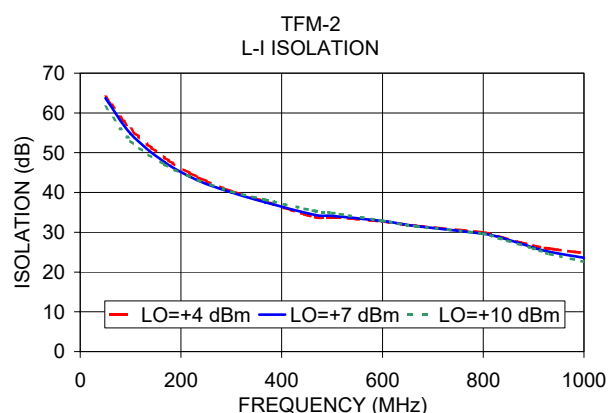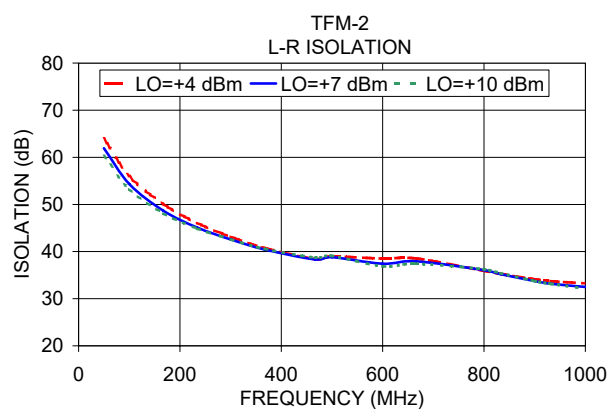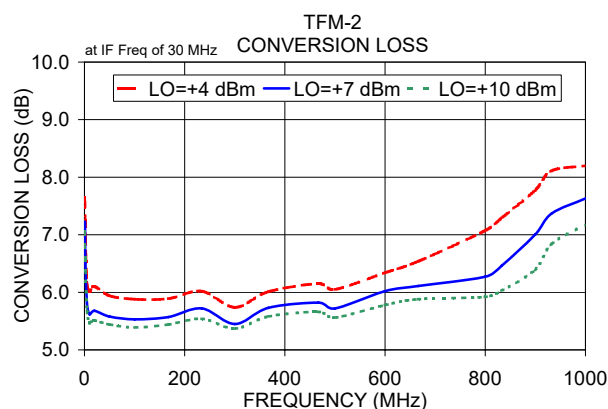

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

TFM-2+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	6.19	5.90	5.63
50.3	80.3	6.45	6.06	5.83
90.5	120.5	6.42	6.10	5.95
130.8	160.8	6.38	6.08	5.92
171.0	201.0	6.36	6.08	5.94
211.2	241.2	6.39	6.09	5.94
251.4	281.4	6.31	6.06	5.92
291.7	321.7	6.32	6.07	5.92
331.9	361.9	6.32	6.06	5.91
372.1	402.1	6.32	6.07	5.94
412.3	442.3	6.46	6.16	5.99
452.6	482.6	6.39	6.14	5.98
492.8	522.8	6.45	6.16	6.00
533.0	563.0	6.47	6.17	5.99
573.2	603.2	6.52	6.23	6.05
613.5	643.5	6.64	6.36	6.15
653.7	683.7	6.65	6.39	6.20
693.9	723.9	6.74	6.43	6.23
734.1	764.1	6.74	6.40	6.19
794.5	824.5	6.92	6.43	6.19
834.7	864.7	7.16	6.53	6.22
895.0	925.0	7.50	6.77	6.32
935.3	965.3	7.68	6.92	6.39
995.6	1025.6	8.08	7.34	6.74
1035.8	1065.8	8.43	7.70	7.08
1096.2	1126.2	8.84	8.15	7.56
1136.4	1166.4	8.95	8.30	7.70
1196.7	1226.7	9.32	8.69	8.09
1237.0	1267.0	9.44	8.88	8.36
1297.3	1327.3	9.71	9.40	9.12
1337.5	1367.5	9.66	9.47	9.32
1397.9	1427.9	9.82	9.65	9.54
1438.1	1468.1	9.95	9.77	9.66
1498.4	1528.4	10.20	10.02	9.92
1538.6	1568.6	10.51	10.30	10.21
1599.0	1629.0	10.89	10.63	10.54
1639.2	1669.2	11.39	11.02	10.92
1699.5	1729.5	11.75	11.31	11.19
1739.8	1769.8	12.50	11.87	11.68
1800.1	1830.1	12.80	12.08	11.84

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	18.08	18.23	17.98
50.3	80.3	20.21	19.05	20.76
90.5	120.5	15.45	18.44	21.03
130.8	160.8	20.44	20.96	21.04
171.0	201.0	20.20	20.96	21.03
211.2	241.2	20.81	20.95	21.03
251.4	281.4	18.55	20.40	21.04
291.7	321.7	20.57	20.97	21.04
331.9	361.9	15.76	17.85	20.22
372.1	402.1	15.95	19.14	21.03
412.3	442.3	14.73	16.43	21.01
452.6	482.6	18.65	20.90	21.01
492.8	522.8	20.77	20.92	20.48
533.0	563.0	15.01	20.92	21.00
573.2	603.2	13.13	16.04	20.98
613.5	643.5	10.91	12.66	15.68
653.7	683.7	10.19	11.95	14.83
693.9	723.9	10.39	12.97	16.55
734.1	764.1	10.46	14.73	20.91
794.5	824.5	10.36	17.67	20.90
834.7	864.7	9.37	18.71	17.06
895.0	925.0	8.14	13.80	16.43
935.3	965.3	8.20	12.90	15.16
995.6	1025.6	7.70	10.10	11.76
1035.8	1065.8	6.68	8.35	9.79
1096.2	1126.2	5.81	6.80	8.18
1136.4	1166.4	5.79	6.56	8.03
1196.7	1226.7	6.25	7.25	9.00
1237.0	1267.0	7.42	8.64	10.44
1297.3	1327.3	10.22	11.02	12.37
1337.5	1367.5	12.39	12.34	13.18
1397.9	1427.9	14.90	13.71	14.26
1438.1	1468.1	16.28	14.79	14.39
1498.4	1528.4	15.23	18.39	15.89
1538.6	1568.6	15.67	16.99	18.89
1599.0	1629.0	16.63	17.15	18.73
1639.2	1669.2	17.39	17.26	18.54
1699.5	1729.5	17.64	15.99	18.41
1739.8	1769.8	17.75	16.33	16.32
1800.1	1830.1	17.60	16.71	16.27

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	1.05	0.57	0.51
50.3	80.3	0.94	0.67	0.56
90.5	120.5	1.01	0.64	0.50
130.8	160.8	0.88	0.68	0.45
171.0	201.0	0.99	0.69	0.50
211.2	241.2	0.87	0.60	0.42
251.4	281.4	0.92	0.65	0.47
291.7	321.7	0.86	0.60	0.44
331.9	361.9	0.86	0.59	0.45
372.1	402.1	0.90	0.65	0.49
412.3	442.3	0.79	0.55	0.44
452.6	482.6	0.94	0.68	0.53
492.8	522.8	0.92	0.67	0.51
533.0	563.0	1.09	0.80	0.61
573.2	603.2	1.12	0.86	0.66
613.5	643.5	1.26	0.96	0.76
653.7	683.7	1.41	1.09	0.87
693.9	723.9	1.46	1.12	0.91
734.1	764.1	1.71	1.35	1.11
794.5	824.5	1.83	1.50	1.22
834.7	864.7	1.84	1.58	1.29
895.0	925.0	1.69	1.54	1.30
935.3	965.3	1.70	1.57	1.39
995.6	1025.6	1.53	1.43	1.30
1035.8	1065.8	1.32	1.24	1.15
1096.2	1126.2	1.13	1.05	0.99
1136.4	1166.4	1.13	1.05	1.03
1196.7	1226.7	1.00	0.94	0.96
1237.0	1267.0	0.96	0.89	0.91
1297.3	1327.3	0.75	0.58	0.53
1337.5	1367.5	0.71	0.47	0.36
1397.9	1427.9	0.61	0.36	0.26
1438.1	1468.1	0.56	0.31	0.23
1498.4	1528.4	0.45	0.24	0.16
1538.6	1568.6	0.42	0.22	0.13
1599.0	1629.0	0.34	0.19	0.12
1639.2	1669.2	0.29	0.17	0.10
1699.5	1729.5	0.24	0.16	0.10
1739.8	1769.8	0.15	0.15	0.11
1800.1	1830.1	0.08	0.15	0.13

REV. X3

TFM-2+

101011

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

TFM-2+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=510.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1010.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
500.0	10.1	6.32	10.0	20.1	6.26	1000.0	10.1	7.42
487.4	22.7	6.20	50.0	60.1	5.78	979.8	30.3	7.37
474.9	35.2	6.09	90.0	100.1	5.97	959.6	50.5	7.30
462.3	47.8	6.11	130.0	140.1	5.78	939.4	70.7	7.38
449.7	60.4	6.11	170.0	180.1	5.98	919.2	90.9	7.38
437.2	72.9	6.01	210.0	220.1	5.83	899.0	111.1	7.38
424.6	85.5	5.97	250.0	260.1	6.25	878.8	131.3	7.36
412.1	98.0	5.99	310.0	320.1	6.11	858.6	151.5	7.34
399.5	110.6	5.97	350.0	360.1	5.99	838.4	171.7	7.39
386.9	123.2	5.95	410.0	420.1	6.23	818.2	191.9	7.32
374.4	135.7	5.95	450.0	460.1	6.23	798.0	212.1	7.41
361.8	148.3	5.99	510.0	520.1	6.25	777.8	232.3	7.32
349.2	160.9	5.99	550.0	560.1	6.29	757.6	252.5	7.24
336.7	173.4	5.99	610.0	620.1	6.55	737.3	272.8	7.34
324.1	186.0	5.98	650.0	660.1	6.46	717.1	293.0	7.33
311.5	198.6	5.96	710.0	720.1	6.37	696.9	313.2	7.38
299.0	211.1	5.97	750.0	760.1	6.12	676.7	333.4	7.29
286.4	223.7	5.98	810.0	820.1	6.16	656.5	353.6	7.33
273.8	236.3	6.00	850.0	860.1	6.13	636.3	373.8	7.26
261.3	248.8	6.04	910.0	920.1	6.03	616.1	394.0	7.28
248.7	261.4	6.06	950.0	960.1	6.01	575.7	434.4	7.18
236.2	273.9	6.04	1010.0	1020.1	6.29	555.5	454.6	7.25
223.6	286.5	6.02	1050.0	1060.1	6.35	515.1	495.0	7.18
211.0	299.1	6.02	1110.0	1120.1	6.17	494.9	515.2	7.13
198.5	311.6	6.00	1150.0	1160.1	6.17	454.5	555.6	7.14
185.9	324.2	6.01	1210.0	1220.1	5.99	434.3	575.8	7.01
173.3	336.8	6.04	1250.0	1260.1	6.31	393.9	616.2	7.11
160.8	349.3	6.09	1310.0	1320.1	6.26	373.7	636.4	7.17
148.2	361.9	6.12	1350.0	1360.1	6.21	333.3	676.8	7.10
135.6	374.5	6.11	1410.0	1420.1	6.65	313.1	697.0	7.15
123.1	387.0	6.11	1450.0	1460.1	7.17	272.7	737.4	7.01
110.5	399.6	6.11	1510.0	1520.1	7.32	252.4	757.7	6.90
97.9	412.2	6.10	1550.0	1560.1	7.54	212.0	798.1	6.88
85.4	424.7	6.10	1610.0	1620.1	8.09	191.8	818.3	6.79
72.8	437.3	6.15	1650.0	1660.1	8.48	151.4	858.7	6.88
60.3	449.8	6.18	1710.0	1720.1	9.15	131.2	878.9	6.93
47.7	462.4	6.16	1750.0	1760.1	9.48	90.8	919.3	7.01
35.1	475.0	6.14	1810.0	1820.1	10.15	70.6	939.5	7.19
22.6	487.5	6.16	1850.0	1860.1	10.59	30.2	979.9	7.30
10.0	500.1	6.39	1910.0	1920.1	11.02	10.0	1000.1	7.57

REV. X3

TFM-2+

101011

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	62.77	61.78	61.54	55.19	53.39	52.41
80.3	57.29	57.84	58.11	50.74	49.09	48.05
120.5	54.42	54.93	55.40	47.43	46.00	45.07
160.8	52.21	52.87	53.47	45.40	44.09	43.17
201.0	50.34	51.13	51.65	43.97	42.71	41.63
241.2	49.11	49.92	50.39	42.57	41.36	40.30
281.4	48.09	48.78	49.31	41.96	40.64	39.56
321.7	47.14	47.84	48.37	40.89	39.51	38.60
361.9	46.26	46.95	47.37	39.94	38.77	37.81
402.1	45.43	46.18	46.64	38.76	37.64	36.88
442.3	44.73	45.38	45.99	37.96	36.89	35.82
482.6	44.24	44.82	45.26	37.11	36.56	35.88
522.8	44.29	44.92	45.20	36.09	35.53	35.17
563.0	43.64	44.64	45.17	35.46	34.51	34.02
603.2	42.85	43.41	43.91	34.85	33.89	32.99
643.5	42.25	42.59	42.80	34.62	34.15	33.16
683.7	41.71	41.97	42.13	33.76	33.99	33.56
723.9	41.33	41.62	41.93	32.75	33.14	33.14
764.1	41.08	41.62	41.73	31.90	32.37	32.40
824.5	40.51	41.19	41.37	30.77	30.79	30.92
864.7	39.67	40.56	41.01	30.61	30.25	30.35
925.0	39.37	40.27	40.79	31.10	30.13	29.85
965.3	39.48	40.23	40.74	31.98	30.70	30.02
1025.6	39.63	40.51	41.11	33.63	32.86	31.66
1065.8	39.37	40.29	40.99	34.81	34.63	33.33
1126.2	38.63	39.24	39.81	35.99	37.32	37.16
1166.4	38.11	38.40	38.73	36.65	38.98	40.04
1226.7	37.73	37.65	37.76	37.52	40.57	43.27
1267.0	38.00	37.81	37.73	38.49	41.82	45.44
1327.3	40.45	40.05	39.41	40.17	43.35	47.27
1367.5	42.00	41.32	40.60	40.45	42.37	44.12
1427.9	38.71	38.82	38.87	38.74	38.70	38.60
1468.1	37.13	37.80	38.28	45.83	42.08	39.66
1528.4	37.10	37.85	38.42	36.81	36.32	35.14
1568.6	36.28	37.04	37.51	34.07	34.03	33.22
1629.0	35.42	36.30	36.93	31.12	31.26	30.88
1669.2	34.48	35.32	36.03	29.52	29.83	29.59
1729.5	34.04	35.11	36.00	27.70	28.26	28.12
1769.8	32.83	33.82	34.52	26.38	27.23	27.31
1830.1	32.44	33.84	34.67	25.36	26.35	26.48

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	57.15	57.43	57.51
50.3	80.3	43.15	43.58	43.76
90.5	120.5	38.84	38.75	39.92
130.8	160.8	36.61	36.80	37.68
171.0	201.0	34.61	35.33	36.19
211.2	241.2	33.68	34.78	35.20
251.4	281.4	33.08	34.04	34.43
291.7	321.7	33.01	34.17	35.13
331.9	361.9	32.98	34.57	35.91
372.1	402.1	32.99	34.51	36.41
412.3	442.3	33.35	34.81	35.96
452.6	482.6	33.82	35.48	37.05
492.8	522.8	33.42	34.99	36.42
533.0	563.0	32.26	33.02	33.16
573.2	603.2	30.25	30.29	29.97
613.5	643.5	28.19	27.88	27.49
653.7	683.7	26.67	26.11	25.85
693.9	723.9	25.12	24.58	24.31
734.1	764.1	24.29	23.70	23.24
794.5	824.5	24.05	23.14	22.54
834.7	864.7	23.91	22.92	22.14
895.0	925.0	24.59	23.40	22.20
935.3	965.3	25.46	24.29	23.02
995.6	1025.6	25.85	25.01	24.15
1035.8	1065.8	24.61	23.78	23.08
1096.2	1126.2	22.04	21.24	20.54
1136.4	1166.4	20.34	19.56	18.85
1196.7	1226.7	17.89	16.95	16.25
1237.0	1267.0	16.48	15.50	14.80
1297.3	1327.3	14.60	13.64	13.14
1337.5	1367.5	13.64	12.82	12.35
1397.9	1427.9	12.29	11.53	11.13
1438.1	1468.1	11.92	11.13	10.72
1498.4	1528.4	10.75	10.11	9.70
1538.6	1568.6	10.47	9.87	9.44
1599.0	1629.0	9.68	9.15	8.81
1639.2	1669.2	9.54	8.94	8.63
1699.5	1729.5	9.10	8.67	8.40
1739.8	1769.8	9.14	8.63	8.39
1800.1	1830.1	8.96	8.55	8.36

Frequency Mixer

TFM-2+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	1.12	1.16	1.03
50.3	80.3	1.02	1.06	1.12
90.5	120.5	1.05	1.10	1.16
130.8	160.8	1.06	1.12	1.17
171.0	201.0	1.09	1.14	1.19
211.2	241.2	1.10	1.15	1.20
251.4	281.4	1.11	1.16	1.21
291.7	321.7	1.13	1.19	1.23
331.9	361.9	1.15	1.20	1.25
372.1	402.1	1.16	1.21	1.25
412.3	442.3	1.17	1.21	1.25
452.6	482.6	1.20	1.24	1.28
492.8	522.8	1.22	1.27	1.32
533.0	563.0	1.24	1.28	1.33
573.2	603.2	1.24	1.28	1.32
613.5	643.5	1.24	1.26	1.30
653.7	683.7	1.24	1.26	1.28
693.9	723.9	1.25	1.27	1.29
734.1	764.1	1.28	1.28	1.30
794.5	824.5	1.39	1.37	1.38
834.7	864.7	1.51	1.48	1.47
895.0	925.0	1.76	1.70	1.67
935.3	965.3	1.97	1.89	1.84
995.6	1025.6	2.31	2.21	2.13
1035.8	1065.8	2.55	2.44	2.34
1096.2	1126.2	2.86	2.75	2.65
1136.4	1166.4	3.06	2.95	2.84
1196.7	1226.7	3.28	3.18	3.06
1237.0	1267.0	3.40	3.33	3.22
1297.3	1327.3	3.52	3.49	3.43
1337.5	1367.5	3.54	3.54	3.52
1397.9	1427.9	3.56	3.54	3.52
1438.1	1468.1	3.55	3.52	3.49
1498.4	1528.4	3.62	3.58	3.54
1538.6	1568.6	3.67	3.62	3.58
1599.0	1629.0	3.73	3.67	3.64
1639.2	1669.2	3.79	3.70	3.67
1699.5	1729.5	3.91	3.83	3.79
1739.8	1769.8	4.00	3.90	3.86
1800.1	1830.1	4.13	4.05	4.01

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
40.1	1.89	2.77	3.90
80.3	1.72	2.44	3.37
120.5	1.78	2.56	3.56
160.8	1.75	2.49	3.43
201.0	1.72	2.44	3.35
241.2	1.76	2.52	3.46
281.4	1.72	2.41	3.29
321.7	1.77	2.50	3.40
361.9	1.76	2.45	3.30
402.1	1.78	2.47	3.33
442.3	1.80	2.48	3.31
482.6	1.81	2.47	3.28
522.8	1.85	2.52	3.32
563.0	1.86	2.49	3.27
603.2	1.90	2.55	3.34
643.5	1.90	2.53	3.29
683.7	1.92	2.55	3.30
723.9	1.96	2.56	3.29
764.1	1.96	2.54	3.25
824.5	2.05	2.62	3.31
864.7	2.08	2.65	3.33
925.0	2.15	2.72	3.39
965.3	2.17	2.74	3.42
1025.6	2.22	2.79	3.47
1065.8	2.23	2.80	3.47
1126.2	2.26	2.82	3.48
1166.4	2.27	2.81	3.46
1226.7	2.28	2.80	3.45
1267.0	2.28	2.78	3.43
1327.3	2.33	2.84	3.50
1367.5	2.39	2.87	3.52
1427.9	2.53	3.00	3.64
1468.1	2.63	3.06	3.67
1528.4	2.83	3.23	3.82
1568.6	2.97	3.30	3.86
1629.0	3.20	3.48	4.02
1669.2	3.36	3.57	4.07
1729.5	3.62	3.78	4.26
1769.8	3.82	3.84	4.17
1830.1	4.09	4.11	4.48

IF (OUT) (MHz)	IF VSWR @LO=1000MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
10.0	1.99	1.69	1.46
30.0	1.95	1.66	1.43
50.0	2.01	1.71	1.48
70.0	2.03	1.73	1.50
90.0	1.96	1.66	1.44
110.0	1.97	1.68	1.46
130.0	2.05	1.75	1.53
150.0	2.03	1.73	1.51
170.0	2.00	1.71	1.50
190.0	2.03	1.74	1.53
210.0	2.04	1.74	1.52
230.0	2.03	1.73	1.52
250.0	2.08	1.80	1.60
270.0	2.08	1.79	1.58
290.0	2.02	1.73	1.53
310.0	2.07	1.79	1.59
330.0	2.14	1.85	1.65
350.0	2.10	1.81	1.61
370.0	2.09	1.81	1.61
390.0	2.15	1.86	1.66
430.0	2.12	1.84	1.63
450.0	2.18	1.90	1.70
490.0	2.11	1.82	1.61
510.0	2.17	1.88	1.67
550.0	2.16	1.87	1.66
570.0	2.14	1.86	1.65
610.0	2.20	1.90	1.68
630.0	2.16	1.88	1.66
670.0	2.17	1.88	1.65
690.0	2.13	1.85	1.63
730.0	2.18	1.90	1.67
750.0	2.09	1.82	1.60
790.0	2.13	1.87	1.65
810.0	2.08	1.83	1.61
850.0	2.05	1.81	1.60
870.0	2.01	1.78	1.58
910.0	1.99	1.78	1.59
930.0	1.97	1.76	1.58
970.0	1.85	1.66	1.50
990.0	1.92	1.74	1.58

REV. X3

TFM-2+

101011

Page 4 of 5

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	14	26	26	16	33	19	35	40	58
1	-	24	+0	41	11	29	26	46	42	39	45	64
2	>90	59	50	63	50	66	52	>70	56	>70	52	67
3	>90	64	>70	66	>70	68	66	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -14.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.43 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	26	33	40	27	45	33	50	58	77
1	-	25	+0	38	11	33	27	50	43	46	55	75
2	72	51	42	61	42	58	47	62	48	58	47	60
3	>90	44	46	49	48	52	42	54	54	64	58	57
4	>90	75	74	64	59	63	57	72	58	75	68	69
5	>90	74	75	>80	57	65	57	65	59	64	74	>80
6	>90	>80	>80	77	76	78	75	79	>80	74	76	>80
7	>90	>80	>80	>80	79	>80	75	>80	>80	>80	73	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	77	79	>80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -4.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.36 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
TFM-2+
101011
Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


TFM-2+

Typical Performance Curves


Conversion Loss @ IF=30MHz

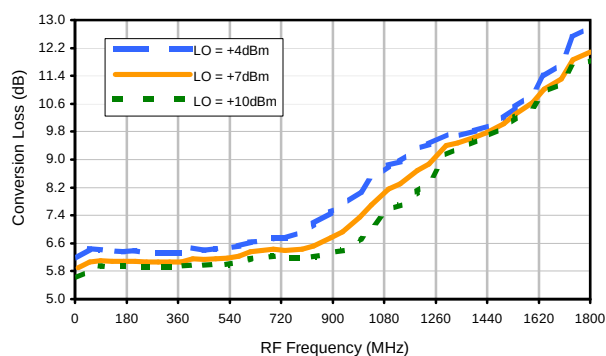


Conversion Loss vs. IF @ RF=510.1MHz

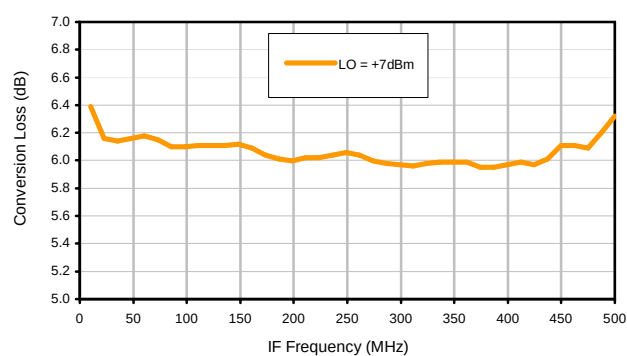


Conversion Loss vs. IF @ RF=10.1MHz

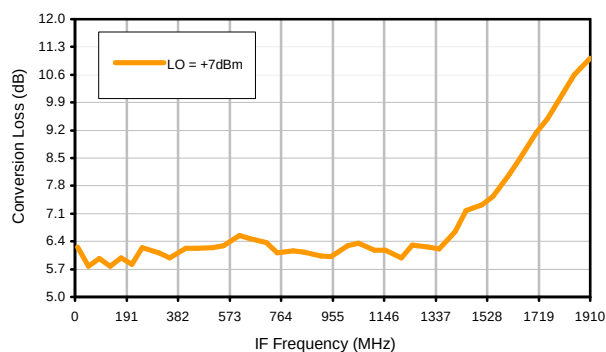


Conversion Loss vs. IF @ RF=1010.1MHz

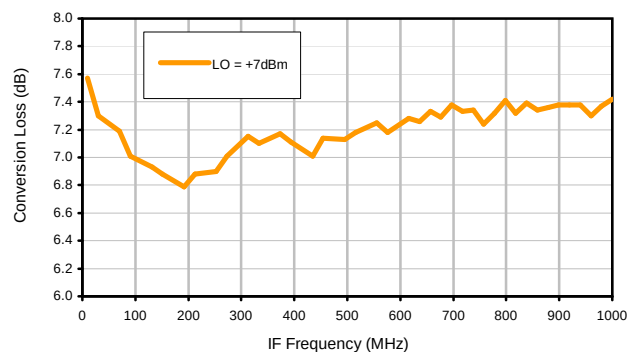

IP3 Input

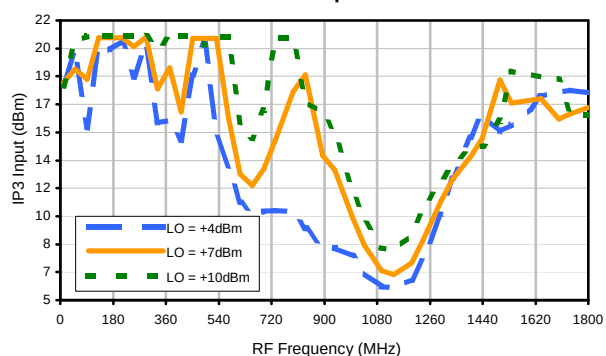

Compression @ RF IN=+1dBm

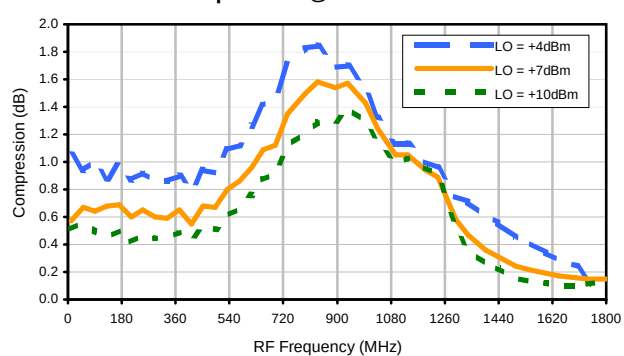

REV. X3

TFM-2+

101011

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

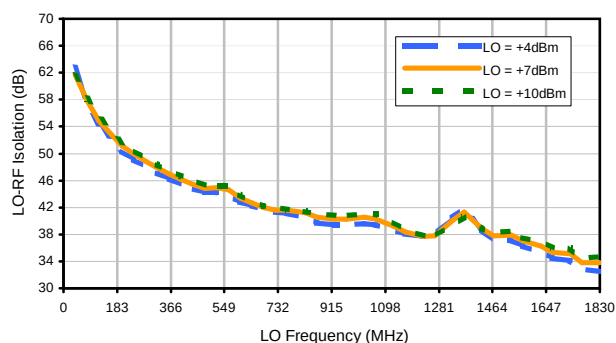


LO-IF Isolation

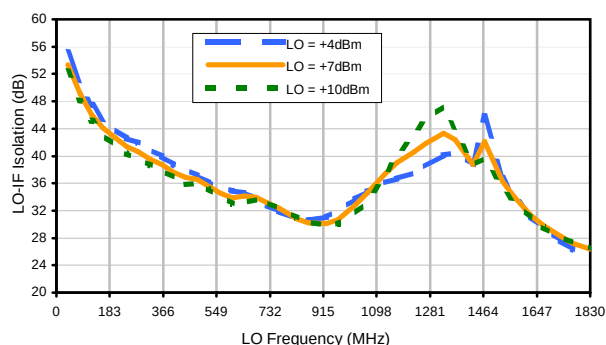


RF-IF Isolation

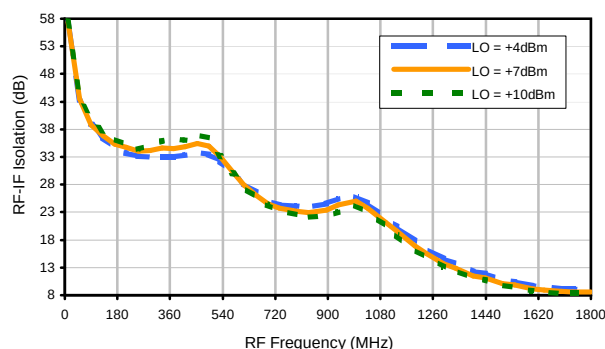


RF VSWR

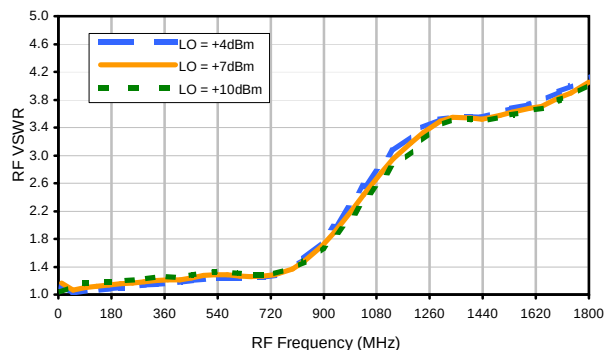

LO VSWR

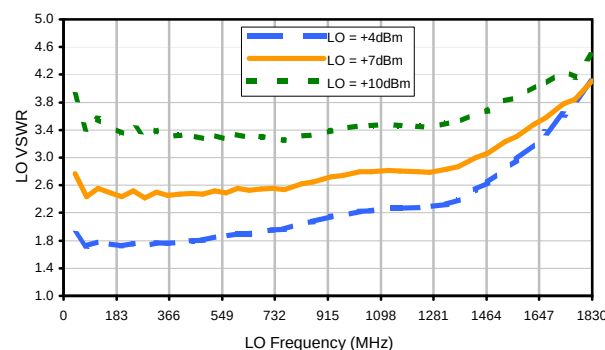

IF VSWR

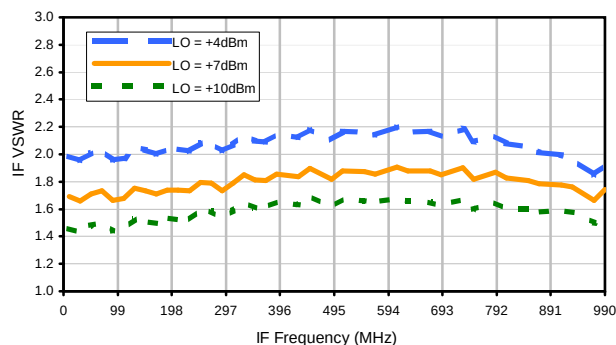

REV. X3

TFM-2+

101011

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	14	26	26	16	33	19	35	40	58
1	-	24	+0	41	11	29	26	46	42	39	45	64
2	>90	59	50	63	50	66	52	>70	56	>70	52	67
3	>90	64	>70	66	>70	68	66	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -14.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.43 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	26	33	40	27	45	33	50	58	77
1	-	25	+0	38	11	33	27	50	43	46	55	75
2	72	51	42	61	42	58	47	62	48	58	47	60
3	>90	44	46	49	48	52	42	54	54	64	58	57
4	>90	75	74	64	59	63	57	72	58	75	68	69
5	>90	74	75	>80	57	65	57	65	59	64	74	>80
6	>90	>80	>80	77	76	78	75	79	>80	74	76	>80
7	>90	>80	>80	>80	79	>80	75	>80	>80	>80	73	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	77	79	>80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -4.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.36 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
TFM-2+
101011
Page 3 of 3

B02

B13

Outline Dimensions

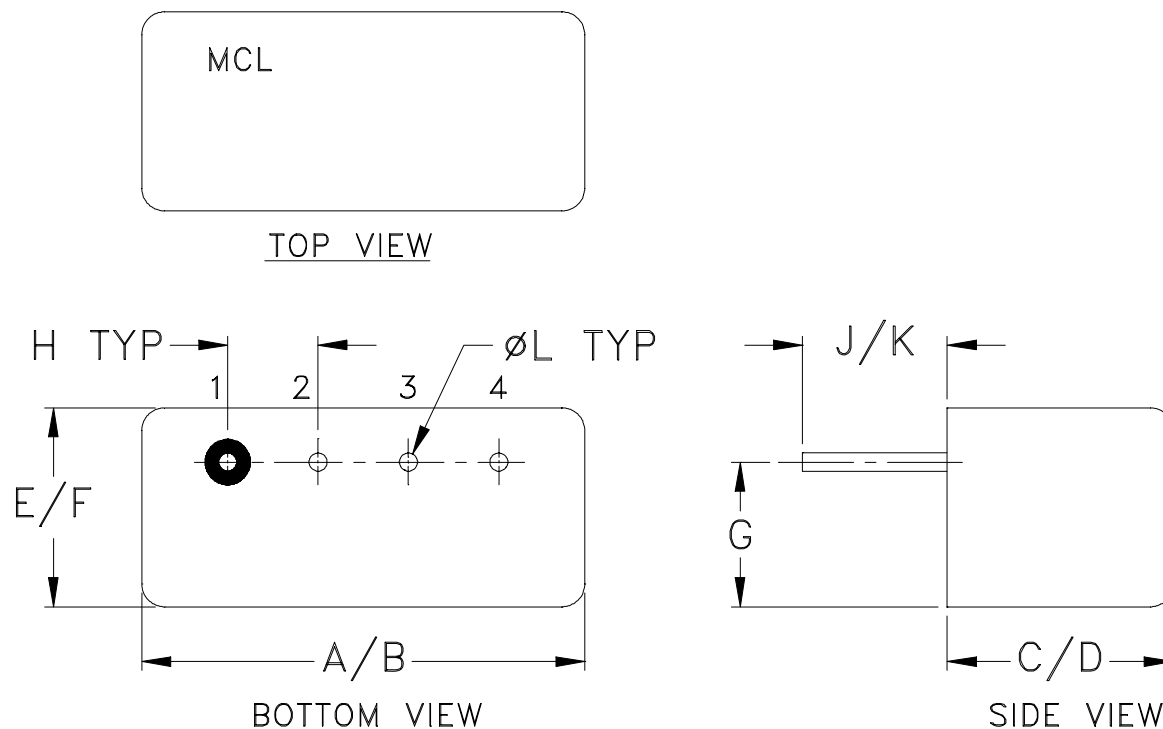

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
B02	.480 (12.19)	.500 (12.70)	.240 (6.10)	.255 (6.48)	.210 (5.33)	.230 (5.84)	.16 (4.06)	.100 (2.54)	.14 (3.56)	.20 (5.08)	.020 (.51)	1.9
B13			.390 (9.91)	.405 (10.29)								2.3

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D