

Non-Catalog Model

Frequency Mixer

Level 7 (LO Power +7 dBm)

TFM-2P

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : B02

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	1		1000	MHz
	RF (fL to fU)	1		1000	MHz
	IF	0		1000	MHz
Conversion Loss	mid band		5.7	7.5	dB
	Total Range			8.5	dB
LO-RF Isolation	Low Range	45	50		dB
	Mid Range	25	40		dB
	Upper Range	25	30		dB
LO-IF Isolation	Low Range	40	45		dB
	Mid Range	25	35		dB
	Upper Range	18	25		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Phase detection, positive polarity.
Hermetically sealed

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	4
RF	1
IF	2
GROUND	3

Electrical Schematics

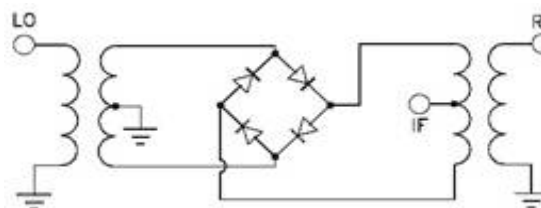

Frequency Mixer

TFM-2P

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	6.14	5.72	5.56
50.9	80.9	6.18	5.84	5.65
91.7	121.7	6.22	5.90	5.75
132.6	162.6	6.22	5.86	5.72
173.4	203.4	6.20	5.91	5.78
214.2	244.2	6.21	5.90	5.75
255.0	285.0	6.22	5.91	5.75
295.9	325.9	6.17	5.90	5.75
336.7	366.7	6.21	5.92	5.75
377.5	407.5	6.19	5.92	5.77
418.3	448.3	6.19	5.88	5.71
459.1	489.1	6.20	5.94	5.78
500.0	530.0	6.23	5.94	5.79
540.8	570.8	6.31	5.99	5.82
581.6	611.6	6.45	6.11	5.90
622.4	652.4	6.45	6.15	5.94
663.3	693.3	6.56	6.26	6.06
704.1	734.1	6.60	6.28	6.06
744.9	774.9	6.63	6.27	6.07
785.7	815.7	6.76	6.30	6.06
826.5	856.5	6.90	6.34	6.07
867.4	897.4	7.19	6.54	6.22
908.2	938.2	7.40	6.73	6.34
949.0	979.0	7.70	6.99	6.52
989.8	1019.8	7.99	7.28	6.75
1030.6	1060.6	8.32	7.64	7.09
1071.5	1101.5	8.62	7.97	7.46
1112.3	1142.3	8.88	8.27	7.77
1153.1	1183.1	9.06	8.51	8.04
1193.9	1223.9	9.35	8.86	8.44
1234.8	1264.8	9.44	9.07	8.72
1255.2	1285.2	9.61	9.30	9.01
1296.0	1326.0	9.73	9.51	9.32
1316.4	1346.4	9.67	9.48	9.33
1357.2	1387.2	9.86	9.69	9.58
1377.6	1407.6	10.02	9.83	9.72
1418.5	1448.5	10.12	9.92	9.80
1438.9	1468.9	10.35	10.14	10.01
1479.7	1509.7	10.85	10.59	10.45
1500.1	1530.1	10.81	10.55	10.41

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	19.49	21.14	20.40
50.9	80.9	18.52	18.81	18.11
91.7	121.7	15.90	17.57	21.12
132.6	162.6	15.36	18.83	21.14
173.4	203.4	16.26	20.02	21.11
214.2	244.2	20.19	21.05	21.13
255.0	285.0	18.67	20.98	21.12
295.9	325.9	20.11	21.05	20.39
336.7	366.7	17.34	20.06	21.13
377.5	407.5	18.57	21.04	19.73
418.3	448.3	20.01	21.06	19.86
459.1	489.1	19.63	17.94	17.52
500.0	530.0	20.88	17.77	17.30
540.8	570.8	18.86	21.00	18.45
581.6	611.6	14.99	19.36	20.93
622.4	652.4	13.84	16.81	21.03
663.3	693.3	14.32	17.98	20.97
704.1	734.1	14.35	19.98	18.93
744.9	774.9	14.48	20.87	17.48
785.7	815.7	14.01	20.02	16.45
826.5	856.5	12.76	17.84	15.19
867.4	897.4	11.98	17.33	14.67
908.2	938.2	11.64	16.13	14.52
949.0	979.0	11.21	14.42	14.09
989.8	1019.8	10.20	12.47	13.56
1030.6	1060.6	9.49	11.20	12.77
1071.5	1101.5	8.92	10.19	11.64
1112.3	1142.3	8.85	9.83	11.08
1153.1	1183.1	9.34	9.85	10.91
1193.9	1223.9	10.20	10.41	11.55
1234.8	1264.8	11.81	11.97	12.71
1255.2	1285.2	12.71	12.67	13.69
1296.0	1326.0	14.89	14.26	15.23
1316.4	1346.4	15.44	14.73	15.76
1357.2	1387.2	16.95	16.07	16.94
1377.6	1407.6	17.28	16.61	17.30
1418.5	1448.5	17.94	17.46	17.47
1438.9	1468.9	18.37	18.03	17.49
1479.7	1509.7	17.99	18.71	17.95
1500.1	1530.1	18.26	18.72	18.14

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	0.70	0.70	0.44
50.9	80.9	0.73	0.58	0.41
91.7	121.7	0.79	0.49	0.31
132.6	162.6	0.64	0.44	0.33
173.4	203.4	0.74	0.51	0.34
214.2	244.2	0.61	0.40	0.27
255.0	285.0	0.67	0.44	0.30
295.9	325.9	0.66	0.45	0.31
336.7	366.7	0.62	0.41	0.28
377.5	407.5	0.68	0.47	0.34
418.3	448.3	0.65	0.45	0.32
459.1	489.1	0.75	0.52	0.37
500.0	530.0	0.71	0.49	0.34
540.8	570.8	0.83	0.61	0.43
581.6	611.6	0.85	0.60	0.45
622.4	652.4	0.94	0.69	0.50
663.3	693.3	1.02	0.73	0.54
704.1	734.1	1.08	0.79	0.59
744.9	774.9	1.28	0.95	0.70
785.7	815.7	1.28	0.99	0.73
826.5	856.5	1.32	1.07	0.79
867.4	897.4	1.15	0.98	0.76
908.2	938.2	1.10	0.96	0.75
949.0	979.0	0.98	0.87	0.71
989.8	1019.8	0.87	0.77	0.65
1030.6	1060.6	0.73	0.63	0.54
1071.5	1101.5	0.61	0.51	0.45
1112.3	1142.3	0.52	0.43	0.38
1153.1	1183.1	0.48	0.39	0.35
1193.9	1223.9	0.42	0.33	0.31
1234.8	1264.8	0.38	0.30	0.27
1255.2	1285.2	0.35	0.26	0.22
1296.0	1326.0	0.30	0.20	0.16
1316.4	1346.4	0.30	0.19	0.15
1357.2	1387.2	0.27	0.17	0.13
1377.6	1407.6	0.26	0.16	0.12
1418.5	1448.5	0.23	0.14	0.11
1438.9	1468.9	0.21	0.14	0.11
1479.7	1509.7	0.18	0.12	0.09
1500.1	1530.1	0.18	0.11	0.09

REV. X3

TFM-2P

101011

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

TFM-2P

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=510.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1010.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
500.0	10.1	6.16	10.0	20.1	5.77	1000.0	10.1	7.49
487.4	22.7	6.08	70.0	80.1	5.79	979.8	30.3	7.52
474.9	35.2	5.95	130.0	140.1	6.10	959.6	50.5	7.59
462.3	47.8	5.97	190.0	200.1	6.18	939.4	70.7	7.71
449.7	60.4	6.02	230.0	240.1	6.11	919.2	90.9	7.75
437.2	72.9	5.94	290.0	300.1	6.05	899.0	111.1	7.61
424.6	85.5	5.92	330.0	340.1	5.79	878.8	131.3	7.60
412.1	98.0	5.92	390.0	400.1	6.18	858.6	151.5	7.63
399.5	110.6	5.87	430.0	440.1	6.22	838.4	171.7	7.68
386.9	123.2	5.83	490.0	500.1	6.54	818.2	191.9	7.64
374.4	135.7	5.85	530.0	540.1	6.10	798.0	212.1	7.64
361.8	148.3	5.86	590.0	600.1	6.40	777.8	232.3	7.61
349.2	160.9	5.84	630.0	640.1	6.24	757.6	252.5	7.52
336.7	173.4	5.87	690.0	700.1	6.33	737.3	272.8	7.67
324.1	186.0	5.88	730.0	740.1	6.10	717.1	293.0	7.62
311.5	198.6	5.86	790.0	800.1	6.09	696.9	313.2	7.59
299.0	211.1	5.89	830.0	840.1	6.21	676.7	333.4	7.49
286.4	223.7	5.88	890.0	900.1	6.38	656.5	353.6	7.49
273.8	236.3	5.83	930.0	940.1	6.15	636.3	373.8	7.48
261.3	248.8	5.87	990.0	1000.1	6.37	616.1	394.0	7.43
248.7	261.4	5.91	1030.0	1040.1	6.27	575.7	434.4	7.39
236.2	273.9	5.86	1090.0	1100.1	6.06	555.5	454.6	7.40
223.6	286.5	5.90	1130.0	1140.1	6.05	515.1	495.0	7.38
211.0	299.1	5.94	1190.0	1200.1	6.20	494.9	515.2	7.34
198.5	311.6	5.88	1230.0	1240.1	6.03	454.5	555.6	7.26
185.9	324.2	5.87	1290.0	1300.1	6.09	434.3	575.8	7.24
173.3	336.8	5.91	1330.0	1340.1	6.43	393.9	616.2	7.22
160.8	349.3	5.89	1390.0	1400.1	6.46	373.7	636.4	7.24
148.2	361.9	5.94	1430.0	1440.1	6.60	333.3	676.8	7.26
135.6	374.5	5.98	1490.0	1500.1	7.18	313.1	697.0	7.29
123.1	387.0	5.95	1530.0	1540.1	7.31	272.7	737.4	7.20
110.5	399.6	5.96	1590.0	1600.1	7.67	252.4	757.7	7.15
97.9	412.2	5.98	1630.0	1640.1	7.78	212.0	798.1	7.10
85.4	424.7	5.91	1690.0	1700.1	8.28	191.8	818.3	7.04
72.8	437.3	5.92	1730.0	1740.1	8.88	151.4	858.7	7.08
60.3	449.8	5.99	1790.0	1800.1	9.20	131.2	878.9	7.14
47.7	462.4	5.95	1830.0	1840.1	9.21	90.8	919.3	7.24
35.1	475.0	5.97	1890.0	1900.1	9.98	70.6	939.5	7.30
22.6	487.5	6.01	1930.0	1940.1	9.97	30.2	979.9	7.37
10.0	500.1	5.98	1990.0	2000.1	10.80	10.0	1000.1	7.41

REV. X3

TFM-2P

101011

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	61.86	62.95	63.15	57.70	57.75	57.79
80.9	55.30	56.46	57.42	55.90	55.50	55.12
121.7	52.43	53.58	54.87	54.43	53.55	52.91
162.6	50.06	51.23	52.28	53.10	51.99	51.12
203.4	48.04	49.34	50.27	52.13	50.66	49.51
244.2	47.29	48.52	49.50	51.01	49.40	48.35
285.0	45.66	46.83	47.80	50.40	48.92	47.76
325.9	44.74	45.98	46.87	48.49	47.36	46.56
366.7	43.91	45.01	45.92	47.23	46.26	45.43
407.5	43.22	44.42	45.27	45.76	45.07	44.57
448.3	42.62	43.63	44.54	45.09	44.04	43.41
489.1	42.00	42.95	43.72	44.28	43.96	43.30
530.0	41.72	42.72	43.36	42.81	42.94	42.83
570.8	41.20	42.48	43.34	41.79	41.84	42.05
611.6	40.74	41.88	42.76	41.43	41.23	41.08
652.4	40.24	41.39	42.30	40.88	41.00	40.63
693.3	39.73	40.83	41.71	40.25	40.89	40.86
734.1	39.55	40.50	41.27	39.57	40.85	41.30
774.9	39.41	40.58	41.33	38.83	40.61	41.71
815.7	39.37	40.79	41.59	38.22	40.17	41.79
856.5	38.99	40.43	41.38	37.81	39.33	41.10
897.4	38.81	40.19	41.18	38.01	39.23	41.09
938.2	38.61	39.99	41.03	38.13	39.08	40.99
979.0	38.52	39.82	40.73	39.29	39.92	41.45
1019.8	38.55	39.83	40.78	41.60	42.60	43.85
1060.6	38.62	39.81	40.76	43.43	45.49	47.29
1101.5	38.53	39.50	40.52	45.98	49.02	52.19
1142.3	38.09	38.93	39.91	49.87	55.03	58.00
1183.1	37.72	38.39	39.31	48.56	47.60	46.18
1223.9	37.29	37.73	38.54	44.97	42.68	41.36
1264.8	37.22	37.62	38.30	41.12	39.02	37.90
1285.2	37.34	37.62	37.95	39.37	37.51	36.40
1326.0	38.01	38.21	38.41	36.93	35.29	34.29
1346.4	38.41	38.60	38.78	35.73	34.20	33.24
1387.2	38.55	38.70	38.86	34.49	33.03	32.12
1407.6	38.44	38.68	38.81	33.81	32.45	31.47
1448.5	37.81	38.17	38.34	32.48	31.32	30.30
1468.9	36.89	37.25	37.44	32.12	31.00	29.87
1509.7	34.81	35.55	36.15	32.40	31.59	30.20
1530.1	35.32	35.99	36.50	31.18	30.69	29.55

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	51.82	51.50	51.31
50.9	80.9	42.32	42.36	41.11
91.7	121.7	37.59	37.18	38.29
132.6	162.6	35.20	35.30	36.56
173.4	203.4	33.70	34.38	35.10
214.2	244.2	32.44	33.09	33.51
255.0	285.0	31.48	32.52	33.02
295.9	325.9	31.52	32.54	33.37
336.7	366.7	31.51	32.86	33.82
377.5	407.5	31.79	33.10	34.26
418.3	448.3	31.83	33.32	34.39
459.1	489.1	32.48	34.34	35.64
500.0	530.0	34.09	36.47	38.74
540.8	570.8	34.92	36.82	38.01
581.6	611.6	33.80	34.63	34.71
622.4	652.4	32.30	32.44	31.93
663.3	693.3	31.39	30.95	30.41
704.1	734.1	30.48	29.57	28.72
744.9	774.9	29.99	28.71	27.78
785.7	815.7	29.42	27.85	26.65
826.5	856.5	29.38	27.45	26.10
867.4	897.4	29.54	27.34	25.81
908.2	938.2	28.99	27.07	25.53
949.0	979.0	27.68	26.20	25.04
989.8	1019.8	25.70	24.62	23.66
1030.6	1060.6	24.00	23.05	22.22
1071.5	1101.5	22.41	21.53	20.83
1112.3	1142.3	20.77	19.89	19.25
1153.1	1183.1	19.33	18.48	18.01
1193.9	1223.9	18.00	17.21	16.70
1234.8	1264.8	16.65	15.95	15.44
1255.2	1285.2	16.09	15.29	14.83
1296.0	1326.0	15.08	14.34	13.93
1316.4	1346.4	14.55	13.87	13.44
1357.2	1387.2	13.64	13.04	12.68
1377.6	1407.6	13.25	12.68	12.34
1418.5	1448.5	12.60	12.02	11.68
1438.9	1468.9	12.39	11.79	11.51
1479.7	1509.7	12.07	11.50	11.11
1500.1	1530.1	11.96	11.32	10.93

Frequency Mixer

TFM-2P

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.13	1.29	1.34	40.1	1.80	2.69	3.86	10.0	1.99	1.66	1.43
50.9	80.9	1.04	1.05	1.11	80.9	1.64	2.36	3.29	30.0	1.99	1.66	1.43
91.7	121.7	1.04	1.10	1.16	121.7	1.72	2.51	3.53	50.0	2.03	1.70	1.46
132.6	162.6	1.10	1.12	1.16	162.6	1.69	2.43	3.38	70.0	1.97	1.65	1.42
173.4	203.4	1.11	1.14	1.19	203.4	1.68	2.40	3.33	90.0	2.03	1.70	1.47
214.2	244.2	1.17	1.20	1.24	244.2	1.72	2.47	3.43	110.0	1.95	1.63	1.41
255.0	285.0	1.16	1.19	1.23	285.0	1.69	2.37	3.26	130.0	2.07	1.74	1.52
295.9	325.9	1.23	1.26	1.30	325.9	1.77	2.48	3.40	150.0	2.02	1.70	1.48
336.7	366.7	1.22	1.24	1.27	366.7	1.76	2.43	3.29	170.0	2.09	1.77	1.55
377.5	407.5	1.28	1.31	1.35	407.5	1.78	2.46	3.33	190.0	2.00	1.69	1.47
418.3	448.3	1.30	1.31	1.34	448.3	1.82	2.48	3.33	210.0	2.07	1.75	1.54
459.1	489.1	1.34	1.37	1.40	489.1	1.85	2.47	3.29	230.0	2.07	1.75	1.54
500.0	530.0	1.39	1.41	1.44	530.0	1.90	2.52	3.34	250.0	2.13	1.82	1.62
540.8	570.8	1.36	1.39	1.42	570.8	1.91	2.50	3.27	270.0	2.09	1.78	1.57
581.6	611.6	1.45	1.46	1.48	611.6	1.96	2.56	3.35	290.0	2.11	1.80	1.61
622.4	652.4	1.40	1.41	1.42	652.4	1.99	2.55	3.31	310.0	2.13	1.82	1.61
663.3	693.3	1.52	1.53	1.54	693.3	2.02	2.57	3.31	330.0	2.15	1.84	1.64
704.1	734.1	1.53	1.52	1.52	734.1	2.06	2.57	3.27	350.0	2.22	1.90	1.70
744.9	774.9	1.62	1.62	1.62	774.9	2.09	2.57	3.26	370.0	2.14	1.84	1.65
785.7	815.7	1.78	1.74	1.72	815.7	2.16	2.63	3.30	390.0	2.22	1.91	1.70
826.5	856.5	1.84	1.80	1.78	856.5	2.20	2.66	3.30	430.0	2.28	1.96	1.76
867.4	897.4	2.18	2.10	2.06	897.4	2.25	2.72	3.35	450.0	2.22	1.91	1.71
908.2	938.2	2.21	2.11	2.06	938.2	2.26	2.72	3.34	490.0	2.20	1.90	1.69
949.0	979.0	2.72	2.59	2.51	979.0	2.29	2.74	3.36	510.0	2.28	1.98	1.77
989.8	1019.8	2.76	2.63	2.52	1019.8	2.32	2.76	3.36	550.0	2.30	2.00	1.79
1030.6	1060.6	3.13	3.00	2.89	1060.6	2.33	2.74	3.34	570.0	2.27	1.96	1.75
1071.5	1101.5	3.36	3.23	3.11	1101.5	2.33	2.73	3.32	610.0	2.35	2.03	1.80
1112.3	1142.3	3.37	3.27	3.17	1142.3	2.33	2.70	3.28	630.0	2.29	1.99	1.78
1153.1	1183.1	4.06	3.94	3.82	1183.1	2.34	2.69	3.25	670.0	2.23	1.95	1.73
1193.9	1223.9	3.57	3.50	3.42	1223.9	2.33	2.65	3.20	690.0	2.32	2.03	1.80
1234.8	1264.8	4.33	4.27	4.19	1264.8	2.34	2.65	3.19	730.0	2.32	2.04	1.81
1255.2	1285.2	4.20	4.14	4.08	1285.2	2.36	2.65	3.18	750.0	2.22	1.95	1.73
1296.0	1326.0	3.74	3.73	3.70	1326.0	2.43	2.68	3.19	790.0	2.20	1.94	1.73
1316.4	1346.4	4.30	4.29	4.27	1346.4	2.48	2.72	3.24	810.0	2.22	1.98	1.77
1357.2	1387.2	4.33	4.29	4.26	1387.2	2.60	2.79	3.26	850.0	2.14	1.92	1.72
1377.6	1407.6	3.87	3.85	3.82	1407.6	2.67	2.82	3.27	870.0	2.13	1.91	1.72
1418.5	1448.5	4.63	4.59	4.56	1448.5	2.82	2.94	3.37	910.0	2.11	1.91	1.73
1438.9	1468.9	4.73	4.66	4.62	1468.9	2.90	2.99	3.40	930.0	2.01	1.82	1.66
1479.7	1509.7	3.86	3.81	3.77	1509.7	3.03	3.04	3.40	970.0	1.91	1.74	1.60
1500.1	1530.1	4.26	4.21	4.17	1530.1	3.11	3.10	3.46	990.0	1.99	1.84	1.70

REV. X3
TFM-2P
101011
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	34	23	34	23	45	21	39	41	56
1	-	29	+0	37	11	38	25	46	45	40	46	51
2	90	64	63	65	61	66	66	>70	64	>70	56	>70
3	>90	68	>70	>70	>70	>70	69	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -14.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.07 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	42	33	46	33	57	35	53	58	72
1	-	30	+0	36	11	40	26	50	47	44	57	56
2	73	60	54	61	53	63	61	63	55	65	49	65
3	>90	48	52	53	55	61	45	71	55	64	61	56
4	>90	78	>80	69	74	71	72	73	72	>80	75	79
5	>90	>80	>80	>80	65	73	60	72	60	69	68	>80
6	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -4.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.04 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X3
TFM-2P
101011
Page 5 of 5

Frequency Mixer


TFM-2P

Typical Performance Curves


Conversion Loss @ IF=30MHz

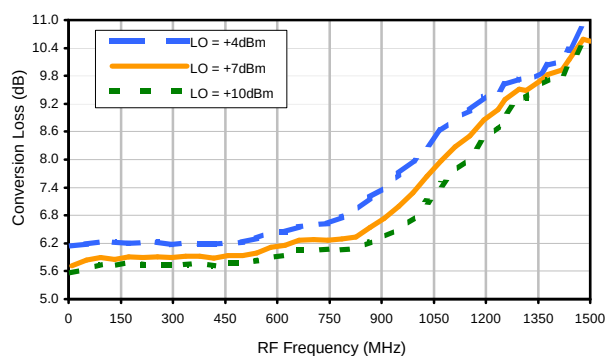


Conversion Loss vs. IF @ RF=510.1MHz

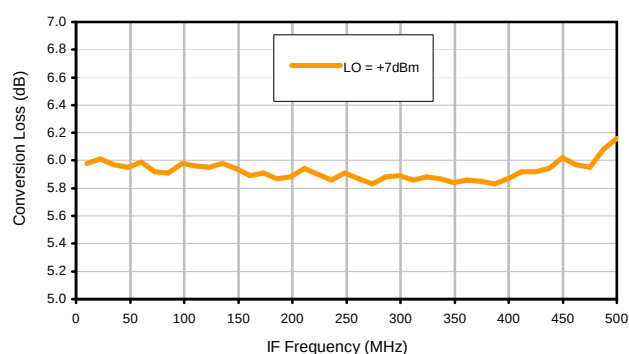


Conversion Loss vs. IF @ RF=10.1MHz

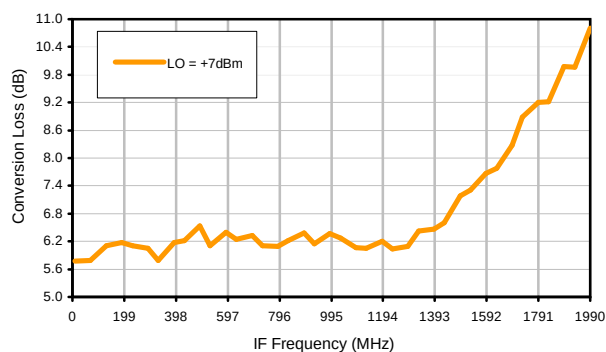


Conversion Loss vs. IF @ RF=1010.1MHz

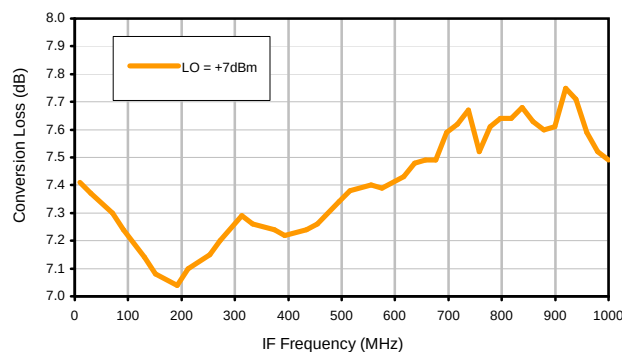

IP3 Input

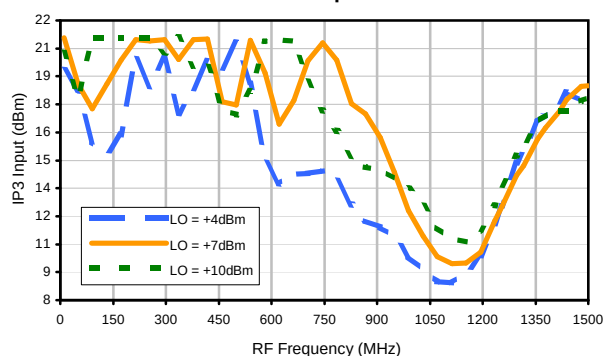

Compression @ RF IN=+1dBm

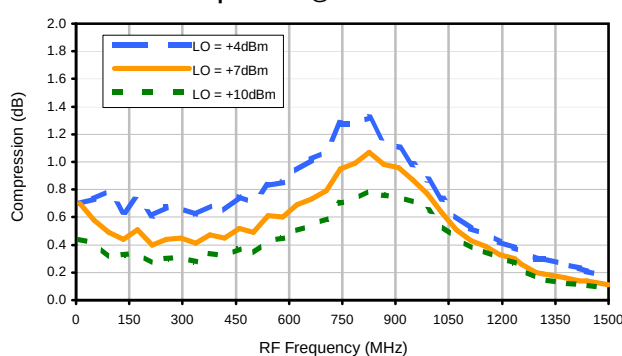

REV. X3

TFM-2P

101011

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

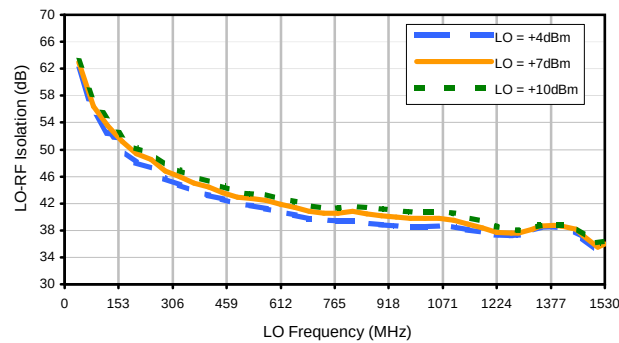


LO-IF Isolation

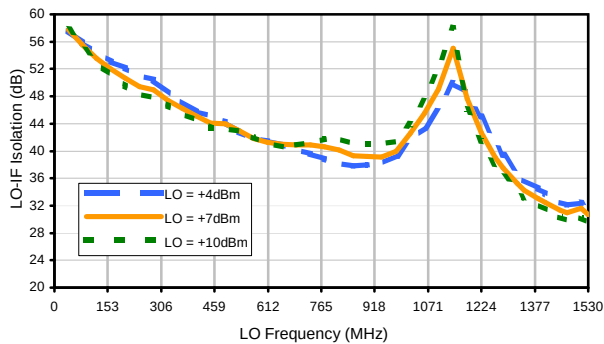


RF-IF Isolation

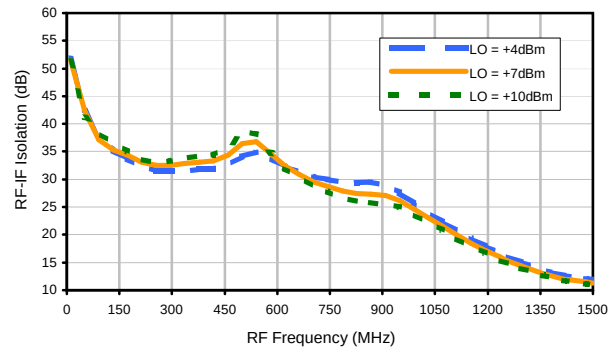


RF VSWR

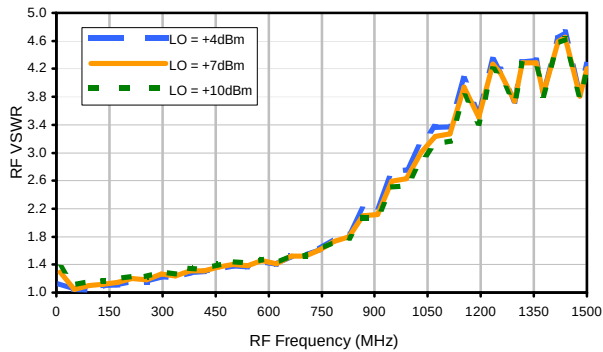

LO VSWR

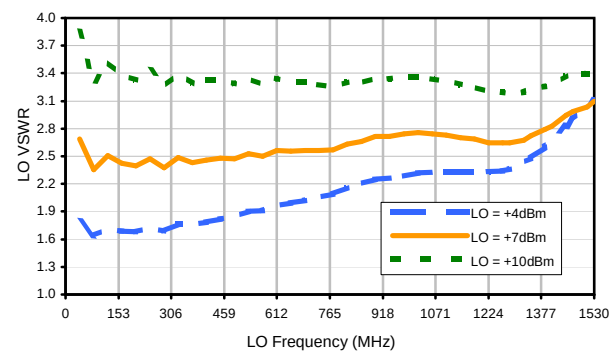

IF VSWR

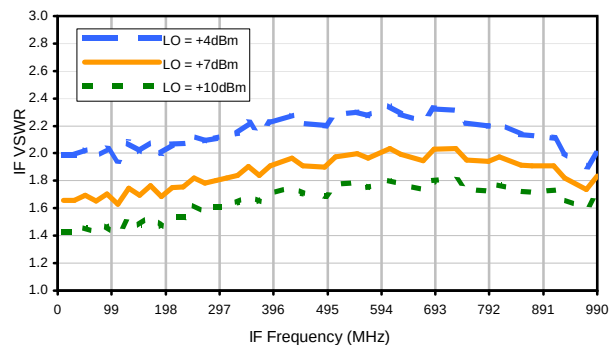

REV. X3

TFM-2P

101011

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	34	23	34	23	45	21	39	41	56
1	-	29	+0	37	11	38	25	46	45	40	46	51
2	90	64	63	65	61	66	66	>70	64	>70	56	>70
3	>90	68	>70	>70	>70	>70	69	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -14.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.07 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	42	33	46	33	57	35	53	58	72
1	-	30	+0	36	11	40	26	50	47	44	57	56
2	73	60	54	61	53	63	61	63	55	65	49	65
3	>90	48	52	53	55	61	45	71	55	64	61	56
4	>90	78	>80	69	74	71	72	73	72	>80	75	79
5	>90	>80	>80	>80	65	73	60	72	60	69	68	>80
6	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -4.00 dBm.
LO IN: 530 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.04 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
TFM-2P
101011
Page 3 of 3

B02

B13

Outline Dimensions

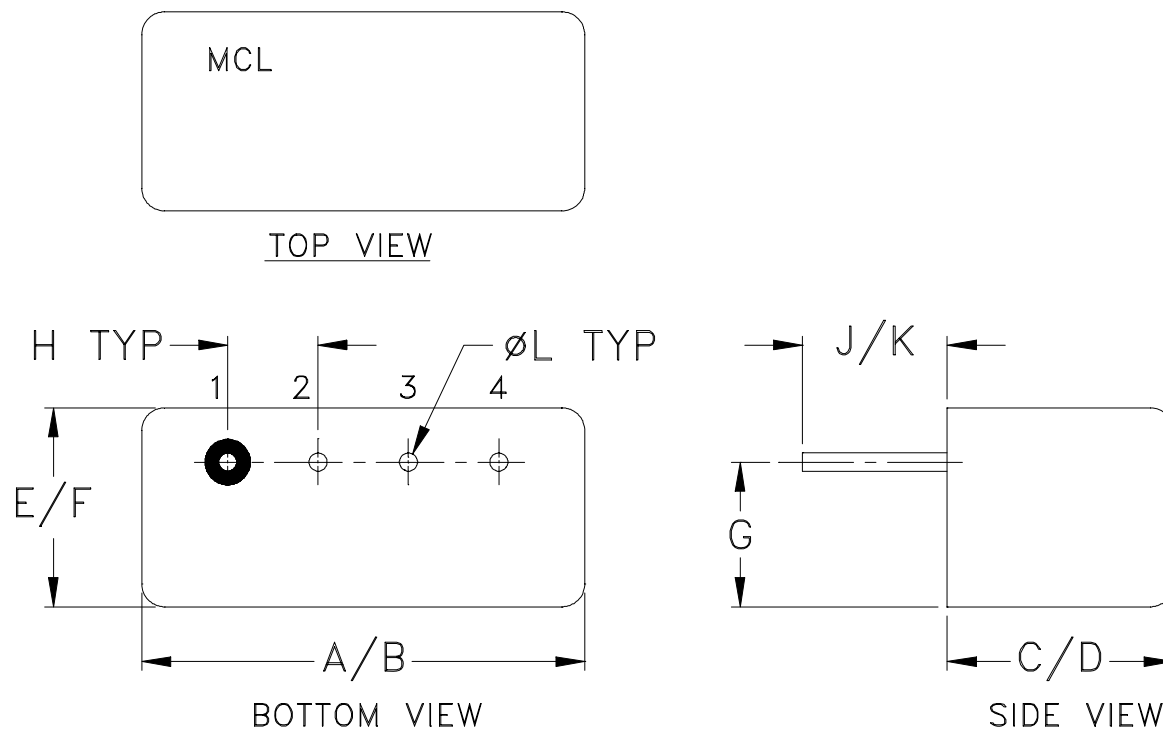

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
B02	.480 (12.19)	.500 (12.70)	.240 (6.10)	.255 (6.48)	.210 (5.33)	.230 (5.84)	.16 (4.06)	.100 (2.54)	.14 (3.56)	.20 (5.08)	.020 (.51)	1.9
B13			.390 (9.91)	.405 (10.29)								2.3

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D