

Frequency Mixer

TFM-3+

Level 7 (LO Power +7 dBm) 0.04 to 400 MHz



Generic photo used for illustration purposes only

CASE STYLE: B02

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Outline Drawing

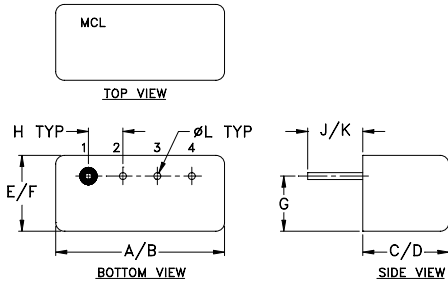

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84
G	H	J	K	L	wt
.16	.100	.14	.20	.020	grams
4.06	2.54	3.56	5.08	0.51	1.9

Features

- low conversion loss, 4.70 dB typ.
- excellent isolation, 50 dB typ. L-R, 45 dB typ. L-I
- rugged welded construction
- hermetically sealed
- phase detection, positive polarity

Applications

- VHF/UHF
- aviation
- federal & defense communications

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Max.	Total Range Max.	L		M		U		L		M		U	
f_L-f_U	DC-400	\bar{X}	σ			Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.04-400*	DC-400	4.70	0.06	7.0	8.0	60	50	50	35	35	25	55	40	45	30	35	25

1 dB COMP.: +1 dBm typ.
 *Below 10°C, f_L is 0.2 MHz
 For phase detection, DC output polarity is positive with in-phase LO and RF signals.
 L = low range [f_L to $10 f_L$]
 M = mid range [$10 f_L$ to $f_U/2$]
 U = upper range [$f_U/2$ to f_U]

Typical Performance Data







Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.04	30.04	6.15	>67.00	>67.00	1.24	2.69
0.05	30.05	5.52	>67.00	>67.00	1.25	2.55
0.07	30.07	5.12	>67.00	>67.00	1.25	2.67
0.10	30.10	4.92	>67.00	>67.00	1.24	2.63
0.50	30.50	4.77	>67.00	>67.00	1.23	2.55
1.00	31.00	4.76	>67.00	63.53	1.23	2.45
5.00	35.00	4.75	>67.00	60.91	1.21	2.48
10.00	40.00	4.75	>67.00	60.97	1.21	2.42
20.00	50.00	4.74	>67.00	58.52	1.19	2.42
60.87	90.87	4.73	50.40	49.37	1.18	2.36
100.00	70.00	4.63	44.80	44.05	1.16	2.38
162.61	132.61	4.79	39.22	39.87	1.15	2.46
200.00	170.00	4.95	37.18	37.86	1.13	2.40
230.44	200.44	4.89	35.78	37.67	1.13	2.42
281.31	251.31	5.05	33.68	35.71	1.13	2.41
315.23	285.23	5.25	34.22	33.98	1.14	2.56
349.14	319.14	5.32	35.64	34.07	1.14	2.63
366.10	336.10	5.37	35.56	34.58	1.14	2.68
383.05	353.05	5.44	35.25	34.26	1.15	2.69
400.00	370.00	5.56	34.72	32.46	1.15	2.76

Electrical Schematic

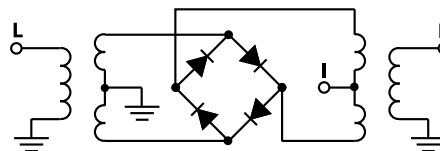

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

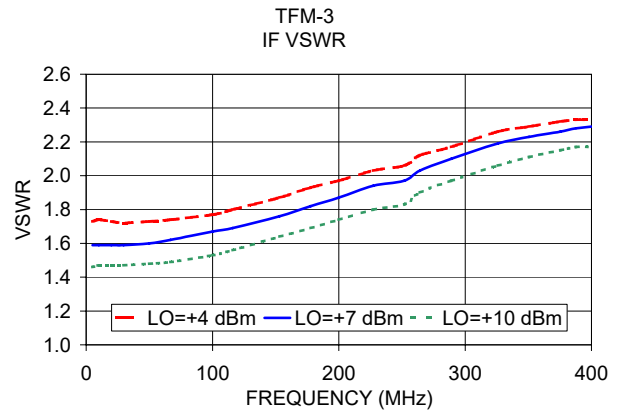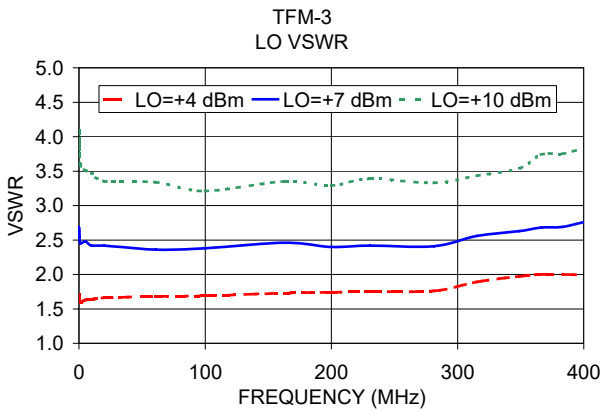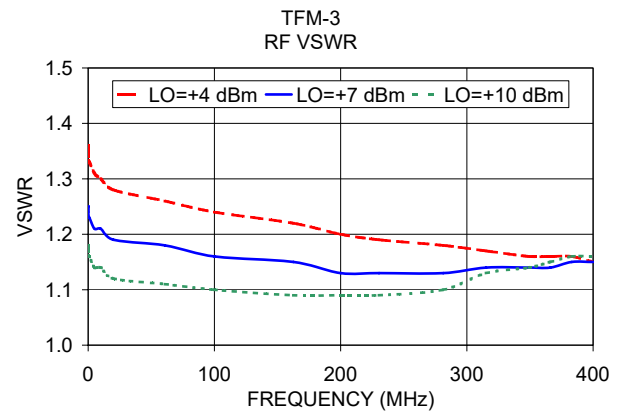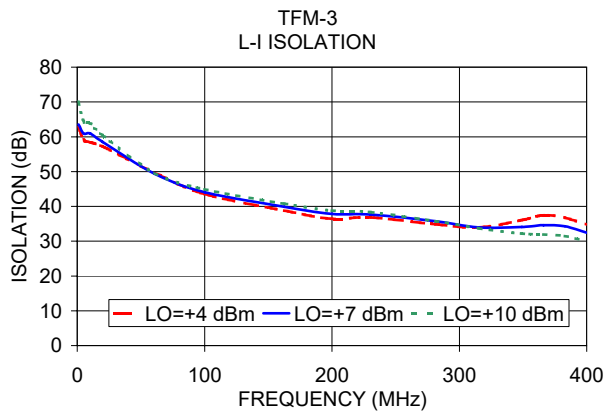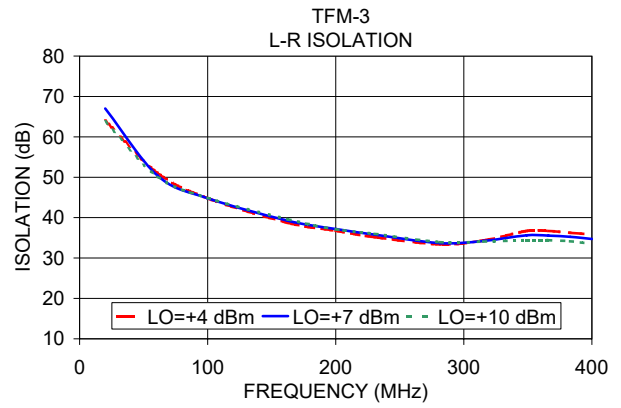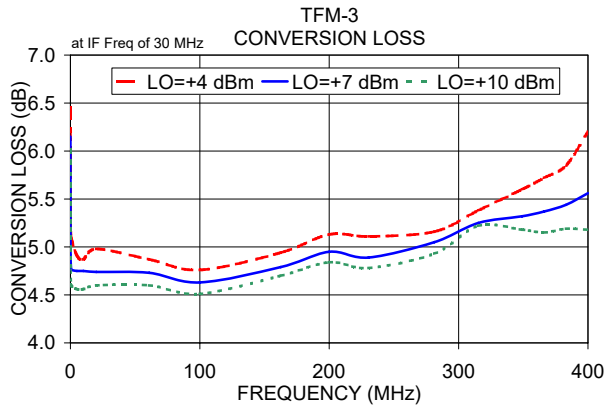

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

TFM-3+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
0.04	30.04	6.45	6.15	6.01	10.1	40.1	18.34	18.12	19.29	10.1	40.1	1.41	1.12	0.86
0.05	30.05	5.82	5.52	5.36	26.5	56.5	15.46	16.47	17.00	26.5	56.5	1.37	1.07	0.83
0.07	30.07	5.44	5.12	4.99	42.9	72.9	15.83	16.32	18.84	42.9	72.9	1.42	1.09	0.85
0.1	30.1	5.30	4.92	4.76	59.3	89.3	14.90	17.08	26.69	59.3	89.3	1.37	1.06	0.81
0.5	30.5	5.10	4.77	4.60	75.7	105.7	15.53	20.21	21.09	75.7	105.7	1.29	1.00	0.76
1.0	31.0	5.07	4.76	4.59	92.2	122.2	15.69	21.92	19.52	92.2	122.2	1.29	0.97	0.75
5.0	35.0	4.91	4.75	4.56	108.6	138.6	17.27	19.72	15.31	108.6	138.6	1.32	1.03	0.81
10.0	40.0	4.87	4.75	4.56	125.0	155.0	15.96	19.66	15.62	125.0	155.0	1.25	0.96	0.75
26.5	56.5	4.95	4.75	4.64	141.4	171.4	16.57	18.74	15.23	141.4	171.4	1.19	0.88	0.68
59.3	89.3	4.90	4.72	4.61	157.8	187.8	14.48	13.78	14.60	157.8	187.8	1.16	0.89	0.67
75.7	105.7	4.89	4.71	4.61	174.2	204.2	10.86	9.57	9.61	174.2	204.2	1.13	0.86	0.68
92.2	122.2	4.93	4.76	4.66	190.6	220.6	13.18	11.49	11.69	190.6	220.6	1.12	0.85	0.67
108.6	138.6	4.96	4.78	4.68	207.0	237.0	21.67	16.79	15.17	207.0	237.0	1.12	0.87	0.67
125.0	155.0	4.98	4.82	4.72	223.4	253.4	18.96	26.39	21.19	223.4	253.4	1.06	0.85	0.65
157.8	187.8	5.02	4.86	4.77	239.8	269.8	12.73	11.76	13.59	239.8	269.8	1.07	0.85	0.67
174.2	204.2	5.01	4.85	4.77	256.3	286.3	10.71	10.03	9.84	256.3	286.3	1.17	0.91	0.71
190.6	220.6	5.09	4.92	4.82	272.7	302.7	10.27	9.73	9.89	272.7	302.7	1.29	0.99	0.78
207.0	237.0	5.21	4.99	4.85	289.1	319.1	9.58	8.94	9.57	289.1	319.1	1.46	1.10	0.83
239.8	269.8	5.37	5.19	5.03	305.5	335.5	9.68	9.46	11.23	305.5	335.5	1.62	1.16	0.85
256.3	286.3	5.36	5.21	5.10	321.9	351.9	9.85	10.88	13.21	321.9	351.9	1.74	1.19	0.87
272.7	302.7	5.36	5.22	5.14	338.3	368.3	9.46	12.39	14.57	338.3	368.3	1.90	1.28	0.94
289.1	319.1	5.42	5.27	5.21	354.7	384.7	7.04	11.87	16.12	354.7	384.7	2.04	1.45	1.07
305.5	335.5	5.51	5.34	5.26	371.1	401.1	3.90	9.26	14.09	371.1	401.1	2.11	1.65	1.23
338.3	368.3	5.72	5.50	5.41	387.5	417.5	1.59	4.94	9.88	387.5	417.5	2.18	1.80	1.42
354.7	384.7	5.90	5.60	5.44	403.9	433.9	0.63	2.54	6.03	403.9	433.9	2.18	1.82	1.55
371.1	401.1	6.15	5.74	5.47	420.4	450.4	0.62	1.91	4.57	420.4	450.4	2.04	1.75	1.55
387.5	417.5	6.37	5.97	5.58	436.8	466.8	0.90	1.96	4.13	436.8	466.8	1.97	1.73	1.54
403.9	433.9	6.60	6.23	5.76	453.2	483.2	1.51	2.36	4.19	453.2	483.2	1.80	1.58	1.41
436.8	466.8	6.96	6.54	6.09	469.6	499.6	3.21	3.85	5.69	469.6	499.6	1.56	1.36	1.18
453.2	483.2	7.22	6.80	6.38	486.0	516.0	4.63	5.15	7.03	486.0	516.0	1.50	1.29	1.06
469.6	499.6	7.55	7.13	6.75	502.4	532.4	6.23	6.75	9.10	502.4	532.4	1.52	1.29	1.02
486.0	516.0	7.70	7.28	6.97	518.8	548.8	8.20	9.20	13.44	518.8	548.8	1.49	1.19	0.93
502.4	532.4	7.82	7.39	7.11	535.2	565.2	8.50	10.98	24.22	535.2	565.2	1.53	1.19	1.00
535.2	565.2	7.89	7.55	7.27	551.6	581.6	8.72	11.06	13.65	551.6	581.6	1.50	1.15	1.01
551.6	581.6	8.05	7.74	7.43	568.0	598.0	8.40	10.17	12.17	568.0	598.0	1.45	1.08	0.91
568.0	598.0	8.22	7.98	7.75	584.5	614.5	7.91	9.30	11.52	584.5	614.5	1.46	1.10	0.88
584.5	614.5	8.39	8.15	8.00	600.9	630.9	7.55	9.15	11.65	600.9	630.9	1.45	1.05	0.80
600.9	630.9	8.67	8.47	8.39	617.3	647.3	7.68	9.57	12.27	617.3	647.3	1.34	0.93	0.68
633.7	663.7	9.39	9.26	9.30	633.7	663.7	8.04	10.37	12.57	633.7	663.7	1.25	0.87	0.67
650.1	680.1	9.84	9.74	9.79	650.1	680.1	8.83	11.29	12.78	650.1	680.1	1.15	0.81	0.67

Frequency Mixer

TFM-3+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=200.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=400.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
190.0	10.1	5.22	10.0	20.1	4.68	390.0	10.1	6.77
185.4	14.7	5.19	19.7	29.8	4.72	380.3	19.8	6.67
180.8	19.3	5.17	29.5	39.6	4.74	370.5	29.6	6.60
176.2	23.9	5.14	39.2	49.3	4.73	360.8	39.3	6.52
171.5	28.6	5.12	49.0	59.1	4.76	351.0	49.1	6.46
166.9	33.2	5.09	58.7	68.8	4.79	341.3	58.8	6.41
162.3	37.8	5.07	68.5	78.6	4.80	331.5	68.6	6.36
157.7	42.4	5.05	78.2	88.3	4.81	321.8	78.3	6.33
153.1	47.0	5.02	87.9	98.0	4.84	312.1	88.0	6.34
148.5	51.6	5.00	97.7	107.8	4.87	302.3	97.8	6.36
143.8	56.3	4.99	107.4	117.5	4.91	292.6	107.5	6.34
139.2	60.9	4.99	117.2	127.3	4.93	282.8	117.3	6.31
134.6	65.5	4.98	126.9	137.0	4.92	273.1	127.0	6.30
130.0	70.1	4.97	136.7	146.8	4.96	263.3	136.8	6.28
125.4	74.7	4.96	146.4	156.5	5.00	253.6	146.5	6.25
120.8	79.3	4.96	156.2	166.3	5.01	243.8	156.3	6.25
116.2	83.9	4.96	165.9	176.0	5.00	234.1	166.0	6.26
111.5	88.6	4.95	175.6	185.7	5.03	224.4	175.7	6.26
106.9	93.2	4.95	185.4	195.5	5.07	214.6	185.5	6.28
102.3	97.8	4.94	195.1	205.2	5.06	204.9	195.2	6.28
97.7	102.4	4.94	204.9	215.0	5.06	195.1	205.0	6.33
93.1	107.0	4.94	214.6	224.7	5.06	185.4	214.7	6.34
88.5	111.6	4.93	224.4	234.5	5.07	175.6	224.5	6.31
83.8	116.3	4.93	234.1	244.2	5.14	165.9	234.2	6.28
79.2	120.9	4.94	243.8	253.9	5.24	156.2	243.9	6.23
74.6	125.5	4.94	253.6	263.7	5.35	146.4	253.7	6.17
70.0	130.1	4.96	263.3	273.4	5.46	136.7	263.4	6.11
65.4	134.7	4.95	273.1	283.2	5.52	126.9	273.2	6.08
60.8	139.3	4.94	282.8	292.9	5.50	117.2	282.9	6.05
56.2	143.9	4.94	292.6	302.7	5.50	107.4	292.7	6.07
51.5	148.6	4.92	302.3	312.4	5.47	97.7	302.4	6.05
46.9	153.2	4.92	312.1	322.2	5.37	87.9	312.2	6.01
42.3	157.8	4.91	321.8	331.9	5.34	78.2	321.9	5.96
37.7	162.4	4.90	331.5	341.6	5.29	68.5	331.6	5.90
33.1	167.0	4.90	341.3	351.4	5.26	58.7	341.4	5.83
28.5	171.6	4.88	351.0	361.1	5.27	49.0	351.1	5.75
23.8	176.3	4.88	360.8	370.9	5.27	39.2	360.9	5.70
19.2	180.9	4.88	370.5	380.6	5.28	29.5	370.6	5.69
14.6	185.5	4.89	380.3	390.4	5.30	19.7	380.4	5.71
10.0	190.1	4.89	390.0	400.1	5.33	10.0	390.1	5.74

Frequency Mixer

TFM-3+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)					@LO (dBm)		
	+4	+7	+10	+4	+7	+10			+4	+7	+10
0.04	64.00	67.00	70.00	64.00	67.00	70.00	10.1	40.1	38.99	37.34	36.05
0.05	64.00	67.00	70.00	64.00	67.00	70.00	26.5	56.5	32.65	32.27	31.88
0.07	64.00	67.00	70.00	64.00	67.00	70.00	42.9	72.9	29.18	29.08	29.02
0.1	64.00	67.00	70.00	64.00	67.00	70.00	59.3	89.3	26.91	26.99	26.92
0.5	64.00	67.00	70.00	64.00	67.00	70.00	75.7	105.7	25.62	25.69	25.71
1.0	64.00	67.00	70.00	62.64	63.53	70.00	92.2	122.2	24.42	24.73	24.91
5.0	64.00	67.00	70.00	59.16	60.91	64.41	108.6	138.6	23.61	23.78	23.94
10.0	64.00	67.00	70.00	58.46	60.97	63.86	125.0	155.0	23.72	23.91	24.00
26.5	63.64	63.74	64.07	68.51	67.00	63.99	141.4	171.4	23.61	24.14	24.42
59.3	56.40	57.07	57.61	59.54	58.60	57.92	157.8	187.8	23.25	24.08	24.81
75.7	54.38	55.00	55.47	56.44	56.36	55.91	174.2	204.2	23.05	23.69	24.29
92.2	52.53	53.30	53.92	54.83	55.18	54.58	190.6	220.6	23.19	23.62	24.05
108.6	51.42	52.05	52.43	53.51	53.60	52.81	207.0	237.0	23.97	24.32	24.74
125.0	49.40	50.12	50.74	52.77	53.18	52.24	223.4	253.4	25.47	25.88	26.25
157.8	49.08	49.80	50.11	50.76	49.69	48.46	239.8	269.8	26.73	27.52	28.43
174.2	47.15	48.30	48.92	53.73	50.60	47.63	256.3	286.3	25.99	26.76	27.68
190.6	44.41	45.24	46.10	53.19	52.00	48.69	272.7	302.7	23.49	24.02	24.51
207.0	43.23	43.82	44.60	52.99	49.95	47.58	289.1	319.1	20.80	21.11	21.40
239.8	44.72	44.69	44.95	44.98	43.33	42.13	305.5	335.5	19.00	19.18	19.25
256.3	46.05	45.83	45.40	41.80	40.57	39.69	321.9	351.9	17.53	17.59	17.61
272.7	47.71	47.16	46.28	40.85	39.28	38.38	338.3	368.3	16.54	16.48	16.47
289.1	47.80	47.00	46.10	39.90	38.12	37.25	354.7	384.7	15.82	15.76	15.78
305.5	47.46	46.56	45.14	41.22	37.98	36.35	371.1	401.1	15.40	15.28	15.33
338.3	42.22	42.40	41.90	44.60	36.27	32.98	387.5	417.5	15.02	14.91	14.98
354.7	40.09	40.42	40.36	43.95	35.36	32.12	403.9	433.9	14.87	14.73	14.80
371.1	38.65	39.37	39.91	42.50	35.06	31.48	420.4	450.4	14.83	14.75	14.76
387.5	37.78	38.46	39.13	39.02	33.74	30.49	436.8	466.8	14.68	14.60	14.67
403.9	37.12	37.45	37.86	37.78	33.32	29.88	453.2	483.2	14.55	14.45	14.48
436.8	37.33	37.91	38.27	34.50	32.98	29.63	469.6	499.6	14.28	14.16	14.21
453.2	37.59	38.29	38.74	32.59	31.50	29.11	486.0	516.0	13.70	13.60	13.71
469.6	37.67	38.56	39.14	31.17	30.32	28.26	502.4	532.4	13.15	13.12	13.21
486.0	37.37	37.94	38.03	29.85	29.15	27.16	518.8	548.8	12.51	12.54	12.63
502.4	36.40	36.96	36.68	28.92	28.54	26.31	535.2	565.2	12.03	12.05	12.02
535.2	35.20	35.15	33.64	26.51	25.98	23.22	551.6	581.6	11.51	11.47	11.36
551.6	34.46	33.90	31.90	25.22	24.26	21.47	568.0	598.0	10.92	10.80	10.63
568.0	33.13	32.03	29.87	24.06	22.70	19.99	584.5	614.5	10.41	10.27	10.03
584.5	31.32	29.94	27.94	22.91	21.36	18.92	600.9	630.9	9.83	9.63	9.32
600.9	29.98	28.61	26.77	21.70	20.24	18.10	617.3	647.3	9.14	8.88	8.53
633.7	26.75	25.67	24.23	19.21	18.24	16.61	633.7	663.7	8.45	8.16	7.82
650.1	25.12	24.22	22.91	17.99	17.19	15.72	650.1	680.1	7.79	7.47	7.19

Frequency Mixer

TFM-3+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
5.0	35.0	1.36	1.24	1.18
10.0	40.0	1.36	1.25	1.18
26.5	56.5	1.36	1.25	1.17
42.9	72.9	1.33	1.22	1.15
59.3	89.3	1.32	1.21	1.14
75.7	105.7	1.27	1.17	1.11
92.2	122.2	1.25	1.15	1.09
108.6	138.6	1.24	1.15	1.09
125.0	155.0	1.22	1.13	1.08
141.4	171.4	1.18	1.09	1.05
157.8	187.8	1.17	1.07	1.04
174.2	204.2	1.14	1.06	1.03
190.6	220.6	1.11	1.04	1.02
207.0	237.0	1.10	1.04	1.07
223.4	253.4	1.10	1.06	1.12
239.8	269.8	1.06	1.07	1.13
256.3	286.3	1.05	1.10	1.16
272.7	302.7	1.09	1.17	1.23
289.1	319.1	1.14	1.23	1.30
305.5	335.5	1.16	1.26	1.33
321.9	351.9	1.17	1.26	1.32
338.3	368.3	1.15	1.24	1.29
354.7	384.7	1.09	1.18	1.23
371.1	401.1	1.01	1.10	1.16
387.5	417.5	1.06	1.03	1.11
403.9	433.9	1.15	1.08	1.08
420.4	450.4	1.26	1.20	1.16
436.8	466.8	1.34	1.28	1.24
453.2	483.2	1.46	1.40	1.36
469.6	499.6	1.64	1.58	1.55
486.0	516.0	1.74	1.70	1.69
502.4	532.4	1.88	1.86	1.85
518.8	548.8	2.03	2.02	2.03
535.2	565.2	2.13	2.13	2.13
551.6	581.6	2.28	2.29	2.26
568.0	598.0	2.43	2.42	2.39
584.5	614.5	2.53	2.52	2.48
600.9	630.9	2.65	2.61	2.58
617.3	647.3	2.72	2.68	2.65
633.7	663.7	2.76	2.71	2.68
650.1	680.1	2.80	2.73	2.69

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
5.0	1.71	2.69	4.09
10.0	1.64	2.55	3.82
26.5	1.66	2.44	3.42
42.9	1.62	2.34	3.25
59.3	1.60	2.30	3.18
75.7	1.62	2.34	3.24
92.2	1.67	2.43	3.36
108.6	1.68	2.43	3.35
125.0	1.66	2.36	3.22
141.4	1.63	2.30	3.12
157.8	1.65	2.32	3.14
174.2	1.69	2.39	3.24
190.6	1.74	2.46	3.34
207.0	1.74	2.44	3.29
223.4	1.74	2.38	3.18
239.8	1.74	2.36	3.14
256.3	1.77	2.43	3.23
272.7	1.83	2.52	3.37
289.1	1.87	2.57	3.43
305.5	1.88	2.54	3.36
321.9	1.87	2.48	3.26
338.3	1.89	2.48	3.24
354.7	1.96	2.55	3.33
371.1	2.06	2.67	3.46
387.5	2.15	2.79	3.58
403.9	2.18	2.84	3.61
420.4	2.15	2.82	3.59
436.8	2.14	2.81	3.59
453.2	2.17	2.86	3.67
469.6	2.22	2.95	3.79
486.0	2.27	3.00	3.85
502.4	2.27	2.97	3.79
518.8	2.25	2.91	3.70
535.2	2.25	2.90	3.67
551.6	2.28	2.92	3.68
568.0	2.32	2.96	3.71
584.5	2.34	2.97	3.72
600.9	2.35	2.95	3.67
617.3	2.36	2.93	3.63
633.7	2.39	2.94	3.62
650.1	2.46	2.99	3.65

IF (OUT) (MHz)	IF VSWR @LO=400.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
5.0	1.73	1.59	1.46
10.0	1.74	1.59	1.47
20.0	2.01	1.60	1.39
30.0	2.02	1.61	1.40
40.0	2.02	1.61	1.41
50.0	2.03	1.63	1.43
60.0	2.04	1.64	1.45
70.0	2.05	1.66	1.47
80.0	2.06	1.67	1.48
90.0	2.06	1.68	1.50
100.0	2.07	1.70	1.52
110.0	2.09	1.73	1.55
120.0	2.11	1.75	1.57
130.0	2.10	1.76	1.59
140.0	2.11	1.77	1.61
150.0	2.11	1.79	1.64
160.0	2.13	1.80	1.66
170.0	2.14	1.82	1.68
180.0	2.14	1.84	1.70
190.0	2.15	1.86	1.73
200.0	2.17	1.88	1.75
210.0	2.17	1.89	1.77
220.0	2.16	1.89	1.78
230.0	2.15	1.90	1.79
240.0	2.15	1.90	1.81
250.0	2.16	1.92	1.82
260.0	2.18	1.93	1.83
270.0	2.18	1.94	1.85
280.0	2.19	1.96	1.87
290.0	2.18	1.96	1.88
300.0	2.17	1.95	1.88
310.0	2.15	1.94	1.86
320.0	2.12	1.92	1.85
330.0	2.11	1.91	1.84
340.0	2.11	1.90	1.84
350.0	2.11	1.90	1.84
360.0	2.11	1.90	1.84
370.0	2.11	1.90	1.84
380.0	2.10	1.90	1.84
390.0	2.09	1.89	1.83
400.0	2.26	2.09	2.06

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	30	13	34	17	36	27	38	38	44
1	-	19	+0	25	11	39	23	43	39	40	37	42
2	>100	59	55	56	56	58	49	61	54	77	62	79
3	>100	68	64	66	68	71	66	69	73	72	65	69
4	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
5	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	78	>81	>81	>81	>81	>81
7	>100	>81	>81	>81	>81	>81	>81	66	>81	>81	>81	>81
8	>100	>81	>81	>81	>81	>81	>81	>81	61	>81	>81	>81
9	>100	>81	>81	>81	>81	>81	>81	>81	>81	51	>81	>81
10	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	79	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -14.00 dBm.
 LO IN: 230.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.03 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	39	24	52	28	50	39	52	52	58
1	-	20	+0	26	12	36	24	50	38	48	46	50
2	97	55	51	53	51	54	46	56	50	70	55	62
3	>100	52	39	45	41	45	37	54	49	54	54	51
4	>100	67	68	65	64	64	65	64	56	72	65	80
5	>100	71	60	67	55	74	52	84	53	63	63	67
6	>100	89	82	82	81	81	75	80	78	79	78	85
7	>100	>91	89	84	82	76	70	74	65	72	62	89
8	>100	>91	>91	>91	>91	87	>91	>91	75	87	87	91
9	>100	>91	89	89	88	>91	78	86	82	67	83	87
10	>100	>91	>91	>91	>91	>91	>91	>91	>91	>91	>91	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -4.00 dBm.
 LO IN: 230.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.07 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 TFM-3+
 100818

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

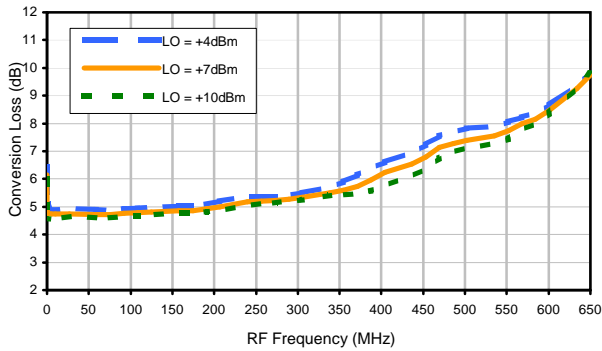


Conversion Loss vs. IF @ RF=200.1MHz

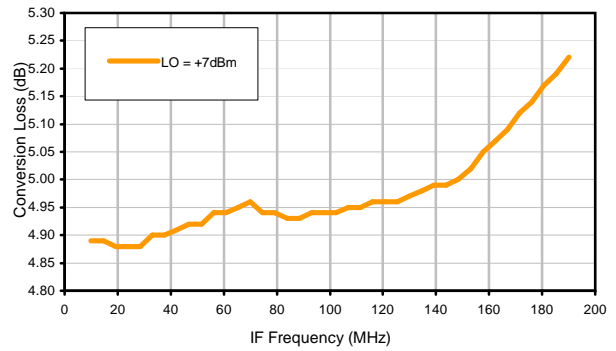


Conversion Loss vs. IF @ RF=10.1MHz

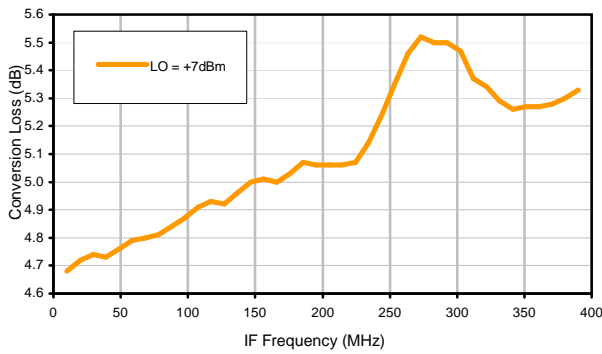


Conversion Loss vs. IF @ RF=400.1MHz

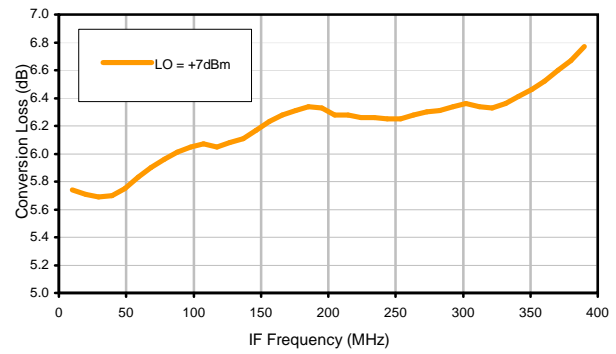

IP3 Input

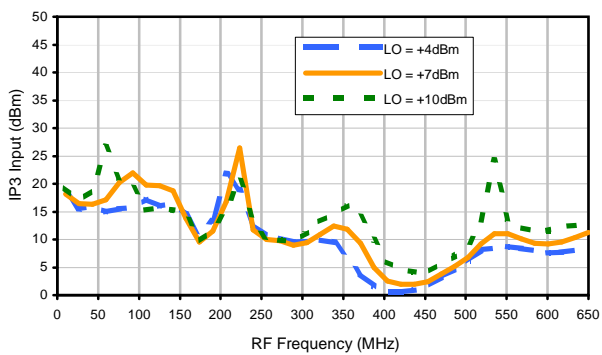


Compression @ RF IN=+1dBm

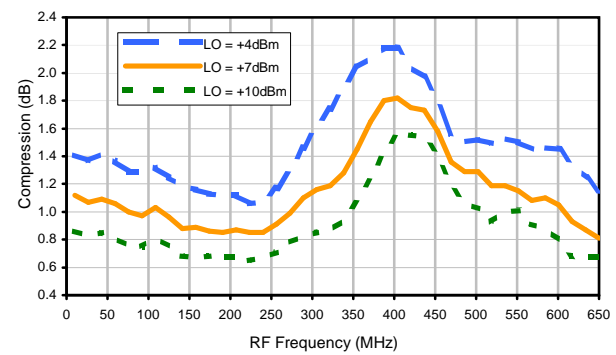


Typical Performance Curves


LO-RF Isolation

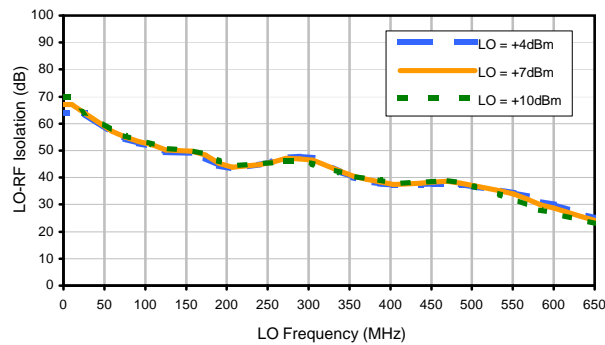


LO-IF Isolation

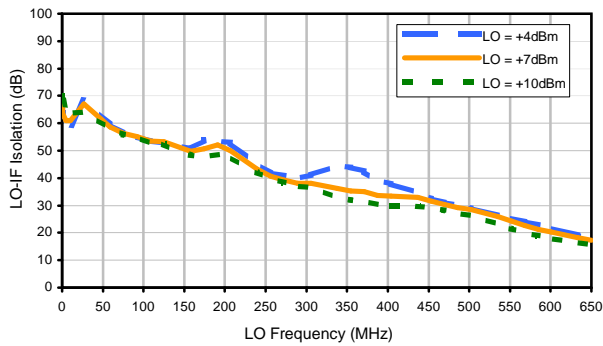


RF-IF Isolation

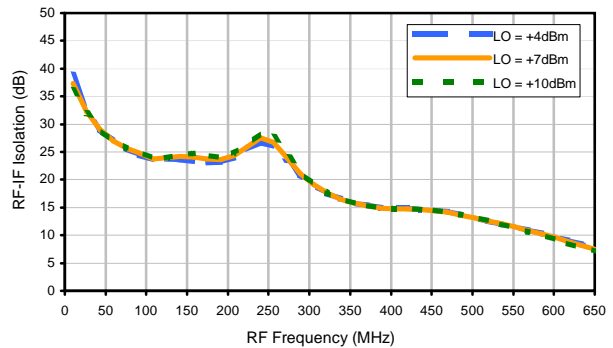


RF VSWR

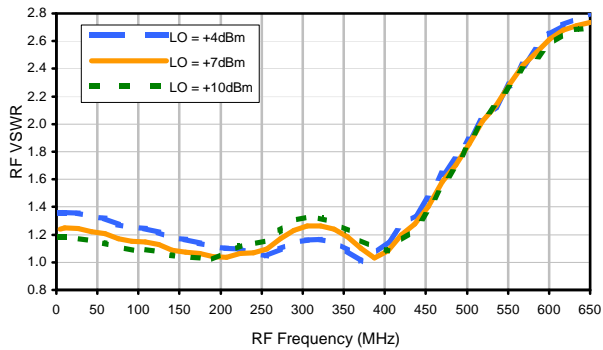

LO VSWR

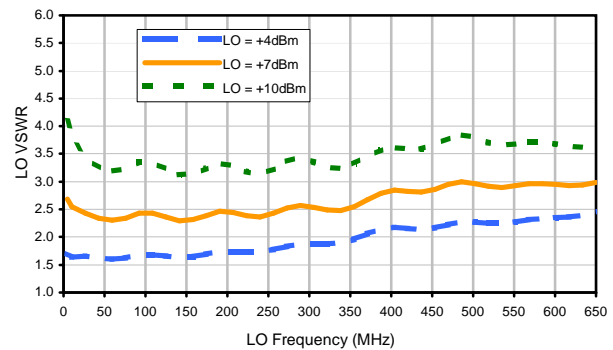

IF VSWR

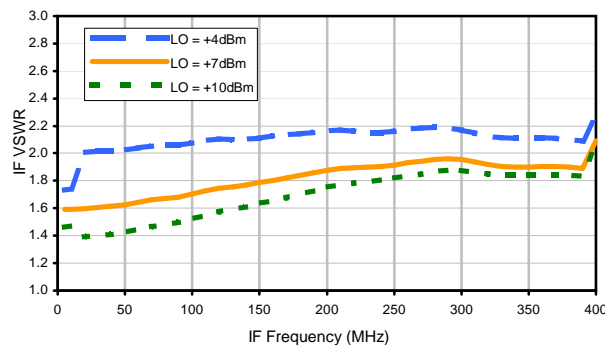

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	30	13	34	17	36	27	38	38	44
1	-	19	+0	25	11	39	23	43	39	40	37	42
2	>100	59	55	56	56	58	49	61	54	77	62	79
3	>100	68	64	66	68	71	66	69	73	72	65	69
4	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
5	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	78	>81	>81	>81	>81	>81
7	>100	>81	>81	>81	>81	>81	>81	66	>81	>81	>81	>81
8	>100	>81	>81	>81	>81	>81	>81	>81	61	>81	>81	>81
9	>100	>81	>81	>81	>81	>81	>81	>81	>81	51	>81	>81
10	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	79	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -14.00 dBm.
 LO IN: 230.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.03 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	39	24	52	28	50	39	52	52	58
1	-	20	+0	26	12	36	24	50	38	48	46	50
2	97	55	51	53	51	54	46	56	50	70	55	62
3	>100	52	39	45	41	45	37	54	49	54	54	51
4	>100	67	68	65	64	64	65	64	56	72	65	80
5	>100	71	60	67	55	74	52	84	53	63	63	67
6	>100	89	82	82	81	81	75	80	78	79	78	85
7	>100	>91	89	84	82	76	70	74	65	72	62	89
8	>100	>91	>91	>91	>91	87	>91	>91	75	87	87	91
9	>100	>91	89	89	88	>91	78	86	82	67	83	87
10	>100	>91	>91	>91	>91	>91	>91	>91	>91	>91	>91	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -4.00 dBm.
 LO IN: 230.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.07 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 TFM-3+
 100818

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Case Style

B

B02
B13

Outline Dimensions

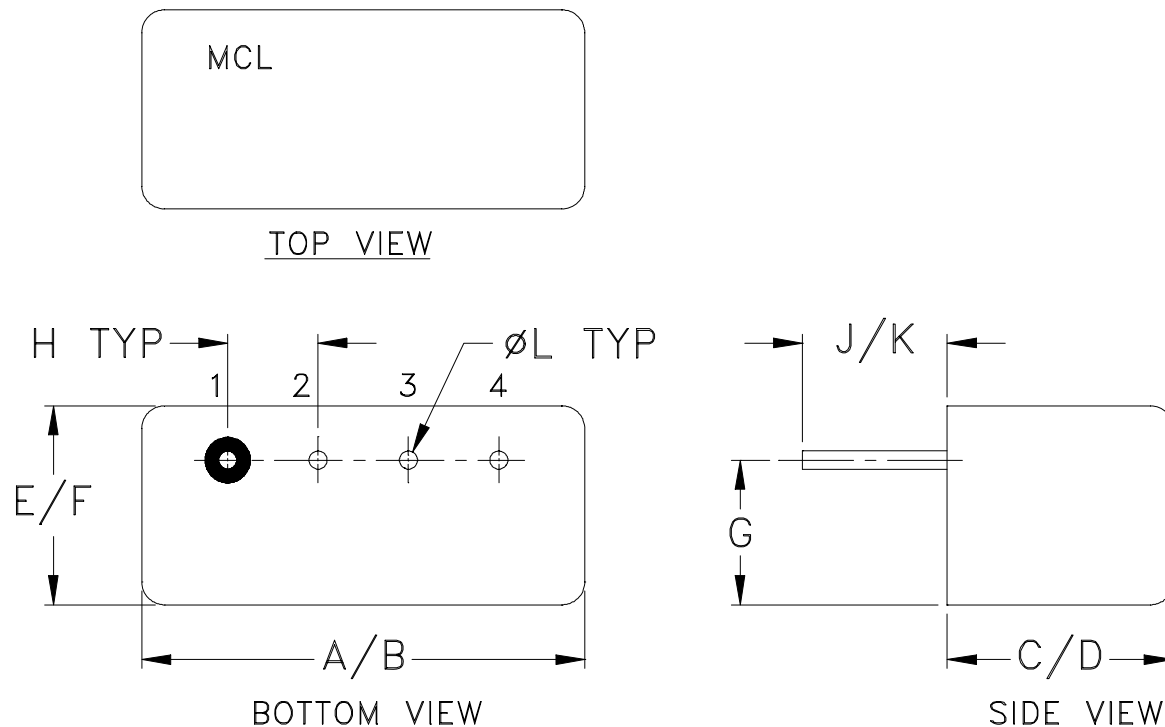

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
B02	.480	.500	.240 (6.10)	.255 (6.48)	.210	.230 (5.84)	.16 (4.06)	.100 (2.54)	.14 (3.56)	.20 (5.08)	.020 (.51)	1.9
B13	(12.19)	(12.70)	.390 (9.91)	.405 (10.29)	(5.33)							2.3

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D