



SURFACE MOUNT

# RF Transformer

## TRS1-182-75-3+

Mini-Circuits

75Ω 10 to 1800 MHz 1:1 Ratio

### FEATURES

- Suitable for Tin/Lead and RoHS Solder Systems
- Wideband, 10 to 1800 MHz
- Balanced Transmission Line
- Good Return Loss, 20 dB Typ. at 1 dB Band
- Excellent Amplitude Unbalance, 0.3 dB Typ.
- Aqueous Washable
- Excellent Intermod Suppression



Generic photo used for illustration purposes only

CASE STYLE: TT1618-2

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		
Frequency Range		10		1800	MHz
Insertion Loss <sup>1</sup>	50-1200		0.6	1.0	dB
	10-1800		0.9	2.0	
Amplitude Unbalance	50-1000		0.3	0.7	dB
	1000-1200		0.5	1.1	
	10-1800		0.7	1.5	
Phase Unbalance	50-1000		2	4	Degree
	1000-1200		3	6	
	10-1800		7.5	15	
Primary Return Loss	50-500	16	22		dB
	500-1000	13	20		
	1000-1200	12	20		
	10-1800	8	12.5		


1. Insertion Loss is referenced to mid-band loss, 0.25 dB typ.

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +100°C
Storage Temperature	-55°C to +125°C
RF Power	1 W
DC Current	30 mA


Permanent damage may occur if any of these limits are exceeded.

### CONFIG. K

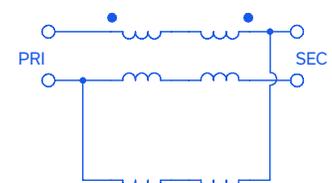

REV. B  
ECO-028366  
TRS1-182-75-3+  
MCL NY  
260128





**SURFACE MOUNT**

# RF Transformer

## TRS1-182-75-3+



75Ω 10 to 1800 MHz 1:1 Ratio


### PIN CONNECTIONS

PRIMARY DOT	1
PRIMARY	2
SECONDARY DOT	3
SECONDARY	4

**PRODUCT MARKING:** N/A

**DEMO BOARD MCL P/N:** TB-875+

### OUTLINE DRAWING

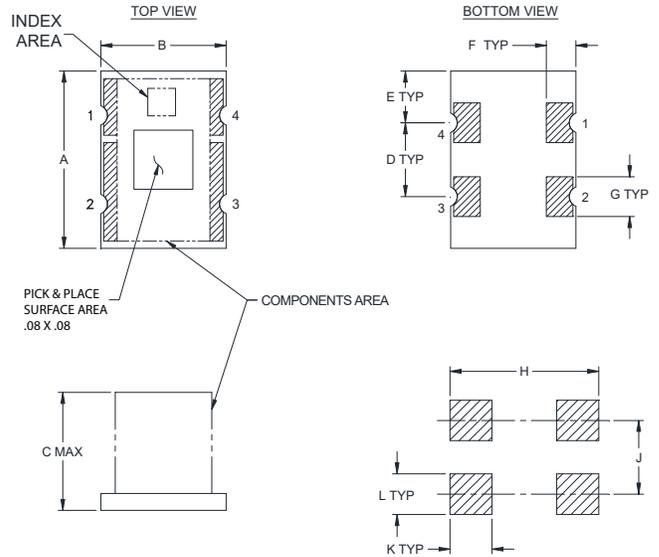

SUGGESTED FOOTPRINT FOR PC LAYOUT  
TOLERANCE TO BE WITHIN ±.002

### OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F
.240	.170	.160	.100	.070	.040
6.10	4.32	4.06	2.54	1.78	1.02
G	H	J	K	L	wt.
.054	.202	.100	.057	.055	grams
1.37	5.13	2.54	1.45	1.40	2.8

**TAPE & REEL INFORMATION:** F77





SURFACE MOUNT

# RF Transformer

## TRS1-182-75-3+


Mini-Circuits

75Ω 10 to 1800 MHz 1:1 Ratio


### TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
10	0.40	12.17	0.62	8.22
50	0.33	26.38	0.21	1.41
100	0.34	31.22	0.20	0.64
200	0.34	35.82	0.16	0.12
400	0.37	33.92	0.07	0.19
500	0.39	30.13	0.00	0.14
600	0.41	27.88	0.08	0.12
1000	0.50	23.13	0.44	0.91
1200	0.55	22.28	0.66	1.87
1800	0.68	22.28	1.14	7.84


INSERTION LOSS

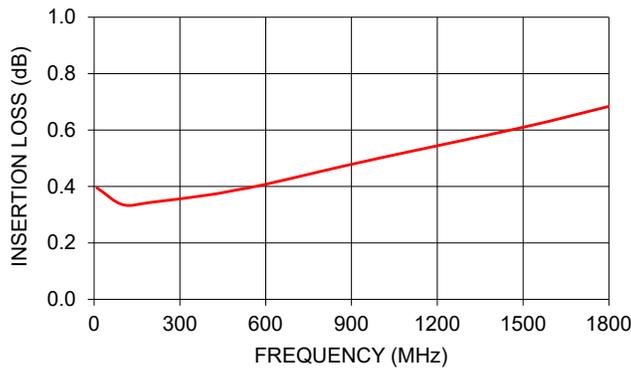


INPUT RETURN LOSS

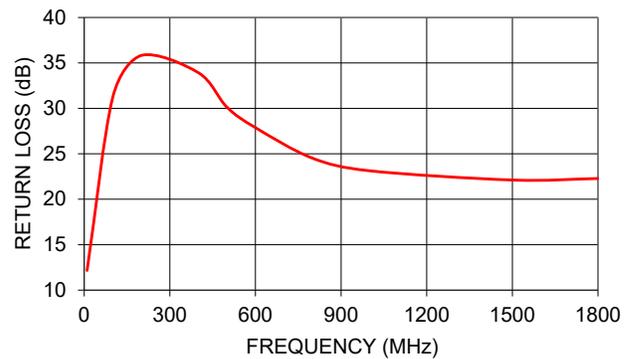

AMPLITUDE UNBALANCE

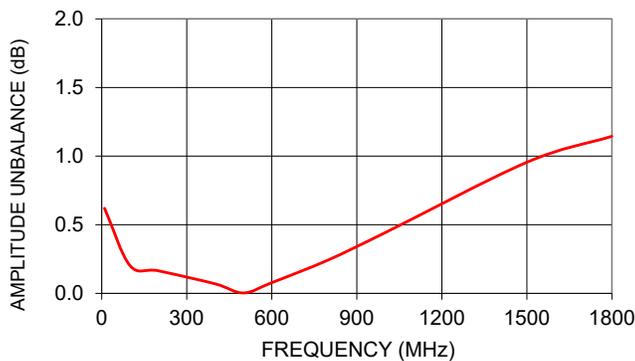

PHASE UNBALANCE

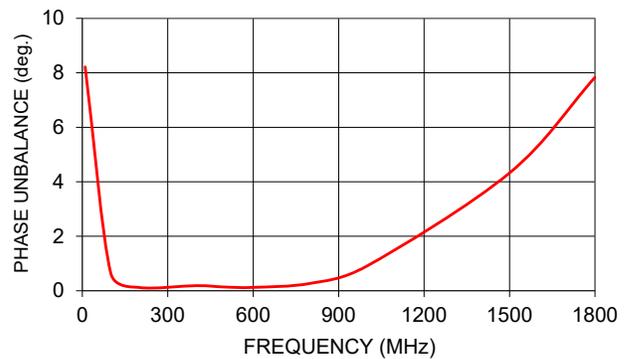

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)







# RF Transformer

# TRS1-182-75-3+

## Typical Performance Data


FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
7	0.69	9.31	1.03	10.09
10	0.40	12.17	0.62	8.22
20	0.20	18.88	0.22	4.20
30	0.27	22.90	0.20	2.50
50	0.33	26.38	0.21	1.41
70	0.33	28.58	0.21	0.99
100	0.34	31.22	0.20	0.64
150	0.35	34.88	0.17	0.39
200	0.34	35.82	0.16	0.12
300	0.35	35.53	0.12	0.07
400	0.37	33.92	0.07	0.19
450	0.38	32.08	0.04	0.17
500	0.39	30.13	0.00	0.14
550	0.40	28.64	0.04	0.12
600	0.41	27.88	0.08	0.12
700	0.43	26.41	0.15	0.03
800	0.46	24.52	0.24	0.27
900	0.48	23.74	0.34	0.58
950	0.49	23.50	0.39	0.71
1000	0.50	23.13	0.44	0.91
1050	0.52	22.56	0.49	1.14
1100	0.53	22.22	0.55	1.36
1150	0.54	22.21	0.60	1.59
1200	0.55	22.28	0.66	1.87
1220	0.55	22.30	0.68	1.99
1250	0.56	22.27	0.71	2.22
1300	0.57	22.03	0.76	2.56
1400	0.59	21.75	0.86	3.34
1500	0.61	22.12	0.96	4.32
1600	0.63	21.85	1.04	5.39
1700	0.66	21.90	1.11	6.57
1750	0.67	22.24	1.13	7.22
1800	0.68	22.28	1.14	7.84
1850	0.69	22.11	1.15	8.59
1900	0.71	21.88	1.15	9.24
1950	0.73	21.86	1.16	9.90
2000	0.75	21.96	1.15	10.61

## Typical Performance Data

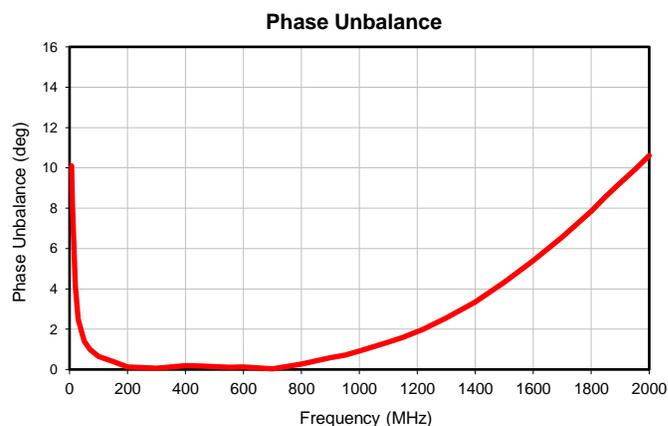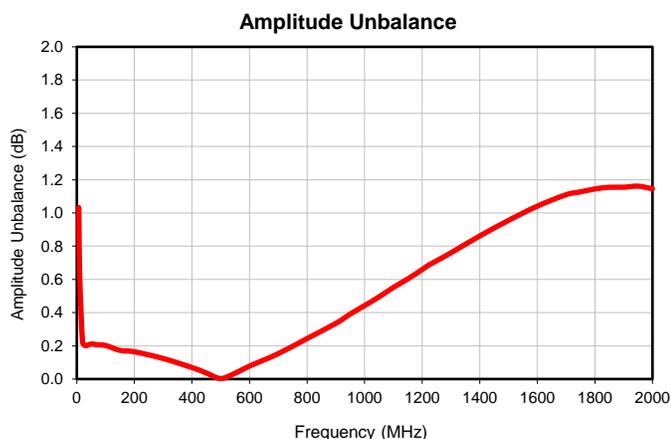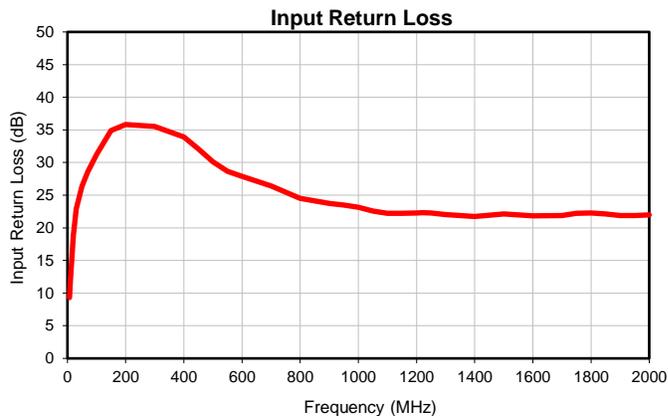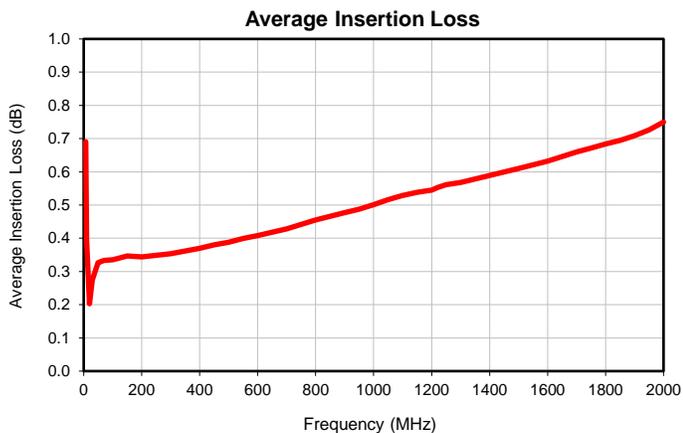

## Outline Dimensions

TT1618-2

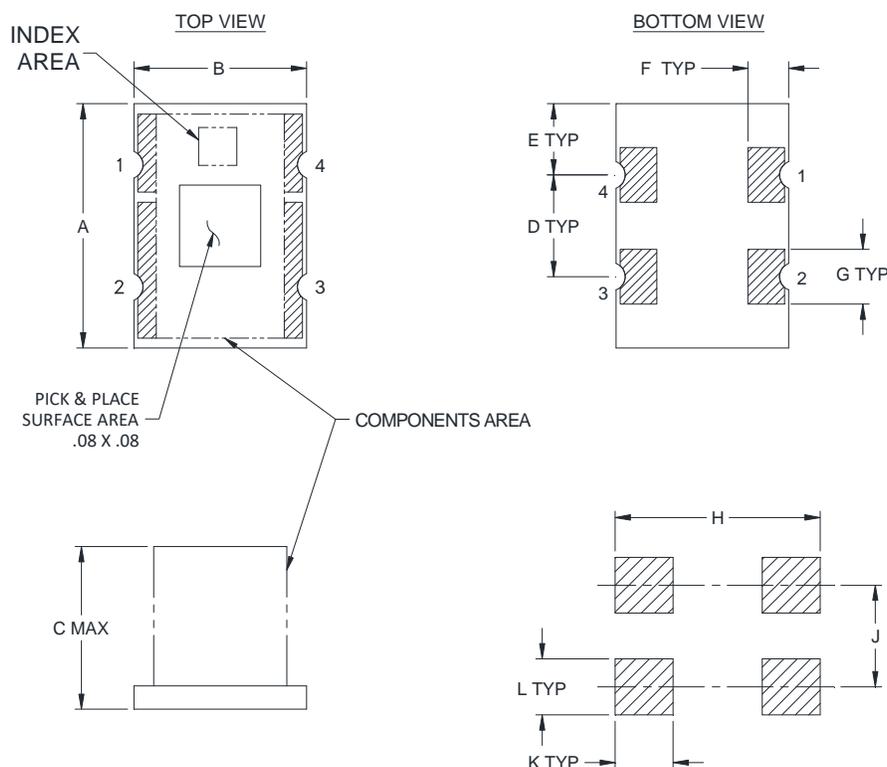

SUGGESTED FOOTPRINT FOR PC LAYOUT  
TOLERANCE TO BE WITHIN  $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT GRAMS
TT1618-2	.240 (6.10)	.170 (4.32)	.160 (4.06)	.100 (2.54)	.070 (1.78)	.040 (1.02)	.054 (1.37)	.202 (5.13)	.100 (2.54)	.057 (1.45)	.055 (1.40)	2.80

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

1. Open style, Base material: Printed wiring laminate.
2. Termination finish: 3-5  $\mu$  inch (.08-.13 microns) Gold over 120-240  $\mu$  inch (3.05-6.10 microns) Nickel plate.  
All models, (+) suffix.
3. Orientation Dot on Unit corresponds to Pin #1.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F77

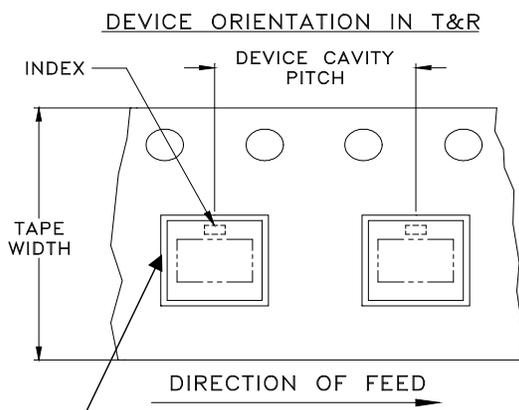

Note: The shape of the pocket may differ

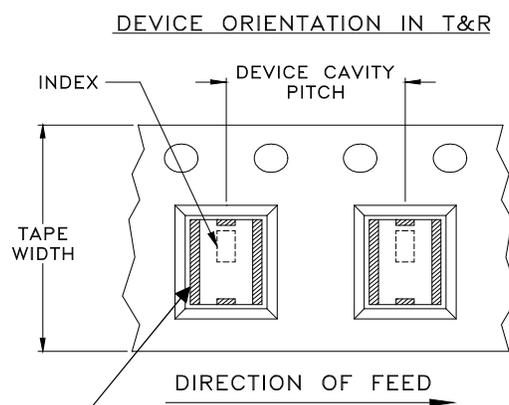

Note: The location and shape of the metallization may differ

### Applicable Case Styles

GU1604, GU1804, GU2644,  
TT1618-2

### Applicable Case Styles

MZ4532C, NM1812C,  
NM1812C-1, NM1812C-2,  
NM1812C-3, NM1812C-5,  
NM1812C-6, NM3237

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standards (see note)	20
				50
				100
				200
				500
		1000		
		13	Standard	2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215