SURFACE MOUNT

RF Transformer

TTC1-682W+

50Ω 800 to 6800 MHz 1:1 Ratio

THE BIG DEAL

- Wideband, 800 to 6800 MHz
- Small size, 1.4 x 2.5mm
- Good amplitude unbalance, ±0.8 dB typ.
- Low phase unbalance, 6˚ typ.
- Excellent common mode rejection, 21 dB typ.



Generic photo used for illustration purposes only

CASE STYLE: GU2939

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Sub- 6GHz 5G Infrastructure
- Broadband Telecom & SATCOM
- Test & Measurement Equipment
- WiFi 6
- Communications, Radar, EW, and ECM Defense Systems

PRODUCT OVERVIEW

Mini-Circuits' TTC1-682W+ is a tiny surface-mount transmission line core and wire transformer covering a very wide frequency range from 800 to 6800 MHz. The transformer provides low insertion loss. It achieves low phase and amplitude unbalance and excellent common mode rejection performance. Featuring core and wire construction on 5 terminal carrier, the unit measures 0.10 x 0.06 x 0.07", accommodating dense circuit board layouts.

KEY FEATURES

Feature	Advantages
Wideband, 800 to 6800 MHz	Very wide frequency range covers bandwidth requirements for many broadband applications.
Low insertion loss, 2.5 dB typ.	TTC1-682W+ provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Excellent common mode rejection, 21 dB typ.	Provides good IP2, IP3.
Small footprint (0.10 x 0.06 x 0.07")	Accommodates tight space requirements for dense PCB layouts.

RF Transformer

TTC1-682W+

50Ω 800 to 6800 MHz 1:1 Ratio

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio			1		
Frequency Range		800		6800	MHz
Average Insertion Loss (above 0.60 dB midband loss)	800-4500	—	1.2	1.9	dB
	4500-6800	—	2.8	3.9	
Phase Unbalance (±)	800-6800	—	6	12	Degree
Amplitude Unbalance	1000-4500	—	0.8	1.5	dB
	800-6800	—	1.2	1.9	
Common Mode Rejection	800-6800	17	21	—	dB

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5W

Permanent damage may occur if any of these limits are exceeded.

FUNCTIONAL DIAGRAM CONFIGURATION G



SURFACE MOUNT

RF Transformer


TTC1-682W+

50Ω 800 to 6800 MHz 1:1 Ratio

PIN CONNECTIONS


PRIMARY DOT	1
PRIMARY	4
SECONDARY DOT	2
SECONDARY	3
NOT USED	5

OUTLINE DRAWING

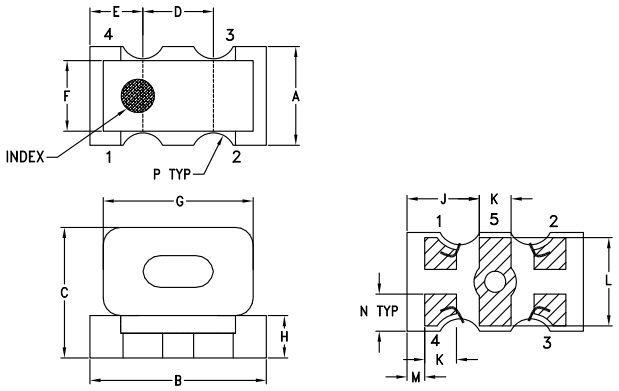

PRODUCT MARKING: N/A

EVALUATION BOARD MCL P/N: TB-TTC1-682W+
SUGGESTED PCB LAYOUT (PL-657)

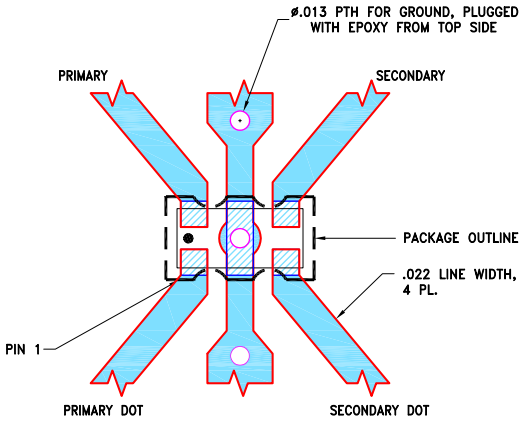


NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

PCB Land Pattern



Suggested Layout
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches / mm)

A	B	C	D	E	F	G	H	J	K
.056	.100	.074	.040	.030	.040	.085	.024	.041	.018
1.42	2.54	1.88	1.02	0.76	1.02	2.16	0.61	1.04	0.46

L	M	N	P	Q	R	S	T		wt
.050	.010	.021	.013	.080	0.013	.018	0.014		grams
1.27	0.25	0.53	0.33	2.03	0.33	0.46	0.36		0.04

TAPE & REEL INFORMATION: F74

SURFACE MOUNT

RF Transformer


TTC1-682W+

50Ω 800 to 6800 MHz 1:1 Ratio


TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
800	0.59	21.44	1.05	1.26
1000	0.67	19.23	0.98	0.68
1400	0.82	14.58	0.84	0.00
2000	1.23	10.50	0.63	0.25
3000	2.07	7.66	0.25	1.66
4000	1.63	13.65	0.19	2.93
5000	2.11	10.57	0.58	2.71
6000	3.63	6.04	0.69	0.79
6200	3.62	5.82	0.60	3.56
6800	3.66	6.54	0.67	7.07


TTC1-682W+
AVG. INSERTION LOSS

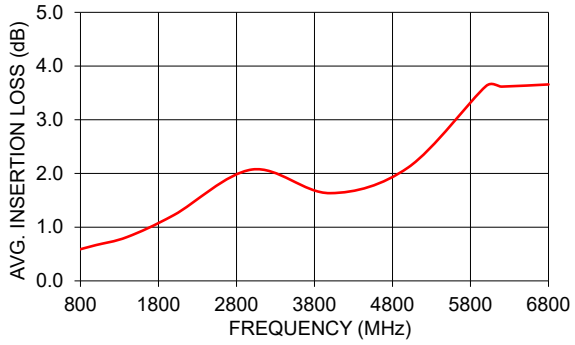


TTC1-682W+
INPUT RETURN LOSS

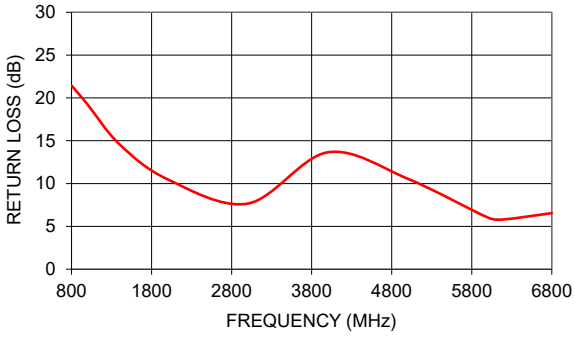

TTC1-682W+
AMPLITUDE UNBALANCE

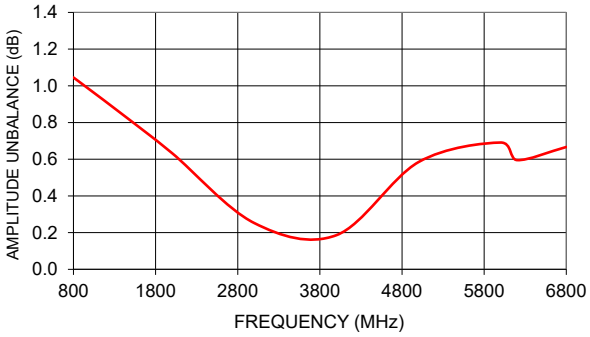

TTC1-682W+
PHASE UNBALANCE

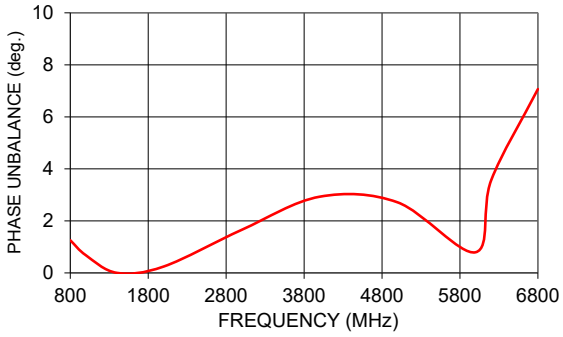

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html


RF Transformer TTC1-682W+


Typical Performance Data


FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)	CMRR (dB)
800	0.59	21.44	1.05	0.47	24.40
1000	0.67	19.23	0.98	0.60	24.96
1200	0.75	16.74	0.91	1.58	25.30
1400	0.82	14.58	0.84	2.46	25.51
1600	0.90	12.98	0.77	3.25	25.58
1800	1.03	11.68	0.71	3.92	25.50
2000	1.23	10.50	0.63	4.56	25.35
2200	1.45	9.48	0.57	5.26	24.99
2400	1.68	8.62	0.49	5.82	24.72
2600	1.88	7.99	0.40	6.27	24.51
2800	2.02	7.68	0.32	6.58	24.38
3000	2.07	7.66	0.25	6.84	24.23
3200	2.04	7.95	0.18	7.05	24.09
3400	1.94	8.63	0.08	7.19	24.01
3600	1.82	9.58	0.01	7.15	24.08
3800	1.70	11.08	0.09	6.86	24.42
4000	1.63	13.65	0.19	6.55	24.70
4200	1.60	18.28	0.28	6.35	24.76
4400	1.64	24.50	0.37	5.93	25.05
4600	1.75	17.94	0.47	5.11	25.64
4800	1.89	13.29	0.57	4.42	25.92
5000	2.11	10.57	0.58	3.85	26.46
5200	2.37	9.06	0.59	3.32	26.99
5400	2.72	7.99	0.64	2.65	27.24
5600	3.11	7.06	0.70	1.95	27.22
5800	3.45	6.23	0.69	1.28	27.67
6000	3.63	6.04	0.69	0.03	28.01
6200	3.62	5.82	0.60	0.62	29.20
6400	3.53	5.80	0.54	1.28	29.59
6600	3.57	6.33	0.57	1.53	29.08
6800	3.66	6.54	0.67	1.92	27.56


Typical Performance Data



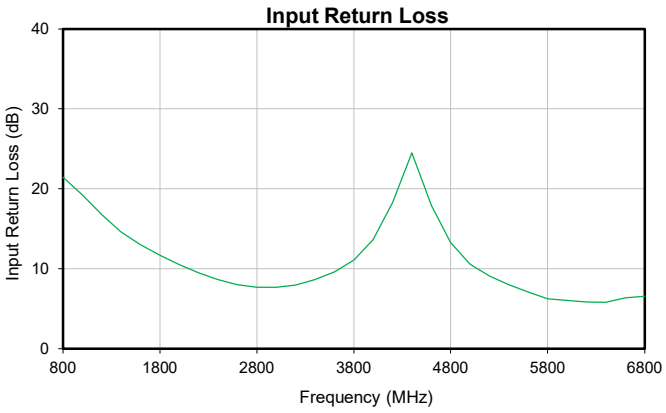

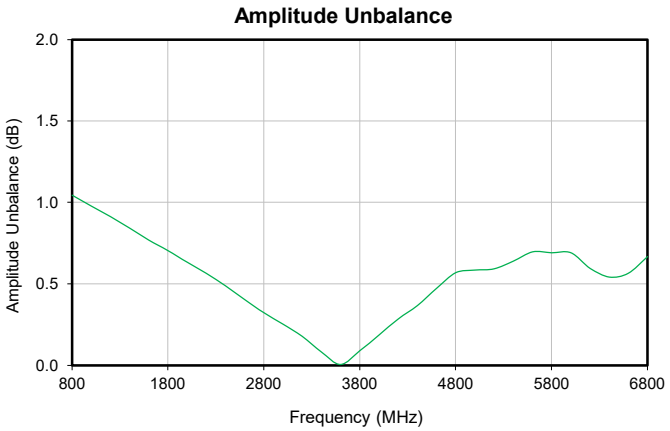

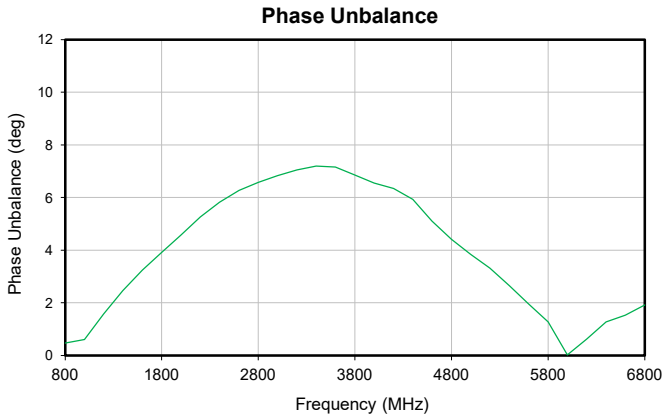


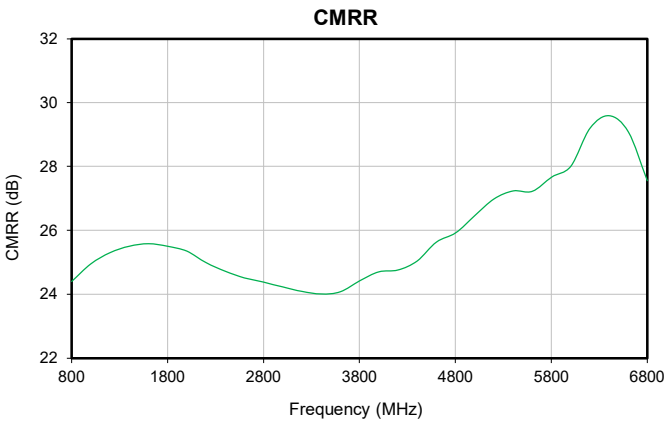



Case Style GU

Outline Dimensions


GU2939

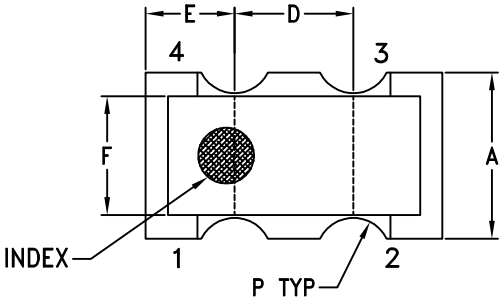

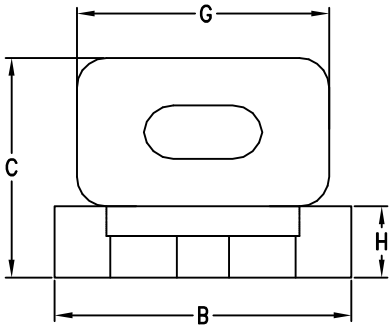

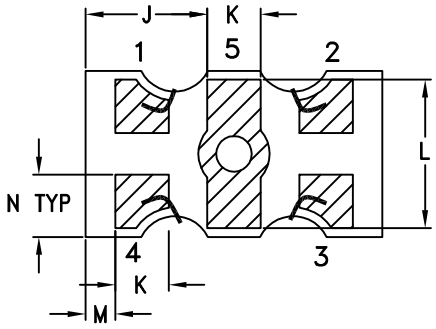

PCB Land Pattern

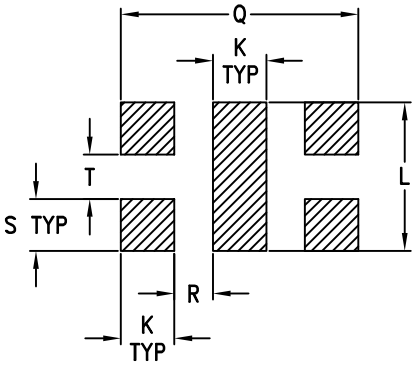

Suggested Layout

Tolerance to be within ±.002

Wires shown are for reference only.

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P
GU2939	.056 (1.42)	.100 (2.54)	.074 (1.88)	.040 (1.02)	.030 (0.76)	.040 (1.02)	.085 (2.16)	.024 (0.61)	.041 (1.04)	.018 (0.46)	.050 (1.27)	.010 (0.25)	.021 (0.53)	.013 (0.33)

CASE #	Q	R	S	T	WT, GRAM
GU2939	.080 (2.03)	.013 (0.33)	.018 (0.46)	.014 (0.36)	.040

Dimensions are in inches (mm). Tolerances: 2 Pl.±.01; 3 Pl. ±.005

Notes:
1. Case material: Plastic Base.
2. Termination finish: Gold Plating.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED
ALL NEW minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com
RF/IF MICROWAVE COMPONENTS

This document and its contents are the property of Mini-Circuits

Tape & Reel Packaging TR-F74

DEVICE ORIENTATION IN T&R




ILLUSTRATION 1

Applicable Case Styles
GE0805C-1
GE0805C-1AP
JV1210C-1
GU2939




ILLUSTRATION 2

Applicable Case Styles
JV1210C
JV1210C-2
JV1210C-3
JV1210C-4
JV1210C-5
JV1210C-6
JV1210C-11




ILLUSTRATION 3

Applicable Case Styles
JC0603C-8
JC0603C-9
JV1210C-7
JV1210C-8
JV1210C-9
JV1210C-10
JV1210C-13
GE0805C-13
GE0805C-19
GE0805C-20

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices per Reel	
8	4	7	Small quantity standards **(see note)**	20
				50
				100
				200
				500
				1000
			Standard	2000
				4000

Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.
Go to: www.minicircuits.com/pages/pdfs/tape.pdf


Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-001192	NEW RELEASE	12/26/19	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR GU2939 CASE STYLE

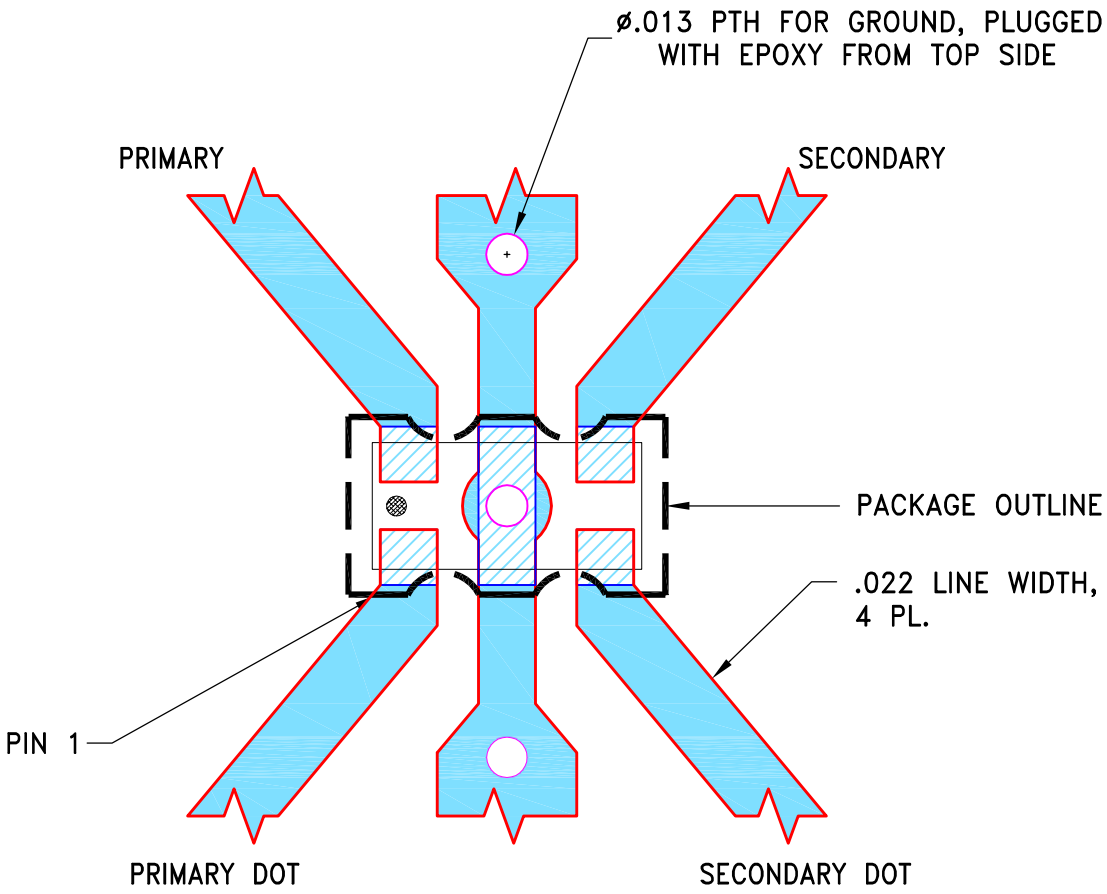

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	ITG	12/24/19
TOLERANCES ON:	CHECKED	GF	12/24/19
2 PL DECIMALS ±	APPROVED	IL	12/26/19
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, GU2939, TB-1111+


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-657	OR

FILE:	SCALE:	SHEET:
98PL657	16:1	1 OF 1

Evaluation Board and Circuit

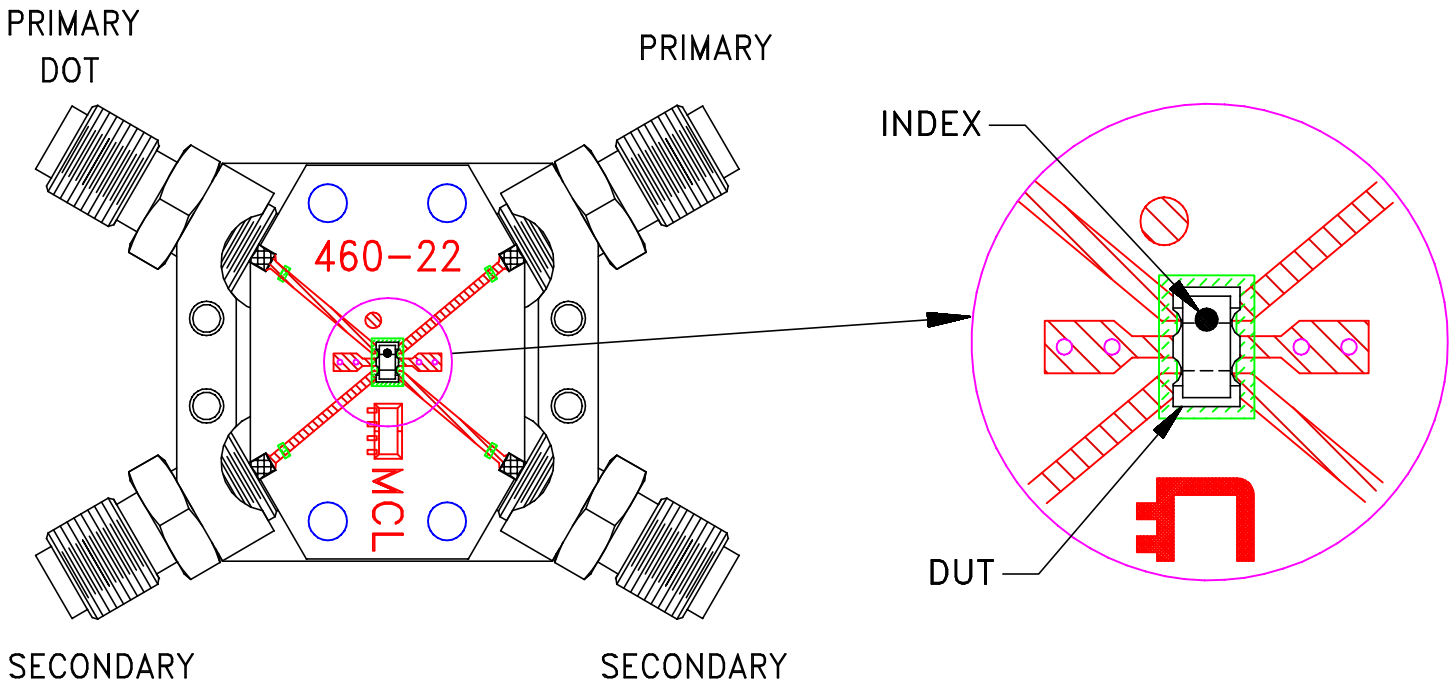

TB-TTC1-682W+

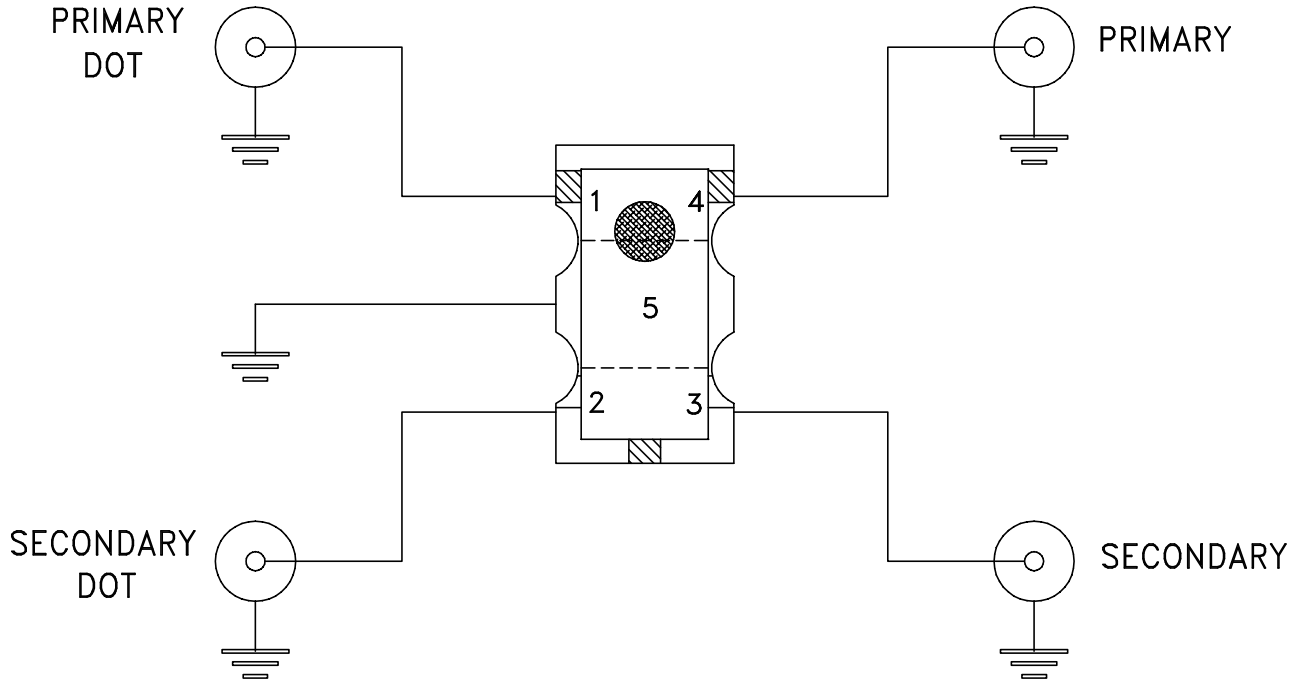

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: RO43504 or equivalent,
   Dielectric Constant=3.5, Thickness=.010 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.