

Non-Catalog Model

Frequency Mixer

TUF-5XSM

Level 7 (LO Power +7 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : NNN150

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	1		1500	MHz
	RF (fL to fU)	1		1500	MHz
	IF	1		1000	MHz
Conversion Loss	mid band		5.9	7.0	dB
	Total Range			9.0	dB
LO-RF Isolation	Low Range	40	60		dB
	Mid Range	20	40		dB
	Upper Range	17	28		dB
LO-IF Isolation	Low Range	45	60		dB
	Mid Range	25	45		dB
	Upper Range	20	38		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Non-hermetic

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	4
RF	2
IF	1
GROUND	3

Electrical Schematics

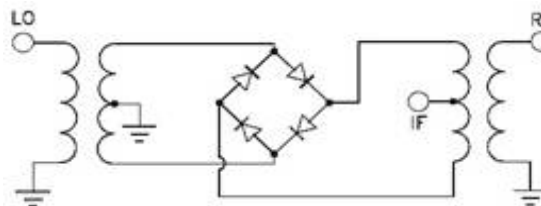

Frequency Mixer

TUF-5XSM

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	6.01	5.72	5.31
70.1	100.1	6.36	6.07	5.90
130.1	160.1	6.55	6.22	6.05
190.1	220.1	6.59	6.28	6.11
250.1	280.1	6.78	6.44	6.23
310.1	340.1	6.73	6.39	6.19
370.1	400.1	6.70	6.36	6.18
430.1	460.1	6.93	6.54	6.31
470.1	500.1	6.86	6.51	6.29
530.1	560.1	7.10	6.69	6.44
570.1	600.1	7.03	6.66	6.43
630.1	660.1	7.15	6.76	6.51
670.1	700.1	7.11	6.77	6.54
730.1	760.1	7.04	6.67	6.45
770.1	800.1	7.00	6.62	6.43
830.1	860.1	7.00	6.57	6.35
870.1	900.1	7.09	6.63	6.38
930.1	960.1	7.11	6.62	6.36
970.1	1000.1	7.24	6.76	6.45
1030.1	1060.1	7.25	6.84	6.54
1070.1	1100.1	7.24	6.87	6.59
1130.1	1160.1	7.30	6.93	6.68
1170.1	1200.1	7.24	6.88	6.63
1230.1	1260.1	7.31	6.91	6.66
1270.1	1300.1	7.27	6.88	6.67
1330.1	1360.1	7.30	6.93	6.75
1370.1	1400.1	7.35	7.00	6.84
1430.1	1460.1	7.44	7.11	6.95
1470.1	1500.1	7.61	7.28	7.14
1530.1	1560.1	7.77	7.41	7.27
1570.1	1600.1	8.03	7.65	7.52
1630.1	1660.1	8.25	7.86	7.73
1670.1	1700.1	8.57	8.15	8.01
1730.1	1760.1	8.83	8.41	8.29
1770.1	1800.1	9.18	8.70	8.58
1830.1	1860.1	9.46	8.99	8.87
1870.1	1900.1	9.81	9.29	9.13
1930.1	1960.1	10.13	9.58	9.38
1970.1	2000.1	10.50	9.85	9.59
2030.1	2060.1	10.84	10.13	9.80

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	15.19	17.45	18.29
70.1	100.1	11.30	13.15	17.16
130.1	160.1	12.87	17.68	20.98
190.1	220.1	17.93	14.78	14.99
250.1	280.1	15.33	14.15	15.18
310.1	340.1	13.02	13.44	15.39
370.1	400.1	12.12	12.99	15.22
430.1	460.1	10.25	11.71	13.57
470.1	500.1	9.55	11.14	13.59
530.1	560.1	8.03	9.59	11.50
570.1	600.1	7.80	9.35	10.72
630.1	660.1	7.54	9.36	10.85
670.1	700.1	7.17	8.58	10.01
730.1	760.1	7.73	9.98	12.16
770.1	800.1	7.55	9.50	11.93
830.1	860.1	9.11	10.08	11.69
870.1	900.1	9.32	10.61	11.77
930.1	960.1	10.47	12.53	13.62
970.1	1000.1	8.97	11.45	12.97
1030.1	1060.1	7.31	8.71	10.34
1070.1	1100.1	6.64	7.54	8.59
1130.1	1160.1	6.44	7.06	7.86
1170.1	1200.1	6.96	7.86	8.74
1230.1	1260.1	8.68	10.81	12.17
1270.1	1300.1	8.93	11.12	13.46
1330.1	1360.1	9.79	12.92	15.59
1370.1	1400.1	9.75	13.09	15.40
1430.1	1460.1	10.56	13.96	15.31
1470.1	1500.1	9.81	13.54	15.10
1530.1	1560.1	9.76	13.68	15.03
1570.1	1600.1	9.08	13.52	15.71
1630.1	1660.1	9.70	14.13	17.24
1670.1	1700.1	9.53	13.88	17.80
1730.1	1760.1	11.31	15.03	18.59
1770.1	1800.1	12.22	14.84	18.25
1830.1	1860.1	10.49	15.09	18.20
1870.1	1900.1	8.50	13.63	18.28
1930.1	1960.1	6.65	11.55	17.59
1970.1	2000.1	5.60	9.82	16.58
2030.1	2060.1	5.42	9.33	16.40

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	1.01	1.17	0.94
70.1	100.1	1.23	0.90	0.65
130.1	160.1	1.25	0.92	0.70
190.1	220.1	1.51	1.16	0.91
250.1	280.1	1.37	1.07	0.85
310.1	340.1	1.48	1.19	0.96
370.1	400.1	1.74	1.43	1.19
430.1	460.1	1.59	1.33	1.14
470.1	500.1	1.74	1.45	1.23
530.1	560.1	1.62	1.36	1.19
570.1	600.1	1.67	1.42	1.22
630.1	660.1	1.63	1.37	1.21
670.1	700.1	1.62	1.32	1.14
730.1	760.1	1.65	1.38	1.20
770.1	800.1	1.64	1.38	1.19
830.1	860.1	1.58	1.35	1.16
870.1	900.1	1.52	1.32	1.14
930.1	960.1	1.47	1.28	1.12
970.1	1000.1	1.34	1.13	1.03
1030.1	1060.1	1.29	1.00	0.88
1070.1	1100.1	1.30	0.96	0.80
1130.1	1160.1	1.30	0.93	0.74
1170.1	1200.1	1.42	1.00	0.77
1230.1	1260.1	1.36	0.90	0.64
1270.1	1300.1	1.49	0.92	0.62
1330.1	1360.1	1.35	0.71	0.43
1370.1	1400.1	1.41	0.69	0.40
1430.1	1460.1	1.19	0.54	0.30
1470.1	1500.1	1.27	0.55	0.30
1530.1	1560.1	1.17	0.48	0.25
1570.1	1600.1	1.25	0.51	0.26
1630.1	1660.1	1.13	0.47	0.23
1670.1	1700.1	1.18	0.51	0.24
1730.1	1760.1	1.09	0.50	0.24
1770.1	1800.1	1.13	0.54	0.26
1830.1	1860.1	1.16	0.62	0.31
1870.1	1900.1	1.25	0.73	0.37
1930.1	1960.1	1.30	0.80	0.47
1970.1	2000.1	1.39	0.92	0.55
2030.1	2060.1	1.42	0.99	0.65

Frequency Mixer

TUF-5XSM

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
740.0	10.1	6.76	10.0	20.1	6.33	1490.0	10.1	10.39
720.0	30.1	6.79	50.0	60.1	5.83	1450.0	50.1	10.04
700.0	50.1	6.77	90.0	100.1	5.36	1410.0	90.1	9.62
680.0	70.1	6.77	130.0	140.1	5.71	1370.0	130.1	9.25
660.0	90.1	6.71	170.0	180.1	5.59	1330.0	170.1	9.08
640.0	110.1	6.70	210.0	220.1	5.45	1290.0	210.1	8.76
620.0	130.1	6.72	250.0	260.1	5.37	1250.0	250.1	8.50
600.0	150.1	6.65	290.0	300.1	5.66	1210.0	290.1	8.35
580.0	170.1	6.67	330.0	340.1	5.89	1170.0	330.1	8.12
560.0	190.1	6.55	370.0	380.1	5.48	1130.0	370.1	8.01
540.0	210.1	6.58	410.0	420.1	5.61	1090.0	410.1	7.84
520.0	230.1	6.56	450.0	460.1	5.67	1050.0	450.1	7.69
500.0	250.1	6.64	490.0	500.1	5.78	1010.0	490.1	7.59
480.0	270.1	6.61	530.0	540.1	5.51	970.0	530.1	7.48
460.0	290.1	6.52	570.0	580.1	5.66	930.0	570.1	7.41
440.0	310.1	6.54	610.0	620.1	5.69	890.0	610.1	7.25
420.0	330.1	6.48	650.0	660.1	5.90	850.0	650.1	7.16
400.0	350.1	6.44	690.0	700.1	6.24	810.0	690.1	7.09
380.0	370.1	6.53	730.0	740.1	5.87	770.0	730.1	7.03
360.0	390.1	6.47	770.0	780.1	6.08	730.0	770.1	6.95
340.0	410.1	6.58	810.0	820.1	5.81	690.0	810.1	7.04
320.0	430.1	6.53	850.0	860.1	6.20	650.0	850.1	7.05
300.0	450.1	6.46	890.0	900.1	6.28	610.0	890.1	7.10
280.0	470.1	6.50	930.0	940.1	6.61	570.0	930.1	7.15
260.0	490.1	6.51	970.0	980.1	6.90	530.0	970.1	7.15
240.0	510.1	6.40	1010.0	1020.1	6.76	490.0	1010.1	7.07
220.0	530.1	6.56	1050.0	1060.1	7.13	450.0	1050.1	7.16
200.0	550.1	6.53	1090.0	1100.1	7.14	410.0	1090.1	7.10
180.0	570.1	6.48	1130.0	1140.1	7.69	370.0	1130.1	6.96
160.0	590.1	6.48	1170.0	1180.1	7.90	330.0	1170.1	7.09
140.0	610.1	6.52	1210.0	1220.1	8.18	290.0	1210.1	7.16
130.0	620.1	6.62	1250.0	1260.1	8.24	250.0	1250.1	7.16
110.0	640.1	6.58	1290.0	1300.1	8.25	210.0	1290.1	7.21
100.0	650.1	6.65	1330.0	1340.1	8.71	190.0	1310.1	7.21
80.0	670.1	6.72	1370.0	1380.1	8.92	150.0	1350.1	7.23
70.0	680.1	6.58	1430.0	1440.1	9.09	130.0	1370.1	7.23
50.0	700.1	6.61	1470.0	1480.1	9.53	90.0	1410.1	7.26
40.0	710.1	6.59	1530.0	1540.1	10.07	70.0	1430.1	7.25
20.0	730.1	6.58	1570.0	1580.1	10.35	30.0	1470.1	7.31
10.0	740.1	6.98	1630.0	1640.1	10.47	10.0	1490.1	7.67

Frequency Mixer

TUF-5XSM

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	54.68	51.61	49.88	51.07	50.36	49.85
100.1	50.10	46.12	44.01	44.13	43.59	43.10
160.1	47.93	43.74	41.37	40.68	40.02	39.47
220.1	45.81	42.17	39.72	38.47	37.77	37.21
280.1	42.38	40.14	38.01	36.57	35.83	35.29
340.1	38.69	37.67	36.16	35.04	34.39	33.88
400.1	36.05	35.99	35.10	33.63	33.00	32.52
460.1	33.49	33.90	33.38	32.51	32.01	31.60
500.1	32.26	32.98	32.74	31.65	31.18	30.81
560.1	30.29	31.05	31.16	30.78	30.28	29.91
600.1	29.58	30.29	30.34	30.31	29.89	29.56
660.1	28.09	29.06	29.20	29.56	29.17	28.87
700.1	27.54	28.92	29.24	29.15	28.87	28.60
760.1	26.10	27.90	28.76	28.48	28.29	28.08
800.1	25.81	27.54	28.43	28.18	28.00	27.82
860.1	24.82	26.59	27.87	27.81	27.74	27.57
900.1	24.46	26.05	27.34	27.57	27.55	27.44
960.1	23.98	25.59	27.08	27.36	27.35	27.37
1000.1	23.75	25.15	26.40	27.32	27.38	27.32
1060.1	23.99	25.64	26.84	27.30	27.47	27.50
1100.1	23.85	25.65	26.90	27.40	27.60	27.63
1160.1	23.62	25.83	27.58	27.67	27.92	28.00
1200.1	23.17	25.42	27.35	27.93	28.19	28.33
1260.1	23.01	25.26	27.21	28.44	28.72	28.82
1300.1	22.61	24.71	26.57	28.89	29.15	29.31
1360.1	22.65	24.56	26.15	29.62	29.89	29.96
1400.1	22.48	24.27	25.71	30.14	30.49	30.61
1460.1	22.67	24.22	25.34	31.16	31.71	32.01
1500.1	22.65	24.14	25.15	31.50	32.15	32.64
1560.1	22.88	24.00	24.75	32.98	33.90	34.81
1600.1	22.84	23.88	24.59	33.53	34.53	35.66
1660.1	23.06	23.84	24.31	35.68	37.30	39.25
1700.1	22.91	23.63	23.95	36.73	38.65	40.97
1760.1	23.10	23.60	23.82	40.21	43.93	49.81
1800.1	22.96	23.31	23.58	42.08	46.96	50.57
1860.1	23.01	23.35	23.54	45.91	49.29	44.66
1900.1	22.78	23.19	23.32	42.25	42.84	40.18
1960.1	22.65	23.10	23.31	39.49	39.29	37.31
2000.1	22.32	22.74	23.08	35.86	36.05	35.08
2060.1	21.68	22.22	22.62	33.27	33.50	32.71

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	47.97	48.17	46.72
70.1	100.1	32.73	32.65	32.61
130.1	160.1	28.34	28.34	28.35
190.1	220.1	25.66	25.72	25.77
250.1	280.1	24.51	24.63	24.74
310.1	340.1	23.79	24.00	24.15
370.1	400.1	23.38	23.65	23.85
430.1	460.1	23.58	23.82	23.99
470.1	500.1	23.40	23.67	23.80
530.1	560.1	23.21	23.54	24.05
570.1	600.1	22.69	23.02	23.34
630.1	660.1	20.92	21.12	21.06
670.1	700.1	20.05	20.07	20.10
730.1	760.1	18.59	18.60	18.74
770.1	800.1	17.76	17.88	17.89
830.1	860.1	17.33	17.30	17.30
870.1	900.1	17.12	17.11	17.12
930.1	960.1	16.99	16.99	16.94
970.1	1000.1	17.09	17.06	17.06
1030.1	1060.1	17.18	17.13	17.09
1070.1	1100.1	17.32	17.38	17.31
1130.1	1160.1	17.59	17.76	17.73
1170.1	1200.1	17.60	17.71	17.71
1230.1	1260.1	17.28	17.24	17.16
1270.1	1300.1	16.77	16.66	16.48
1330.1	1360.1	15.50	15.18	14.92
1370.1	1400.1	14.65	14.22	13.94
1430.1	1460.1	13.43	12.92	12.59
1470.1	1500.1	12.76	12.11	11.68
1530.1	1560.1	11.64	10.96	10.56
1570.1	1600.1	11.09	10.33	9.87
1630.1	1660.1	10.10	9.40	8.97
1670.1	1700.1	9.71	8.92	8.51
1730.1	1760.1	9.02	8.31	7.96
1770.1	1800.1	8.75	7.99	7.61
1830.1	1860.1	8.36	7.67	7.34
1870.1	1900.1	8.28	7.59	7.25
1930.1	1960.1	7.96	7.42	7.13
1970.1	2000.1	7.91	7.46	7.20
2030.1	2060.1	7.50	7.19	6.98

Frequency Mixer

TUF-5XSM

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.43	1.09	1.06	40.1	1.95	2.96	4.36	10.1	1.13	1.11	1.13
70.1	100.1	1.18	1.05	1.03	100.1	1.90	2.78	3.92	30.1	1.06	1.04	1.09
130.1	160.1	1.22	1.09	1.03	160.1	1.87	2.68	3.68	50.1	1.05	1.02	1.08
190.1	220.1	1.31	1.19	1.12	220.1	1.81	2.54	3.45	70.1	1.04	1.03	1.08
250.1	280.1	1.36	1.24	1.17	280.1	1.92	2.71	3.67	90.1	1.07	1.01	1.07
310.1	340.1	1.41	1.28	1.20	340.1	2.03	2.87	3.90	110.1	1.05	1.03	1.09
370.1	400.1	1.51	1.38	1.30	400.1	2.01	2.80	3.74	130.1	1.05	1.03	1.09
430.1	460.1	1.58	1.45	1.36	460.1	2.04	2.80	3.71	150.1	1.06	1.03	1.08
470.1	500.1	1.62	1.49	1.41	500.1	2.15	2.98	4.02	190.1	1.06	1.04	1.08
530.1	560.1	1.67	1.54	1.46	560.1	2.21	3.02	4.03	210.1	1.05	1.06	1.12
570.1	600.1	1.72	1.59	1.51	600.1	2.30	3.14	4.18	250.1	1.07	1.08	1.12
630.1	660.1	1.75	1.64	1.58	660.1	2.35	3.18	4.20	270.1	1.06	1.09	1.15
670.1	700.1	1.77	1.68	1.63	700.1	2.45	3.30	4.35	310.1	1.09	1.11	1.16
730.1	760.1	1.75	1.68	1.67	760.1	2.51	3.31	4.34	330.1	1.09	1.10	1.15
770.1	800.1	1.74	1.66	1.66	800.1	2.60	3.43	4.47	370.1	1.13	1.16	1.21
830.1	860.1	1.73	1.65	1.66	860.1	2.69	3.51	4.53	390.1	1.15	1.18	1.22
870.1	900.1	1.74	1.63	1.62	900.1	2.78	3.61	4.63	430.1	1.17	1.19	1.23
930.1	960.1	1.75	1.64	1.60	960.1	2.88	3.70	4.72	450.1	1.22	1.25	1.29
970.1	1000.1	1.77	1.66	1.60	1000.1	2.95	3.76	4.77	490.1	1.28	1.31	1.35
1030.1	1060.1	1.77	1.71	1.66	1060.1	3.07	3.86	4.87	510.1	1.27	1.30	1.34
1070.1	1100.1	1.73	1.69	1.66	1100.1	3.10	3.85	4.83	550.1	1.37	1.40	1.44
1130.1	1160.1	1.70	1.68	1.67	1160.1	3.18	3.91	4.88	570.1	1.40	1.42	1.45
1170.1	1200.1	1.61	1.60	1.61	1200.1	3.16	3.83	4.75	610.1	1.45	1.47	1.50
1230.1	1260.1	1.54	1.56	1.62	1260.1	3.20	3.83	4.75	630.1	1.53	1.55	1.57
1270.1	1300.1	1.46	1.51	1.58	1300.1	3.20	3.79	4.66	670.1	1.63	1.65	1.67
1330.1	1360.1	1.42	1.52	1.60	1360.1	3.40	3.95	4.80	690.1	1.70	1.72	1.74
1370.1	1400.1	1.35	1.46	1.55	1400.1	3.54	4.00	4.77	730.1	1.83	1.85	1.87
1430.1	1460.1	1.33	1.46	1.57	1460.1	3.83	4.20	4.91	750.1	1.87	1.89	1.90
1470.1	1500.1	1.26	1.40	1.52	1500.1	4.03	4.27	4.89	790.1	2.02	2.03	2.04
1530.1	1560.1	1.24	1.40	1.53	1560.1	4.29	4.42	4.98	810.1	2.09	2.10	2.10
1570.1	1600.1	1.19	1.38	1.51	1600.1	4.51	4.50	4.96	850.1	2.24	2.25	2.25
1630.1	1660.1	1.19	1.38	1.51	1660.1	4.72	4.60	4.99	870.1	2.39	2.41	2.41
1670.1	1700.1	1.17	1.39	1.54	1700.1	4.95	4.68	4.96	910.1	2.53	2.54	2.54
1730.1	1760.1	1.19	1.41	1.55	1760.1	5.13	4.77	4.96	930.1	2.65	2.67	2.67
1770.1	1800.1	1.19	1.44	1.58	1800.1	5.33	4.82	4.92	970.1	2.85	2.88	2.87
1830.1	1860.1	1.21	1.43	1.57	1860.1	5.42	4.87	4.89	990.1	2.86	2.88	2.87
1870.1	1900.1	1.22	1.44	1.58	1900.1	5.61	4.92	4.84	1030.1	3.12	3.14	3.14
1930.1	1960.1	1.21	1.41	1.52	1960.1	5.65	4.92	4.79	1050.1	3.23	3.25	3.25
1970.1	2000.1	1.21	1.40	1.51	2000.1	5.74	4.92	4.72	1090.1	3.35	3.37	3.37
2030.1	2060.1	1.15	1.30	1.39	2060.1	5.72	4.89	4.64	1110.1	3.57	3.60	3.59

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	1	10	20	24	14	30	29	41	38	50
1	-	12	+0	39	17	28	31	40	38	40	48	44
2	78	52	54	45	51	59	52	53	44	56	50	57
3	>90	62	61	>69	59	>69	67	60	>69	66	66	64
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -14.00 dBm.
LO IN: 780.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.69 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	10	20	28	38	28	48	50	65	59	63
1	-	11	+0	36	17	33	35	43	47	52	65	64
2	58	52	49	43	46	52	56	51	41	54	54	65
3	>90	40	40	59	39	54	51	45	54	57	57	58
4	>90	71	71	55	59	51	58	65	60	61	53	64
5	>90	72	>79	72	64	65	56	77	63	59	74	69
6	>90	76	78	>79	76	66	76	61	70	73	69	71
7	>90	>79	>79	>79	>79	>79	73	78	67	76	73	74
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	76	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER


Test conditions: RF IN: 750.1 MHz; -4.00 dBm.
LO IN: 780.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.75 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.




Typical Performance Curves


Conversion Loss @ IF=30MHz

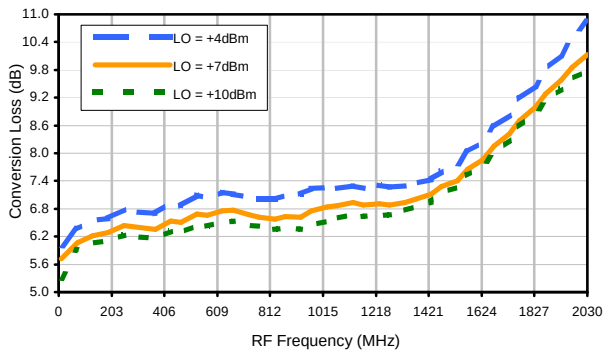


Conversion Loss vs. IF @ RF=750.1MHz

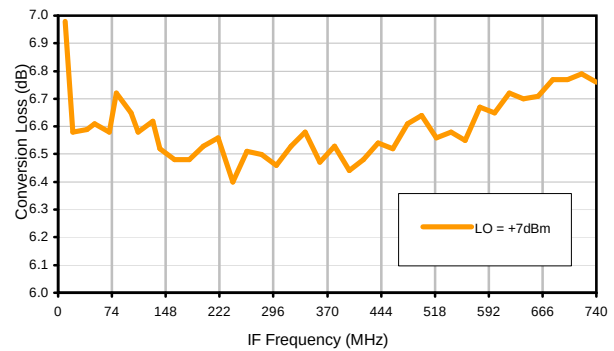


Conversion Loss vs. IF @ RF=10.1MHz

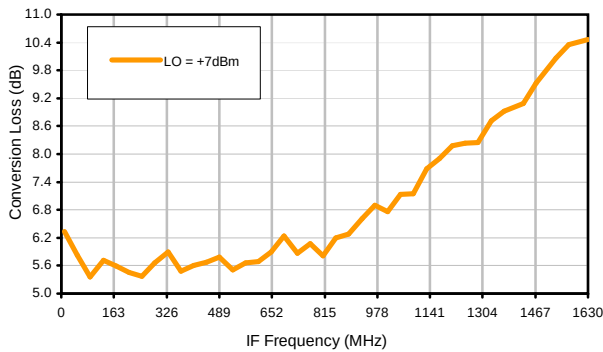


Conversion Loss vs. IF @ RF=1500.1MHz

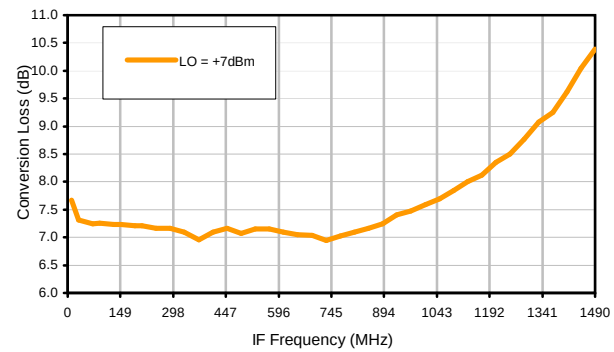

IP3 Input

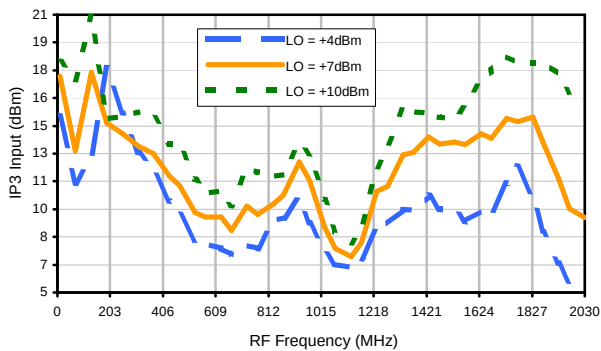


Compression @ RF IN=+1dBm

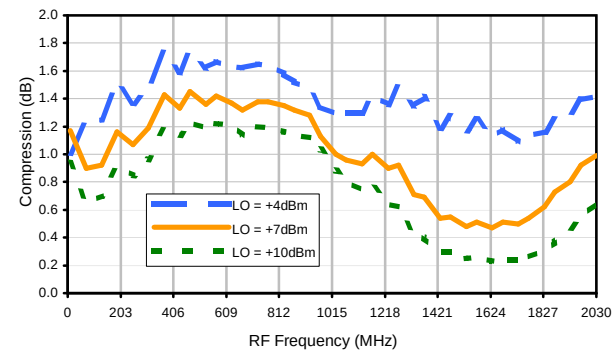


Typical Performance Curves


LO-RF Isolation

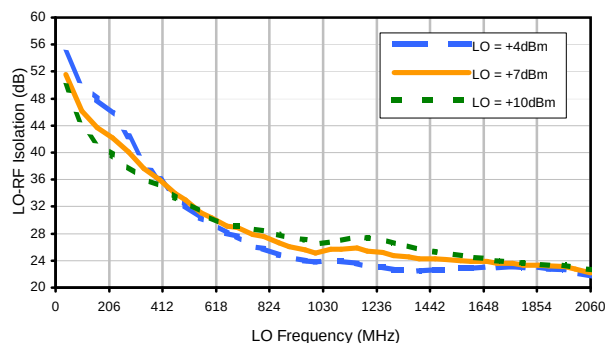


LO-IF Isolation

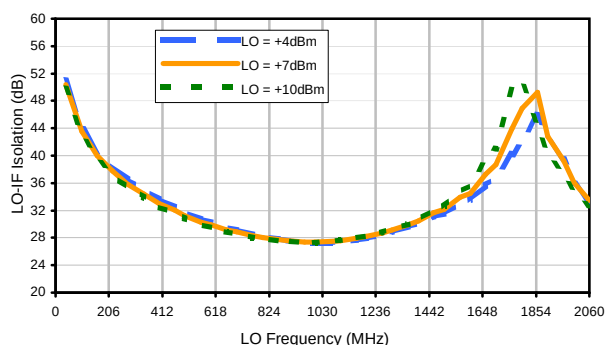


RF-IF Isolation

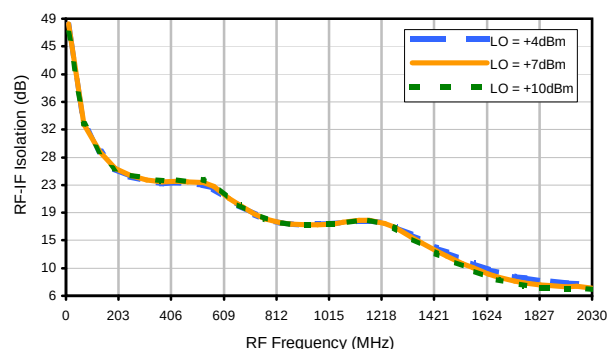


RF VSWR

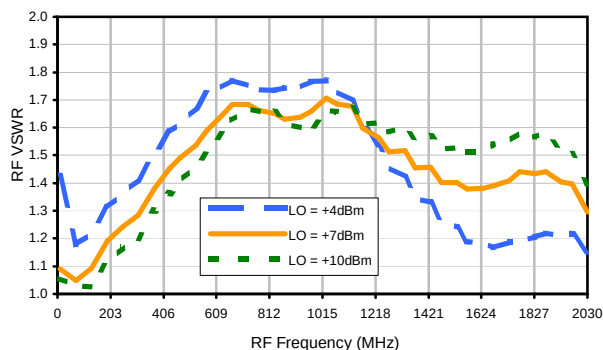

LO VSWR

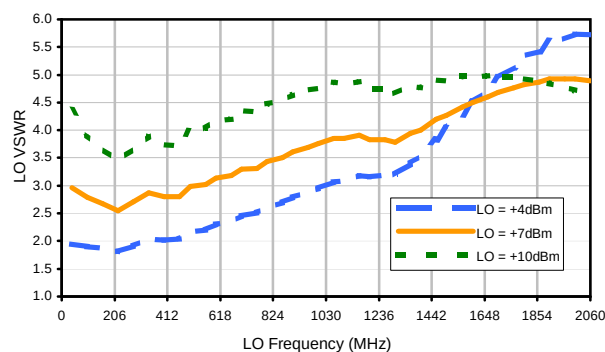

IF VSWR

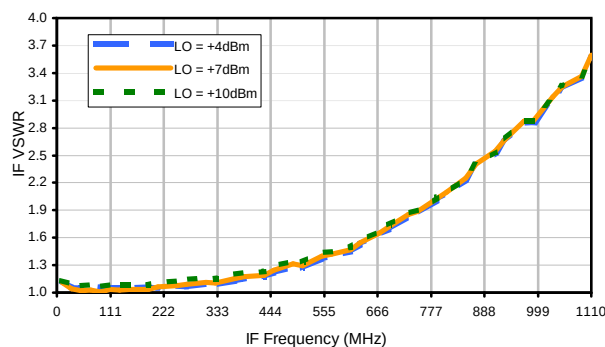

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	1	10	20	24	14	30	29	41	38	50
1	-	12	+0	39	17	28	31	40	38	40	48	44
2	78	52	54	45	51	59	52	53	44	56	50	57
3	>90	62	61	>69	59	>69	67	60	>69	66	66	64
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -14.00 dBm.
LO IN: 780.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.69 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	10	20	28	38	28	48	50	65	59	63
1	-	11	+0	36	17	33	35	43	47	52	65	64
2	58	52	49	43	46	52	56	51	41	54	54	65
3	>90	40	40	59	39	54	51	45	54	57	57	58
4	>90	71	71	55	59	51	58	65	60	61	53	64
5	>90	72	>79	72	64	65	56	77	63	59	74	69
6	>90	76	78	>79	76	66	76	61	70	73	69	71
7	>90	>79	>79	>79	>79	>79	73	78	67	76	73	74
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	76	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -4.00 dBm.
LO IN: 780.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.75 dBm


Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.




Outline Dimensions

NNN150

NOTE: BLUE BEAD INDICATES PIN #1.
PIN NUMBERS DO NOT APPEAR
ON UNIT.FOR REFERENCE ONLY.

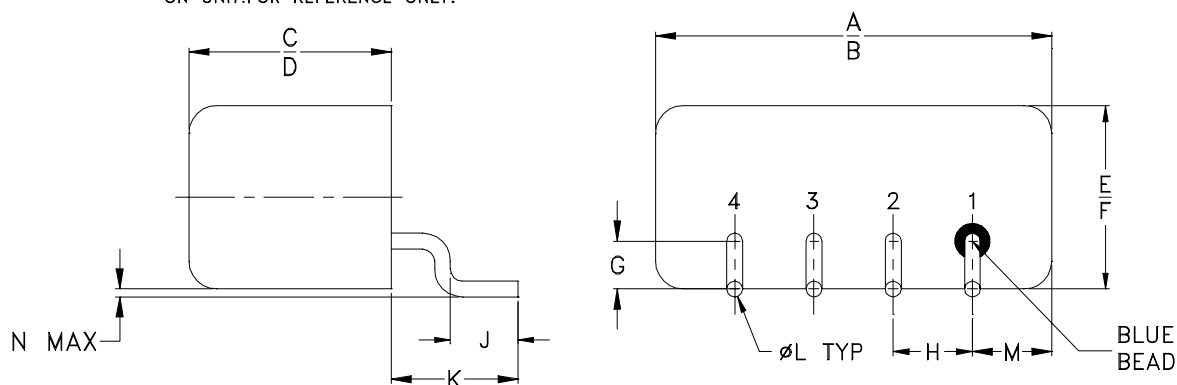

PCB Land Pattern

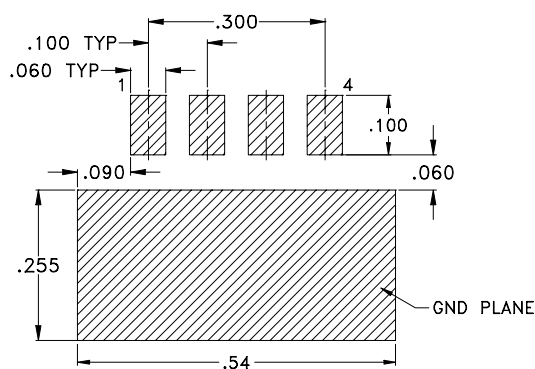

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
NNN150	.50 (12.70)	.48 (12.19)	.255 (6.48)	.240 (6.10)	.23 (5.84)	.21 (5.33)	.06 (1.52)	.100 (2.54)	.09 (2.29)	.16 (4.06)	.020 (0.51)	.09 (2.29)	.005 (0.13)	1.9

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material C.R.S. Pin material #52 alloy.
- Finish: Electro-Tin, hot-oil flowed or electro-Tin-Silver.
- Cover material: Cupro-Nickel.
- Pin's meniscus 0.015 inch max.
- Special Tolerances: Pin diameter $\pm .005$ inch.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F9

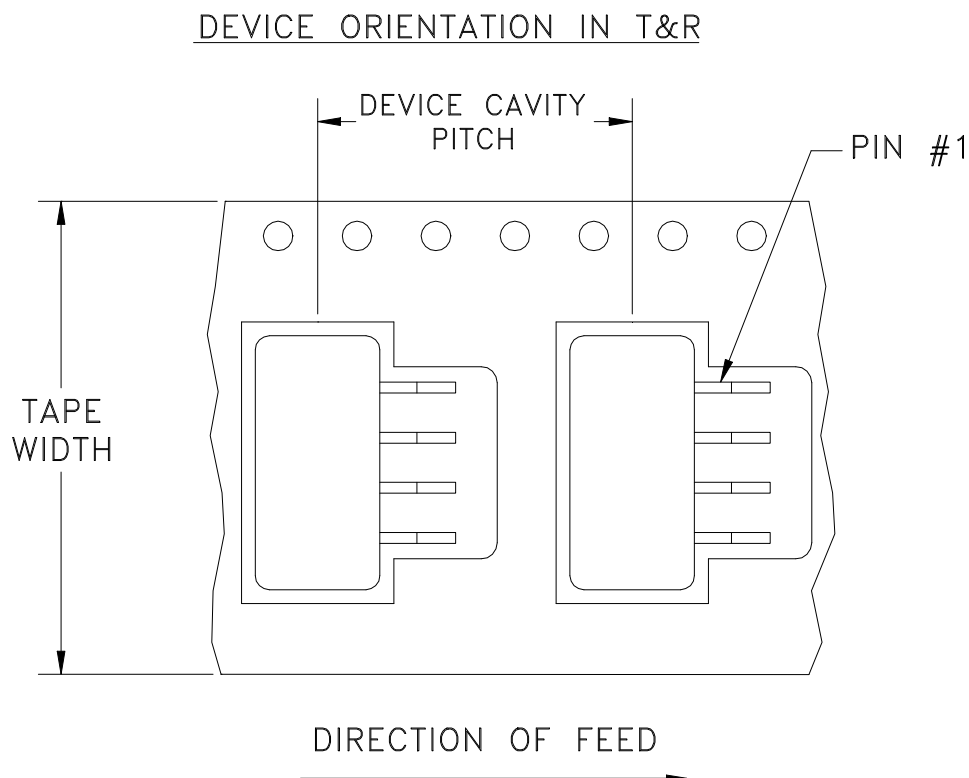

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M86549	NEW RELEASE	04/15/03	GF	DJ
A	M102713	UPDATED NOTES & DISCRIPTION	01/14/06	GF	IL

Technical drawing of a PCB layout for a 16-pin package. The drawing shows a 4x4 grid of vias (PTH) with dimensions: .064 LINE WIDTH, 3 PL. (SEE NOTE BELOW); .030; .020 2 PL.; .090 TYP; .038; .072; .080 TYP; and Ø.020 PTH, 20 PL. FOR GROUND. The package outline is indicated by a dashed line.

2.BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ±	DRAWN	GF	04/11/03
	CHECKED	AV	04/15/03
	APPROVED	DJ	04/15/03

4

Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235


PL, z/cm NNN150, TUF/TFAS-SM, TB-201

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-081		REV: A
FILE: 98PL081		SCALE: 6:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

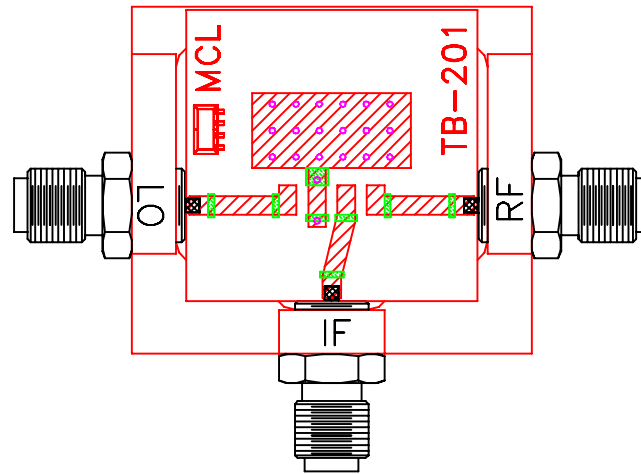

TB-201

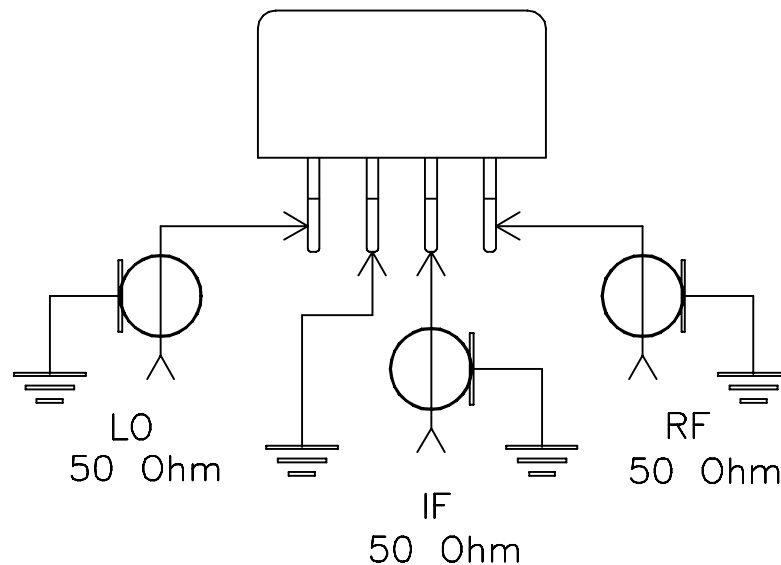

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D