

Non-Catalog Model

Frequency Mixer

TUF-860SM

Level 7 (LO Power +7 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : NNN150


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	800		1050	MHz
	RF (fL to fU)	800		1050	MHz
	IF	0		250	MHz
Conversion Loss			5.6	7.8	dB
LO-RF Isolation		25	35		dB
LO-IF Isolation		20	27		dB
1 dB Comp. Input Power			+1		dBm

Note: Non-hermetic

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	4
RF	1
IF	2
GROUND	3

Electrical Schematics

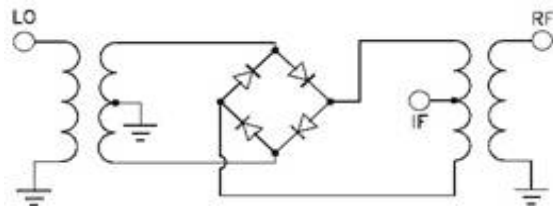

Frequency Mixer

TUF-860SM

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
100.1	130.1	12.03	10.75	10.34
140.4	170.4	9.48	8.65	8.30
180.6	210.6	7.69	7.28	7.11
220.9	250.9	6.87	6.54	6.33
261.1	291.1	6.26	5.96	5.82
301.4	331.4	5.80	5.61	5.43
341.7	371.7	5.65	5.42	5.24
381.9	411.9	5.46	5.24	5.05
422.2	452.2	5.39	5.17	5.01
462.4	492.4	5.38	5.16	4.98
502.7	532.7	5.27	5.01	4.87
543.0	573.0	5.32	5.07	4.84
583.2	613.2	5.26	5.06	4.91
623.5	653.5	5.27	5.07	4.95
663.7	693.7	5.33	5.12	5.00
704.0	734.0	5.37	5.16	4.99
744.3	774.3	5.45	5.20	5.06
784.5	814.5	5.58	5.26	5.08
824.8	854.8	5.80	5.37	5.13
865.0	895.0	6.07	5.56	5.18
905.3	935.3	6.30	5.74	5.26
945.6	975.6	6.60	6.04	5.53
985.8	1015.8	6.80	6.16	5.63
1026.1	1056.1	7.17	6.53	5.97
1066.3	1096.3	7.46	6.87	6.27
1106.6	1136.6	7.66	7.08	6.57
1146.9	1176.9	7.82	7.25	6.73
1187.1	1217.1	7.86	7.28	6.69
1227.4	1257.4	7.84	7.18	6.60
1267.6	1297.6	7.76	7.13	6.69
1307.9	1337.9	7.79	7.25	6.95
1348.2	1378.2	7.97	7.58	7.37
1388.4	1418.4	8.34	7.97	7.79
1428.7	1458.7	8.73	8.42	8.17
1468.9	1498.9	9.11	8.80	8.57
1509.2	1539.2	9.42	9.09	8.83
1549.5	1579.5	9.75	9.37	9.27
1589.7	1619.7	10.10	9.88	9.71
1630.0	1660.0	10.48	10.29	10.17
1650.1	1680.1	10.81	10.64	10.51

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
100.1	130.1	15.24	15.37	15.23
140.4	170.4	13.50	12.03	13.82
180.6	210.6	10.41	11.91	13.05
220.9	250.9	9.84	11.46	12.88
261.1	291.1	9.87	11.69	13.92
301.4	331.4	10.11	11.24	13.22
341.7	371.7	10.35	12.01	14.82
381.9	411.9	11.20	12.95	14.57
422.2	452.2	13.27	16.76	25.37
462.4	492.4	10.73	12.94	14.16
502.7	532.7	10.16	12.31	14.07
543.0	573.0	12.31	12.40	13.58
583.2	613.2	16.38	16.66	14.75
623.5	653.5	14.19	15.38	17.62
663.7	693.7	11.71	11.17	12.45
704.0	734.0	21.24	15.02	15.30
744.3	774.3	15.31	21.82	24.01
784.5	814.5	16.56	16.56	22.53
824.8	854.8	8.29	18.90	17.72
865.0	895.0	5.24	10.92	18.82
905.3	935.3	3.75	7.13	16.31
945.6	975.6	3.65	6.08	12.01
985.8	1015.8	4.56	6.39	10.65
1026.1	1056.1	5.91	7.00	9.62
1066.3	1096.3	6.86	8.63	10.81
1106.6	1136.6	6.18	7.36	9.47
1146.9	1176.9	5.96	6.42	8.22
1187.1	1217.1	5.83	6.59	8.79
1227.4	1257.4	7.36	10.39	15.61
1267.6	1297.6	9.91	14.06	16.69
1307.9	1337.9	12.34	15.80	18.79
1348.2	1378.2	13.72	15.67	18.22
1388.4	1418.4	12.97	15.01	22.51
1428.7	1458.7	12.60	16.44	18.58
1468.9	1498.9	12.71	16.18	17.57
1509.2	1539.2	12.79	15.08	17.53
1549.5	1579.5	12.63	15.25	15.54
1589.7	1619.7	13.92	13.75	18.74
1630.0	1660.0	16.94	17.94	20.29
1650.1	1680.1	14.33	19.02	19.33

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
100.1	130.1	-0.11	0.00	-0.03
140.4	170.4	0.07	0.04	-0.01
180.6	210.6	0.23	0.10	0.02
220.9	250.9	0.41	0.24	0.12
261.1	291.1	0.62	0.37	0.23
301.4	331.4	0.74	0.46	0.33
341.7	371.7	0.84	0.58	0.43
381.9	411.9	0.87	0.62	0.47
422.2	452.2	0.89	0.65	0.48
462.4	492.4	0.89	0.63	0.46
502.7	532.7	0.96	0.72	0.52
543.0	573.0	1.00	0.75	0.57
583.2	613.2	1.10	0.82	0.61
623.5	653.5	1.20	0.90	0.68
663.7	693.7	1.29	0.94	0.71
704.0	734.0	1.39	1.00	0.76
744.3	774.3	1.52	1.07	0.79
784.5	814.5	1.66	1.23	0.91
824.8	854.8	1.78	1.43	1.10
865.0	895.0	1.87	1.56	1.27
905.3	935.3	1.97	1.72	1.47
945.6	975.6	1.89	1.66	1.44
985.8	1015.8	1.76	1.61	1.41
1026.1	1056.1	1.49	1.38	1.23
1066.3	1096.3	1.26	1.15	1.04
1106.6	1136.6	1.15	0.99	0.89
1146.9	1176.9	1.00	0.80	0.72
1187.1	1217.1	0.99	0.78	0.65
1227.4	1257.4	0.95	0.70	0.56
1267.6	1297.6	0.95	0.66	0.45
1307.9	1337.9	0.89	0.55	0.37
1348.2	1378.2	0.67	0.40	0.27
1388.4	1418.4	0.52	0.32	0.22
1428.7	1458.7	0.36	0.24	0.18
1468.9	1498.9	0.32	0.21	0.17
1509.2	1539.2	0.30	0.20	0.16
1549.5	1579.5	0.24	0.16	0.13
1589.7	1619.7	0.24	0.16	0.12
1630.0	1660.0	0.24	0.16	0.12
1650.1	1680.1	0.24	0.15	0.11

Frequency Mixer

TUF-860SM

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=925.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=800.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1050.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
125.0	800.1	5.50	10.0	810.1	5.23	250.0	800.1	5.85
118.9	806.2	5.47	16.2	816.3	5.25	243.8	806.3	5.85
112.9	812.2	5.47	22.3	822.4	5.25	237.7	812.4	5.86
106.8	818.3	5.45	28.5	828.6	5.28	231.5	818.6	5.86
100.8	824.3	5.47	34.6	834.7	5.29	225.4	824.7	5.84
94.7	830.4	5.50	40.8	840.9	5.29	219.2	830.9	5.84
88.7	836.4	5.49	46.9	847.0	5.28	213.1	837.0	5.82
82.6	842.5	5.49	53.1	853.2	5.28	206.9	843.2	5.85
76.6	848.5	5.50	59.2	859.3	5.31	200.8	849.3	5.88
70.5	854.6	5.52	65.4	865.5	5.35	194.6	855.5	5.92
64.5	860.6	5.57	71.5	871.6	5.38	188.5	861.6	5.93
58.4	866.7	5.57	77.7	877.8	5.38	182.3	867.8	5.93
52.4	872.7	5.57	83.8	883.9	5.36	176.2	873.9	5.96
46.3	878.8	5.56	90.0	890.1	5.38	170.0	880.1	5.98
40.3	884.8	5.58	96.2	896.3	5.41	163.8	886.3	6.05
34.2	890.9	5.65	102.3	902.4	5.46	157.7	892.4	6.08
28.2	896.9	5.68	108.5	908.6	5.43	151.5	898.6	6.08
22.1	903.0	5.72	114.6	914.7	5.42	145.4	904.7	6.11
16.1	909.0	5.67	120.8	920.9	5.43	139.2	910.9	6.09
10.0	915.1	5.64	126.9	927.0	5.48	133.1	917.0	6.15
10.0	935.1	5.79	133.1	933.2	5.55	126.9	923.2	6.22
16.1	941.2	5.78	139.2	939.3	5.56	120.8	929.3	6.22
22.1	947.2	5.81	145.4	945.5	5.55	114.6	935.5	6.21
28.2	953.3	5.85	151.5	951.6	5.53	108.5	941.6	6.20
34.2	959.3	5.91	157.7	957.8	5.54	102.3	947.8	6.25
40.3	965.4	5.92	163.8	963.9	5.57	96.2	953.9	6.33
46.3	971.4	5.88	170.0	970.1	5.56	90.0	960.1	6.40
52.4	977.5	5.83	176.2	976.3	5.55	83.8	966.3	6.40
58.4	983.5	5.84	182.3	982.4	5.51	77.7	972.4	6.37
64.5	989.6	5.91	188.5	988.6	5.52	71.5	978.6	6.38
70.5	995.6	5.95	194.6	994.7	5.56	65.4	984.7	6.43
76.6	1001.7	5.94	200.8	1000.9	5.58	59.2	990.9	6.48
82.6	1007.7	5.89	206.9	1007.0	5.58	53.1	997.0	6.49
88.7	1013.8	5.88	213.1	1013.2	5.54	46.9	1003.2	6.46
94.7	1019.8	5.91	219.2	1019.3	5.55	40.8	1009.3	6.45
100.8	1025.9	5.95	225.4	1025.5	5.57	34.6	1015.5	6.50
106.8	1031.9	5.98	231.5	1031.6	5.63	28.5	1021.6	6.58
112.9	1038.0	5.99	237.7	1037.8	5.67	22.3	1027.8	6.62
118.9	1044.0	5.98	243.8	1043.9	5.66	16.2	1033.9	6.60
125.0	1050.1	6.00	250.0	1050.1	5.66	10.0	1040.1	6.54

REV. X2
TUF-860SM
100818
Page 2 of 5

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
100.1	52.32	52.79	52.87	53.64	49.78	48.87
140.4	53.05	52.34	50.82	48.60	48.07	49.02
180.6	50.82	49.49	48.61	48.57	49.41	49.97
220.9	47.09	46.67	46.47	51.05	51.57	51.15
261.1	44.07	44.49	44.78	54.69	53.81	52.06
301.4	42.14	42.72	43.22	55.38	53.24	51.33
341.7	40.64	41.47	42.02	53.31	52.20	50.39
381.9	39.66	40.78	41.40	47.52	48.57	48.56
422.2	38.51	39.56	40.36	44.56	45.77	46.57
462.4	36.75	37.82	38.72	41.66	42.64	43.53
502.7	36.02	36.93	37.71	40.20	41.28	42.31
543.0	35.44	36.27	36.97	40.31	41.41	42.54
583.2	35.32	36.26	36.83	40.46	41.54	42.34
623.5	35.85	36.67	37.20	40.10	41.64	42.45
663.7	35.94	36.53	36.82	39.24	41.49	42.71
704.0	35.96	36.20	36.29	37.75	40.34	42.10
744.3	35.47	35.76	35.84	36.07	38.87	41.26
784.5	34.91	35.37	35.50	34.53	37.23	39.73
824.8	33.94	34.62	34.86	33.16	35.61	37.94
865.0	32.98	33.78	34.13	32.24	34.54	36.86
905.3	32.52	33.30	33.70	31.70	33.92	36.27
945.6	31.82	32.65	33.18	31.57	33.45	35.62
985.8	32.06	32.79	33.29	31.48	33.23	35.34
1026.1	32.10	33.08	33.60	31.27	33.13	35.12
1066.3	31.89	32.86	33.58	31.41	33.27	35.08
1106.6	32.19	33.12	33.82	31.35	33.16	34.74
1146.9	31.94	32.67	33.33	31.24	32.77	33.86
1187.1	31.96	32.50	33.11	31.12	32.10	32.30
1227.4	31.48	31.81	32.29	30.64	30.55	29.72
1267.6	31.00	31.06	31.34	29.43	28.10	27.36
1307.9	30.87	30.72	30.70	27.68	26.32	25.79
1348.2	30.84	30.44	30.24	26.53	25.16	24.46
1388.4	30.95	30.29	29.94	26.06	24.45	23.47
1428.7	30.99	30.07	29.43	25.94	23.83	22.41
1468.9	30.75	29.72	28.98	25.40	23.08	21.51
1509.2	30.39	29.17	28.30	24.90	22.31	20.58
1549.5	29.68	28.38	27.47	24.05	21.50	19.74
1589.7	28.79	27.60	26.72	22.94	20.54	18.78
1630.0	27.78	26.58	25.70	21.94	19.79	18.08
1650.1	27.21	26.21	25.45	21.15	19.15	17.55

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
100.1	130.1	36.64	36.21	36.03
140.4	170.4	31.34	31.22	30.99
180.6	210.6	27.95	27.93	27.97
220.9	250.9	25.74	25.79	25.74
261.1	291.1	24.43	24.44	24.51
301.4	331.4	23.72	23.74	23.71
341.7	371.7	23.37	23.63	23.81
381.9	411.9	23.31	23.91	24.30
422.2	452.2	22.96	23.38	23.80
462.4	492.4	23.42	23.44	23.46
502.7	532.7	24.67	24.57	24.49
543.0	573.0	27.32	27.06	26.76
583.2	613.2	29.96	30.64	31.16
623.5	653.5	28.07	28.72	29.32
663.7	693.7	24.69	24.79	24.84
704.0	734.0	22.32	22.19	22.13
744.3	774.3	20.18	19.87	19.84
784.5	814.5	18.74	18.46	18.29
824.8	854.8	17.52	17.25	17.08
865.0	895.0	16.54	16.24	16.26
905.3	935.3	15.97	15.67	15.59
945.6	975.6	15.52	15.31	15.19
985.8	1015.8	15.30	15.21	15.24
1026.1	1056.1	15.42	15.45	15.45
1066.3	1096.3	15.43	15.48	15.58
1106.6	1136.6	15.27	15.48	15.56
1146.9	1176.9	15.23	15.41	15.58
1187.1	1217.1	15.15	15.36	15.47
1227.4	1257.4	15.11	15.39	15.49
1267.6	1297.6	15.22	15.70	15.84
1307.9	1337.9	15.24	15.56	15.59
1348.2	1378.2	14.95	15.06	14.91
1388.4	1418.4	14.32	14.19	13.92
1428.7	1458.7	13.53	13.22	12.80
1468.9	1498.9	12.63	12.21	11.71
1509.2	1539.2	11.73	11.25	10.75
1549.5	1579.5	10.93	10.25	9.70
1589.7	1619.7	10.20	9.42	8.85
1630.0	1660.0	9.30	8.54	8.05
1650.1	1680.1	8.94	8.14	7.66

Frequency Mixer

TUF-860SM

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1050.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
100.1	130.1	15.67	13.60	12.61	100.1	15.39	9.79	6.56	10.0	2.23	1.93	1.62
140.4	170.4	8.95	7.70	7.22	140.4	6.01	4.46	4.42	16.2	2.32	1.95	1.67
180.6	210.6	5.54	5.10	4.89	180.6	3.84	3.35	3.71	22.3	2.49	2.09	1.82
220.9	250.9	4.09	3.84	3.70	220.9	2.80	2.97	3.62	28.5	2.48	2.10	1.81
261.1	291.1	3.19	3.03	2.95	261.1	2.27	2.65	3.38	34.6	2.47	2.13	1.85
301.4	331.4	2.61	2.51	2.46	301.4	2.01	2.54	3.31	40.8	2.49	2.17	1.88
341.7	371.7	2.24	2.15	2.12	341.7	1.89	2.51	3.35	46.9	2.51	2.19	1.90
381.9	411.9	1.96	1.91	1.88	381.9	1.74	2.38	3.21	53.1	2.49	2.18	1.91
422.2	452.2	1.77	1.74	1.73	422.2	1.73	2.44	3.30	59.2	2.49	2.19	1.92
462.4	492.4	1.58	1.56	1.56	462.4	1.67	2.37	3.22	65.4	2.51	2.20	1.92
502.7	532.7	1.42	1.43	1.46	502.7	1.66	2.38	3.25	71.5	2.50	2.19	1.91
543.0	573.0	1.32	1.34	1.39	543.0	1.68	2.40	3.26	77.7	2.51	2.20	1.92
583.2	613.2	1.24	1.28	1.35	583.2	1.68	2.39	3.23	83.8	2.52	2.19	1.92
623.5	653.5	1.21	1.27	1.34	623.5	1.73	2.46	3.32	90.0	2.53	2.20	1.92
663.7	693.7	1.20	1.28	1.35	663.7	1.73	2.43	3.27	96.2	2.53	2.19	1.92
704.0	734.0	1.20	1.30	1.39	704.0	1.77	2.46	3.30	102.3	2.56	2.21	1.93
744.3	774.3	1.21	1.33	1.41	744.3	1.80	2.44	3.25	108.5	2.56	2.21	1.93
784.5	814.5	1.14	1.26	1.33	784.5	1.85	2.46	3.26	114.6	2.56	2.21	1.93
824.8	854.8	1.02	1.14	1.21	824.8	1.96	2.57	3.35	120.8	2.56	2.22	1.93
865.0	895.0	1.10	1.06	1.12	865.0	2.02	2.62	3.38	126.9	2.56	2.21	1.93
905.3	935.3	1.27	1.18	1.16	905.3	2.08	2.71	3.48	133.1	2.55	2.21	1.93
945.6	975.6	1.49	1.39	1.34	945.6	2.11	2.73	3.50	139.2	2.56	2.22	1.94
985.8	1015.8	1.75	1.64	1.56	985.8	2.15	2.78	3.56	145.4	2.57	2.24	1.96
1026.1	1056.1	2.08	1.96	1.85	1026.1	2.17	2.79	3.58	151.5	2.59	2.26	1.98
1066.3	1096.3	2.43	2.31	2.21	1066.3	2.19	2.80	3.60	157.7	2.62	2.28	2.01
1106.6	1136.6	2.74	2.63	2.54	1106.6	2.20	2.79	3.59	163.8	2.65	2.32	2.04
1146.9	1176.9	3.02	2.92	2.83	1146.9	2.18	2.75	3.53	170.0	2.67	2.33	2.06
1187.1	1217.1	3.23	3.15	3.05	1187.1	2.17	2.71	3.48	176.2	2.67	2.34	2.07
1227.4	1257.4	3.42	3.33	3.27	1227.4	2.12	2.61	3.36	182.3	2.67	2.33	2.05
1267.6	1297.6	3.59	3.52	3.48	1267.6	2.07	2.56	3.33	188.5	2.64	2.31	2.03
1307.9	1337.9	3.73	3.69	3.66	1307.9	2.07	2.54	3.31	194.6	2.61	2.28	2.01
1348.2	1378.2	3.90	3.89	3.86	1348.2	2.15	2.61	3.37	200.8	2.59	2.26	1.98
1388.4	1418.4	4.13	4.13	4.11	1388.4	2.30	2.71	3.43	206.9	2.56	2.23	1.96
1428.7	1458.7	4.36	4.35	4.34	1428.7	2.47	2.80	3.47	213.1	2.56	2.23	1.96
1468.9	1498.9	4.46	4.44	4.41	1468.9	2.65	2.94	3.59	219.2	2.57	2.24	1.97
1509.2	1539.2	4.42	4.40	4.35	1509.2	2.83	3.03	3.62	225.4	2.59	2.26	2.00
1549.5	1579.5	4.42	4.34	4.29	1549.5	3.01	3.17	3.74	231.5	2.61	2.29	2.03
1589.7	1619.7	4.44	4.32	4.25	1589.7	3.17	3.26	3.78	237.7	2.65	2.33	2.07
1630.0	1660.0	4.45	4.29	4.19	1630.0	3.35	3.36	3.83	243.8	2.68	2.36	2.10
1650.1	1680.1	4.51	4.31	4.17	1650.1	3.42	3.43	3.90	250.0	2.69	2.37	2.12

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	26	8	32	27	62	57	44	41	50
1	-	11	+0	25	13	50	33	38	56	57	58	50
2	>100	51	40	55	43	58	51	69	62	>80	>80	71
3	>100	74	49	62	48	56	53	69	64	74	>80	>80
4	>100	>80	>80	>80	76	>80	72	79	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 920.10 MHz; -14.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.89 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	42	19	43	39	78	68	57	79	60
1	-	11	+0	27	14	54	35	47	64	62	60	56
2	85	45	35	53	39	52	43	66	61	85	79	67
3	>100	51	34	45	38	42	44	56	45	54	74	72
4	>100	72	61	58	56	58	54	63	61	71	69	85
5	>100	61	56	71	49	59	46	54	52	69	60	73
6	>100	>90	75	85	75	72	63	67	63	69	74	88
7	>100	>90	85	72	78	88	74	72	66	67	66	83
8	>100	>90	>90	>90	>90	>90	>90	83	84	83	74	90
9	>100	>90	>90	>90	>90	88	88	>90	83	81	79	78
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	86	86
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 920.10 MHz; -4.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.85 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
TUF-860SM
100818
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

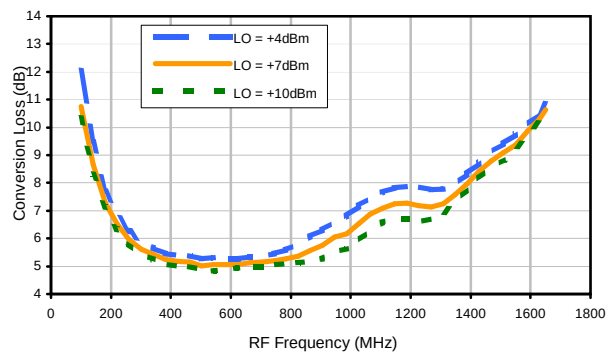


Conversion Loss vs. LO @ RF=925.1MHz

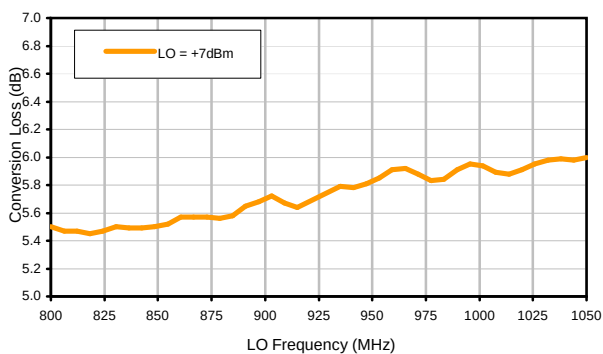


Conversion Loss vs. IF @ RF=925.1MHz

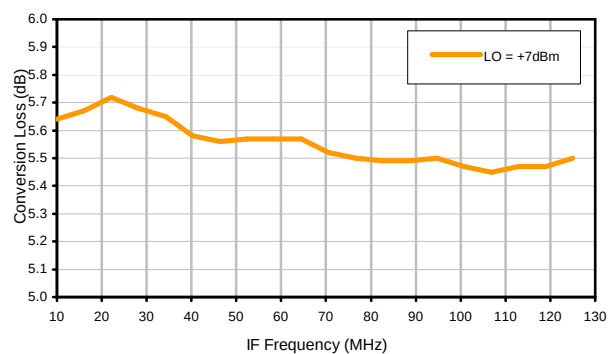


Conversion Loss vs. IF @ RF=800.1MHz

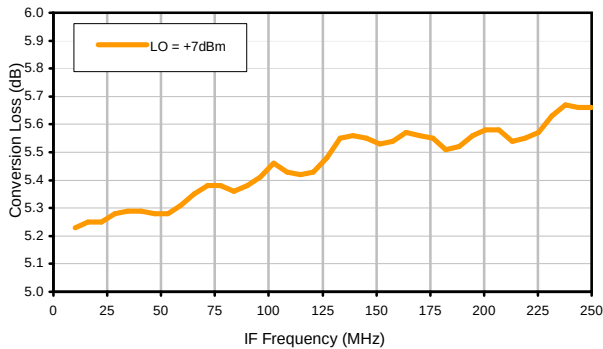


Conversion Loss vs. IF @ RF=1050.1MHz

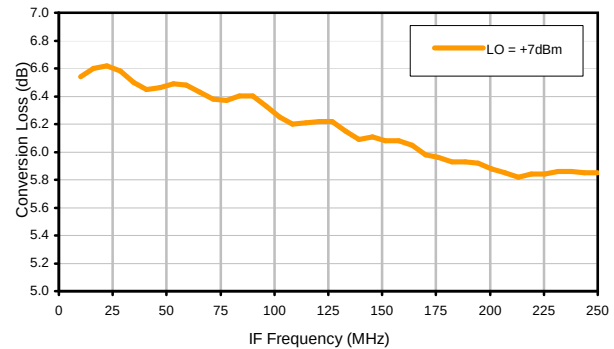

IP3 Input

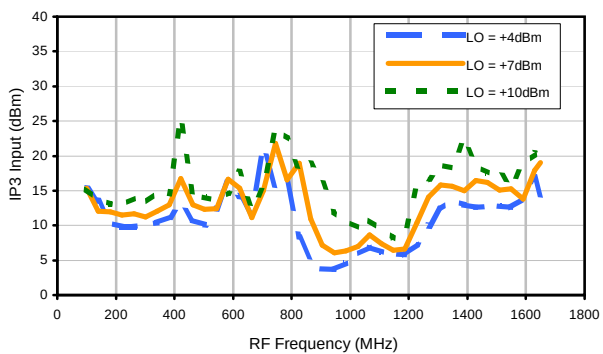


Compression @ RF IN=+1dBm

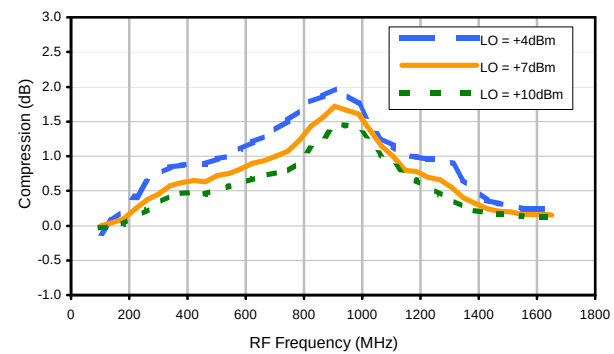


Typical Performance Curves


LO-RF Isolation

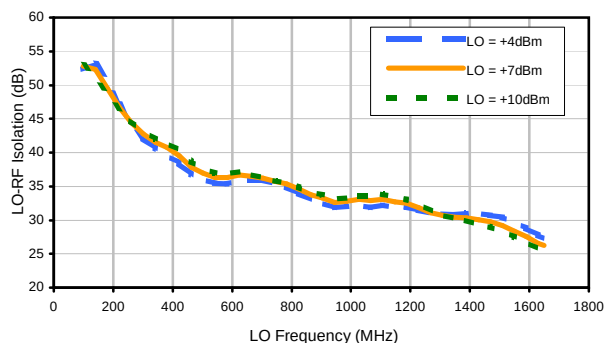


LO-IF Isolation

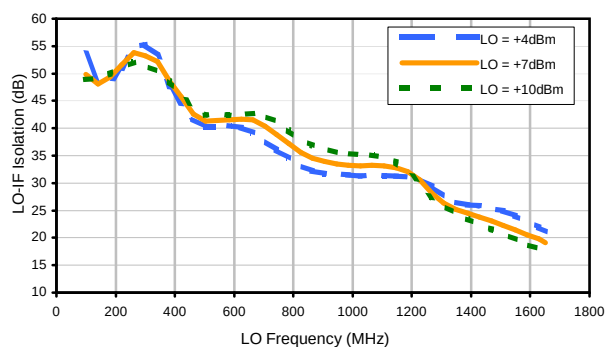


RF-IF Isolation

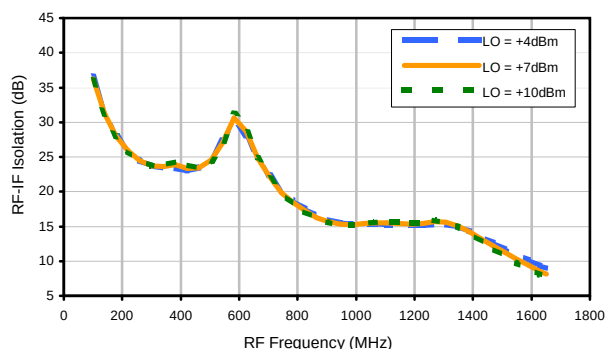


RF VSWR

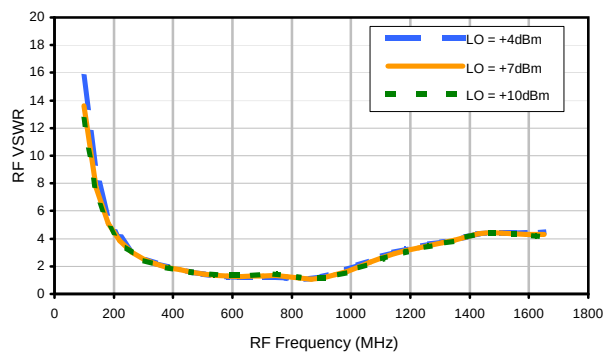

LO VSWR

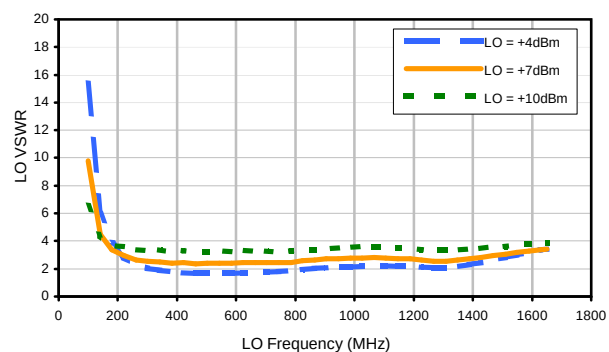

IF VSWR

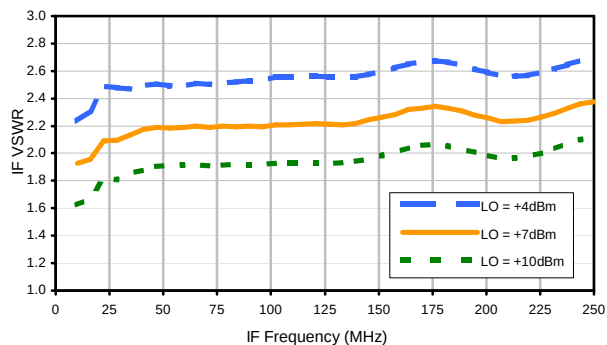

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	26	8	32	27	62	57	44	41	50
1	-	11	+0	25	13	50	33	38	56	57	58	50
2	>100	51	40	55	43	58	51	69	62	>80	>80	71
3	>100	74	49	62	48	56	53	69	64	74	>80	>80
4	>100	>80	>80	>80	76	>80	72	79	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -14.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.89 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	42	19	43	39	78	68	57	79	60
1	-	11	+0	27	14	54	35	47	64	62	60	56
2	85	45	35	53	39	52	43	66	61	85	79	67
3	>100	51	34	45	38	42	44	56	45	54	74	72
4	>100	72	61	58	56	58	54	63	61	71	69	85
5	>100	61	56	71	49	59	46	54	52	69	60	73
6	>100	>90	75	85	75	72	63	67	63	69	74	88
7	>100	>90	85	72	78	88	74	72	66	67	66	83
8	>100	>90	>90	>90	>90	>90	>90	83	84	83	74	90
9	>100	>90	>90	>90	>90	88	88	>90	83	81	79	78
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	86	86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 920.1 MHz; -4.00 dBm.
LO IN: 950.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.85 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X2
TUF-860SM
100818
Page 3 of 3




Outline Dimensions

NNN150

NOTE: BLUE BEAD INDICATES PIN #1.
PIN NUMBERS DO NOT APPEAR
ON UNIT.FOR REFERENCE ONLY.

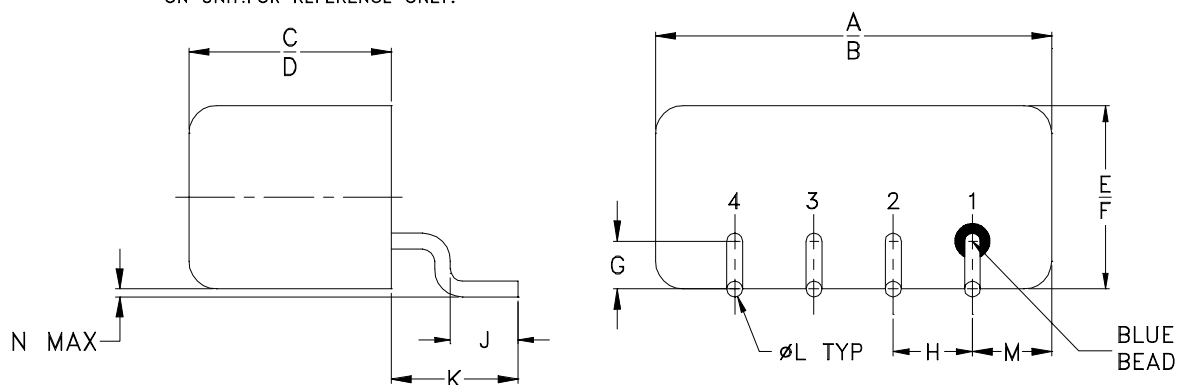

PCB Land Pattern

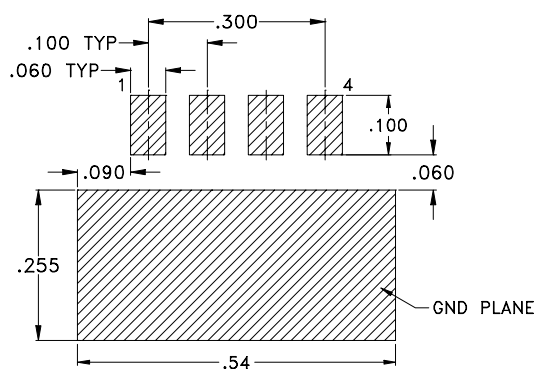

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
NNN150	.50 (12.70)	.48 (12.19)	.255 (6.48)	.240 (6.10)	.23 (5.84)	.21 (5.33)	.06 (1.52)	.100 (2.54)	.09 (2.29)	.16 (4.06)	.020 (0.51)	.09 (2.29)	.005 (0.13)	1.9

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material C.R.S. Pin material #52 alloy.
- Finish: Electro-Tin, hot-oil flowed or electro-Tin-Silver.
- Cover material: Cupro-Nickel.
- Pin's meniscus 0.015 inch max.
- Special Tolerances: Pin diameter $\pm .005$ inch.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F9

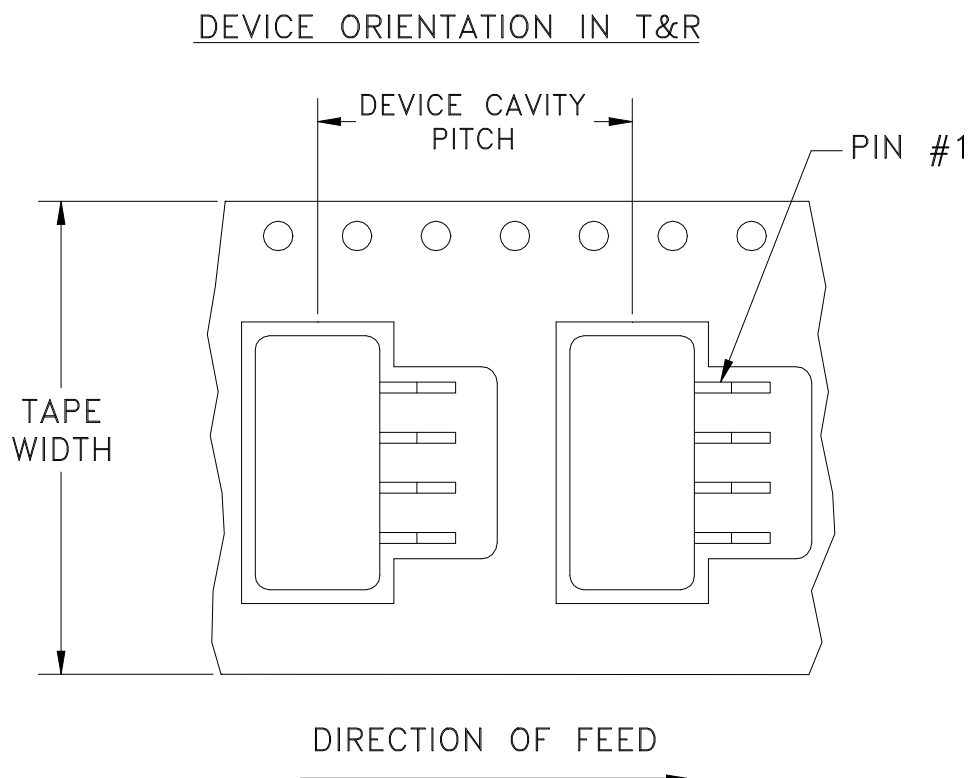

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M86549	NEW RELEASE	04/15/03	GF	DJ
A	M102713	UPDATED NOTES & DISCRIPTION	01/14/06	GF	IL


**SUGGESTED MOUNTING CONFIGURATION
FOR NNN150 CASE STYLE, "z"/"cm" PIN CONNECTIONS.**

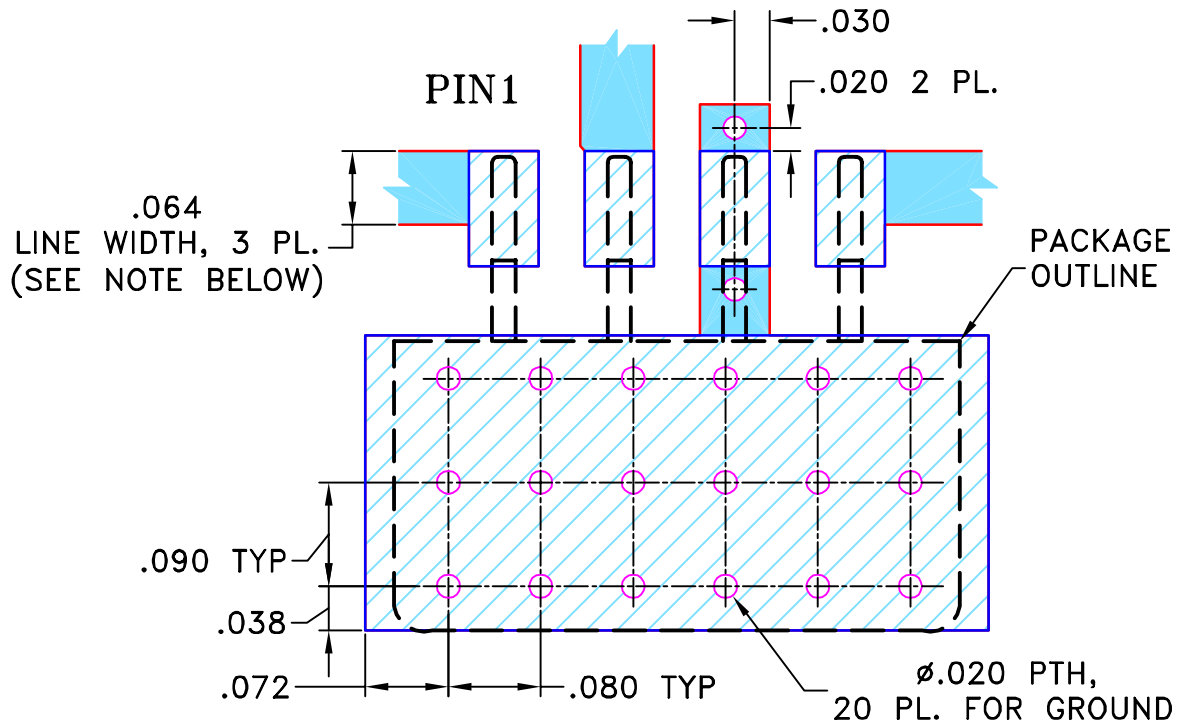

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $0.030'' \pm 0.002''$; COPPER: $1/2$ OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

GF

04/11/03

TOLERANCES ON:

CHECKED

AV

04/15/03

2 PL DECIMALS $\pm$

APPROVED

DJ

04/15/03

3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$
 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, z/cm NNN150, TUF/TFAS-SM, TB-201


SIZE
ACODE IDENT
15542DRAWING NO:
98-PL-081REV:
A

FILE: 98PL081


SCALE: 6:1

SHEET: 1 OF 1

Evaluation Board and Circuit

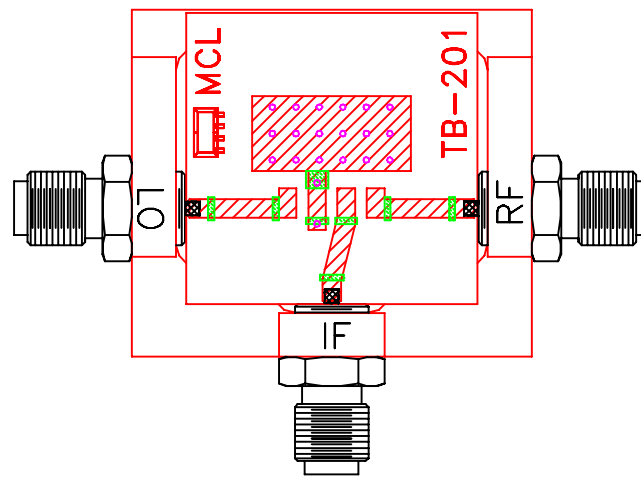

TB-201

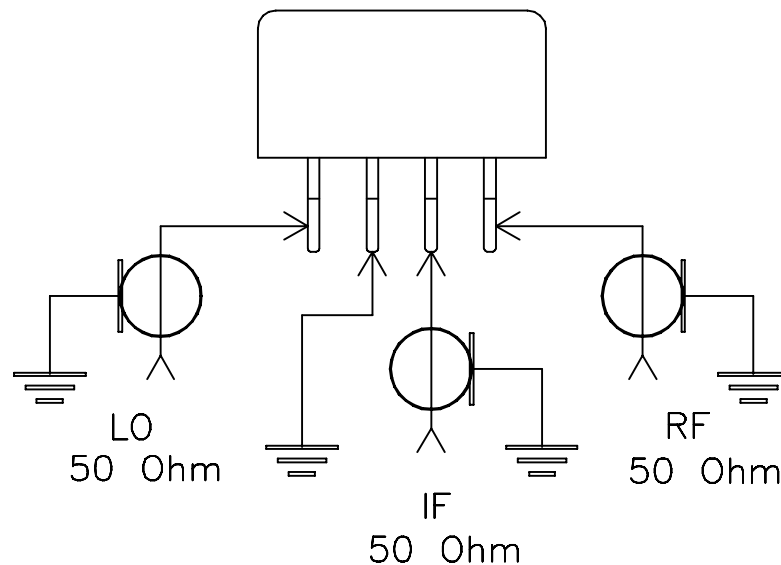

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**