

Frequency Mixer

TUF-ED12915/2

Level 10 (LO Power + 10 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : NNN150

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fu)	10		1330	MHz
	RF (fL to fu)	10		1330	MHz
	IF	10		1000	MHz
Conversion Loss	mid band		6.12		dB
	Total Range		6.5		dB
LO-RF Isolation	Low Range		55		dB
	Mid Range		49		dB
	Upper Range		42		dB
LO-IF Isolation	Low Range		51		dB
	Mid Range		40		dB
	Upper Range		30		dB
Input IP3			+16		dBm
1 dB Compression			+5		dBm

Note: Low Range = [fL to 10fL]
mid band = [2fL to fu/2]


Mid Range = [10fL to fu/2]

Upper Range = [fu/2 to fu]

MAXIMUM RATINGS	
Operating Temperature	-55°C TO +100°C
Storage Temperature	-55°C TO +100°C

PIN CONNECTIONS	
LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Electrical Schematics

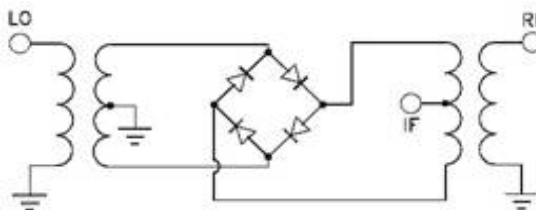

Frequency Mixer

TUF-ED12915/2

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	6.58	6.07	5.76
50.1	80.1	6.68	6.19	5.92
90.1	120.1	6.61	6.11	5.89
130.1	160.1	6.58	6.11	5.87
170.1	200.1	6.55	6.07	5.87
210.1	240.1	6.51	6.05	5.85
250.1	280.1	6.53	6.08	5.89
290.1	320.1	6.40	6.02	5.88
330.1	360.1	6.42	6.06	5.89
370.1	400.1	6.39	6.06	5.92
410.1	440.1	6.41	6.09	5.95
450.1	480.1	6.39	6.07	5.95
490.1	520.1	6.40	6.09	5.95
530.1	560.1	6.48	6.18	6.01
570.1	600.1	6.55	6.22	6.02
610.1	640.1	6.58	6.26	6.06
650.1	680.1	6.58	6.28	6.12
690.1	720.1	6.60	6.33	6.18
730.1	760.1	6.68	6.41	6.26
770.1	800.1	6.77	6.48	6.32
810.1	840.1	6.89	6.58	6.39
850.1	880.1	7.06	6.70	6.46
890.1	920.1	7.19	6.83	6.57
930.1	960.1	7.34	6.99	6.72
970.1	1000.1	7.53	7.14	6.85
1010.1	1040.1	7.63	7.16	6.84
1050.1	1080.1	7.66	7.06	6.71
1090.1	1120.1	7.55	6.90	6.58
1130.1	1160.1	7.46	6.79	6.49
1170.1	1200.1	7.49	6.80	6.48
1210.1	1240.1	7.61	6.85	6.53
1250.1	1280.1	7.82	6.94	6.61
1290.1	1320.1	8.19	7.17	6.79
1330.1	1360.1	8.44	7.37	6.95
1370.1	1400.1	8.76	7.66	7.16
1410.1	1440.1	9.15	8.01	7.43
1450.1	1480.1	9.64	8.48	7.78
1490.1	1520.1	10.28	9.14	8.37
1530.1	1560.1	10.93	9.89	9.13
1550.1	1580.1	11.26	10.35	9.60

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	20.59	22.49	23.23
50.1	80.1	20.91	22.28	22.80
90.1	120.1	19.74	20.96	22.87
130.1	160.1	19.51	21.03	26.74
170.1	200.1	19.56	23.00	21.53
210.1	240.1	19.49	23.00	19.49
250.1	280.1	20.57	21.11	18.53
290.1	320.1	19.42	17.48	18.37
330.1	360.1	20.12	17.03	18.37
370.1	400.1	17.73	16.99	19.80
410.1	440.1	16.01	16.27	18.95
450.1	480.1	15.06	15.78	18.52
490.1	520.1	14.55	15.92	18.03
530.1	560.1	13.89	16.08	17.96
570.1	600.1	14.16	17.03	18.85
610.1	640.1	14.46	17.59	19.16
650.1	680.1	14.15	16.15	17.42
690.1	720.1	13.66	14.92	15.66
730.1	760.1	13.07	14.45	15.24
770.1	800.1	12.92	15.27	16.97
810.1	840.1	12.30	15.80	19.70
850.1	880.1	11.66	14.65	18.15
890.1	920.1	11.04	12.73	14.46
930.1	960.1	10.41	11.43	12.77
970.1	1000.1	10.24	11.32	12.97
1010.1	1040.1	10.57	12.27	14.77
1050.1	1080.1	11.77	14.55	19.54
1090.1	1120.1	13.74	18.48	20.69
1130.1	1160.1	15.53	19.23	17.44
1170.1	1200.1	15.45	18.00	17.24
1210.1	1240.1	15.26	18.28	18.06
1250.1	1280.1	14.83	18.19	19.14
1290.1	1320.1	14.15	17.37	19.76
1330.1	1360.1	13.59	16.31	18.57
1370.1	1400.1	13.21	15.10	16.92
1410.1	1440.1	13.56	14.78	16.06
1450.1	1480.1	14.39	14.59	14.94
1490.1	1520.1	15.74	15.76	14.68
1530.1	1560.1	14.78	19.79	16.23
1550.1	1580.1	14.02	19.50	17.99

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+5dBm (dB)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	1.16	0.73	0.51
50.1	80.1	0.95	0.69	0.51
90.1	120.1	0.97	0.71	0.48
130.1	160.1	0.93	0.65	0.44
170.1	200.1	0.97	0.68	0.48
210.1	240.1	0.94	0.67	0.45
250.1	280.1	0.97	0.65	0.45
290.1	320.1	0.98	0.66	0.43
330.1	360.1	0.94	0.59	0.39
370.1	400.1	1.01	0.63	0.42
410.1	440.1	0.97	0.60	0.41
450.1	480.1	0.98	0.60	0.41
490.1	520.1	0.92	0.59	0.42
530.1	560.1	0.87	0.54	0.39
570.1	600.1	0.88	0.59	0.45
610.1	640.1	0.95	0.65	0.50
650.1	680.1	1.12	0.79	0.59
690.1	720.1	1.19	0.84	0.62
730.1	760.1	1.33	0.92	0.67
770.1	800.1	1.44	1.03	0.73
810.1	840.1	1.48	1.10	0.80
850.1	880.1	1.57	1.18	0.92
890.1	920.1	1.60	1.20	0.93
930.1	960.1	1.63	1.21	0.90
970.1	1000.1	1.58	1.12	0.83
1010.1	1040.1	1.66	1.22	0.92
1050.1	1080.1	1.66	1.28	1.00
1090.1	1120.1	1.81	1.43	1.08
1130.1	1160.1	1.97	1.55	1.17
1170.1	1200.1	2.06	1.61	1.22
1210.1	1240.1	2.08	1.65	1.25
1250.1	1280.1	1.98	1.68	1.30
1290.1	1320.1	1.84	1.71	1.36
1330.1	1360.1	1.71	1.75	1.46
1370.1	1400.1	1.51	1.75	1.59
1410.1	1440.1	1.26	1.68	1.66
1450.1	1480.1	0.91	1.47	1.65
1490.1	1520.1	0.49	1.09	1.42
1530.1	1560.1	-0.01	0.53	0.92
1550.1	1580.1	-0.19	0.22	0.61



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

REF/RF MICROWAVE COMPONENTS



REV. X2

TUF-ED12915/2

25/10/2010

Page 1 of 5

Frequency Mixer

TUF-ED12915/2

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=510.1MHz (dB)
		@LO (dBm) +10
490.1	20.0	6.35
478.1	32.0	6.30
466.1	44.0	6.28
454.1	56.0	6.31
442.1	68.0	6.23
430.1	80.0	6.27
418.1	92.0	6.25
406.1	104.0	6.24
394.1	116.0	6.15
382.1	128.0	6.08
370.1	140.0	6.05
358.1	152.0	6.08
346.1	164.0	6.06
334.1	176.0	6.09
322.1	188.0	6.07
310.1	200.0	6.05
298.1	212.0	6.02
286.1	224.0	6.01
274.1	236.0	6.01
262.1	248.0	6.03
250.1	260.0	6.02
238.1	272.0	6.01
226.1	284.0	6.02
214.1	296.0	6.04
202.1	308.0	6.07
190.1	320.0	6.09
178.1	332.0	6.09
166.1	344.0	6.12
154.1	356.0	6.13
142.1	368.0	6.13
130.1	380.0	6.10
118.1	392.0	6.11
106.1	404.0	6.13
94.1	416.0	6.11
82.1	428.0	6.15
70.1	440.0	6.18
58.1	452.0	6.20
46.1	464.0	6.19
22.1	488.0	6.19
10.1	500.0	6.51

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=39.9MHz (dB)
		@LO (dBm) +10
10.1	50.0	6.46
70.1	110.0	6.14
130.1	170.0	6.30
190.1	230.0	6.20
250.1	290.0	6.33
310.1	350.0	6.16
350.1	390.0	6.26
410.1	450.0	6.28
450.1	490.0	6.24
510.1	550.0	6.08
550.1	590.0	6.17
610.1	650.0	6.34
650.1	690.0	6.43
710.1	750.0	6.69
750.1	790.0	6.65
810.1	850.0	6.55
850.1	890.0	6.45
910.1	950.0	6.42
950.1	990.0	6.25
1010.1	1050.0	6.12
1050.1	1090.0	5.99
1110.1	1150.0	5.99
1150.1	1190.0	6.06
1210.1	1250.0	6.06
1250.1	1290.0	6.05
1310.1	1350.0	6.04
1350.1	1390.0	6.17
1410.1	1450.0	6.24
1450.1	1490.0	6.43
1510.1	1550.0	6.78
1550.1	1590.0	6.85
1610.1	1650.0	7.17
1650.1	1690.0	7.35
1710.1	1750.0	7.81
1750.1	1790.0	8.28
1810.1	1850.0	8.81
1850.1	1890.0	9.22
1910.1	1950.0	9.90
1950.1	1990.0	10.23
2010.1	2050.0	11.07

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1010.1MHz (dB)
		@LO (dBm) +10
990.1	20.0	7.34
970.1	40.0	7.23
950.1	60.0	7.19
930.1	80.0	7.24
910.1	100.0	7.11
890.1	120.0	7.11
870.1	140.0	6.91
850.1	160.0	6.94
830.1	180.0	6.90
810.1	200.0	6.88
790.1	220.0	6.88
770.1	240.0	6.83
750.1	260.0	6.85
730.1	280.0	6.86
710.1	300.0	6.88
690.1	320.0	6.91
670.1	340.0	6.96
650.1	360.0	6.97
630.1	380.0	7.04
610.1	400.0	7.05
570.1	440.0	7.08
550.1	460.0	7.06
510.1	500.0	7.06
490.1	520.0	7.13
450.1	560.0	7.14
430.1	580.0	7.07
390.1	620.0	7.10
370.1	640.0	7.16
330.1	680.0	7.20
310.1	700.0	7.25
270.1	740.0	7.21
250.1	760.0	7.16
210.1	800.0	7.03
190.1	820.0	6.96
150.1	860.0	7.02
130.1	880.0	7.04
90.1	920.0	7.25
70.1	940.0	7.37
30.1	980.0	7.33
10.1	1000.0	7.68



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



REV. X2
TUF-ED12915/2
25/10/2010
Page 2 of 5

Frequency Mixer

TUF-ED12915/2

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)					@LO (dBm)		
	+7	+10	+13	+7	+10	+13			+7	+10	+13
40.1	67.31	64.56	65.52	59.21	57.20	55.96	10.1	40.1	51.43	50.68	51.26
80.1	60.76	60.26	61.13	55.12	52.94	51.49	50.1	80.1	37.19	37.69	37.34
120.1	56.87	57.31	57.92	51.56	49.39	48.07	90.1	120.1	32.59	32.78	32.57
160.1	54.67	55.17	55.81	49.25	47.10	45.92	130.1	160.1	29.67	29.81	30.15
200.1	52.92	53.75	54.34	47.63	45.57	44.68	170.1	200.1	27.80	28.15	28.32
240.1	51.53	52.42	53.02	46.13	44.40	43.62	210.1	240.1	26.78	27.12	27.17
280.1	50.73	51.75	52.31	44.96	43.65	42.80	250.1	280.1	25.97	26.22	26.72
320.1	49.62	50.74	51.39	44.02	42.83	41.60	290.1	320.1	25.68	25.97	26.28
360.1	48.98	49.93	50.55	43.57	42.12	40.85	330.1	360.1	25.54	26.00	26.10
400.1	48.22	49.17	49.77	43.21	41.74	40.15	370.1	400.1	25.41	26.29	26.49
440.1	47.83	49.14	49.85	42.71	40.96	39.52	410.1	440.1	25.54	26.44	27.06
480.1	47.26	48.54	48.92	41.82	40.07	38.36	450.1	480.1	25.65	26.53	27.09
520.1	45.98	47.02	47.61	40.08	38.75	37.44	490.1	520.1	25.91	26.20	26.25
560.1	44.76	45.69	46.58	38.92	37.73	36.98	530.1	560.1	25.80	25.71	25.76
600.1	43.98	45.00	46.08	37.89	36.54	35.60	570.1	600.1	25.32	25.46	25.93
640.1	43.50	44.68	46.03	37.17	35.90	34.81	610.1	640.1	24.32	25.08	26.11
680.1	43.71	44.91	46.01	36.65	35.55	34.53	650.1	680.1	22.83	23.74	24.66
720.1	43.94	44.91	45.35	35.91	35.16	34.20	690.1	720.1	20.98	21.36	21.83
760.1	44.37	44.98	45.06	35.26	34.52	33.96	730.1	760.1	18.91	18.82	18.82
800.1	44.50	44.73	44.29	34.35	33.37	32.66	770.1	800.1	17.72	17.46	17.25
840.1	43.75	43.60	43.15	33.88	32.67	31.79	810.1	840.1	16.69	16.29	15.99
880.1	42.91	42.59	42.39	33.33	31.98	31.06	850.1	880.1	15.86	15.41	15.10
920.1	42.19	41.96	41.75	32.67	31.62	30.55	890.1	920.1	15.22	14.77	14.46
960.1	41.94	41.76	41.30	32.24	31.53	30.31	930.1	960.1	14.64	14.23	13.86
1000.1	41.44	41.23	40.93	31.58	31.18	30.31	970.1	1000.1	14.22	13.74	13.35
1040.1	40.71	40.78	40.57	31.02	31.08	30.52	1010.1	1040.1	13.93	13.44	13.06
1080.1	40.17	40.35	40.25	30.18	30.53	30.17	1050.1	1080.1	13.83	13.38	13.05
1120.1	39.41	39.78	39.85	29.28	29.84	29.57	1090.1	1120.1	13.80	13.45	13.23
1160.1	38.91	39.67	40.14	28.58	29.30	29.39	1130.1	1160.1	13.89	13.71	13.60
1200.1	38.52	39.64	40.42	27.77	28.46	28.83	1170.1	1200.1	13.82	13.72	13.68
1240.1	38.36	39.70	40.80	27.29	27.70	28.24	1210.1	1240.1	13.71	13.60	13.53
1280.1	38.43	40.02	41.38	27.01	27.24	27.74	1250.1	1280.1	13.47	13.39	13.32
1320.1	38.52	40.44	42.03	26.72	26.88	27.35	1290.1	1320.1	13.30	13.12	13.03
1360.1	38.67	41.03	42.82	26.65	26.90	27.29	1330.1	1360.1	13.00	12.86	12.68
1400.1	38.96	41.75	43.74	26.47	26.75	27.06	1370.1	1400.1	12.66	12.53	12.37
1440.1	38.92	41.94	43.55	26.27	26.77	26.99	1410.1	1440.1	12.26	12.12	11.93
1480.1	36.61	39.29	41.20	25.98	26.38	26.59	1450.1	1480.1	11.79	11.67	11.45
1520.1	36.52	40.35	44.51	26.66	26.91	27.02	1490.1	1520.1	11.56	11.38	11.18
1560.1	38.01	43.17	49.97	27.23	27.76	27.91	1530.1	1560.1	11.10	10.86	10.62
1580.1	38.39	43.91	52.11	27.24	27.99	28.17	1550.1	1580.1	10.81	10.55	10.30



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



REV. X2
TUF-ED12915/2
25/10/2010
Page 3 of 5

Frequency Mixer

TUF-ED12915/2

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1020.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+7	+10	+13		+7	+10	+13		+7	+10	+13
10.1	40.1	1.40	1.38	1.44	40.1	1.73	2.53	3.51	10.0	1.88	1.64	1.48
50.1	80.1	1.12	1.10	1.13	80.1	1.61	2.28	3.12	30.0	1.89	1.64	1.48
90.1	120.1	1.12	1.07	1.11	120.1	1.64	2.36	3.25	50.0	1.91	1.66	1.50
130.1	160.1	1.13	1.03	1.04	160.1	1.63	2.34	3.21	70.0	1.93	1.68	1.52
170.1	200.1	1.10	1.06	1.12	200.1	1.59	2.25	3.09	90.0	1.91	1.66	1.50
210.1	240.1	1.13	1.05	1.10	240.1	1.63	2.34	3.21	110.0	1.93	1.68	1.52
250.1	280.1	1.09	1.08	1.16	280.1	1.59	2.25	3.07	130.0	1.94	1.70	1.54
290.1	320.1	1.12	1.11	1.17	320.1	1.60	2.28	3.13	150.0	1.93	1.69	1.53
330.1	360.1	1.08	1.11	1.16	360.1	1.58	2.25	3.07	170.0	1.95	1.70	1.55
370.1	400.1	1.11	1.15	1.21	400.1	1.57	2.23	3.04	190.0	1.96	1.72	1.57
410.1	440.1	1.10	1.14	1.19	440.1	1.58	2.24	3.06	210.0	1.96	1.72	1.56
450.1	480.1	1.10	1.17	1.23	480.1	1.56	2.20	2.98	230.0	1.97	1.73	1.58
490.1	520.1	1.10	1.15	1.19	520.1	1.57	2.22	3.02	250.0	2.00	1.76	1.61
530.1	560.1	1.11	1.16	1.19	560.1	1.56	2.19	2.95	270.0	1.98	1.75	1.61
570.1	600.1	1.14	1.18	1.22	600.1	1.57	2.20	2.97	290.0	1.99	1.76	1.61
610.1	640.1	1.14	1.18	1.23	640.1	1.58	2.20	2.95	310.0	2.01	1.79	1.65
650.1	680.1	1.18	1.23	1.28	680.1	1.57	2.18	2.92	330.0	2.01	1.79	1.65
690.1	720.1	1.18	1.22	1.26	720.1	1.59	2.20	2.94	350.0	2.01	1.79	1.66
730.1	760.1	1.20	1.26	1.30	760.1	1.58	2.17	2.87	390.0	2.03	1.82	1.69
770.1	800.1	1.16	1.21	1.25	800.1	1.60	2.18	2.89	410.0	2.02	1.82	1.69
810.1	840.1	1.12	1.16	1.20	840.1	1.61	2.18	2.87	450.0	2.05	1.85	1.73
850.1	880.1	1.10	1.13	1.16	880.1	1.60	2.17	2.85	470.0	2.02	1.83	1.71
890.1	920.1	1.07	1.07	1.09	920.1	1.62	2.19	2.86	510.0	2.05	1.86	1.74
930.1	960.1	1.10	1.09	1.11	960.1	1.62	2.17	2.83	530.0	2.03	1.85	1.74
970.1	1000.1	1.19	1.17	1.17	1000.1	1.62	2.17	2.82	570.0	2.04	1.87	1.76
1010.1	1040.1	1.23	1.21	1.21	1040.1	1.62	2.15	2.79	590.0	2.02	1.84	1.74
1050.1	1080.1	1.37	1.36	1.36	1080.1	1.61	2.12	2.74	630.0	2.04	1.87	1.77
1090.1	1120.1	1.45	1.43	1.41	1120.1	1.61	2.12	2.74	650.0	2.01	1.84	1.75
1130.1	1160.1	1.53	1.51	1.49	1160.1	1.64	2.13	2.74	690.0	2.02	1.84	1.74
1170.1	1200.1	1.66	1.62	1.58	1200.1	1.65	2.13	2.73	710.0	1.99	1.82	1.72
1210.1	1240.1	1.69	1.64	1.60	1240.1	1.69	2.17	2.77	750.0	1.99	1.82	1.73
1250.1	1280.1	1.85	1.77	1.73	1280.1	1.71	2.18	2.74	770.0	1.97	1.79	1.69
1290.1	1320.1	1.89	1.78	1.72	1320.1	1.72	2.19	2.75	810.0	1.95	1.76	1.67
1330.1	1360.1	2.01	1.89	1.82	1360.1	1.75	2.22	2.78	830.0	1.94	1.75	1.65
1370.1	1400.1	2.12	1.97	1.88	1400.1	1.74	2.20	2.73	870.0	1.91	1.71	1.61
1410.1	1440.1	2.16	2.01	1.91	1440.1	1.77	2.24	2.79	890.0	1.89	1.69	1.58
1450.1	1480.1	2.35	2.18	2.06	1480.1	1.75	2.21	2.73	930.0	1.85	1.65	1.54
1490.1	1520.1	2.32	2.17	2.04	1520.1	1.74	2.20	2.73	950.0	1.86	1.64	1.52
1530.1	1560.1	2.53	2.39	2.26	1560.1	1.76	2.23	2.76	990.0	1.80	1.57	1.44
1550.1	1580.1	2.57	2.45	2.32	1580.1	1.75	2.20	2.72	1010.0	1.82	1.59	1.47



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



REV. X2
TUF-ED12915/2
25/10/2010
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)											
0	-	-	14	26	16	34	30	37	42	31	39	51
1	-	20	+0	27	12	30	21	36	50	31	39	37
2	84	73	54	> 74	55	> 74	53	66	70	> 74	> 74	61
3	> 90	68	55	> 74	54	68	53	73	57	> 74	68	66
4	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
5	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
6	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
7	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
8	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
9	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
10	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 525.00 MHz; -10.00 dBm.
LO IN: 555.00 MHz; +10.00 dBm
IF OUT: 30.00 MHz; -16.42 dBm

RF HARMONICS ORDER

	(-dBm)											
0	-	-	23	36	28	49	41	48	60	44	66	68
1	-	20	+0	28	12	31	22	39	45	38	49	46
2	64	73	45	74	45	78	45	58	67	69	61	55
3	> 90	52	38	65	41	52	37	61	51	54	56	47
4	> 90	73	68	> 84	69	75	67	77	63	78	71	72
5	> 90	78	60	71	53	72	51	64	48	70	53	69
6	> 90	> 84	> 84	> 84	80	81	73	> 84	70	83	68	83
7	> 90	81	82	> 84	71	80	78	> 84	76	80	68	82
8	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	83	> 84
9	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	79	> 84	79	82
10	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 525.25 MHz; +.00 dBm.
LO IN: 555.00 MHz; +10.00 dBm
IF OUT: 30.00 MHz; -6.43 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


RF/IF MICROWAVE COMPONENTS




REV. X2
TUF-ED12915/2
25/10/2010
Page 5 of 5

Typical Performance Curves


Conversion Loss @ IF=30MHz

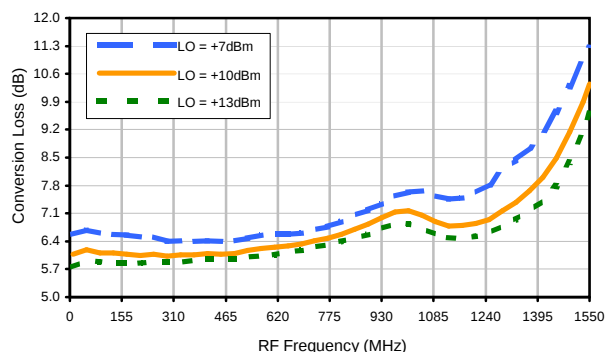


Conversion Loss vs. IF @ RF=510.1MHz

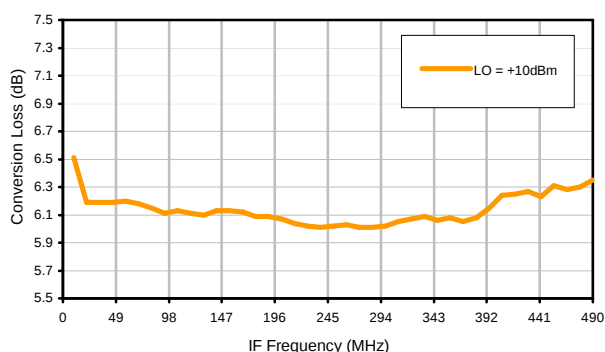


Conversion Loss vs. IF @ RF=39.9MHz

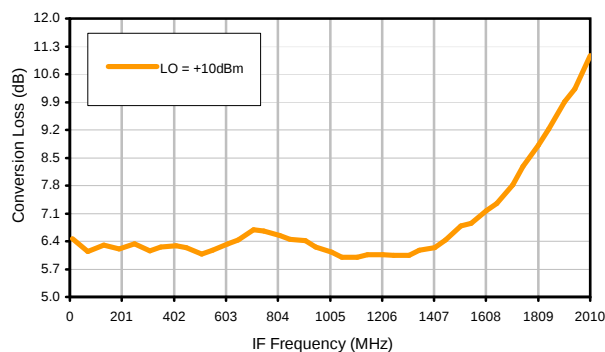


Conversion Loss vs. IF @ RF=1010.1MHz

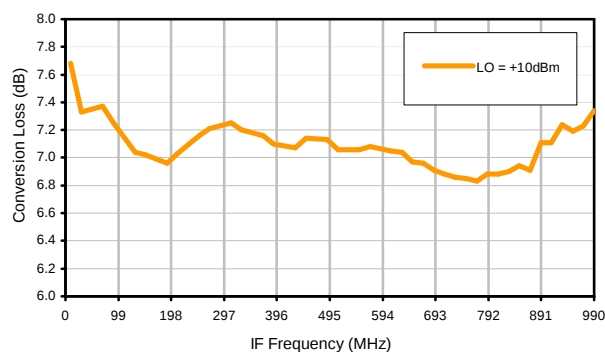

IP3 Input

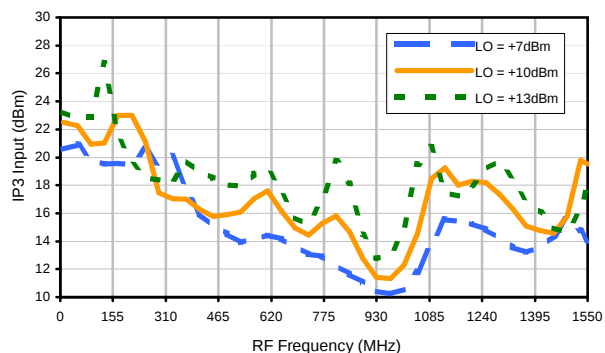


Compression @ RF IN=+5dBm

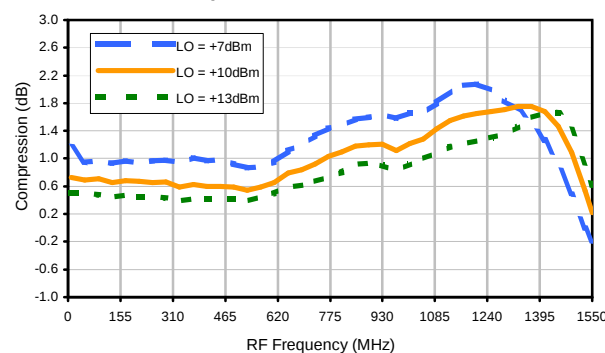


Typical Performance Curves


LO-RF Isolation

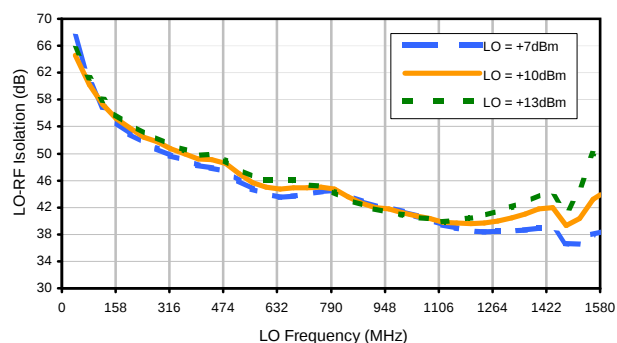


LO-IF Isolation

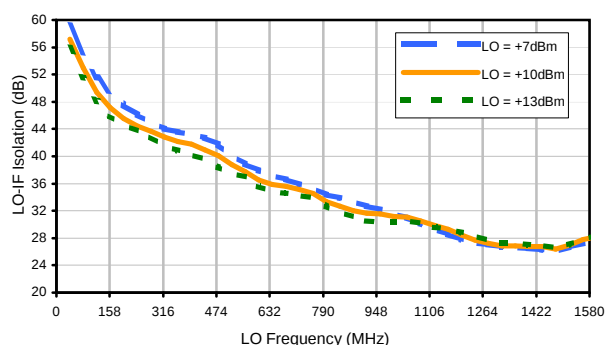


RF-IF Isolation

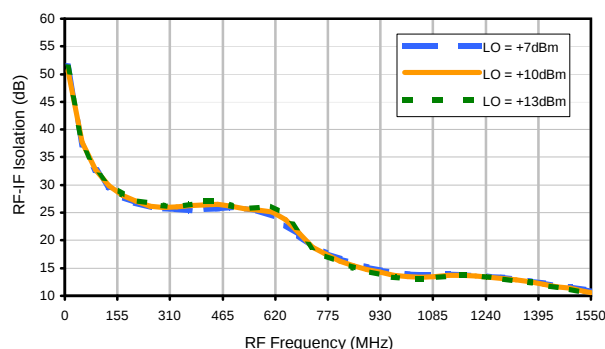


RF VSWR

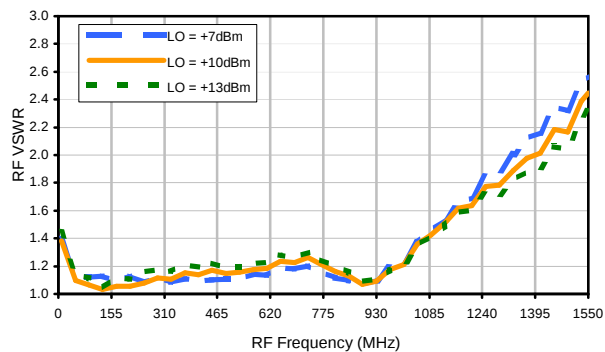

LO VSWR

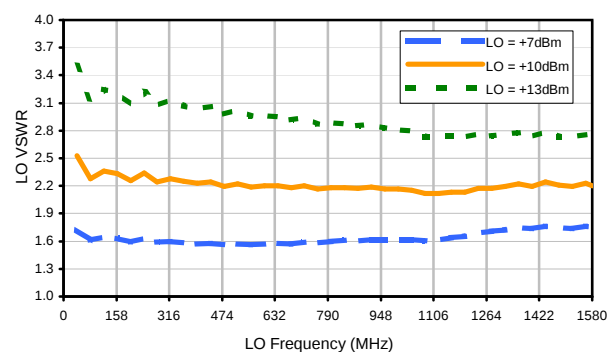

IF VSWR

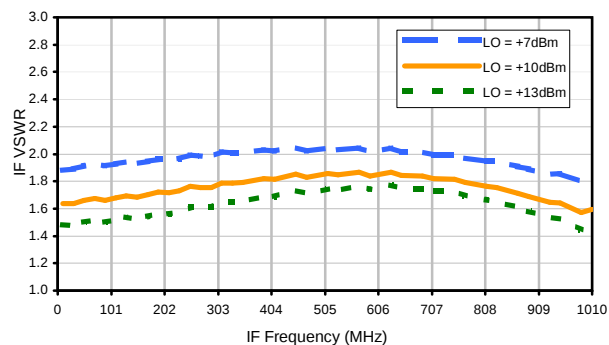

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)											
0	-	-	14	26	16	34	30	37	42	31	39	51
1	-	20	+0	27	12	30	21	36	50	31	39	37
2	84	73	54	> 74	55	> 74	53	66	70	> 74	> 74	61
3	> 90	68	55	> 74	54	68	53	73	57	> 74	68	66
4	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
5	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
6	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
7	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
8	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
9	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
10	> 90	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74	> 74
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 525.00 MHz; -10.00 dBm.
LO IN: 555.00 MHz; +10.00 dBm
IF OUT: 30.00 MHz; -16.42 dBm

RF HARMONICS ORDER

	(-dBm)											
0	-	-	23	36	28	49	41	48	60	44	66	68
1	-	20	+0	28	12	31	22	39	45	38	49	46
2	64	73	45	74	45	78	45	58	67	69	61	55
3	> 90	52	38	65	41	52	37	61	51	54	56	47
4	> 90	73	68	> 84	69	75	67	77	63	78	71	72
5	> 90	78	60	71	53	72	51	64	48	70	53	69
6	> 90	> 84	> 84	> 84	80	81	73	> 84	70	83	68	83
7	> 90	81	82	> 84	71	80	78	> 84	76	80	68	82
8	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	83	> 84
9	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	79	> 84	79	82
10	> 90	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84	> 84
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 525.25 MHz; +.00 dBm.
LO IN: 555.00 MHz; +10.00 dBm
IF OUT: 30.00 MHz; -6.43 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


RF/IF MICROWAVE COMPONENTS

REV. X2
TUF-ED12915/2
25/10/2010
Page 3 of 3


Outline Dimensions

NNN150

NOTE: BLUE BEAD INDICATES PIN #1.
PIN NUMBERS DO NOT APPEAR
ON UNIT.FOR REFERENCE ONLY.

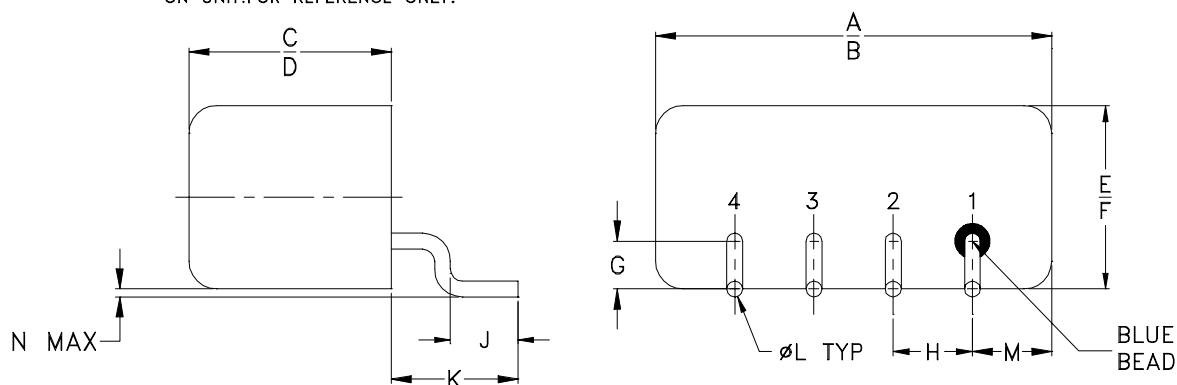

PCB Land Pattern

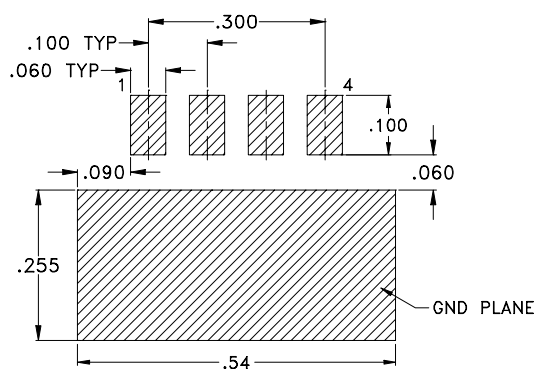

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
NNN150	.50 (12.70)	.48 (12.19)	.255 (6.48)	.240 (6.10)	.23 (5.84)	.21 (5.33)	.06 (1.52)	.100 (2.54)	.09 (2.29)	.16 (4.06)	.020 (0.51)	.09 (2.29)	.005 (0.13)	1.9

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material C.R.S. Pin material #52 alloy.
- Finish: Electro-Tin, hot-oil flowed or electro-Tin-Silver.
- Cover material: Cupro-Nickel.
- Pin's meniscus 0.015 inch max.
- Special Tolerances: Pin diameter $\pm .005$ inch.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F9

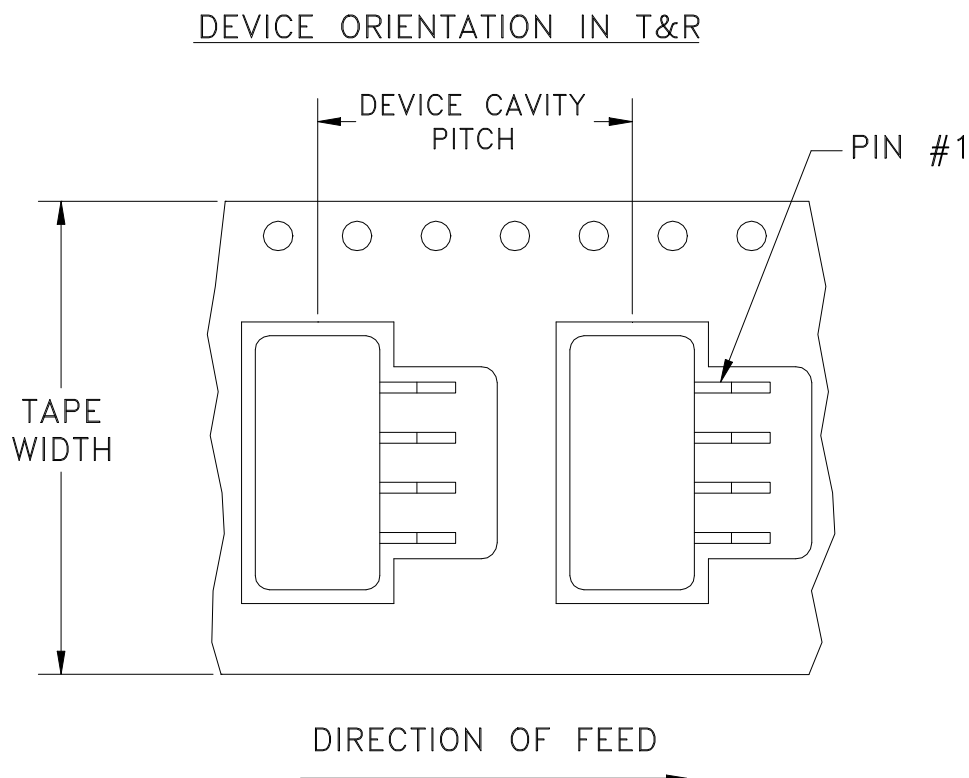

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M86549	NEW RELEASE	04/15/03	GF	DJ
A	M102713	UPDATED NOTES & DISCRIPTION	01/14/06	GF	IL


SUGGESTED MOUNTING CONFIGURATION
FOR NNN150 CASE STYLE, "z"/"cm" PIN CONNECTIONS.

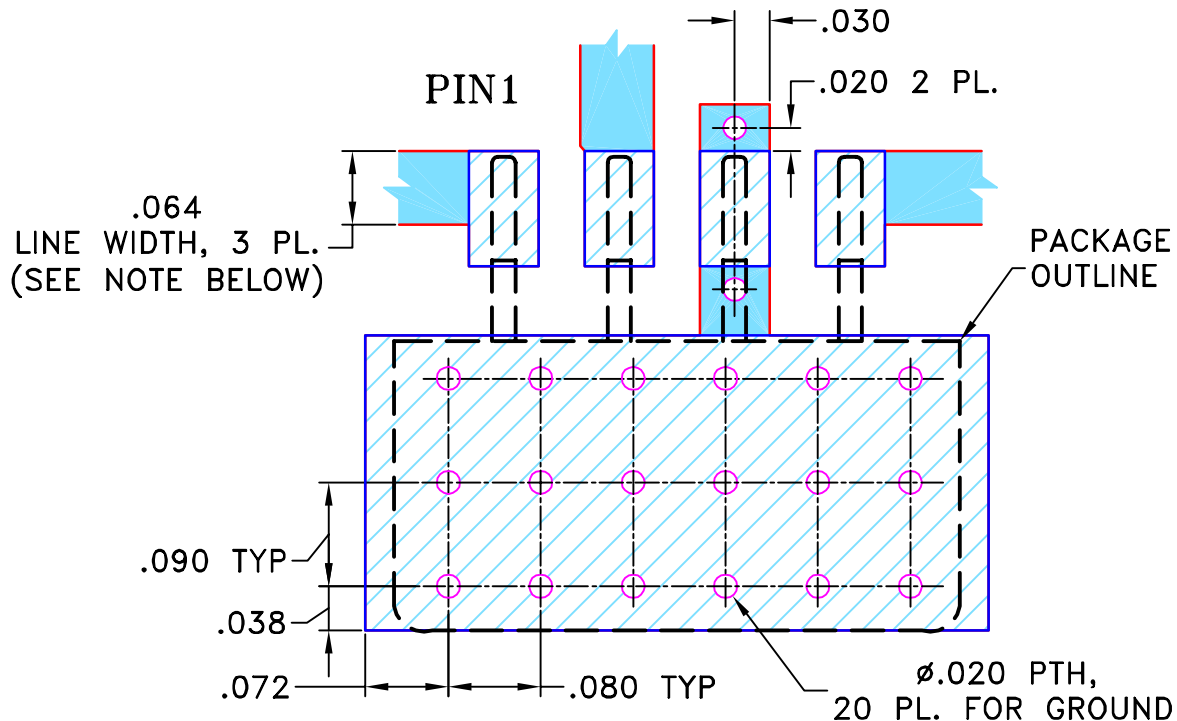

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $0.030" \pm 0.002"$; COPPER: $1/2$ OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

GF

04/11/03

TOLERANCES ON:

CHECKED

AV

04/15/03

2 PL DECIMALS $\pm$

APPROVED

DJ

04/15/03

3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$
 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, z/cm NNN150, TUF/TFAS-SM, TB-201


SIZE
ACODE IDENT
15542DRAWING NO:
98-PL-081REV:
A

FILE: 98PL081


SCALE: 6:1

SHEET: 1 OF 1

Evaluation Board and Circuit

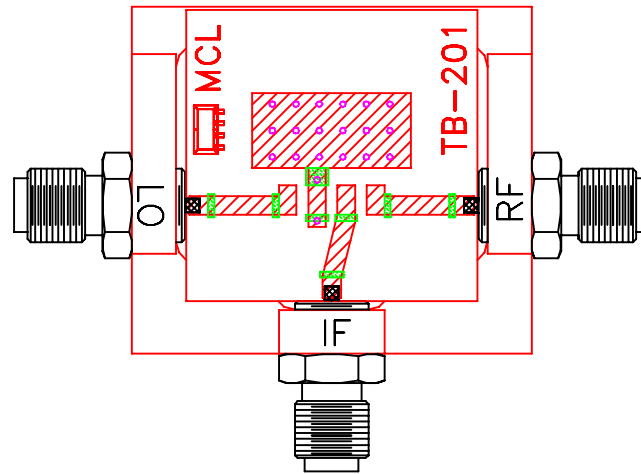

TB-201

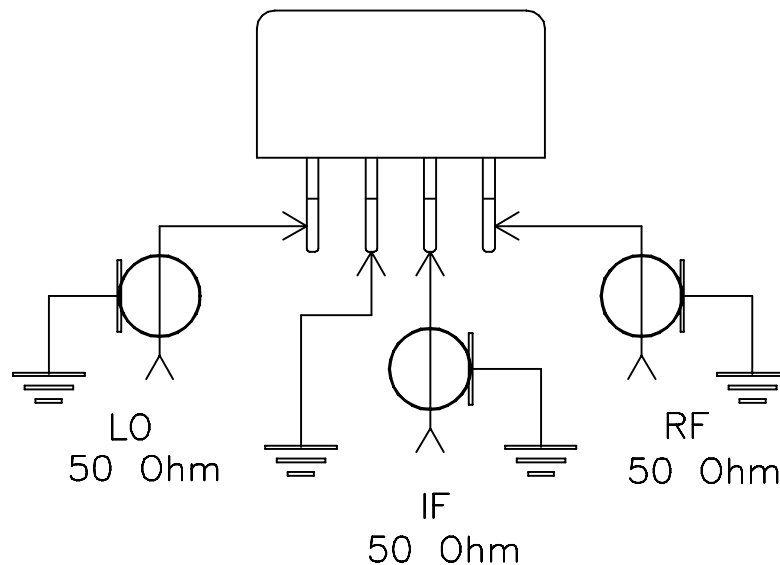

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D