# Coaxial **High Pass Filter**

#### 50Ω 140 to 1150 MHz

### **The Big Deal**

- •Low Insertion Loss (2.0 dB max.)
- •Good close-in rejection
- •Versatile small size, coaxial, 1.43" length

<u>VHF-145+</u>

CASE STYLE: FF704

### **Product Overview**

The VHF-145+ High Pass Filter is constructed using internal LTCC High Pass Filter structure to achieve repeatable performance. Covering 140-1150 MHz, these filters offer a wide bandwith. For a high pass filter, that is versatile for many upconverter applications. Built using Mini-Circuits proven unibody construction which integrates the RF connectors with the case body, the VHF-145+ takes very little space and meets rugged field test lab system environment.

## **Key Features**

Feature	Advantages	
Wideband	Covers VHF and UHF bands, and is ideal for up conversion applications.	
Compact Versatile Case (1.43"x0.41")	Enables use in a variety of applications including space constrained connectorized sys Connectors: SMA Female (1), SMA Male (1)	
Rugged Unibody Construction	Mini-Circuits Unibody construction allows survivability in critical applications including milita- rized or industrial systems.	

- Notes
- A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



# Coaxial **High Pass Filter**

#### 500

## 140 to 1150 MHz

#### **Maximum Ratings**

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C

\* Passband rating, derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

#### **Features**

- rugged unibody construction, small size
- 7 sections
- temperature stable
- excellent power handling, 7W
- low cost

#### Applications

- sub-harmonic rejection
- transmitters/receivers
- lab use




Generic photo used for illustration purposes only

CASE STYLE: FF704

Connectors Model SMA VHF-145+

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### **Outline Drawing**



#### Outline Dimensions (inch)

В	D	Е	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Frequency (MHz) Parameter F# Min Unit Тур. Max. DC-F1 DC-80 20 dB **Rejection Loss** DC-F2 DC-115 15 dB Stop Band Freq. Cut-Off F3 132 3.0 dB DC-F2 DC-115 VSWR 20 :1 F5-F6 155-1050 1.5 dB Insertion Loss 140-1150 dB Pass Band F4-F7 3.0 VSWR F5-F7 155-1150 1.5 :1

Electrical Specifications at 25°C


#### **Typical Frequency Response**

#### (අප ම 40 ATTENUATION 20 13 DC F1 F2 F3 F4 F5 F6 F7 FREQUENCY

#### **Electrical Schematic**



#### Typical Performance Data at 25°C

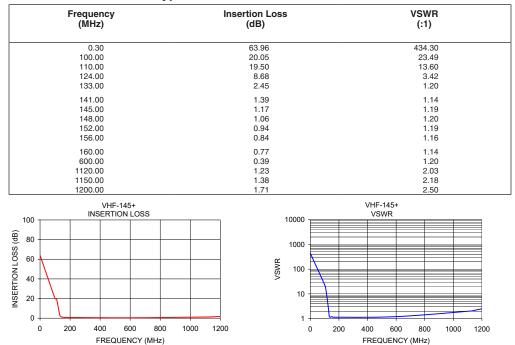



A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



#### Mini-Circuits

#### www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


# Coaxial High Pass Filter Typical Performance Data


FREQUENCY	INSERTION LOSS	RETURN LOSS
(MHz)	(dB)	(dB)
0.3	63.96	0.04
1.0	53.29	0.00
10.0	33.38	0.00
40.0	23.59	0.06
70.0	28.65	0.20
100.0	20.05	0.74
110.0	19.50	1.28
115.0	22.35	1.80
120.0	15.57	2.98
125.0	7.42	6.11
130.0	3.50	13.18
131.0	3.08	15.29
132.0	2.73	17.75
140.0	1.46	24.91
141.0	1.39	23.61
142.0	1.33	22.70
143.0	1.27	22.06
144.0	1.22	21.60
145.0	1.17	21.29
146.0	1.13	21.09
147.0	1.09	20.98
148.0	1.06	20.94
149.0	1.02	20.97
150.0	0.99	21.06
151.0	0.96	21.19
152.0	0.94	21.36
153.0	0.91	21.57
154.0	0.89	21.82
155.0	0.86	22.08
156.0	0.84	22.37
157.0	0.82	22.69
158.0	0.80	23.04
159.0	0.79	23.40
160.0	0.77	23.78 26.62
180.0	0.56	
200.0	0.48	21.52
400.0	0.37	18.85
600.0	0.39	20.64
800.0	0.49	18.09
1000.0	0.80	12.73
1110.0	1.18	9.66
1120.0	1.23	9.39
1130.0	1.28	9.12
1140.0	1.33	8.86
1150.0	1.38	8.61
1160.0	1.44	8.35
1170.0	1.50	8.10
1180.0	1.56	7.85
1190.0	1.63	7.61
1200.0	1.71	7.37



minicircuits.com

REV. X1 VHF-145+ 5/17/2011 Page 1 of 1

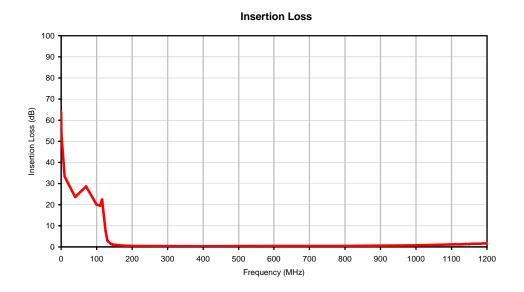

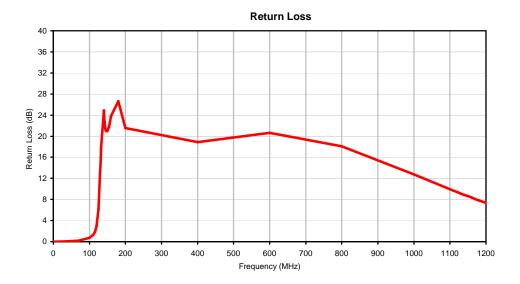





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


REV. X1

# Case Style

FF704

FF

## **Outline Dimensions**

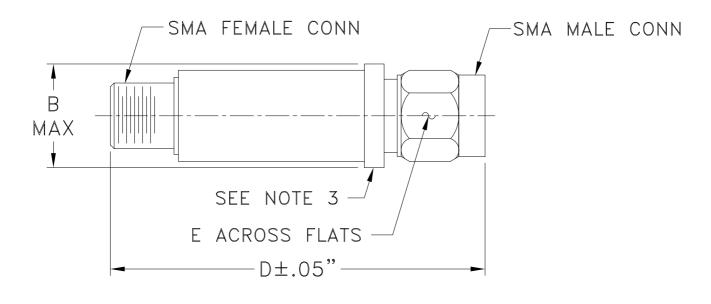

CASE #.	А	В	С	D	Е	WT GRAMS
FF704		.410		1.43	.312	10.0
		(10.41)		(36.32)	(7.92)	

Dimensions are in inches (mm). Tolerances: 2Pl. ±.04; 3Pl. ±.030

Notes:

- 1. Case material: Stainless steel.
- 2. Case finish: Gold plated.
- 3. Round Flange may have .312 Across Flats in some models.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantity From MINI-CIRCUITS At: www.minicircuits.com RF/IF MICROWAVE COMPONENTS

FF704 Rev.: AR (13/AUG/21) ECO-009237 File: FF704 This document and its contents are the property of Mini-Circuits.

Sheet 1 of 1

# **Mini-Circuits** Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

ENV28 Rev: B 09/26/13 M143494 File: ENV28.pdf

This document and its contents are the property of Mini-Circuits.