

Coaxial High Pass Filter

50Ω 1900 to 4750 MHz

VHF-1810+



Generic photo used for illustration purposes only

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C

* Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction, small size
- 7 sections
- temperature stable
- excellent power handling, 7W
- low cost

Applications

- sub-harmonic rejection
- transmitters/receivers
- lab use


CASE STYLE: FF704

Connectors	Model
SMA	VHF-1810+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

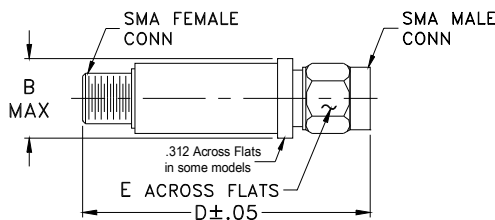


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Electrical Specifications (T_{AMB}=25°C)

STOP BAND (MHz) Min.	f _{co} , MHz Nom.	PASSBAND (MHz)		VSWR (:1) Typ.	NO. OF SECTIONS
		(loss < 1.3 dB)	(loss < 2 dB)		
(loss > 40 dB) (loss > 20 dB)	(loss 3 dB) Typ.	Max.	Typ.	Frequency (MHz) Stopband 1.5:1	
1100 1480	1810	2250-4000	1900-4750	20:1 2250-3750	7

typical frequency response

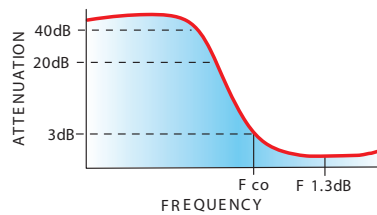


electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	94.72	1737.18
100	76.19	1737.18
1100	58.71	62.05
1480	27.69	25.56
1630	13.76	11.24
1730	6.11	3.98
1810	2.86	1.95
1900	1.84	1.76
2250	0.90	1.51
2750	0.55	1.27
3750	0.74	1.68
4000	1.03	2.07
4750	2.13	3.48
5500	3.10	4.88
7000	4.35	6.94

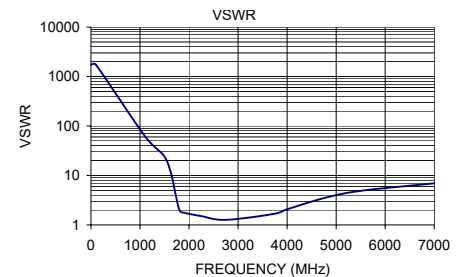

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. G
M151107
VHF-1810+
EDR-6437/4
RVN/AD/AM
200520
Page 1 of 1

Coaxial High Pass Filter

VHF-1810+

Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB)			INPUT RETURN LOSS (dB)			OUTPUT RETURNLOSS (dB)		
	@ -55° C	@ +25° C	@ +100° C	@ -55° C	@ +25° C	@ +100° C	@ -55° C	@ +25° C	@ +100° C
1	99.32	94.72	80.00	0.01	0.01	0.02	0.01	0.01	0.00
50	70.90	66.22	80.86	0.02	0.02	0.03	0.01	0.01	0.00
100	75.34	76.19	70.55	0.00	0.01	0.01	0.01	0.01	0.01
200	73.41	73.56	75.79	0.01	0.03	0.03	0.02	0.00	0.02
500	78.06	78.10	74.64	0.02	0.07	0.09	0.03	0.06	0.10
715	83.96	82.70	80.84	0.06	0.11	0.15	0.07	0.10	0.15
1000	61.47	61.48	61.49	0.15	0.22	0.29	0.12	0.18	0.23
1100	58.36	58.71	58.63	0.19	0.28	0.33	0.17	0.23	0.28
1150	58.22	58.40	58.85	0.21	0.29	0.36	0.17	0.26	0.31
1365	41.55	40.27	39.07	0.35	0.48	0.56	0.30	0.40	0.46
1455	31.16	30.18	29.21	0.47	0.62	0.74	0.37	0.47	0.57
1480	28.63	27.69	26.71	0.53	0.68	0.81	0.40	0.52	0.62
1555	21.39	20.50	19.57	0.74	0.93	1.15	0.52	0.67	0.81
1670	11.14	10.39	9.61	1.75	2.26	2.87	1.25	1.57	1.97
1700	8.74	8.08	7.43	2.41	3.13	3.97	1.72	2.18	2.70
1730	6.63	6.11	5.62	3.49	4.46	5.60	2.48	3.09	3.78
1745	5.66	5.24	4.87	4.16	5.30	6.61	2.99	3.66	4.40
1770	4.35	4.11	3.86	5.59	6.98	8.50	4.01	4.77	5.59
1800	3.18	3.12	3.05	7.61	9.15	10.68	5.42	6.20	6.99
1810	2.90	2.86	2.83	8.31	9.82	11.28	5.91	6.66	7.39
1850	2.13	2.23	2.30	10.38	11.39	12.16	7.55	8.10	8.62
1885	1.79	1.93	2.04	10.86	11.37	11.72	8.47	8.83	9.28
1900	1.68	1.84	1.95	10.86	11.23	11.54	8.77	9.10	9.50
1950	1.47	1.62	1.74	10.61	10.82	11.08	9.34	9.62	10.05
1980	1.36	1.53	1.63	10.49	10.70	10.98	9.62	9.94	10.40
2000	1.28	1.44	1.56	10.57	10.76	11.07	9.88	10.22	10.71
2160	0.89	1.02	1.15	12.14	12.47	12.73	12.31	12.90	13.54
2250	0.75	0.90	1.02	13.61	13.89	14.05	14.05	14.67	15.21
2340	0.65	0.79	0.92	14.86	15.04	15.03	15.55	16.02	16.29
3750	0.54	0.74	0.90	11.99	11.89	11.61	11.76	11.64	11.38
3900	0.71	0.91	1.08	10.20	10.08	9.93	10.11	9.99	9.82
4000	0.83	1.03	1.20	9.24	9.15	9.07	9.19	9.08	8.95
4400	1.35	1.57	1.74	6.43	6.48	6.56	6.49	6.46	6.49
4650	1.73	1.96	2.08	5.32	5.45	5.59	5.40	5.43	5.49
4750	1.92	2.13	2.27	5.01	5.14	5.31	5.06	5.09	5.19
6000	3.27	3.58	3.83	2.99	3.11	3.24	2.97	3.04	3.17
7000	4.06	4.35	4.62	2.33	2.52	2.72	2.31	2.47	2.75
9220	6.08	6.63	6.46	1.56	2.12	2.79	1.80	2.19	2.93
10000	5.08	5.25	5.45	1.67	2.01	2.27	1.96	2.22	2.44
11130	5.93	7.81	8.08	1.94	2.01	2.36	5.15	10.44	15.67
12000	3.82	4.36	5.03	3.48	4.01	4.53	3.34	3.67	3.99

REV. X1
VHF-1810+
071001
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Coaxial High Pass Filter


Typical Performance Curves

VHF-1810+


INSERTION LOSS vs. TEMPERATURE

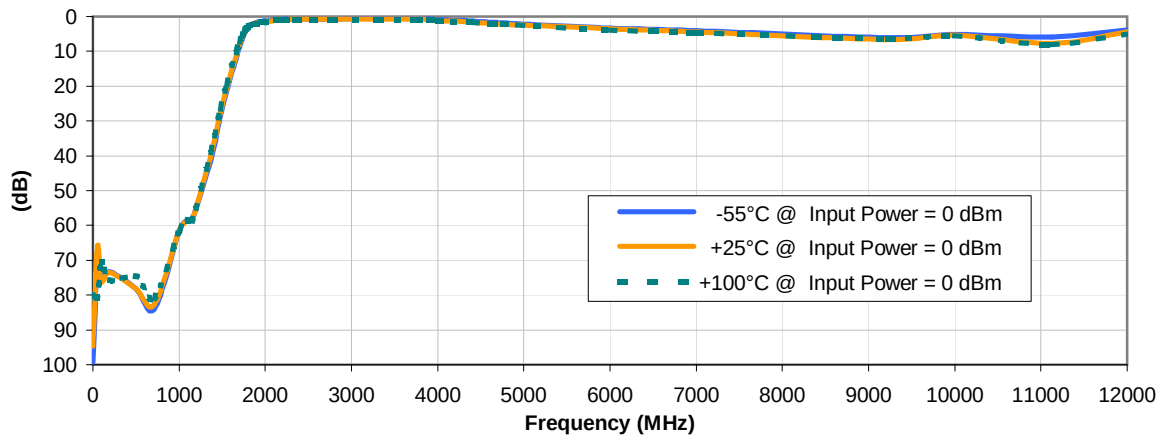

INPUT RETURN LOSS vs. TEMPERATURE

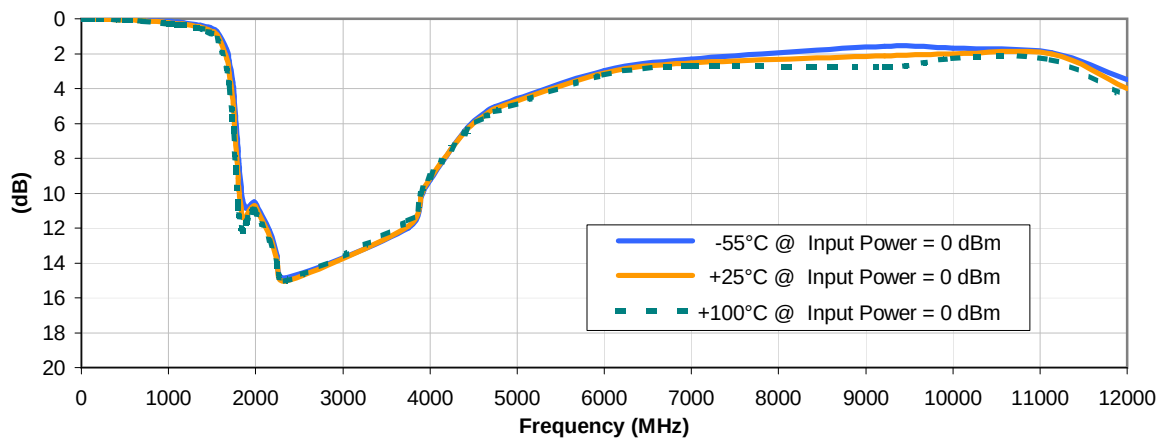

OUTPUT RETURN LOSS vs. TEMPERATURE

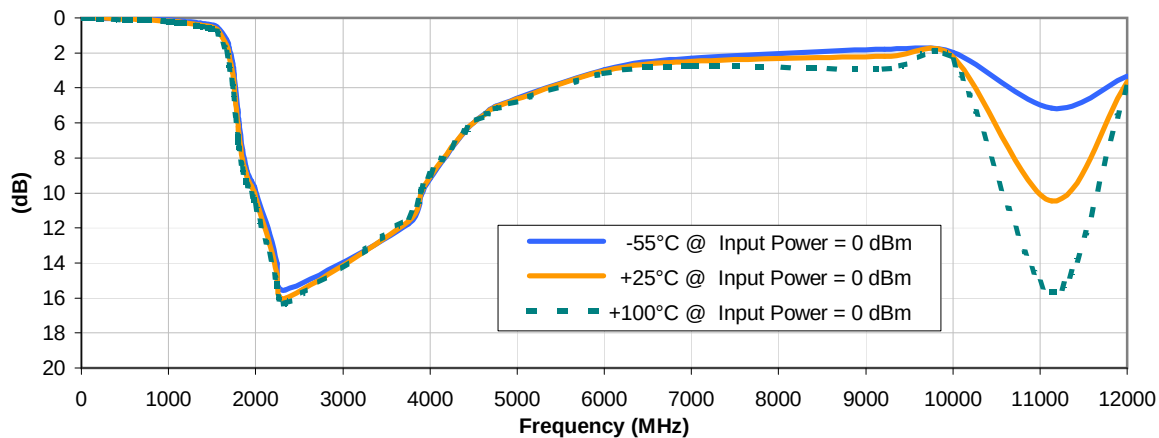

REV. X1
VHF-1810+
071001
Page 1 of 1

Mini-Circuits®


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Outline Dimensions

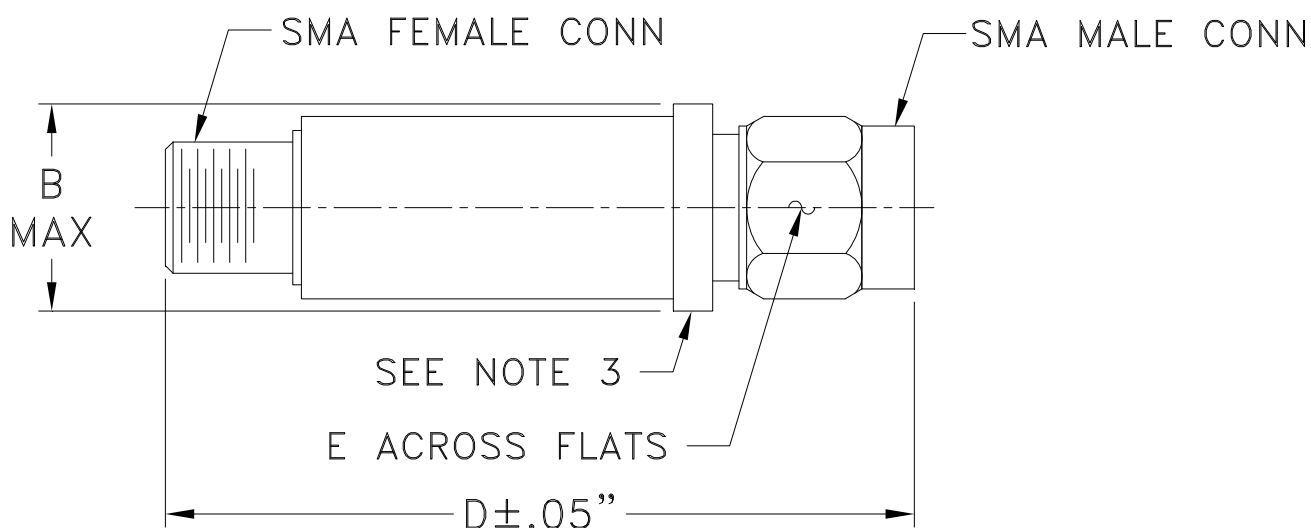

CASE #.	A	B	C	D	E	WT GRAMS
FF704	--	.410 (10.41)	--	1.43 (36.32)	.312 (7.92)	10.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I