Coaxial

Low Pass Filter

VLFX-825+

50Ω DC to 825 MHz (40 dB Typ. Isolation up to 20 GHz)



Generic photo used for illustration purposes only

CASE STYLE: FF1118

Connectors	Model
SMA	VLFX-825+

Features

- Very good isolation, 40 dB typ. up to 20 GHz
- Excellent power handling, 10W
- Temperature stable LTCC internal structure
- Re-entry frequency > 20 GHz
- Protected by US patent 6,943,646
- Rugged unibody construction

Applications

- Harmonic rejection
- Transmitters/receivers
- Lab use
- Test instrumentation

Functional Schematic



Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications[(1)] at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-825	—	1.1	1.6	dB
	Freq. Cut-Off	F2	1275	—	3.0	—	dB
	VSWR	DC-F1	DC-825	—	1.2	—	:1
Stop Band	Insertion Loss	F3	1550	20	30	—	dB
		F4-F5	1850-20000	—	40	—	dB
	VSWR	F3-F5	1550-20000	—	10	—	:1

(1) In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

Maximum Ratings	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max.

*Passband rating, derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.07	1.03
250	0.35	1.10
500	0.54	1.09
825	0.85	1.14
1000	1.15	1.09
1275	3.70	1.44
1355	10.17	3.11
1435	20.76	5.68
1550	29.03	10.19
1600	30.78	12.52
1850	46.94	24.48
2500	77.83	46.96
5000	74.23	39.49
7500	65.65	36.20
10000	68.67	8.72
12500	61.88	7.14
15000	46.58	3.37
17500	53.29	17.39
18500	53.88	18.50
20000	34.65	12.99

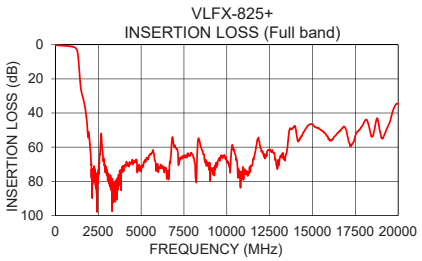

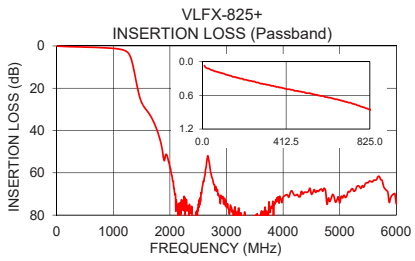

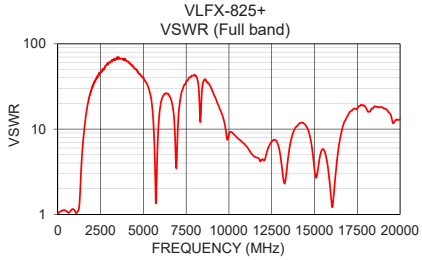

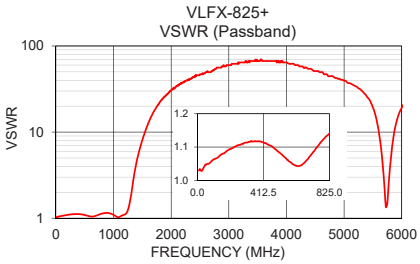

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Connections

INPUT	SMA-Male
OUTPUT	SMA-Female

Outline Drawing

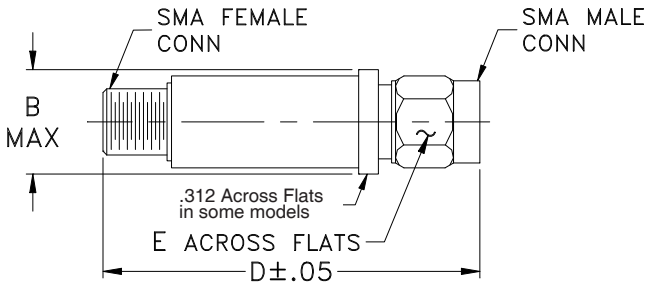

Outline Dimensions (inch / mm)

B	D	E	wt.
.410	**2.67**	**.312**	**grams**
10.41	67.82	7.92	17.0

Note: Please refer to case style drawing for details

Coaxial Low Pass Filter VLFX-825+

Typical Performance Data

FREQ.	INSERTION LOSS	INPUT RETURN LOSS	OUTPUT RETURN LOSS
(MHz)	(dB)	(dB)	(dB)
10	0.07	36.77	37.07
50	0.15	32.68	33.77
75	0.18	32.11	33.90
100	0.21	30.39	33.35
200	0.31	26.99	37.90
300	0.40	25.42	33.83
500	0.54	27.50	25.75
550	0.58	29.72	25.74
600	0.62	32.71	26.38
650	0.66	33.01	27.20
700	0.71	29.30	27.62
800	0.82	24.27	25.96
825	0.85	23.63	25.39
850	0.88	23.26	24.84
900	0.96	23.19	24.54
1000	1.15	27.06	27.79
1100	1.46	35.94	34.54
1200	2.13	25.83	20.58
1250	2.93	19.22	13.94
1275	3.70	14.87	10.53
1300	4.96	11.07	7.53
1400	16.19	3.91	2.36
1430	20.15	3.19	2.14
1550	29.03	1.71	2.37
1600	30.78	1.39	2.53
1650	32.76	1.16	2.55
1700	35.18	1.00	2.44
1750	38.20	0.88	2.26
1800	42.03	0.79	2.17
1850	46.94	0.71	2.57
1900	54.25	0.66	7.93
1950	51.79	0.62	4.38
2000	56.98	0.57	1.97
2500	77.83	0.37	1.07
2750	62.58	0.33	1.01
3000	76.29	0.29	0.98
3500	80.61	0.26	1.03
4000	71.48	0.27	1.13
5000	74.23	0.44	1.94
7500	65.65	0.48	0.49
8000	64.37	0.40	0.49
9000	69.26	0.59	0.63
10000	68.67	2.00	0.76
11000	75.12	2.76	0.86
11500	70.28	3.72	0.74
12000	60.92	4.06	0.65
12500	61.88	2.45	0.81
13000	67.44	3.56	6.72
13500	62.85	3.29	1.68
14000	47.95	1.60	0.48
14500	51.10	1.59	0.39
15000	46.58	5.32	0.38
15500	50.10	3.02	0.48
16000	56.16	16.66	0.61
16500	51.63	2.25	1.03
17000	51.43	1.15	1.17
18500	53.88	0.94	1.58
19000	53.43	0.98	1.72
19500	45.70	1.27	2.10
20000	34.65	1.34	2.62

Typical Performance Curves

INSERTION LOSS
INPUT POWER = 0 dBm

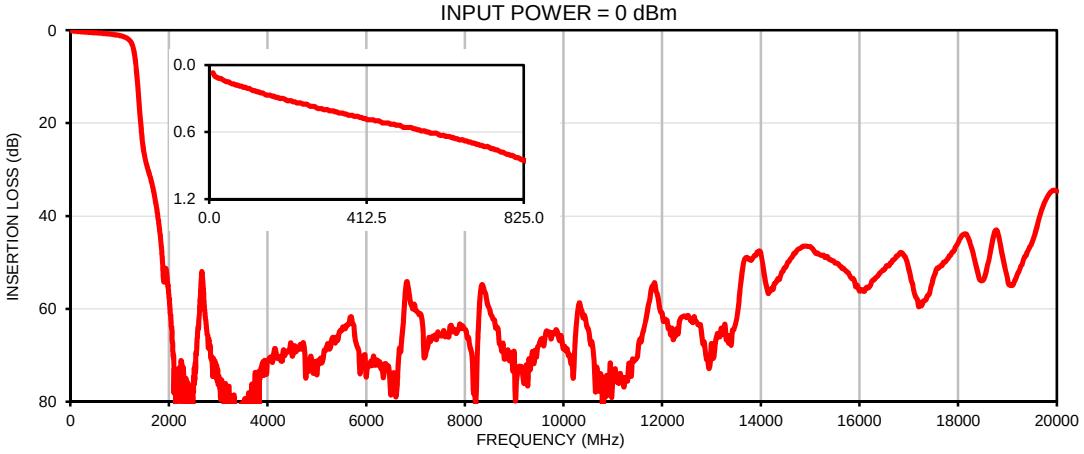

INPUT RETURN LOSS
INPUT POWER = 0 dBm

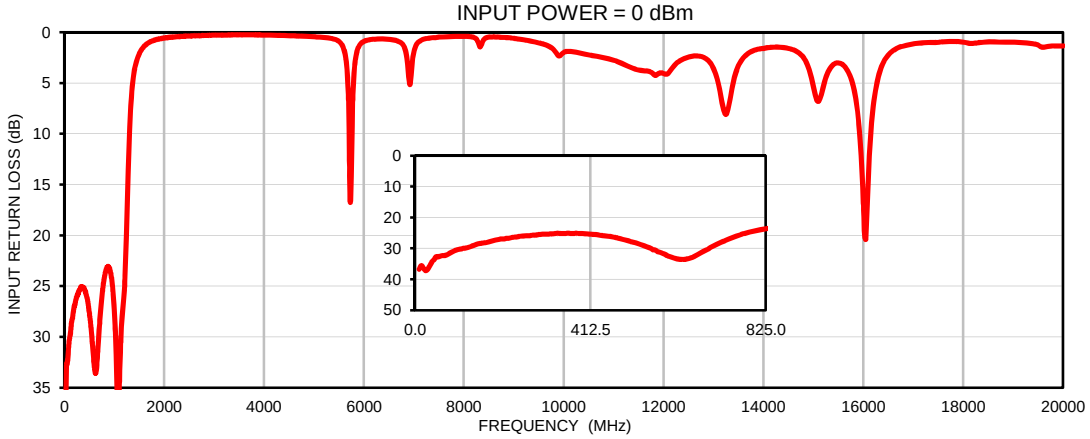

OUTPUT RETURN LOSS
INPUT POWER = 0 dBm

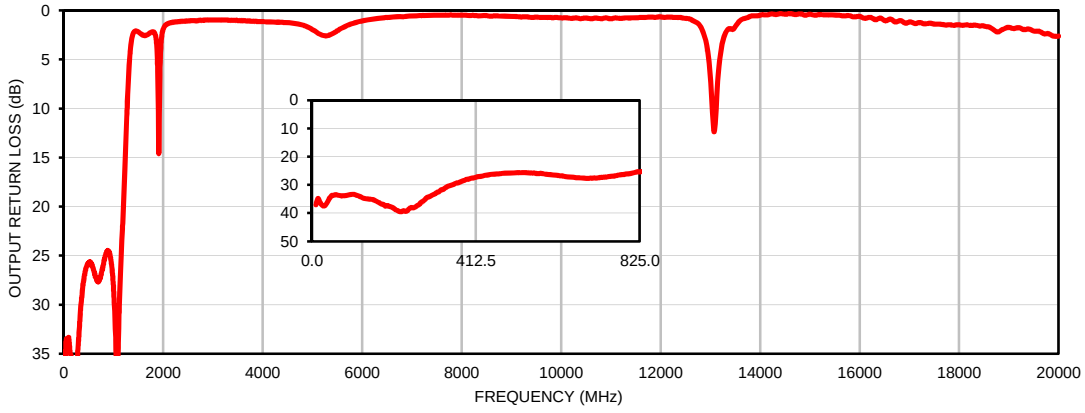

Case Style FF

FF1118

Outline Dimensions

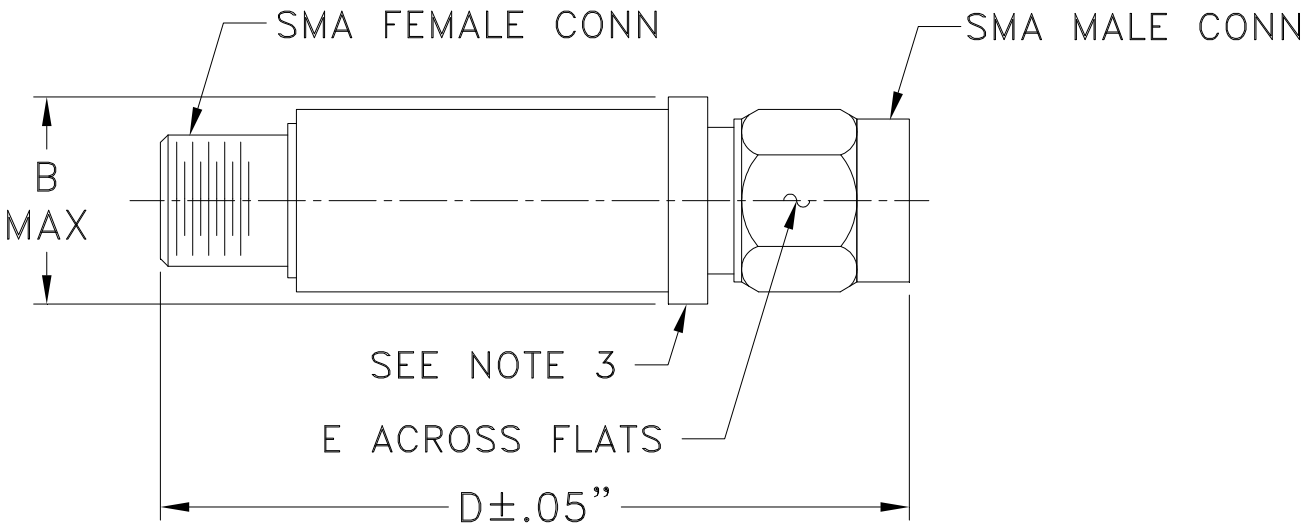

CASE #.	A	B	C	D	E	WT GRAMS
FF1118	-- --	.410 (10.41)	-- --	2.67 (67.82)	.312 (7.92)	17.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.

Mini-Circuits

Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I