

DC Pass

# Power Splitter/Combiner

ZAPD-2DC+

2 Way-0° 50Ω 950 to 2150 MHz

## The Big Deal

- Excellent for GPS and satellite distribution
- DC pass through, 500 mA, 25V
- L Band coverage: 950 to 2150 MHz
- Low insertion loss: 0.25 dB Typ



N-Type version shown  
Case Style F14



SMA version shown  
Case Style F1164

## Product Overview

The ZAPD-2DC+ 2way power splitter/combiner offers excellent RF performance in a small package. The DC pass through feeds DC on the coaxial center conductor from Port 1 to the Sum to support remote amplifier power. Built in a rugged shielded case, the ZAPD-2DC+ is available with three connector options: BNC, SMA and N-Type.

The ZAPD-2DC+ is well suited tower mounted amplifiers, GPS and satellite distribution or any other application where a high performance splitter with DC pass through is required.

## Key Features

Feature	Advantages
DC Pass through	Enables remote powering of antenna mounted amplifiers while splitting the RF signal. Eliminates additional cable runs. Designed to handle up to ½ Amp at 25 Volts, the ZAPD-2DC+ can support a wide variety of remotely powered RF equipment.
Wide bandwidth	Operating over the 950 to 2150 MHz Band, the ZAPD-2DC+ is ideally suited for L- Band Satellite Communications Applications. In addition, this broadband coverage supports additional applications such as GPS, Cellular PCS and DCS
Low Insertion Loss	With 0.25 dB typical Insertion Loss, the ZAPD-2DC+ can be used in sensitive receive paths with minimized concern for additional Signal to Noise Ratio degradation.
Excellent Phase and Amplitude Balance	Industry leading Phase and Amplitude balance enables this power splitter to be an ideal candidate for phase and amplitude matched or tracked systems.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Power Splitter/Combiner

2 Way-0° 50Ω 950 to 2150 MHz

## ZAPD-2DC+



N-Type version shown  
Case Style F14

SMA version shown  
Case Style F1164

Connectors	Model
BNC	ZAPD-2DC+
N-TYPE	ZAPD-2DC-N+
SMA	ZAPD-2DC-S+

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.125W max.
DC Voltage	25V max.
DC Current	500mA max.

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S (RF+DC)
PORT 1	1 (RF+DC)
PORT 2	2 (RF)

### Features

- low insertion loss, 0.25 dB typ.
- good isolation, 25 dB typ.
- dc pass, 500mA current
- excellent amplitude unbalance, 0.1 dB typ.
- good phase unbalance, 2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

### Applications


- GPS
- satellite distribution
- PCS/DCS
- communications systems

### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.			S		OUT	
$f_L$ - $f_U$					Max.	Max.	Typ.	Max.	Typ.	Max.
950-2150	22	18	0.3	0.7	5	0.3	1.3	—	1.15	—
1000-2000	25	19	0.25	0.6	4	0.25	1.15	—	1.1	—
1200-1600	25	20	0.25	0.6	4	0.2	1.1	—	1.1	—

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Outline Drawing

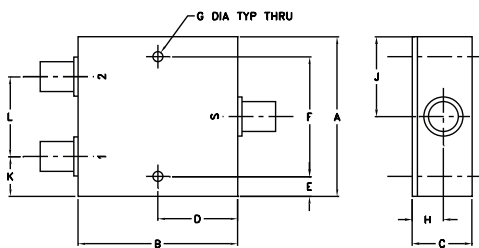

#### Case Style F14

#### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G		
2.00	2.00	0.75	1.00	0.25	1.500	0.125		
50.80	50.80	19.05	25.40	6.35	38.10	3.18		
H	J	K	L				wt	
0.39	1.00	0.50	1.00				grams	
9.91	25.40	12.70	25.40				170.0	




#### Case Style F1164

A	B	C	D	E	F	G		
2.00	1.75	0.75	0.875	0.13	1.750	0.125		
50.80	44.45	19.05	22.23	3.30	44.45	3.18		
H	J	K	L				wt	
0.38	1.00	0.50	1.00				grams	
9.65	25.40	12.70	25.40				65.0	


### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
950.00	3.20	3.26	0.05	21.61	1.27	1.37	1.13	1.20
1000.00	3.19	3.24	0.05	23.27	1.34	1.32	1.13	1.20
1100.00	3.16	3.21	0.05	27.33	1.43	1.25	1.12	1.20
1200.00	3.15	3.21	0.06	32.79	1.51	1.20	1.12	1.19
1250.00	3.15	3.22	0.08	34.43	1.66	1.19	1.12	1.19
1450.00	3.18	3.26	0.08	37.88	1.88	1.18	1.11	1.18
1550.00	3.20	3.27	0.08	37.87	2.01	1.17	1.10	1.18
1600.00	3.20	3.28	0.08	42.11	1.97	1.17	1.10	1.17
1700.00	3.20	3.29	0.09	47.46	2.18	1.13	1.08	1.16
1800.00	3.19	3.29	0.10	38.43	2.41	1.09	1.05	1.14
1900.00	3.18	3.30	0.11	30.82	2.65	1.03	1.01	1.14
2000.00	3.17	3.31	0.14	25.87	2.82	1.05	1.03	1.15
2050.00	3.19	3.36	0.16	23.70	2.79	1.09	1.06	1.17
2100.00	3.18	3.34	0.16	22.04	2.92	1.13	1.08	1.20
2150.00	3.22	3.43	0.21	20.26	2.98	1.17	1.11	1.23

1. Total Loss = Insertion Loss + 3dB splitter loss.

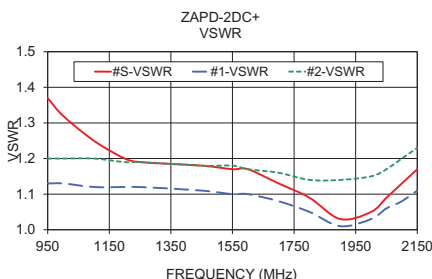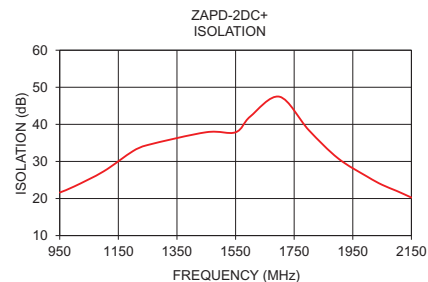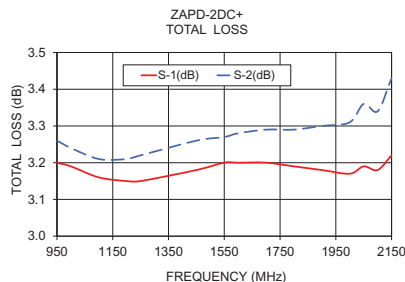

### electrical schematic

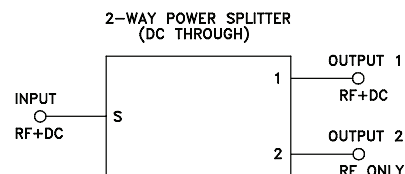

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



# 2 Way-0° Power Splitter/Combiner

# ZAPD-2DC+

## Typical Performance Data

FREQUENCY (MHz)	TOTAL LOSS <sup>1</sup>		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB) 1-2	PHASE UNBALANCE (deg.)	FREQUENCY (MHz)	VSWR (:1)		
	(dB)						S	1	2
	S-1	S-2							
950.0	3.20	3.26	0.05	21.61	1.27	950.0	1.37	1.13	1.20
1000.0	3.19	3.24	0.05	23.27	1.34	1000.0	1.32	1.13	1.20
1050.0	3.16	3.22	0.06	24.95	1.40	1050.0	1.28	1.13	1.20
1100.0	3.16	3.21	0.05	27.33	1.43	1100.0	1.25	1.12	1.20
1150.0	3.14	3.21	0.07	29.18	1.54	1150.0	1.22	1.12	1.19
1200.0	3.15	3.21	0.06	32.79	1.51	1200.0	1.20	1.12	1.19
1250.0	3.15	3.22	0.08	34.43	1.66	1250.0	1.19	1.12	1.19
1300.0	3.16	3.22	0.06	40.70	1.63	1300.0	1.18	1.12	1.19
1350.0	3.17	3.25	0.08	38.34	1.74	1350.0	1.18	1.12	1.19
1400.0	3.18	3.24	0.06	47.46	1.72	1400.0	1.18	1.11	1.19
1450.0	3.18	3.26	0.08	37.88	1.88	1450.0	1.18	1.11	1.18
1500.0	3.19	3.26	0.07	42.60	1.82	1500.0	1.18	1.11	1.18
1550.0	3.20	3.27	0.08	37.87	2.01	1550.0	1.17	1.10	1.18
1600.0	3.20	3.28	0.08	42.11	1.97	1600.0	1.17	1.10	1.17
1650.0	3.20	3.28	0.08	40.97	2.17	1650.0	1.15	1.09	1.17
1700.0	3.20	3.29	0.09	47.46	2.18	1700.0	1.13	1.08	1.16
1750.0	3.19	3.28	0.08	47.94	2.32	1750.0	1.11	1.06	1.15
1800.0	3.19	3.29	0.10	38.43	2.41	1800.0	1.09	1.05	1.14
1850.0	3.19	3.29	0.10	35.58	2.51	1850.0	1.06	1.03	1.14
1900.0	3.18	3.30	0.11	30.82	2.65	1900.0	1.03	1.01	1.14
1950.0	3.18	3.31	0.13	28.46	2.64	1950.0	1.02	1.01	1.14
2000.0	3.17	3.31	0.14	25.87	2.82	2000.0	1.05	1.03	1.15
2050.0	3.19	3.36	0.16	23.70	2.79	2050.0	1.09	1.06	1.17
2100.0	3.18	3.34	0.16	22.04	2.92	2100.0	1.13	1.08	1.20
2150.0	3.22	3.43	0.21	20.26	2.98	2150.0	1.17	1.11	1.23






<sup>1</sup>Total Loss = Insertion Loss + 3dB Splitter Loss



# 2 Way-0° Power Splitter/Combiner

# ZAPD-2DC+

## Typical Performance Curves

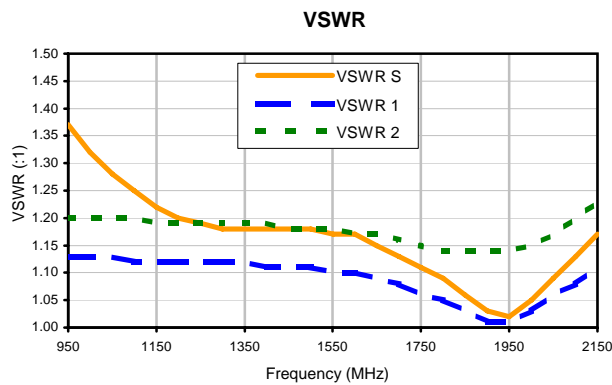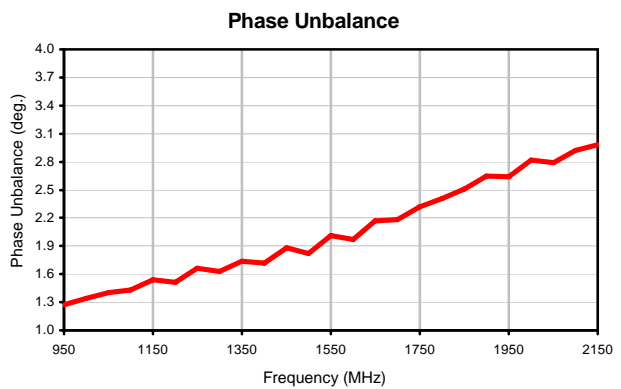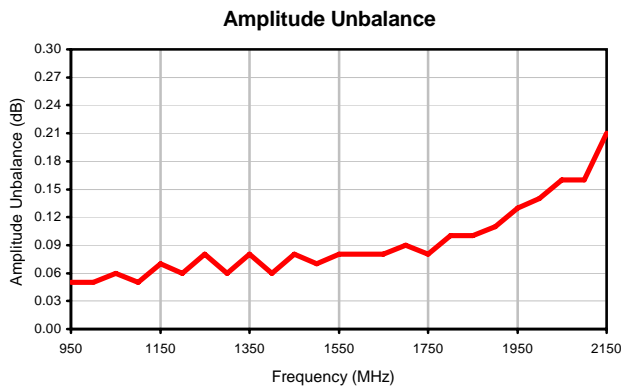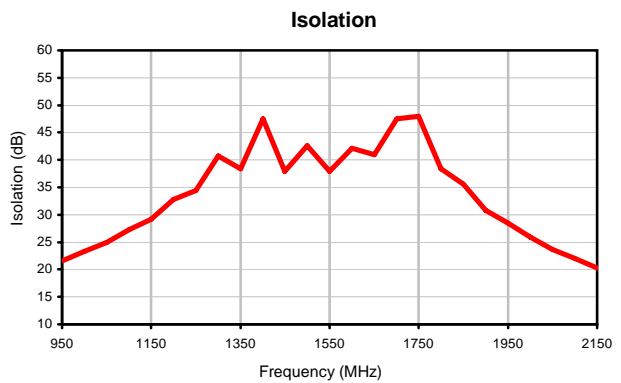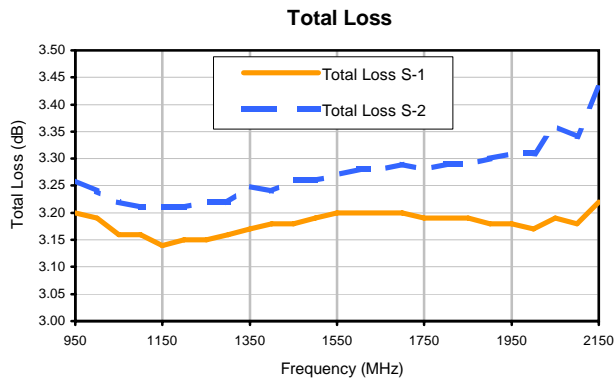


# Case Style

# F

## Outline Dimensions

## F1164

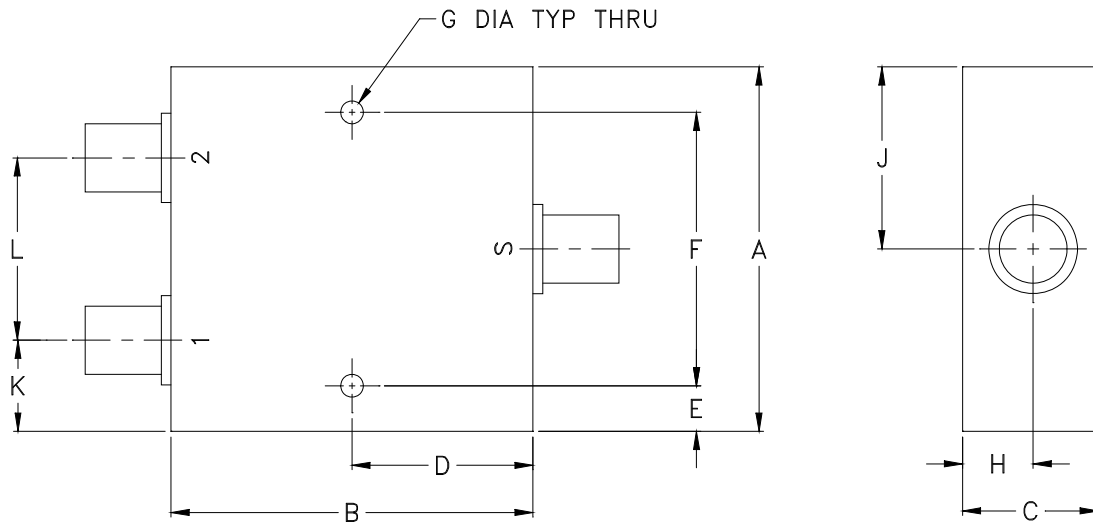

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
F1164	2.00 (50.80)	1.75 (44.45)	0.75 (19.05)	0.875 (22.23)	0.13 (3.30)	1.750 (44.45)	0.125 (3.18)	0.38 (9.65)	1.00 (25.40)	0.50 (12.70)	1.00 (25.40)	65.00

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3Pl.  $\pm .015$

### Notes:

- Case material: Aluminum alloy.
- Case finish:  
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.

**Mini-Circuits**<sup>®</sup>

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C