

Coaxial

Power Splitter/Combiner

8 Way-0° 50Ω 10 to 800 MHz
ZBSC-8-82+


BNC version shown

CASE STYLE: UU1268

Connectors Model

BNC ZBSC-8-82+

SMA ZBSC-8-82-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	1W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8

Outline Drawing

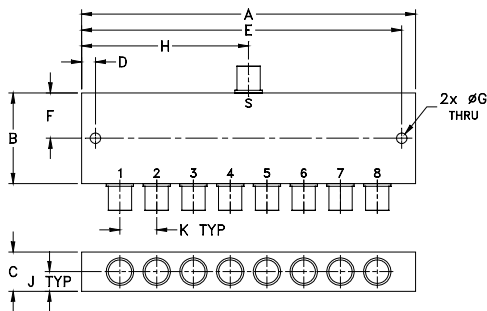

Outline Dimensions (inch/mm)

A	B	C	D	E	F
6.00	1.62	.70	.250	5.75	.810
152.40	41.15	17.78	6.35	146.05	20.57
G	H	J	K	wt	
.187	3.00	.35	.660	grams	
4.75	76.20	8.89	16.76	300	

Features

- wideband, 10 to 800 MHz
- good isolation, 27 dB typ.
- good S-port matching VSWR, 1.20 typ.
- good output matching VSWR, 1.05 typ.
- rugged shielded case

Applications

- VHF/UHF
- federal and defense communication
- communication system

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 9.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-800	28	25	26	22	25	20	0.6	1.0	0.9	1.5	1.8	2.8	2.0	4.0	9.0	0.2	0.3	0.5

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amp. Unbal. (dB)	Isolation (dB)				Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-8	2-3	3-4				
10.00	9.53	9.53	9.53	9.53	9.54	9.54	0.02	42.90	58.21	28.34	46.39	0.08	1.06	1.08	1.07
50.00	9.60	9.59	9.59	9.59	9.60	9.59	0.01	41.92	54.54	28.37	42.07	0.22	1.05	1.04	1.04
100.00	9.68	9.67	9.68	9.68	9.68	9.67	0.01	38.77	49.55	28.17	38.54	0.41	1.06	1.04	1.04
160.00	9.76	9.76	9.76	9.76	9.76	9.75	0.01	36.25	46.67	27.80	35.94	0.63	1.07	1.04	1.04
200.00	9.82	9.81	9.81	9.81	9.81	9.80	0.02	35.13	45.42	27.45	34.82	0.80	1.08	1.03	1.03
250.00	9.89	9.88	9.88	9.88	9.88	9.86	0.03	34.17	44.25	26.98	33.92	1.01	1.09	1.03	1.03
300.00	9.96	9.95	9.96	9.95	9.95	9.92	0.04	33.52	43.40	26.48	33.33	1.22	1.11	1.03	1.03
350.00	10.03	10.03	10.03	10.02	10.02	9.99	0.04	32.98	42.83	25.98	32.93	1.46	1.12	1.03	1.03
400.00	10.12	10.12	10.12	10.11	10.10	10.07	0.06	32.42	42.52	25.51	32.62	1.68	1.14	1.03	1.03
450.00	10.21	10.21	10.21	10.20	10.18	10.15	0.07	31.68	42.50	25.16	32.23	1.93	1.16	1.03	1.04
500.00	10.30	10.31	10.31	10.29	10.27	10.23	0.08	30.72	42.86	24.97	31.69	2.20	1.17	1.04	1.04
550.00	10.40	10.41	10.41	10.39	10.35	10.31	0.10	29.46	43.55	25.02	30.77	2.49	1.18	1.04	1.05
600.00	10.49	10.51	10.51	10.48	10.43	10.39	0.13	28.00	44.70	25.43	29.41	2.81	1.18	1.04	1.04
700.00	10.69	10.72	10.72	10.68	10.59	10.55	0.21	25.16	48.52	26.41	26.22	3.48	1.16	1.04	1.03
800.00	11.07	11.11	11.13	11.07	10.91	10.89	0.31	24.05	45.86	27.19	24.50	4.07	1.22	1.09	1.08

1. Total Loss = Insertion Loss + 9dB splitter loss.

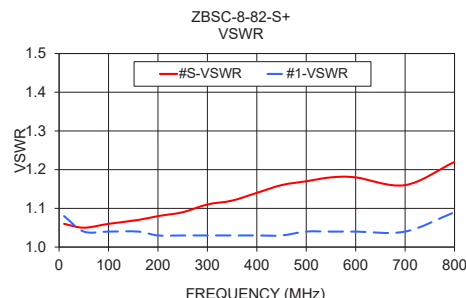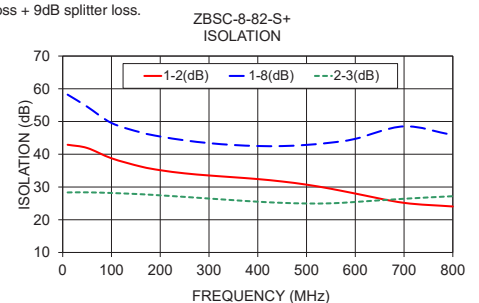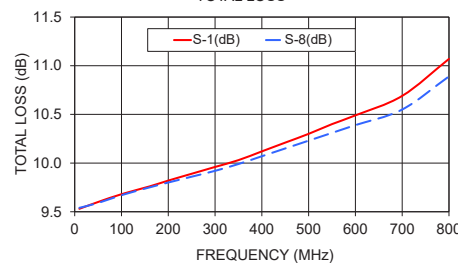

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M151107
ZBSC-8-82+
ED-13009/2
HY/TD/AM
191206

8 Way-0° Power Splitter/Combiner

ZBSC-8-82+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹							AMP. UNBAL. (dB)	ISOLATION				PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR		
	S-1	S-2	S-3	S-4	S-5	S-6	S-8		1-2	1-8	2-3	3-4			S	1	8
10.00	9.53	9.53	9.53	9.53	9.54	9.54	9.54	0.02	42.90	58.21	28.34	46.39	0.08	10.00	1.06	1.08	1.07
30.00	9.56	9.56	9.56	9.56	9.56	9.56	9.56	0.01	43.32	59.24	28.43	43.99	0.17	30.00	1.04	1.04	1.04
50.00	9.60	9.59	9.59	9.59	9.59	9.60	9.59	0.01	41.92	54.54	28.37	42.07	0.22	50.00	1.05	1.04	1.04
60.00	9.62	9.61	9.61	9.61	9.61	9.62	9.61	0.01	41.26	53.25	28.34	41.23	0.26	60.00	1.05	1.04	1.04
80.00	9.65	9.64	9.65	9.65	9.64	9.65	9.64	0.01	39.93	51.06	28.27	39.81	0.33	80.00	1.05	1.04	1.04
100.00	9.68	9.67	9.68	9.68	9.67	9.68	9.67	0.01	38.77	49.55	28.17	38.54	0.41	100.00	1.06	1.04	1.04
120.00	9.71	9.70	9.70	9.70	9.70	9.71	9.70	0.01	37.79	48.42	28.07	37.52	0.48	120.00	1.06	1.04	1.04
140.00	9.74	9.73	9.73	9.73	9.73	9.73	9.72	0.01	36.95	47.52	27.94	36.66	0.56	140.00	1.06	1.04	1.04
160.00	9.76	9.76	9.76	9.76	9.76	9.76	9.75	0.01	36.25	46.67	27.80	35.94	0.63	160.00	1.07	1.04	1.04
180.00	9.79	9.78	9.79	9.79	9.78	9.79	9.77	0.02	35.64	45.89	27.63	35.30	0.72	180.00	1.07	1.03	1.03
200.00	9.82	9.81	9.81	9.81	9.81	9.81	9.80	0.02	35.13	45.42	27.45	34.82	0.80	200.00	1.08	1.03	1.03
220.00	9.85	9.84	9.84	9.84	9.84	9.84	9.83	0.02	34.72	44.85	27.27	34.41	0.87	220.00	1.08	1.03	1.03
240.00	9.87	9.86	9.87	9.87	9.86	9.86	9.85	0.03	34.33	44.45	27.07	34.07	0.97	240.00	1.09	1.03	1.03
250.00	9.89	9.88	9.88	9.88	9.87	9.88	9.86	0.03	34.17	44.25	26.98	33.92	1.01	250.00	1.09	1.03	1.03
300.00	9.96	9.95	9.96	9.95	9.94	9.95	9.92	0.04	33.52	43.40	26.48	33.33	1.22	300.00	1.11	1.03	1.03
350.00	10.03	10.03	10.03	10.02	10.00	10.02	9.99	0.04	32.98	42.83	25.98	32.93	1.46	350.00	1.12	1.03	1.03
400.00	10.12	10.12	10.12	10.11	10.08	10.10	10.07	0.06	32.42	42.52	25.51	32.62	1.68	400.00	1.14	1.03	1.03
450.00	10.21	10.21	10.21	10.20	10.16	10.18	10.15	0.07	31.68	42.50	25.16	32.23	1.93	450.00	1.16	1.03	1.04
500.00	10.30	10.31	10.31	10.29	10.23	10.27	10.23	0.08	30.72	42.86	24.97	31.69	2.20	500.00	1.17	1.04	1.04
525.00	10.35	10.36	10.36	10.34	10.27	10.31	10.27	0.09	30.14	43.15	24.95	31.30	2.34	525.00	1.18	1.04	1.04
550.00	10.40	10.41	10.41	10.39	10.31	10.35	10.31	0.10	29.46	43.55	25.02	30.77	2.49	550.00	1.18	1.04	1.05
575.00	10.45	10.46	10.46	10.44	10.34	10.39	10.35	0.12	28.74	44.06	25.18	30.13	2.64	575.00	1.18	1.04	1.05
600.00	10.49	10.51	10.51	10.48	10.38	10.43	10.39	0.13	28.00	44.70	25.43	29.41	2.81	600.00	1.18	1.04	1.04
620.00	10.53	10.55	10.55	10.52	10.40	10.46	10.42	0.15	27.39	45.26	25.70	28.78	2.94	620.00	1.18	1.04	1.04
640.00	10.56	10.59	10.59	10.56	10.43	10.49	10.45	0.16	26.79	45.96	26.04	28.11	3.06	640.00	1.18	1.04	1.04
660.00	10.60	10.63	10.63	10.59	10.45	10.52	10.48	0.18	26.21	46.76	26.41	27.46	3.21	660.00	1.17	1.04	1.04
680.00	10.64	10.67	10.68	10.64	10.48	10.55	10.51	0.19	25.66	47.65	26.82	26.83	3.33	680.00	1.16	1.04	1.03
700.00	10.69	10.72	10.72	10.68	10.52	10.59	10.55	0.21	25.16	48.52	27.19	26.22	3.48	700.00	1.16	1.04	1.03
720.00	10.74	10.77	10.78	10.74	10.55	10.63	10.60	0.23	24.74	49.12	27.42	25.69	3.60	720.00	1.16	1.05	1.03
740.00	10.80	10.84	10.85	10.80	10.60	10.68	10.65	0.25	24.40	49.23	27.42	25.23	3.74	740.00	1.16	1.06	1.04
800.00	11.07	11.11	11.13	11.07	10.82	10.91	10.89	0.31	24.05	45.86	25.37	24.50	4.07	800.00	1.22	1.09	1.08

¹Total Loss = Insertion Loss + 9dB Splitter Loss




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS


REV. X2
 ZBSC-8-82+
 8/9/2010
 Page 1 of 1

Typical Performance Curves

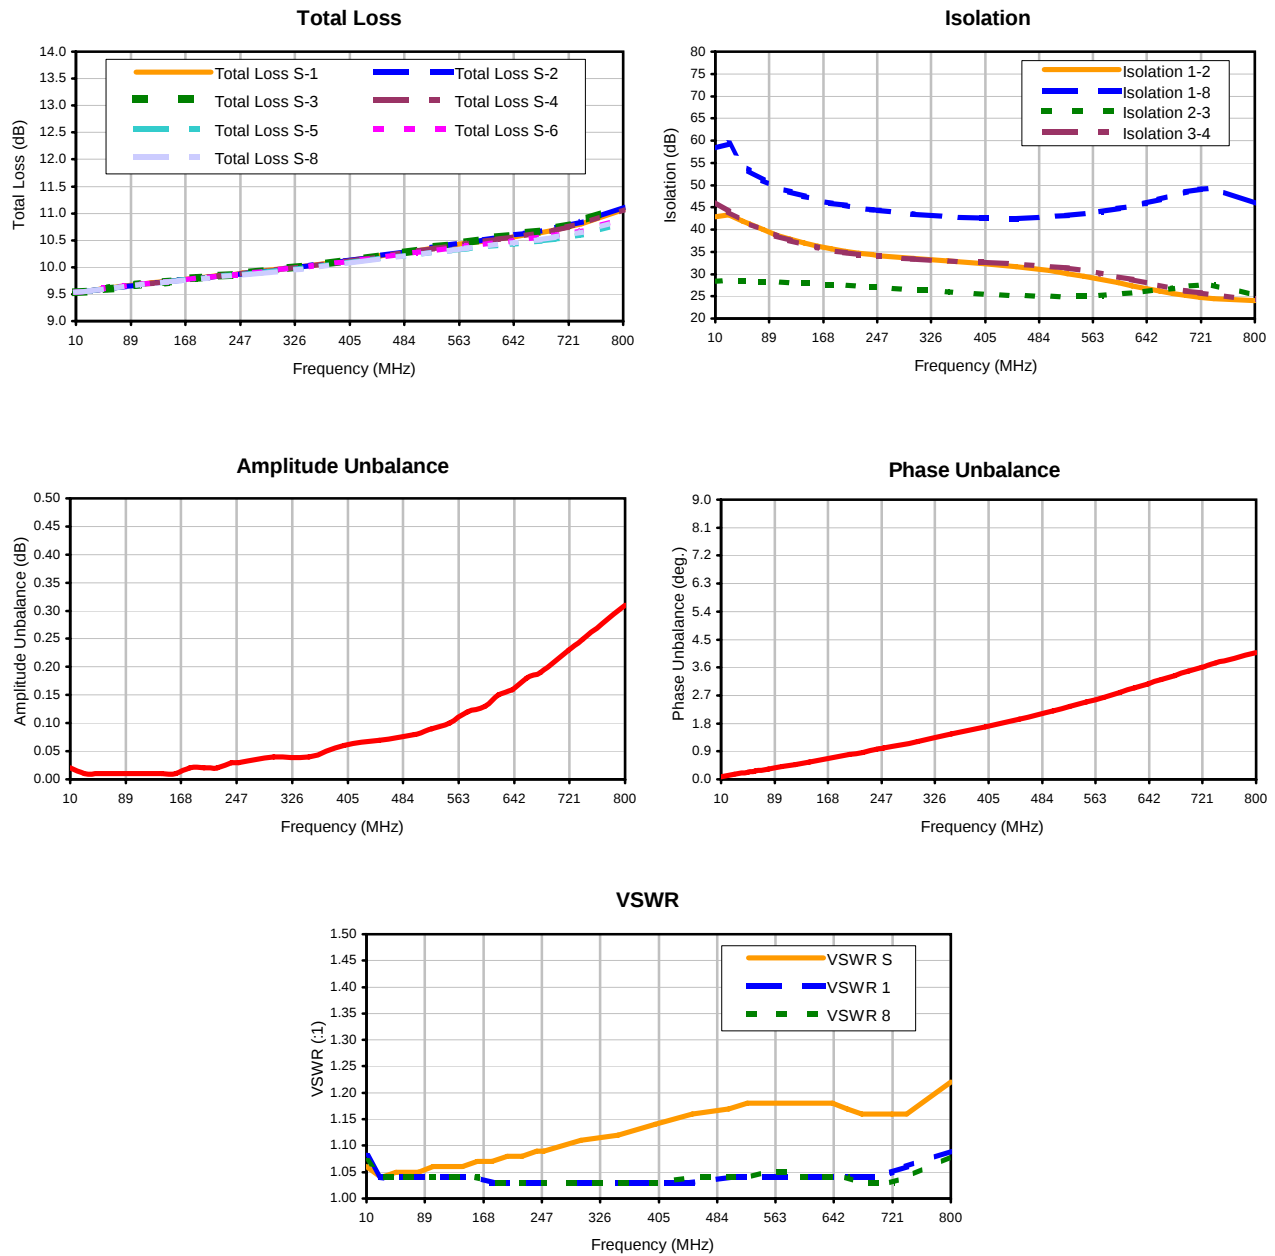

Outline Dimensions

UU1268

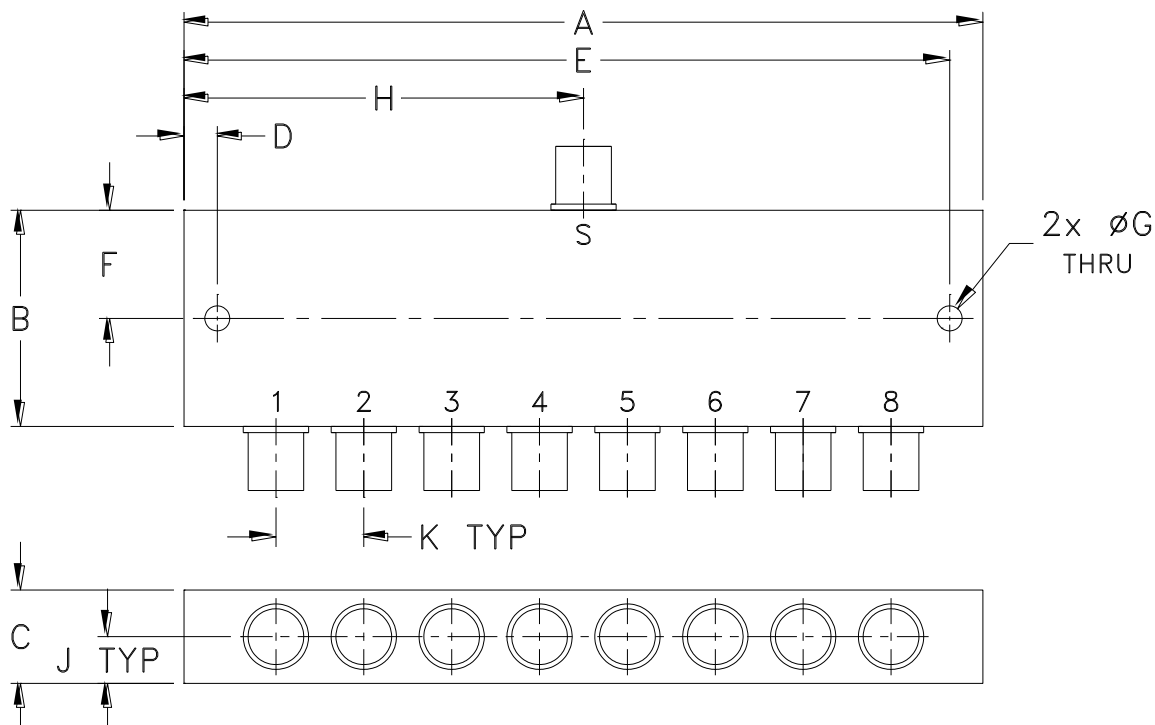

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAMS
UU1268	6.00 (152.40)	1.62 (41.15)	.70 (17.78)	.250 (6.35)	5.75 (146.05)	.810 (20.57)	.187 (4.75)	3.00 (76.20)	.35 (8.89)	.660 (16.76)	300

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I