DC Pass, High Power

Power Splitter/Combiner ZC2PD-V2654+

2 Way-0° 50Ω 26000 to 50000 MHz

The Big Deal

- Ultra wideband, 26 to 50 GHz
- Low insertion loss, 1.0 dB typ.
- High Isolation, 26 dB typ.
- 16W power handling
- Low amplitude unbalance, 0.06 dB typ.



CASE STYLE: UU2624-6

Product Overview

Mini-Circuits' ZC2PD-V2654+ is an ultra wideband 2-way 0˚ splitter/combiner providing coverage from 26 to 50 GHz, supporting a wide range of applications including 5G, V-Band, instrumentation and many more. This model provides 16W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC2PD-V2654+ comes housed in a case measuring 1.06 x 0.85 x 0.5".

Key Features

Feature	Advantages
Ultra-wideband, 26 to 50 GHz	Extremely wide frequency range supports many broadband applications in a single model. Ideal for use in widebnad instrumentation
Low insertion loss, 1.0 dB typ. at 37 GHz	The combination of 16W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 26.8 dB typ. at 37 GHz	Minimizes interference between ports.
High power handling: • 16W as a splitter at 25°C	The ZC2PD-V2654+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.02 dB at 37 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 374mA	Supports applications where DC power is needed to pass through the RF line.

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

DC Pass, High Power

Power Splitter/Combiner

ZC2PD-V2654+

2 Way-0° 50Ω 26000 to 50000 MHz



Generic photo used for illustration purposes only

CASE STYLE: UU2624-6

Connectors	Model
2.4mm-Fem	ZC2PD-V2654+

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	16W* max.
Internal Dissipation	0.44W max.
DC Current	374mA

Permanent damage may occur if any of these limits are exceeded.
* Derate linearly to 7W at 100°C

Coaxial Connections

Sum Port	S
Port 1	1
Port 2	2


Features

- Ultra wideband, 26000 - 50000 MHz
- Low insertion loss, 1.0 dB typ.
- Low amplitude unbalance, 0.06 dB typ.
- Excellent VSWR, 1.18:1 typ.
- High isolation, 26 dB typ.

Applications

- 5G
- Fixed satellite
- Space research
- Mobile

Outline Drawing

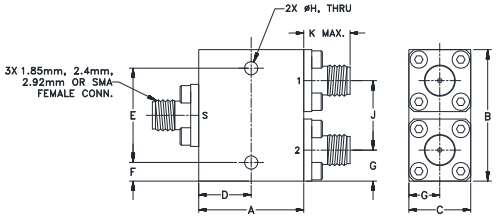


Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.85	1.06	.50	.425	.760	.150	.25
21.59	26.92	12.70	10.80	19.30	3.81	6.35

H	J	K	wt
.106	.56	.43	grams
2.7	14.22	11	45

Electrical Schematic



Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		26000		50000	MHz
Insertion Loss Above 3.0 dB	26000-40000		0.9	1.5	dB
	40000-50000		1.1	1.8	
Isolation	26000-40000	16	27		dB
	40000-50000	16	25		
Phase Unbalance	26000-40000		±1.0	±4	Degree
	40000-50000		±1.2	±5	
Amplitude Unbalance	26000-40000		±0.06	±0.3	dB
	40000-50000		±0.07	±0.4	
VSWR (Port S)	26000-40000		1.16	1.7	:1
	40000-50000		1.20	1.8	
VSWR (Port 1-2)	26000-40000		1.20	1.7	:1
	40000-50000		1.16	1.8	

Typical Performance Data


Frequency (MHz)	Total Loss[1] (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
26000	3.63	3.63	0.00	39.17	1.94	1.05	1.03	1.01
28000	3.74	3.75	0.01	26.96	2.06	1.24	1.29	1.31
30000	3.72	3.74	0.01	27.53	2.06	1.16	1.21	1.24
32000	3.77	3.77	0.00	28.05	2.10	1.09	1.19	1.19
34000	3.97	3.95	0.02	24.37	2.26	1.44	1.35	1.35
36000	3.83	3.84	0.01	49.88	2.54	1.07	1.02	1.06
38000	3.96	3.99	0.04	22.25	2.47	1.32	1.32	1.33
40000	4.20	4.21	0.01	21.63	2.41	1.60	1.43	1.50
42000	3.98	3.99	0.01	33.04	2.65	1.06	1.05	1.08
44000	4.02	4.09	0.07	26.96	2.65	1.14	1.21	1.33
46000	4.06	4.11	0.05	29.60	2.09	1.10	1.12	1.24
48000	4.14	4.10	0.04	22.37	2.12	1.17	1.15	1.04
49000	4.24	4.18	0.06	20.87	2.36	1.26	1.23	1.13
50000	4.52	4.46	0.05	22.10	2.58	1.63	1.49	1.34

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.


ZC2PD-V2654+
TOTAL LOSS

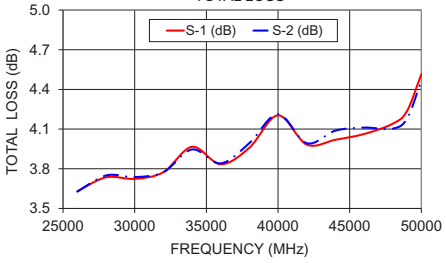

ZC2PD-V2654+
ISOLATION

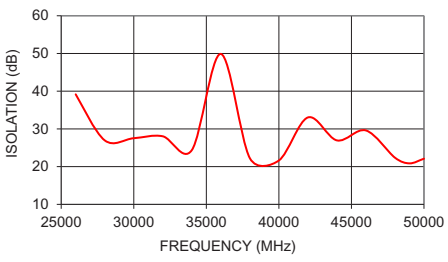

ZC2PD-V2654+
VSWR

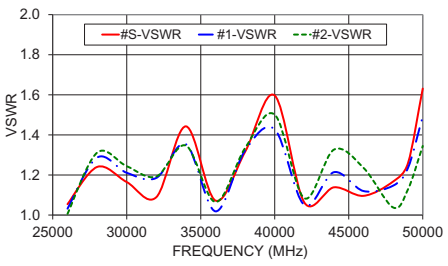

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

2 Way-0° Power Splitter/Combiner ZC2PD-V2654+

Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = +25°C

FREQUENCY (MHz)	TOTAL LOSS[1] (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (Deg)
	S-1	S-2		1-2	
25000	3.79	3.78	0.01	27.54	1.85
25500	3.69	3.68	0.01	31.20	1.90
26000	3.63	3.63	0.00	39.17	1.94
26500	3.66	3.65	0.00	40.22	1.97
27000	3.71	3.72	0.00	32.66	2.04
27500	3.75	3.75	0.01	28.93	2.03
28000	3.74	3.75	0.01	26.96	2.06
28500	3.71	3.73	0.02	26.02	2.04
29000	3.70	3.72	0.01	25.80	2.04
29500	3.71	3.72	0.01	26.43	2.05
30000	3.72	3.74	0.01	27.53	2.06
30500	3.74	3.75	0.01	29.03	2.05
31000	3.75	3.75	0.00	30.27	2.02
31500	3.76	3.76	0.00	29.80	2.10
32000	3.77	3.77	0.00	28.05	2.10
32500	3.80	3.80	0.00	26.13	2.12
33000	3.88	3.86	0.02	24.78	2.11
33500	3.91	3.89	0.02	24.36	2.23
34000	3.97	3.95	0.02	24.37	2.26
34500	3.98	3.96	0.03	25.51	2.31
35000	3.94	3.92	0.02	28.32	2.52
35500	3.85	3.84	0.01	33.73	2.58
36000	3.83	3.84	0.01	49.88	2.54
36500	3.92	3.93	0.01	32.47	2.53
37000	4.00	4.02	0.02	26.83	2.56
37500	4.02	4.04	0.02	24.01	2.52
38000	3.96	3.99	0.04	22.25	2.47
38500	3.91	3.94	0.04	21.31	2.46
39000	3.94	3.97	0.03	20.85	2.38
39500	4.08	4.10	0.02	20.90	2.40
40000	4.20	4.21	0.01	21.63	2.41
40500	4.24	4.24	0.00	22.91	2.48
41000	4.17	4.17	0.00	24.73	2.56
41500	4.04	4.05	0.00	28.02	2.62
42000	3.98	3.99	0.01	33.04	2.65
42500	3.99	4.01	0.02	36.21	2.75
43000	4.02	4.06	0.05	30.95	2.71
43500	4.04	4.09	0.05	28.00	2.63
44000	4.02	4.09	0.07	26.96	2.65
45000	4.04	4.12	0.08	27.15	2.36
46000	4.06	4.11	0.05	29.60	2.09
47000	4.09	4.10	0.01	26.32	1.97
48000	4.14	4.10	0.04	22.37	2.12
49000	4.24	4.18	0.06	20.87	2.36
50000	4.52	4.46	0.05	22.10	2.58
51000	4.41	4.39	0.02	26.09	2.37

FREQUENCY (MHz)	VSWR (:1)		
	S	1	2
25000	1.43	1.30	1.30
25500	1.25	1.17	1.17
26000	1.05	1.03	1.01
26500	1.14	1.12	1.14
27000	1.25	1.22	1.25
27500	1.29	1.29	1.32
28000	1.24	1.29	1.31
28500	1.14	1.27	1.29
29000	1.08	1.23	1.26
29500	1.13	1.22	1.25
30000	1.16	1.21	1.24
30500	1.17	1.19	1.22
31000	1.13	1.17	1.19
31500	1.11	1.17	1.18
32000	1.09	1.19	1.19
32500	1.12	1.21	1.22
33000	1.21	1.26	1.26
33500	1.35	1.32	1.32
34000	1.44	1.35	1.35
34500	1.46	1.35	1.33
35000	1.35	1.27	1.23
35500	1.17	1.14	1.10
36000	1.07	1.02	1.06
36500	1.27	1.18	1.23
37000	1.42	1.31	1.34
37500	1.45	1.38	1.39
38000	1.32	1.32	1.33
38500	1.10	1.27	1.30
39000	1.16	1.26	1.32
39500	1.43	1.37	1.45
40000	1.60	1.43	1.50
40500	1.63	1.44	1.49
41000	1.50	1.35	1.36
41500	1.27	1.19	1.20
42000	1.06	1.05	1.08
42500	1.11	1.09	1.19
43000	1.20	1.16	1.28
43500	1.21	1.21	1.33
44000	1.14	1.21	1.33
45000	1.11	1.19	1.31
46000	1.10	1.12	1.24
47000	1.09	1.09	1.04
48000	1.17	1.15	1.04
49000	1.26	1.23	1.13
50000	1.63	1.49	1.34
51000	1.50	1.42	1.28

[1]Total Loss = Insertion Loss + 3dB Splitter Loss

Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = -55°C

FREQUENCY (MHz)	TOTAL LOSS[1] (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (Deg)
	S-1	S-2		1-2	
25000	3.45	3.54	0.09	30.00	1.99
25500	3.37	3.45	0.08	28.24	1.98
26000	3.39	3.45	0.06	26.43	1.98
26500	3.44	3.48	0.04	25.40	2.01
27000	3.45	3.48	0.03	25.08	2.08
27500	3.43	3.46	0.03	26.42	2.15
28000	3.42	3.47	0.05	27.81	2.23
28500	3.42	3.49	0.07	32.08	2.26
29000	3.43	3.50	0.07	37.67	2.33
29500	3.43	3.50	0.07	33.28	2.35
30000	3.45	3.50	0.06	29.37	2.39
30500	3.46	3.51	0.04	26.98	2.43
31000	3.47	3.49	0.03	26.00	2.46
31500	3.50	3.51	0.02	26.78	2.47
32000	3.57	3.59	0.02	28.90	2.47
32500	3.67	3.69	0.02	31.00	2.46
33000	3.67	3.72	0.05	37.71	2.41
33500	3.62	3.70	0.08	46.49	2.40
34000	3.57	3.66	0.09	42.03	2.43
34500	3.54	3.62	0.08	38.16	2.51
35000	3.52	3.59	0.07	35.10	2.53
35500	3.52	3.58	0.06	33.20	2.63
36000	3.54	3.58	0.05	30.82	2.70
36500	3.58	3.63	0.05	28.13	2.78
37000	3.62	3.68	0.06	25.12	2.83
37500	3.64	3.71	0.07	23.22	2.86
38000	3.61	3.70	0.09	22.54	2.90
38500	3.57	3.65	0.08	22.52	2.90
39000	3.62	3.71	0.10	23.13	2.86
39500	3.72	3.83	0.11	25.33	2.84
40000	3.77	3.90	0.13	28.35	2.76
40500	3.78	3.89	0.11	33.51	2.79
41000	3.70	3.79	0.09	47.89	2.79
41500	3.64	3.72	0.08	41.20	2.82
42000	3.65	3.70	0.06	34.31	2.90
42500	3.66	3.69	0.03	33.74	2.94
43000	3.68	3.69	0.01	32.64	3.01
43500	3.69	3.71	0.02	33.06	3.06
44000	3.69	3.73	0.04	29.44	3.08
45000	3.71	3.80	0.09	24.08	3.06
46000	3.73	3.81	0.08	22.41	3.04
47000	3.74	3.76	0.03	25.55	2.98
48000	3.77	3.80	0.03	30.55	2.96
49000	3.77	3.85	0.08	26.78	2.84
50000	3.92	3.98	0.06	29.12	2.73
51000	4.07	4.04	0.04	32.01	3.04

FREQUENCY (MHz)	VSWR (:1)		
	S	1	2
25000	1.30	1.27	1.34
25500	1.07	1.10	1.17
26000	1.13	1.04	1.04
26500	1.23	1.11	1.09
27000	1.22	1.13	1.11
27500	1.10	1.15	1.13
28000	1.02	1.14	1.15
28500	1.08	1.13	1.19
29000	1.10	1.10	1.18
29500	1.11	1.06	1.14
30000	1.14	1.13	1.11
30500	1.14	1.15	1.08
31000	1.04	1.17	1.10
31500	1.11	1.26	1.17
32000	1.29	1.38	1.30
32500	1.45	1.49	1.40
33000	1.46	1.46	1.45
33500	1.41	1.41	1.45
34000	1.31	1.31	1.39
34500	1.22	1.25	1.31
35000	1.12	1.16	1.22
35500	1.06	1.11	1.17
36000	1.09	1.07	1.11
36500	1.20	1.08	1.14
37000	1.34	1.13	1.20
37500	1.38	1.17	1.21
38000	1.28	1.15	1.17
38500	1.08	1.15	1.20
39000	1.25	1.26	1.33
39500	1.44	1.41	1.48
40000	1.54	1.45	1.56
40500	1.51	1.44	1.53
41000	1.32	1.30	1.38
41500	1.13	1.12	1.22
42000	1.04	1.07	1.11
42500	1.02	1.10	1.06
43000	1.05	1.16	1.08
43500	1.07	1.21	1.14
44000	1.05	1.19	1.16
45000	1.18	1.10	1.09
46000	1.21	1.06	1.07
47000	1.12	1.22	1.16
48000	1.15	1.29	1.18
49000	1.15	1.16	1.17
50000	1.38	1.30	1.31
51000	1.53	1.57	1.42

[1]Total Loss = Insertion Loss + 3dB Splitter Loss

2 Way-0° Power Splitter/Combiner ZC2PD-V2654+

Typical Performance Data

TEST CONDITIONS: INPUT POWER =0 dBm @Temperature = +100°C


FREQUENCY (MHz)	TOTAL LOSS[1] (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (Deg)
	S-1	S-2		1-2	
25000	3.93	3.86	0.06	27.66	3.22
25500	3.83	3.77	0.06	31.19	3.32
26000	3.77	3.71	0.06	38.88	3.39
26500	3.80	3.74	0.06	41.30	3.45
27000	3.85	3.80	0.05	33.21	3.55
27500	3.90	3.85	0.05	29.29	3.58
28000	3.89	3.84	0.05	27.20	3.64
28500	3.87	3.82	0.05	26.10	3.66
29000	3.86	3.81	0.05	25.75	3.67
29500	3.87	3.81	0.06	26.21	3.73
30000	3.89	3.83	0.06	27.16	3.78
30500	3.90	3.84	0.06	28.59	3.86
31000	3.92	3.85	0.07	30.08	3.85
31500	3.93	3.86	0.07	30.09	3.96
32000	3.94	3.87	0.07	28.56	3.99
32500	3.96	3.89	0.07	26.61	4.03
33000	4.04	3.95	0.09	25.04	4.01
33500	4.08	3.99	0.09	24.51	4.18
34000	4.14	4.05	0.10	24.45	4.26
34500	4.17	4.07	0.10	25.43	4.36
35000	4.15	4.04	0.11	28.20	4.59
35500	4.05	3.96	0.08	32.98	4.68
36000	4.02	3.95	0.07	50.17	4.67
36500	4.10	4.03	0.07	33.49	4.67
37000	4.20	4.13	0.06	27.31	4.74
37500	4.22	4.16	0.06	24.33	4.72
38000	4.17	4.11	0.05	22.49	4.73
38500	4.12	4.06	0.06	21.50	4.75
39000	4.14	4.07	0.07	20.96	4.73
39500	4.27	4.20	0.07	20.93	4.76
40000	4.41	4.32	0.09	21.55	4.81
40500	4.45	4.36	0.10	22.80	4.93
41000	4.40	4.30	0.10	24.55	5.05
41500	4.28	4.18	0.10	27.62	5.14
42000	4.21	4.12	0.09	32.45	5.25
42500	4.22	4.14	0.08	37.07	5.37
43000	4.25	4.19	0.06	31.64	5.38
43500	4.27	4.22	0.05	28.33	5.29
44000	4.26	4.22	0.04	26.98	5.36
45000	4.28	4.24	0.04	26.74	5.14
46000	4.32	4.24	0.08	29.28	4.98
47000	4.35	4.23	0.11	27.10	5.02
48000	4.40	4.25	0.15	22.77	5.17
49000	4.49	4.31	0.18	20.99	5.53
50000	4.79	4.61	0.18	22.07	5.86
51000	4.68	4.54	0.14	26.09	5.70

FREQUENCY (MHz)	VSWR (:1)		
	S	1	2
25000	1.43	1.30	1.31
25500	1.25	1.18	1.18
26000	1.06	1.03	1.02
26500	1.13	1.11	1.13
27000	1.25	1.22	1.24
27500	1.29	1.30	1.32
28000	1.25	1.30	1.31
28500	1.15	1.28	1.29
29000	1.07	1.24	1.26
29500	1.12	1.23	1.25
30000	1.16	1.21	1.24
30500	1.18	1.19	1.22
31000	1.15	1.16	1.19
31500	1.11	1.15	1.18
32000	1.09	1.17	1.20
32500	1.10	1.19	1.22
33000	1.18	1.24	1.27
33500	1.32	1.31	1.33
34000	1.43	1.34	1.35
34500	1.46	1.35	1.34
35000	1.37	1.27	1.25
35500	1.19	1.16	1.12
36000	1.05	1.01	1.05
36500	1.25	1.16	1.21
37000	1.41	1.30	1.34
37500	1.45	1.37	1.39
38000	1.33	1.32	1.34
38500	1.12	1.27	1.30
39000	1.14	1.25	1.31
39500	1.39	1.35	1.44
40000	1.57	1.41	1.49
40500	1.61	1.43	1.49
41000	1.51	1.35	1.38
41500	1.29	1.20	1.21
42000	1.08	1.06	1.08
42500	1.09	1.08	1.17
43000	1.20	1.17	1.27
43500	1.22	1.23	1.33
44000	1.15	1.24	1.32
45000	1.09	1.21	1.30
46000	1.12	1.15	1.24
47000	1.08	1.05	1.04
48000	1.18	1.15	1.06
49000	1.22	1.21	1.13
50000	1.62	1.47	1.36
51000	1.51	1.42	1.30


[1]Total Loss = Insertion Loss + 3dB Splitter Loss

Typical Performance Curves


Total Loss

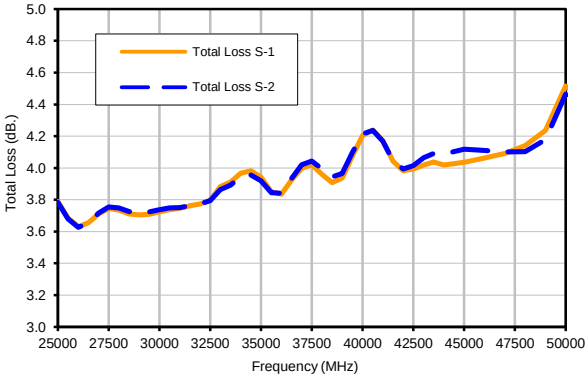


Total Loss S-1 vs. TEMPERATURE

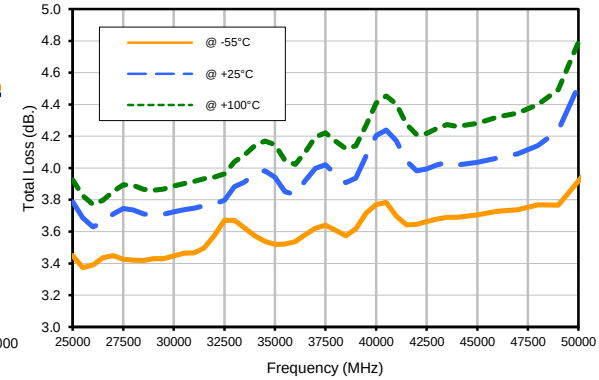


Amplitude Unbalance vs. TEMPERATURE

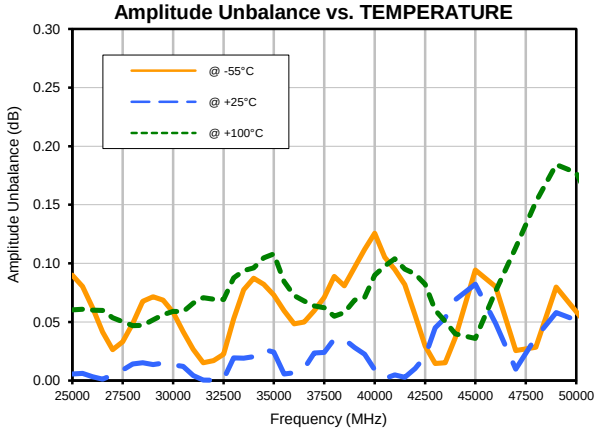


Phase Unbalance vs. TEMPERATURE

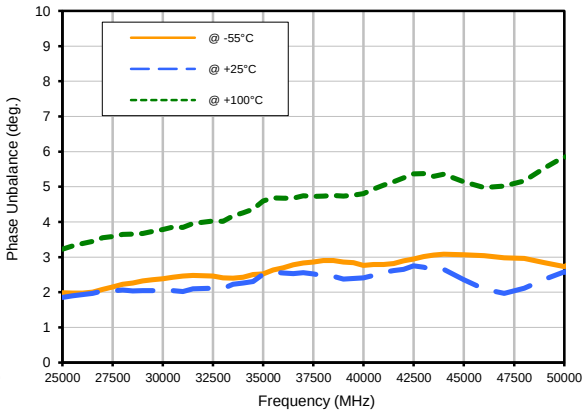



Isolation 1-2 vs. TEMPERATURE

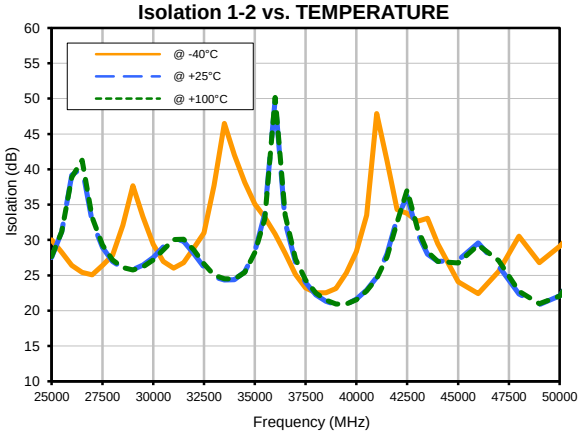

Typical Performance Curves

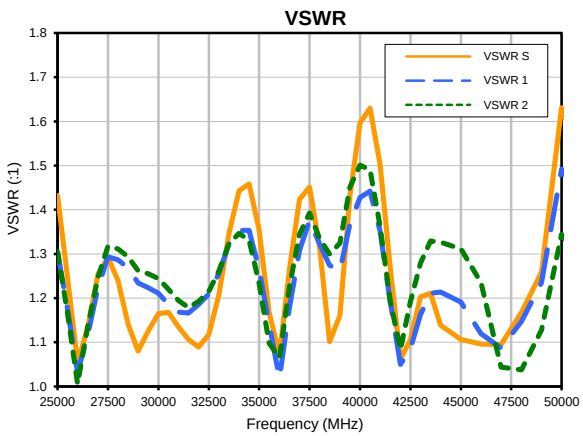

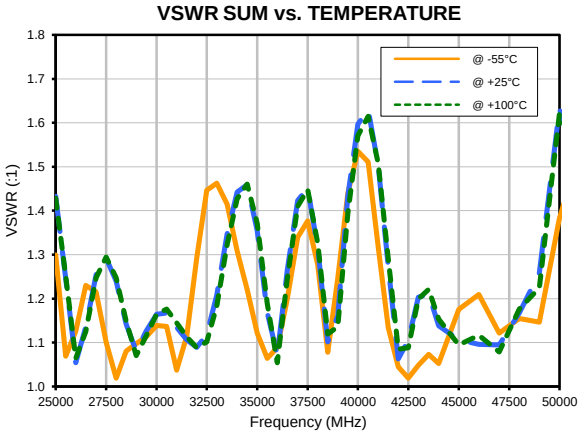


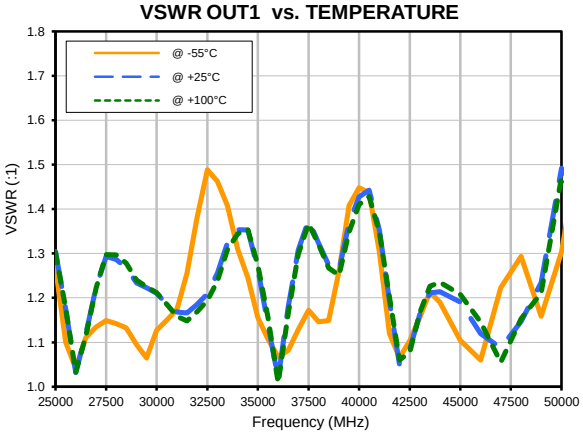

Case Style UU

Outline Dimensions

UU2624-6

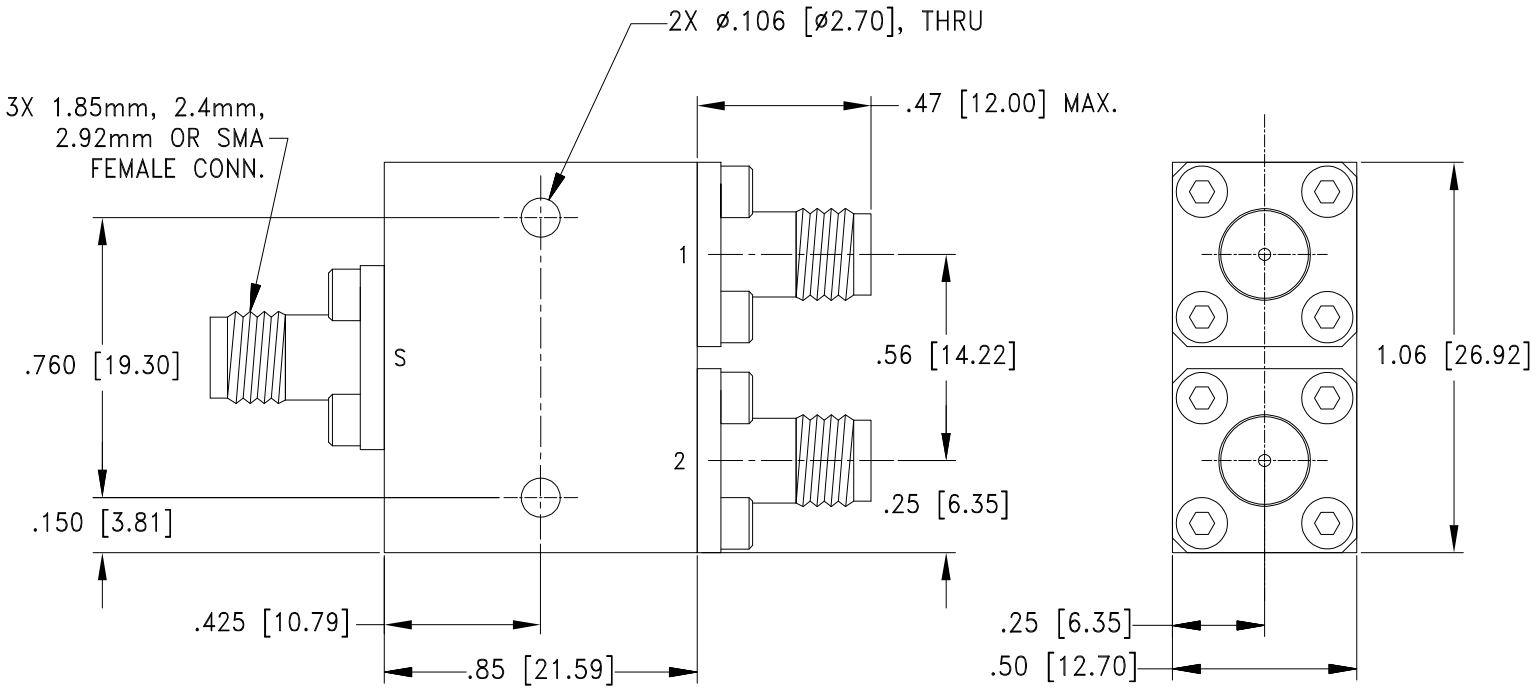

Weight: 35 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.±.03; 3 Pl. ± .015

Notes:

1. Case Material: Aluminum Alloy
2. Case Finish:
   For RoHS Case Styles: Nickel Plating.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED
ALL NEW minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com
RF/IF MICROWAVE COMPONENTS

Mini-Circuits

Environmental Specifications **ENV102**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 25 cycles	MIL-STD-202, Method 107, Condition A-1 except +100°C instead of 85°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I
Connector Durability	500 mating/unmating cycles	MIL-PRF-39012E, PARAGRAPH 4.6.12

This document and its contents are the property of Mini-Circuits.