

Engineering Development Model

Power Splitter/Combiner

ZCSC-ED8308/1

3 Way-0°

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.



CASE STYLE : UU233

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C				
Parameter		Min.	Typ.	Max. Units
Frequency		0.3		800 MHz
Isolation	.3 - 3 MHz		22	dB
	3 - 400 MHz		24	dB
	400 - 800 MHz		20	dB
Insertion Loss Above 4.8 dB	.3 - 3 MHz		0.30	dB
	3 - 400 MHz		0.60	dB
	400 - 800 MHz		2.00	dB
Phase Unbalance	.3 - 3 MHz		0.400	deg.
	3 - 400 MHz		1.200	deg.
	400 - 800 MHz		4.500	deg.
Amplitude Unbalance	.3 - 3 MHz		0.045	dB
	3 - 400 MHz		0.150	dB
	400 - 800 MHz		0.500	dB
VSWR	SUM Port		1.35	(:1)
	OUT Ports		1.25	(:1)

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

COAXIAL CONNECTIONS	
SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3

Functional Diagram



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS



REV. X3
ZCSC-ED8308/1
07/12/2011
Page 1 of 1

3 Way-0° Power Splitter/Combiner

ZCSC-ED8308/1

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)			AMP. UNBAL. (dB)	ISOLATION (dB)			PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)			
	S-1	S-2	S-3		1-2	1-3	2-3			S	1	2	3
0.3	5.30	5.28	5.29	0.02	20.96	21.30	20.76	0.26	0.3	1.51	1.88	1.89	1.89
0.5	5.23	5.23	5.23	0.00	22.51	22.85	22.32	0.17	0.5	1.32	1.58	1.59	1.58
0.7	5.21	5.21	5.21	0.00	23.67	23.98	23.45	0.13	0.7	1.26	1.45	1.46	1.46
1.0	5.18	5.19	5.19	0.00	25.02	25.31	24.75	0.08	1.0	1.22	1.36	1.37	1.36
3.0	5.07	5.07	5.07	0.00	28.33	28.48	28.00	0.03	3.0	1.16	1.19	1.19	1.19
5.0	5.04	5.04	5.04	0.00	29.18	29.27	28.81	0.01	5.0	1.14	1.14	1.14	1.14
7.0	5.03	5.03	5.02	0.00	29.47	29.53	29.16	0.01	7.0	1.14	1.13	1.13	1.13
10.0	5.02	5.02	5.02	0.00	29.57	29.61	29.29	0.02	10.0	1.13	1.12	1.12	1.12
30.0	5.05	5.05	5.05	0.00	29.33	29.41	29.15	0.06	30.0	1.13	1.11	1.11	1.11
50.0	5.07	5.07	5.07	0.00	29.07	29.20	28.91	0.12	50.0	1.13	1.11	1.11	1.11
70.0	5.10	5.10	5.09	0.01	28.68	28.90	28.59	0.16	70.0	1.13	1.11	1.10	1.11
100.0	5.13	5.13	5.12	0.01	27.99	28.35	28.04	0.25	100.0	1.14	1.10	1.10	1.10
150.0	5.17	5.17	5.15	0.02	26.86	27.44	27.10	0.36	150.0	1.15	1.09	1.09	1.09
200.0	5.22	5.23	5.19	0.05	25.78	26.56	26.18	0.54	200.0	1.17	1.09	1.07	1.08
250.0	5.27	5.29	5.22	0.07	24.97	25.88	25.47	0.69	250.0	1.18	1.07	1.06	1.07
300.0	5.32	5.35	5.24	0.10	24.38	25.40	24.96	0.87	300.0	1.19	1.06	1.05	1.06
350.0	5.37	5.40	5.27	0.14	24.12	25.23	24.74	1.06	350.0	1.19	1.04	1.06	1.04
400.0	5.42	5.47	5.29	0.18	24.15	25.35	24.83	1.27	400.0	1.18	1.03	1.08	1.04
425.0	5.44	5.50	5.30	0.20	24.34	25.59	25.05	1.38	425.0	1.17	1.02	1.09	1.04
450.0	5.46	5.53	5.31	0.22	24.66	26.00	25.42	1.52	450.0	1.16	1.03	1.11	1.05
500.0	5.50	5.60	5.33	0.27	25.78	27.39	26.63	1.80	500.0	1.12	1.04	1.14	1.07
550.0	5.55	5.68	5.36	0.32	27.92	30.19	28.96	2.15	550.0	1.09	1.07	1.17	1.09
600.0	5.61	5.79	5.41	0.38	31.66	37.23	33.08	2.57	600.0	1.12	1.11	1.20	1.12
650.0	5.71	5.95	5.51	0.44	32.60	38.55	33.15	3.08	650.0	1.24	1.15	1.23	1.16
700.0	5.90	6.22	5.72	0.50	25.78	27.00	25.88	3.71	700.0	1.46	1.20	1.24	1.20
750.0	6.26	6.67	6.11	0.56	20.52	21.25	20.66	4.53	750.0	1.81	1.26	1.24	1.25
800.0	6.89	7.45	6.83	0.61	16.71	17.35	16.89	5.57	800.0	2.39	1.32	1.21	1.29

¹Total Loss = Insertion Loss + 4.8dB Splitter Loss








P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS




REV. X4
 ZCSC-ED8308/1
 7/12/2011
 Page 1 of 1

Typical Performance Curves

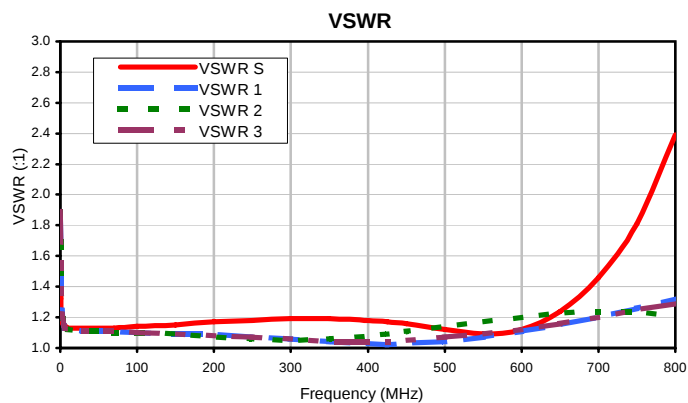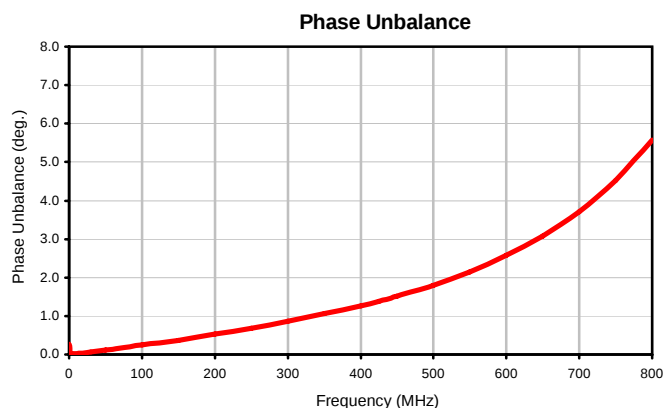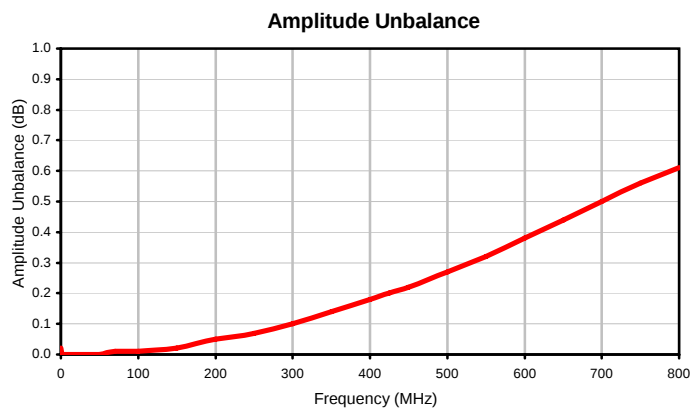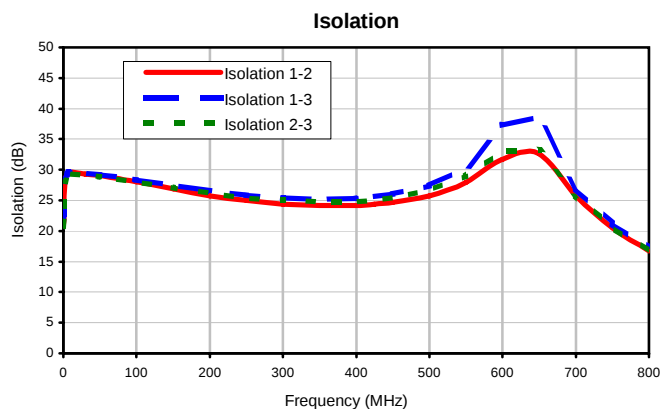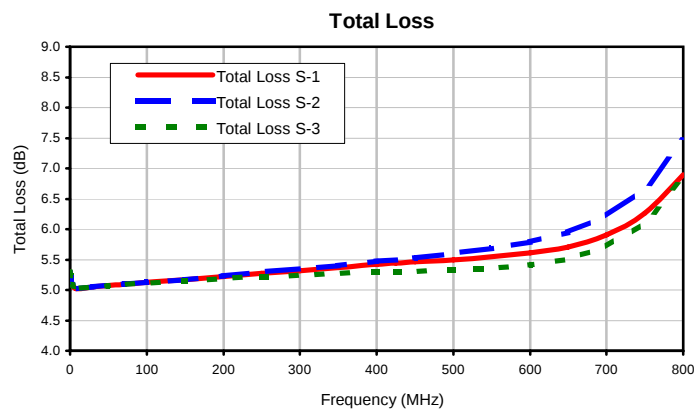

Outline Dimensions

UU233

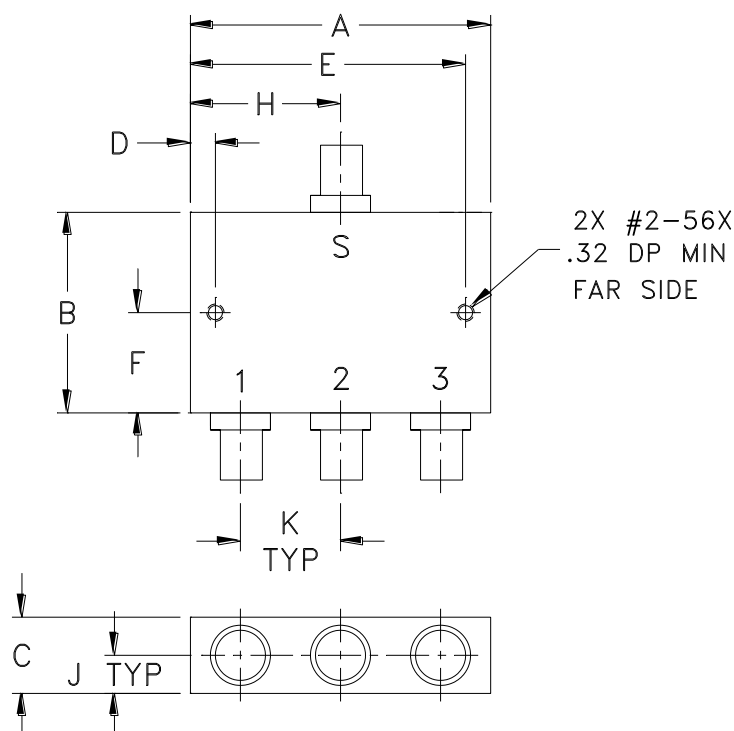

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAMS
UU233	1.50 (38.10)	1.00 (25.40)	.38 (9.65)	.125 (3.18)	1.375 (34.93)	.500 (12.70)	-- --	.75 (19.05)	.19 (4.83)	.50 (12.70)	28

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

UU233 Rev.: AZ (02/25/19) M172688 File: UU233

This document and its contents are the property of Mini-Circuits

Sheet 1 of 1



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I