

Coaxial Directional Coupler

50Ω

0.5 to 500 MHz

ZDC-10-1+



Generic photo used for illustration purposes only

CASE STYLE: M22

Connectors Model
BNC ZDC-10-1+
BRACKET (OPTION "B")
BRACKET (OPTION "BR")

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

INPUT	3
OUTPUT	2
COUPLED	1


Features

- excellent directivity, 32 dB typ.
- excellent mainline loss, 0.65 dB typ.
- rugged shielded case

Applications

- VHF/HF
- instrumentation
- communication receivers & transmitters
- amateur radio

Outline Drawing

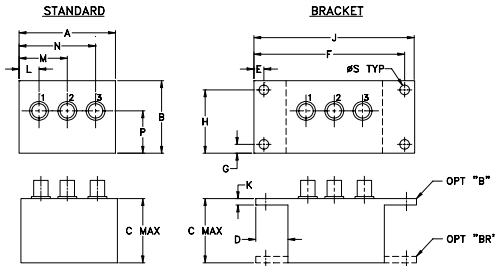

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45
J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Directional Coupler Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT (W)	
			L		M		U		L		M		U				
	f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.
0.5-500	11.5±0.5	±0.6	0.85	1.3	0.65	1.0	0.85	1.3	32	25	32	25	22	15	1.2	1.5	3.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
0.50	0.79	11.64	51.25	23.85	19.63	19.66
0.90	0.70	11.56	50.03	27.29	21.30	21.28
4.00	0.56	11.44	49.98	34.05	24.12	23.94
38.00	0.59	11.48	46.48	35.54	23.96	23.10
94.00	0.61	11.51	41.48	32.20	23.33	20.84
160.00	0.62	11.54	38.35	28.76	22.29	18.21
210.00	0.67	11.63	36.91	26.97	21.43	16.63
275.00	0.74	11.71	34.57	25.19	20.29	15.00
400.00	0.94	11.85	26.91	22.30	18.40	13.06
500.00	1.05	11.79	20.87	19.79	17.45	12.48

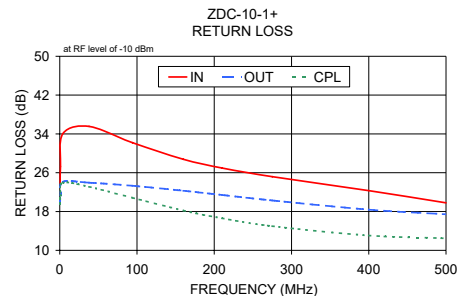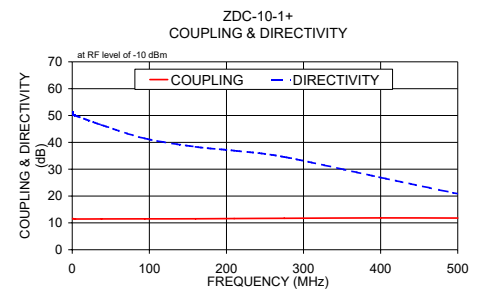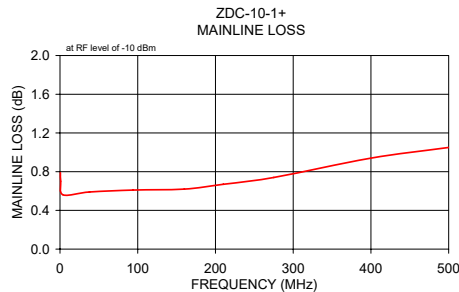

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
ZDC-10-1+
WZ/TD/CP/AM
200608
Page 1 of 1

Directional Coupler

ZDC-10-1+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	RETURN LOSS		
				IN	OUT	CPL
0.5	0.79	11.64	51.25	23.85	19.63	19.66
0.6	0.76	11.63	50.49	24.93	20.17	20.19
0.7	0.74	11.61	50.69	25.84	20.61	20.61
0.8	0.72	11.60	50.94	26.60	20.98	20.98
0.9	0.70	11.56	50.03	27.29	21.30	21.28
1.0	0.68	11.56	50.46	27.90	21.58	21.56
2.0	0.61	11.49	50.37	31.57	23.17	23.04
3.0	0.58	11.46	49.79	33.21	23.82	23.64
4.0	0.56	11.44	49.98	34.05	24.12	23.94
5.0	0.57	11.45	50.24	34.57	24.27	24.06
10.0	0.56	11.44	49.83	35.46	24.41	24.15
24.0	0.58	11.45	48.07	35.94	24.16	23.64
38.0	0.59	11.48	46.48	35.54	23.96	23.10
52.0	0.60	11.50	45.62	34.75	23.82	22.56
66.0	0.60	11.50	43.69	33.95	23.68	22.01
80.0	0.60	11.51	42.71	33.07	23.51	21.42
94.0	0.61	11.51	41.48	32.20	23.33	20.84
108.0	0.62	11.53	40.80	31.44	23.13	20.24
122.0	0.63	11.54	39.77	30.63	22.91	19.66
136.0	0.63	11.56	39.38	29.91	22.67	19.10
150.0	0.62	11.55	38.73	29.19	22.44	18.57
160.0	0.62	11.54	38.35	28.76	22.29	18.21
170.0	0.62	11.55	38.16	28.35	22.12	17.86
180.0	0.65	11.57	37.67	27.98	21.96	17.54
190.0	0.66	11.60	37.48	27.63	21.80	17.23
200.0	0.67	11.62	37.13	27.29	21.61	16.92
210.0	0.67	11.63	36.91	26.97	21.43	16.63
220.0	0.65	11.59	36.66	26.65	21.24	16.33
230.0	0.63	11.57	36.33	26.34	21.06	16.06
240.0	0.65	11.58	36.04	26.05	20.90	15.81
250.0	0.67	11.60	35.52	25.76	20.72	15.56
275.0	0.74	11.71	34.57	25.19	20.29	15.00
300.0	0.69	11.60	33.40	24.62	19.85	14.49
325.0	0.78	11.70	31.77	24.01	19.43	14.04
350.0	0.80	11.75	30.23	23.47	19.07	13.67
375.0	0.78	11.63	28.55	22.89	18.69	13.32
400.0	0.94	11.85	26.91	22.30	18.40	13.06
425.0	0.89	11.75	25.31	21.77	18.13	12.84
450.0	1.00	11.80	23.74	21.20	17.82	12.64
475.0	1.09	11.97	22.29	20.50	17.58	12.52
500.0	1.05	11.79	20.87	19.79	17.45	12.48

REV. X1
ZDC-10-1+
060718
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Directional Coupler

ZDC-10-1+

Typical Performance Curves

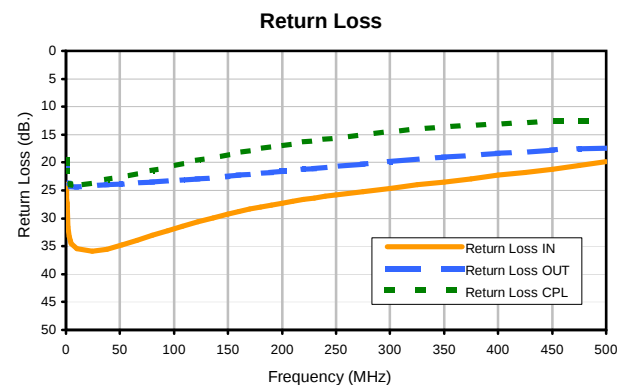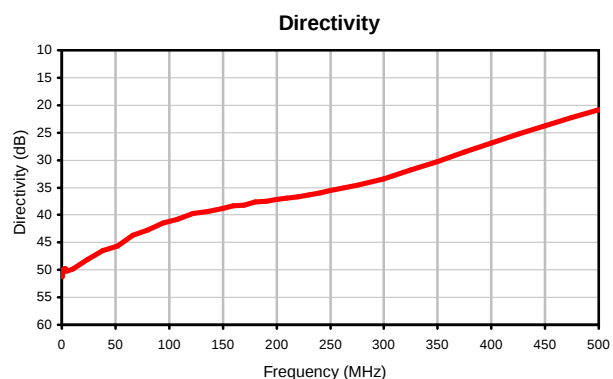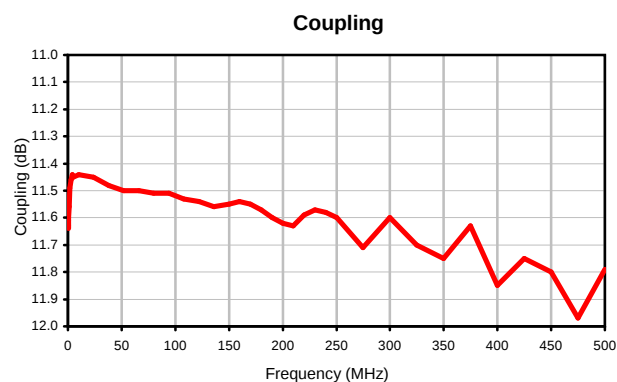

REV. X1
ZDC-10-1+
060718
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Outline Dimensions

M21

M22

M23



CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
M21	1.50 (38.10)	1.13 (28.70)	1.00 (25.40)	.50 (12.70)	.155 (3.94)	2.345 (59.56)	.138 (3.51)	.987 (25.07)	2.50 (63.50)	.10 (2.54)	.31 (7.87)	.75 (19.05)	1.19 (30.23)
M22	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.40 (10.16)	1.15 (29.21)	1.86 (47.24)
M23	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.63 (16.00)	1.06 (26.92)	1.63 (41.40)

CASE#	P	Q	R	S	WT. GRAMS
M21	.66 (16.76)	--	--	.150 (3.81)	40.0
M22	.64 (16.26)	--	--		74.0
M23	.69 (17.53)	--	--		70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
 - For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
 - For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.

Due to transition from non-RoHS to RoHS, models will be supplied with either case style finish until the non-RoHS case inventory is depleted.
- Mounting bracket available on request. For bracket mounted on connector end add suffix B to part number and add \$5.00 to unit cost. For bracket mounted on the rear, add suffix BR to part number and add \$1.50 to unit cost.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I