Coaxial

Frequency Mixer

Level 7 (LO Power +7 dBm) 10 to 750 MHz

ZFM-1W+
ZFM-1W

SMA version shown
CASE STYLE: K18

Connectors	Model	Price	Qty.
BNC	ZFM-1W(+)	$51.95 ea.	(1-9)
SMA	ZFM-1W-S+	$56.95 ea.	(1-9)
BRACKET (OPTION "B")		$5.00	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	2
IF	3

Features

- low conversion loss, 5.42 dB typ.
- good L-R isolation, 45 dB typ, L-I, 40 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- defense & federal communications
- instrumentation

Outline Drawing

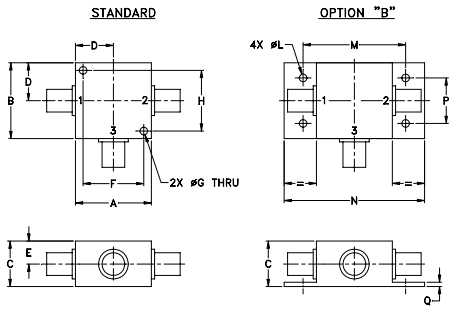

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band m			Total Range	L		M		U		L		M		U	
f_L-f_U		$\overline{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
10-750	DC-750	5.42	0.14	7.0	8.0	50	45	45	30	35	25	45	40	40	25	27	20

1 dB COMP.: +1 dBm typ.

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
m= mid band [2f_L to f_U/2]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1.00	31.00	6.42	>67.00	>67.00	1.20	3.31
2.00	32.00	5.97	>67.00	>67.00	1.12	3.09
5.00	35.00	5.50	>67.00	>67.00	1.10	3.15
10.00	40.00	5.66	>67.00	>67.00	1.12	2.99
20.00	50.00	5.60	>67.00	>67.00	1.14	2.99
50.00	80.00	5.60	>67.00	62.28	1.16	2.84
100.00	70.00	5.47	>67.00	55.09	1.20	2.88
130.14	100.14	5.52	57.96	51.55	1.23	2.75
200.00	170.00	5.62	50.48	45.84	1.30	2.74
285.11	255.11	5.47	45.61	40.64	1.35	2.74
362.59	332.59	5.71	42.62	37.34	1.40	2.78
414.25	384.25	5.97	40.09	36.21	1.45	2.78
500.00	470.00	6.14	39.49	33.17	1.48	2.80
543.39	513.39	6.24	37.59	31.35	1.50	2.82
595.04	565.04	6.21	37.44	31.39	1.49	2.85
646.70	616.70	6.16	36.31	33.58	1.51	2.93
672.53	642.53	6.27	36.63	31.60	1.58	2.94
698.36	668.36	6.43	36.64	29.86	1.64	3.03
724.18	694.18	6.68	36.68	28.78	1.72	3.01
750.00	720.00	6.98	35.77	27.45	1.83	3.01

Electrical Schematic

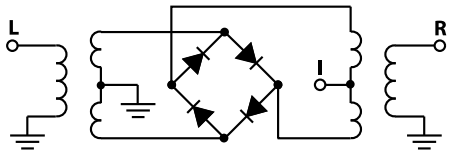

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Performance Charts

ZFM-1W+
CONVERSION LOSS
at IF Freq of 30 MHz

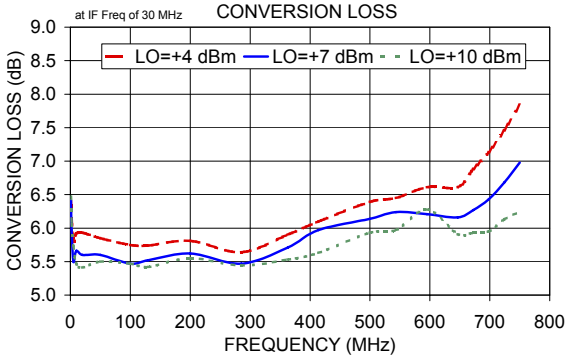

ZFM-1W+
L-R ISOLATION

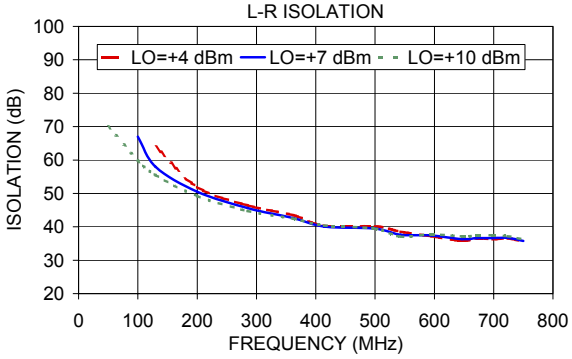

ZFM-1W+
L-I ISOLATION

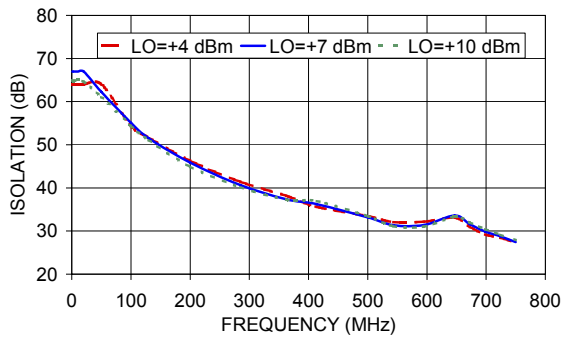

ZFM-1W+
RF VSWR

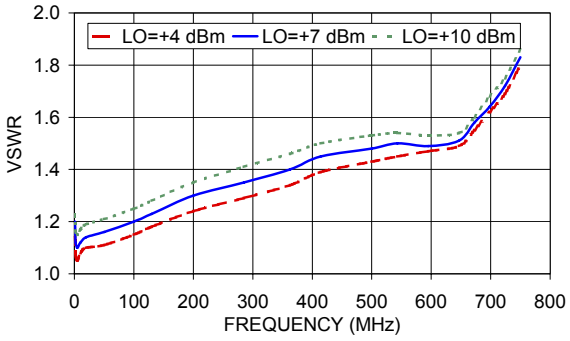

ZFM-1W+
LO VSWR

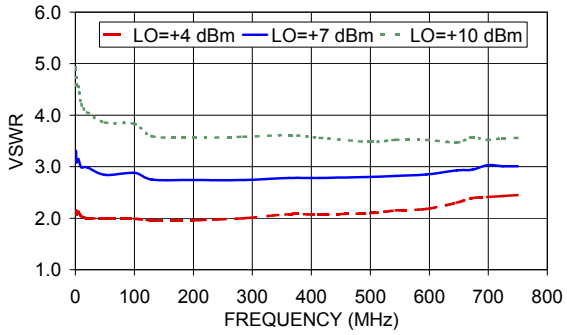

ZFM-1W+
IF VSWR

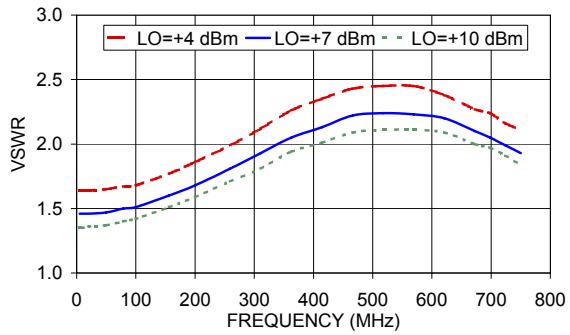

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Frequency Mixer ZFM-1W+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+4	+7	+10
10.1	40.1	6.15	5.72	5.11
50.1	80.1	6.44	6.04	5.84
90.1	120.1	6.40	6.09	5.94
130.1	160.1	6.52	6.15	5.96
170.1	200.1	6.47	6.17	6.03
210.1	240.1	6.57	6.25	6.08
250.1	280.1	6.57	6.27	6.10
290.1	320.1	6.65	6.35	6.16
330.1	360.1	6.77	6.44	6.24
370.1	400.1	6.76	6.43	6.25
410.1	440.1	6.97	6.60	6.38
450.1	480.1	6.92	6.56	6.34
490.1	520.1	7.15	6.73	6.48
530.1	560.1	7.28	6.87	6.60
570.1	600.1	7.45	6.99	6.70
610.1	640.1	7.62	7.10	6.77
650.1	680.1	7.60	7.04	6.69
690.1	720.1	7.72	7.06	6.69
730.1	760.1	7.78	7.06	6.68
770.1	800.1	7.91	7.16	6.72
810.1	840.1	8.01	7.29	6.81
850.1	880.1	8.08	7.42	6.93
890.1	920.1	8.13	7.51	7.04
930.1	960.1	8.28	7.68	7.23
970.1	1000.1	8.33	7.78	7.35
1010.1	1040.1	8.46	7.95	7.53
1050.1	1080.1	8.50	8.04	7.66
1070.1	1100.1	8.59	8.13	7.77
1110.1	1140.1	8.60	8.19	7.88
1130.1	1160.1	8.69	8.28	7.99
1170.1	1200.1	8.79	8.45	8.22
1190.1	1220.1	8.86	8.53	8.31
1230.1	1260.1	9.02	8.73	8.56
1250.1	1280.1	9.11	8.85	8.69
1290.1	1320.1	9.29	8.98	8.82
1310.1	1340.1	9.42	9.09	8.93
1350.1	1380.1	9.82	9.42	9.25
1370.1	1400.1	9.96	9.50	9.32
1410.1	1440.1	10.43	9.86	9.65
1430.1	1460.1	10.70	10.10	9.87

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+4	+7	+10
10.1	40.1	18.30	20.01	21.45
50.1	80.1	20.23	20.45	18.18
90.1	120.1	19.46	16.08	18.47
130.1	160.1	14.10	15.31	19.06
170.1	200.1	13.86	16.78	20.99
210.1	240.1	13.56	17.73	20.96
250.1	280.1	13.44	17.69	20.95
290.1	320.1	13.91	18.22	20.92
330.1	360.1	13.55	18.42	20.88
370.1	400.1	15.37	20.78	19.75
410.1	440.1	15.24	19.69	19.76
450.1	480.1	15.43	20.72	20.83
490.1	520.1	12.73	18.05	20.76
530.1	560.1	11.82	14.97	20.62
570.1	600.1	12.15	15.27	19.68
610.1	640.1	13.46	15.72	16.28
650.1	680.1	14.16	14.01	14.32
690.1	720.1	11.70	11.84	12.39
730.1	760.1	10.63	11.27	11.86
770.1	800.1	9.48	10.79	11.40
810.1	840.1	8.37	9.67	10.68
850.1	880.1	8.30	9.52	10.63
890.1	920.1	7.70	8.97	9.99
930.1	960.1	7.83	8.93	10.09
970.1	1000.1	8.05	9.26	10.55
1010.1	1040.1	7.98	9.06	10.51
1050.1	1080.1	9.05	10.16	11.50
1070.1	1100.1	9.61	10.65	12.02
1110.1	1140.1	10.86	11.99	13.27
1130.1	1160.1	10.95	12.27	13.64
1170.1	1200.1	12.11	13.37	14.69
1190.1	1220.1	12.73	14.08	15.21
1230.1	1260.1	13.09	14.76	15.56
1250.1	1280.1	13.35	15.16	15.81
1290.1	1320.1	13.24	15.30	16.34
1310.1	1340.1	13.35	15.90	17.01
1350.1	1380.1	13.48	16.01	17.34
1370.1	1400.1	13.56	16.03	17.20
1410.1	1440.1	13.51	16.24	17.74
1430.1	1460.1	13.61	15.94	17.81

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB) @LO (dBm)		
		+4	+7	+10
10.1	40.1	0.63	0.77	0.27
50.1	80.1	0.71	0.48	0.29
90.1	120.1	0.70	0.42	0.25
130.1	160.1	0.60	0.34	0.20
170.1	200.1	0.68	0.39	0.27
210.1	240.1	0.53	0.32	0.20
250.1	280.1	0.58	0.40	0.27
290.1	320.1	0.54	0.35	0.25
330.1	360.1	0.54	0.36	0.25
370.1	400.1	0.61	0.42	0.31
410.1	440.1	0.59	0.40	0.30
450.1	480.1	0.75	0.58	0.42
490.1	520.1	0.76	0.57	0.44
530.1	560.1	0.87	0.67	0.54
570.1	600.1	0.92	0.72	0.59
610.1	640.1	0.95	0.75	0.62
650.1	680.1	1.07	0.89	0.74
690.1	720.1	1.12	0.95	0.78
730.1	760.1	1.09	1.00	0.80
770.1	800.1	1.03	0.97	0.81
810.1	840.1	0.97	0.90	0.76
850.1	880.1	0.92	0.81	0.70
890.1	920.1	0.95	0.81	0.70
930.1	960.1	0.86	0.71	0.60
970.1	1000.1	0.88	0.71	0.59
1010.1	1040.1	0.85	0.66	0.55
1050.1	1080.1	0.88	0.66	0.54
1070.1	1100.1	0.83	0.63	0.51
1110.1	1140.1	0.88	0.64	0.51
1130.1	1160.1	0.89	0.62	0.49
1170.1	1200.1	0.81	0.55	0.42
1190.1	1220.1	0.77	0.51	0.39
1230.1	1260.1	0.68	0.43	0.33
1250.1	1280.1	0.65	0.40	0.30
1290.1	1320.1	0.64	0.37	0.27
1310.1	1340.1	0.63	0.34	0.25
1350.1	1380.1	0.57	0.31	0.21
1370.1	1400.1	0.58	0.31	0.21
1410.1	1440.1	0.56	0.31	0.20
1430.1	1460.1	0.52	0.30	0.19

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=385.1MHz (dB) @LO (dBm) +7
370.1	15.0	6.49
360.1	25.0	6.42
350.1	35.0	6.35
340.1	45.0	6.37
330.1	55.0	6.40
320.1	65.0	6.37
310.1	75.0	6.37
300.1	85.0	6.39
290.1	95.0	6.34
280.1	105.0	6.33
270.1	115.0	6.33
260.1	125.0	6.30
250.1	135.0	6.29
240.1	145.0	6.34
230.1	155.0	6.35
220.1	165.0	6.33
210.1	175.0	6.34
200.1	185.0	6.38
190.1	195.0	6.35
180.1	205.0	6.33
170.1	215.0	6.35
160.1	225.0	6.35
150.1	235.0	6.37
140.1	245.0	6.40
130.1	255.0	6.41
120.1	265.0	6.37
110.1	275.0	6.38
100.1	285.0	6.45
90.1	295.0	6.42
85.1	300.0	6.43
75.1	310.0	6.43
70.1	315.0	6.44
60.1	325.0	6.46
55.1	330.0	6.47
45.1	340.0	6.46
40.1	345.0	6.45
30.1	355.0	6.47
25.1	360.0	6.45
15.1	370.0	6.56
10.1	375.0	6.83

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB) @LO (dBm) +7
10.0	20.1	5.95
47.0	57.1	5.55
84.0	94.1	5.52
121.0	131.1	5.75
158.0	168.1	5.75
195.0	205.1	5.78
232.0	242.1	5.54
269.0	279.1	5.83
306.0	316.1	5.69
343.0	353.1	5.89
380.0	390.1	5.69
417.0	427.1	5.90
454.0	464.1	6.21
491.0	501.1	5.87
528.0	538.1	5.88
565.0	575.1	6.10
602.0	612.1	5.93
639.0	649.1	6.00
676.0	686.1	6.08
713.0	723.1	6.04
750.0	760.1	6.02
787.0	797.1	6.14
824.0	834.1	5.82
861.0	871.1	6.10
898.0	908.1	6.02
935.0	945.1	6.12
972.0	982.1	6.17
1009.0	1019.1	6.09
1046.0	1056.1	6.32
1083.0	1093.1	6.43
1120.0	1130.1	6.74
1157.0	1167.1	7.02
1194.0	1204.1	7.26
1231.0	1241.1	7.39
1268.0	1278.1	7.88
1305.0	1315.1	8.25
1342.0	1352.1	8.63
1397.5	1407.6	9.21
1434.5	1444.6	9.62
1490.0	1500.1	10.34

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=762.1MHz (dB) @LO (dBm) +7
752.1	10.0	7.13
732.1	30.0	7.05
712.1	50.0	7.04
692.1	70.0	7.07
672.1	90.0	7.14
652.1	110.0	7.06
632.1	130.0	7.10
612.1	150.0	7.08
592.1	170.0	7.09
572.1	190.0	7.15
552.1	210.0	7.07
532.1	230.0	7.15
512.1	250.0	7.07
492.1	270.0	7.13
472.1	290.0	7.14
452.1	310.0	7.08
432.1	330.0	7.13
412.1	350.0	7.14
392.1	370.0	7.19
372.1	390.0	7.23
352.1	410.0	7.16
332.1	430.0	7.27
312.1	450.0	7.19
292.1	470.0	7.21
272.1	490.0	7.21
252.1	510.0	7.16
232.1	530.0	7.26
212.1	550.0	7.18
192.1	570.0	7.24
172.1	590.0	7.18
152.1	610.0	7.16
132.1	630.0	7.16
112.1	650.0	7.06
102.1	660.0	7.08
82.1	680.0	6.93
72.1	690.0	6.99
52.1	710.0	6.95
42.1	720.0	6.97
22.1	740.0	6.98
12.1	750.0	7.23

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	60.58	60.50	61.53	58.33	59.99	61.49
80.1	56.14	56.03	56.26	56.48	58.01	59.44
120.1	53.57	53.43	53.55	53.89	55.76	58.07
160.1	50.84	51.06	51.05	51.00	53.21	55.47
200.1	49.14	49.18	49.16	49.16	51.33	53.45
240.1	47.87	47.82	47.81	47.55	49.51	51.33
280.1	46.73	46.74	46.78	46.20	47.89	49.34
320.1	45.65	45.74	45.70	44.58	45.96	47.27
360.1	44.78	44.87	44.84	43.39	44.67	45.73
400.1	44.36	44.37	44.31	42.68	43.72	44.59
440.1	44.09	44.05	43.92	42.07	42.54	42.79
480.1	43.25	43.27	43.22	41.27	41.58	41.61
520.1	42.37	42.57	42.63	39.70	40.02	40.17
560.1	41.41	41.66	41.77	37.97	38.27	38.54
600.1	41.07	41.25	41.43	36.68	36.62	36.85
640.1	40.59	40.88	41.02	35.96	35.60	35.33
680.1	40.26	40.58	40.76	35.32	34.88	34.49
720.1	40.21	40.59	40.64	34.34	33.98	33.35
760.1	39.53	40.04	40.25	33.14	32.83	32.20
800.1	38.94	39.51	39.87	31.93	31.88	31.30
840.1	38.10	38.59	38.98	30.44	30.65	30.20
880.1	37.50	37.91	38.24	28.94	29.30	29.21
920.1	36.99	37.26	37.53	27.24	27.52	27.73
960.1	36.23	36.52	36.83	25.92	25.92	26.11
1000.1	35.34	35.62	35.81	24.92	24.75	24.63
1040.1	34.50	34.78	34.97	24.02	23.75	23.44
1080.1	33.82	34.05	34.17	23.47	23.18	22.75
1100.1	33.43	33.55	33.59	23.19	22.81	22.44
1140.1	32.96	33.09	33.14	22.50	22.19	21.78
1160.1	32.84	32.99	33.03	22.13	21.83	21.49
1200.1	32.35	32.50	32.49	21.47	21.28	20.99
1220.1	32.13	32.29	32.14	21.12	21.01	20.66
1260.1	31.74	32.04	31.88	20.54	20.60	20.32
1280.1	31.46	31.83	31.71	20.26	20.39	20.15
1320.1	30.68	31.14	31.17	19.70	19.95	19.76
1340.1	30.33	30.81	30.97	19.47	19.70	19.62
1380.1	29.77	30.33	30.59	19.13	19.46	19.44
1400.1	29.32	29.93	30.23	18.81	19.18	19.22
1440.1	28.63	29.44	29.78	18.43	18.95	18.98
1460.1	28.38	29.27	29.56	18.27	18.88	18.84

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+4	+7	+10
10.1	40.1	48.46	48.36	48.14
50.1	80.1	35.34	37.19	37.44
90.1	120.1	32.54	32.13	32.20
130.1	160.1	29.31	29.86	29.98
170.1	200.1	28.25	28.18	28.31
210.1	240.1	27.02	27.59	27.61
250.1	280.1	26.42	26.94	26.94
290.1	320.1	26.23	26.91	27.25
330.1	360.1	26.20	26.97	27.22
370.1	400.1	26.13	26.98	27.34
410.1	440.1	25.82	26.57	27.49
450.1	480.1	25.52	26.51	27.41
490.1	520.1	25.27	26.30	27.03
530.1	560.1	24.83	25.24	25.50
570.1	600.1	23.59	23.73	23.52
610.1	640.1	22.35	22.24	22.14
650.1	680.1	21.28	21.06	20.97
690.1	720.1	20.71	20.36	20.18
730.1	760.1	20.39	20.06	19.70
770.1	800.1	20.56	20.10	19.66
810.1	840.1	20.55	20.17	19.71
850.1	880.1	20.80	20.41	19.96
890.1	920.1	20.76	20.45	20.19
930.1	960.1	20.49	20.06	19.82
970.1	1000.1	19.94	19.53	19.07
1010.1	1040.1	19.02	18.54	18.06
1050.1	1080.1	18.06	17.46	16.94
1070.1	1100.1	17.54	16.89	16.34
1110.1	1140.1	16.38	15.68	15.21
1130.1	1160.1	15.85	15.08	14.59
1170.1	1200.1	14.75	14.05	13.59
1190.1	1220.1	14.19	13.54	13.06
1230.1	1260.1	13.28	12.66	12.23
1250.1	1280.1	12.85	12.21	11.84
1290.1	1320.1	12.18	11.55	11.23
1310.1	1340.1	11.85	11.28	10.92
1350.1	1380.1	11.14	10.62	10.30
1370.1	1400.1	11.02	10.40	10.08
1410.1	1440.1	10.49	9.91	9.59
1430.1	1460.1	10.20	9.71	9.42

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Frequency Mixer ZFM-1W+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+4	+7	+10
10.1	40.1	1.10	1.15	1.11
50.1	80.1	1.07	1.04	1.10
90.1	120.1	1.10	1.10	1.14
130.1	160.1	1.07	1.08	1.12
170.1	200.1	1.11	1.13	1.16
210.1	240.1	1.09	1.11	1.14
250.1	280.1	1.10	1.12	1.16
290.1	320.1	1.11	1.11	1.14
330.1	360.1	1.11	1.11	1.14
370.1	400.1	1.14	1.13	1.15
410.1	440.1	1.15	1.13	1.13
450.1	480.1	1.17	1.14	1.15
490.1	520.1	1.19	1.15	1.14
530.1	560.1	1.22	1.18	1.16
570.1	600.1	1.29	1.24	1.21
610.1	640.1	1.38	1.33	1.30
650.1	680.1	1.47	1.42	1.38
690.1	720.1	1.57	1.51	1.48
730.1	760.1	1.68	1.61	1.57
770.1	800.1	1.78	1.70	1.65
810.1	840.1	1.89	1.81	1.76
850.1	880.1	1.94	1.87	1.81
890.1	920.1	2.03	1.97	1.91
930.1	960.1	2.06	2.00	1.94
970.1	1000.1	2.09	2.04	2.00
1010.1	1040.1	2.12	2.08	2.04
1050.1	1080.1	2.09	2.07	2.03
1070.1	1100.1	2.12	2.10	2.07
1110.1	1140.1	2.11	2.10	2.08
1130.1	1160.1	2.08	2.08	2.07
1170.1	1200.1	2.13	2.14	2.14
1190.1	1220.1	2.13	2.14	2.15
1230.1	1260.1	2.10	2.12	2.13
1250.1	1280.1	2.13	2.16	2.18
1290.1	1320.1	2.17	2.20	2.22
1310.1	1340.1	2.16	2.18	2.20
1350.1	1380.1	2.25	2.27	2.29
1370.1	1400.1	2.29	2.31	2.33
1410.1	1440.1	2.33	2.34	2.36
1430.1	1460.1	2.39	2.39	2.41

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+4	+7	+10
40.1	1.62	2.42	3.44
80.1	1.52	2.17	3.00
120.1	1.56	2.28	3.19
160.1	1.54	2.21	3.05
200.1	1.54	2.21	3.05
240.1	1.58	2.25	3.09
280.1	1.57	2.20	2.99
320.1	1.62	2.27	3.08
360.1	1.63	2.24	2.99
400.1	1.67	2.29	3.05
440.1	1.68	2.26	2.97
480.1	1.72	2.30	3.00
520.1	1.75	2.30	2.97
560.1	1.77	2.31	2.96
600.1	1.81	2.32	2.95
640.1	1.82	2.29	2.89
680.1	1.86	2.33	2.90
720.1	1.88	2.31	2.85
760.1	1.92	2.36	2.89
800.1	1.94	2.36	2.86
840.1	1.94	2.36	2.86
880.1	1.96	2.37	2.86
920.1	1.96	2.35	2.82
960.1	1.98	2.37	2.84
1000.1	1.98	2.36	2.81
1040.1	1.99	2.36	2.81
1080.1	2.02	2.39	2.83
1100.1	2.03	2.38	2.82
1140.1	2.06	2.41	2.86
1160.1	2.10	2.45	2.90
1200.1	2.16	2.50	2.94
1220.1	2.20	2.54	2.97
1260.1	2.34	2.67	3.11
1280.1	2.41	2.73	3.16
1320.1	2.55	2.84	3.25
1340.1	2.65	2.93	3.34
1380.1	2.84	3.10	3.49
1400.1	2.93	3.16	3.54
1440.1	3.15	3.37	3.74
1460.1	3.26	3.48	3.84

IF (OUT) (MHz)	IF VSWR @LO=750.1MHz (:1) @LO (dBm)		
	+4	+7	+10
10.1	1.69	1.43	1.27
30.1	1.66	1.40	1.25
50.1	1.66	1.40	1.25
70.1	1.70	1.43	1.28
90.1	1.74	1.46	1.31
110.1	1.70	1.44	1.28
130.1	1.70	1.44	1.28
150.1	1.70	1.43	1.28
170.1	1.73	1.46	1.31
190.1	1.78	1.51	1.35
210.1	1.74	1.47	1.32
230.1	1.72	1.45	1.30
250.1	1.75	1.49	1.34
270.1	1.79	1.52	1.37
290.1	1.78	1.52	1.37
310.1	1.78	1.52	1.37
330.1	1.76	1.50	1.36
350.1	1.79	1.53	1.38
370.1	1.84	1.58	1.43
390.1	1.80	1.55	1.41
410.1	1.79	1.54	1.40
430.1	1.81	1.56	1.41
450.1	1.83	1.58	1.44
470.1	1.83	1.58	1.45
490.1	1.82	1.57	1.44
510.1	1.82	1.57	1.44
530.1	1.81	1.57	1.43
550.1	1.82	1.58	1.44
570.1	1.83	1.59	1.46
580.1	1.80	1.56	1.43
600.1	1.81	1.57	1.44
610.1	1.77	1.53	1.40
630.1	1.80	1.56	1.43
640.1	1.76	1.53	1.39
660.1	1.78	1.55	1.42
670.1	1.74	1.51	1.38
690.1	1.74	1.51	1.38
700.1	1.70	1.47	1.34
720.1	1.69	1.47	1.34
730.1	1.70	1.47	1.33

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	16	24	21	34	16	53	19	43	40	62
1	-	20	+0	32	13	33	24	44	42	55	45	56
2	>90	>70	66	68	>70	68	61	>70	57	>70	55	>70
3	>90	>70	>70	>70	>70	>70	62	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 380 MHz; -14.00 dBm.
LO IN: 410 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.45 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	25	34	32	46	27	60	32	58	54	78
1	-	21	+0	31	12	35	25	48	42	59	48	62
2	72	75	55	64	60	62	52	63	49	64	47	69
3	>90	49	53	53	57	66	47	60	55	64	63	66
4	>90	>79	78	79	>79	79	>79	76	77	>79	71	79
5	>90	76	72	70	59	71	57	69	56	68	64	>79
6	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	77	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 380 MHz; -4.00 dBm.
LO IN: 410 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.57 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

Conversion Loss @ IF=30MHz

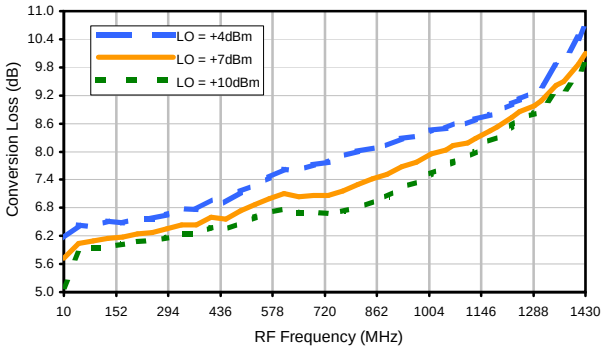

Conversion Loss vs. IF @ RF=385.1MHz

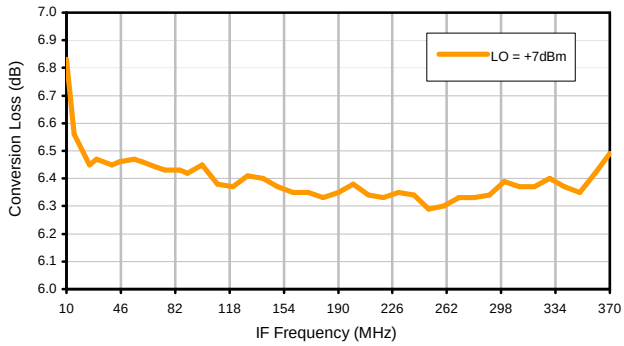

Conversion Loss vs. IF @ RF=10.1MHz

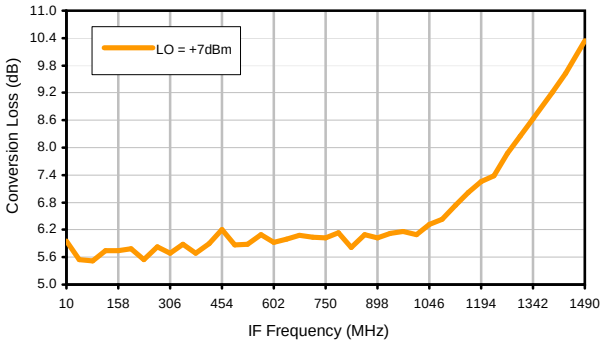

Conversion Loss vs. IF @ RF=762.1MHz

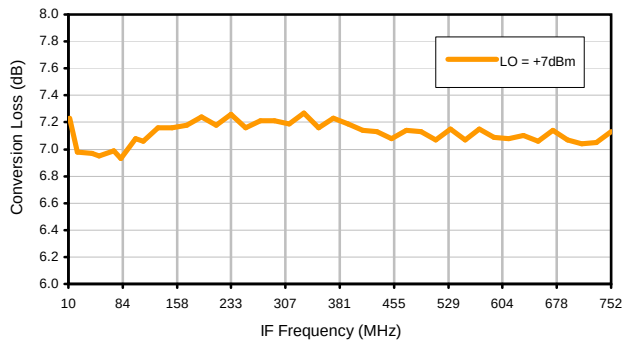

IP3 Input

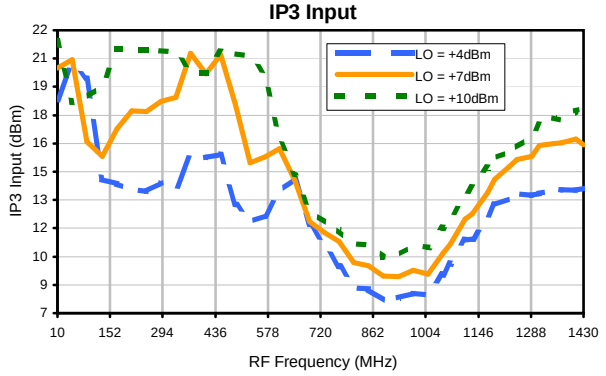

Compression @ RF IN=+1dBm

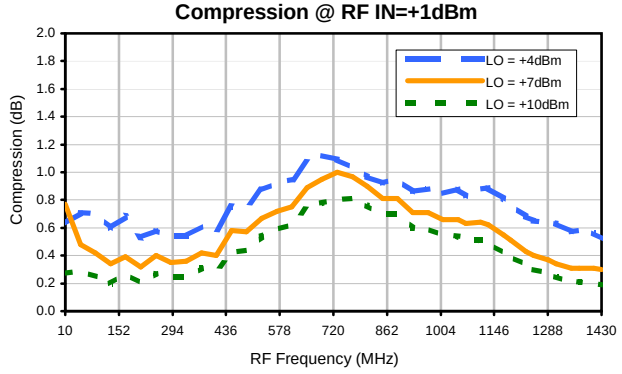

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

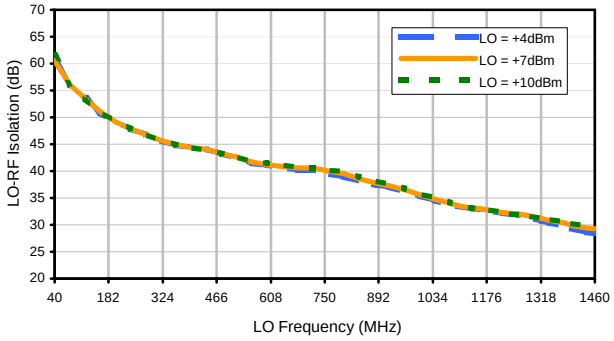

LO-IF Isolation

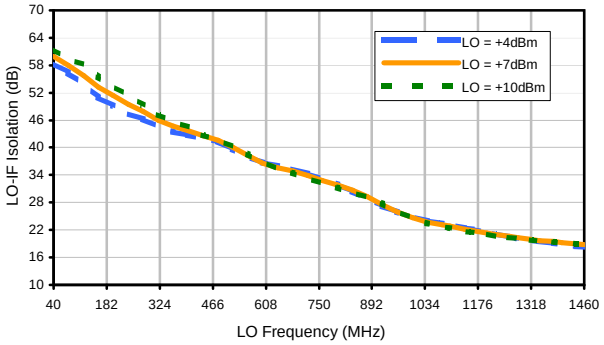

RF-IF Isolation

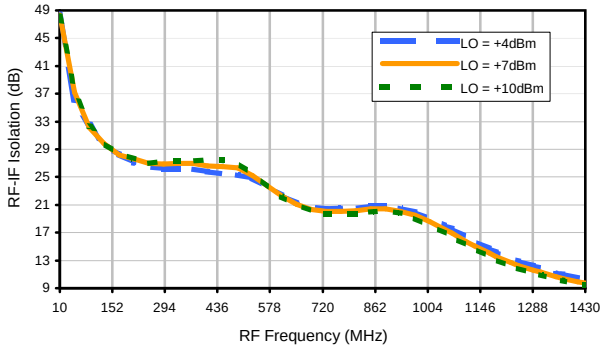

RF VSWR

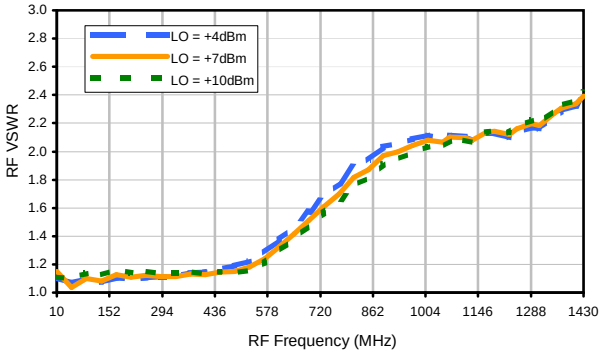

LO VSWR

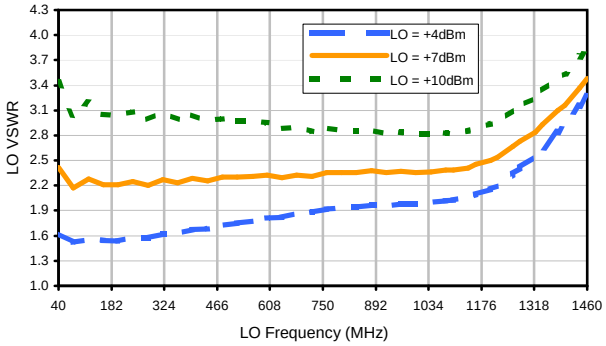

IF VSWR

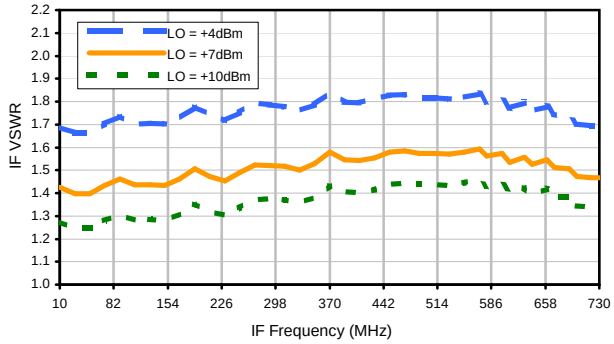

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	16	24	21	34	16	53	19	43	40	62
1	-	20	+0	32	13	33	24	44	42	55	45	56
2	>90	>70	66	68	>70	68	61	>70	57	>70	55	>70
3	>90	>70	>70	>70	>70	>70	62	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 380 MHz; -14.00 dBm.
LO IN: 410 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.45 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	25	34	32	46	27	60	32	58	54	78
1	-	21	+0	31	12	35	25	48	42	59	48	62
2	72	75	55	64	60	62	52	63	49	64	47	69
3	>90	49	53	53	57	66	47	60	55	64	63	66
4	>90	>79	78	79	>79	79	>79	76	77	>79	71	79
5	>90	76	72	70	59	71	57	69	56	68	64	>79
6	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	77	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 380 MHz; -4.00 dBm.
LO IN: 410 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.57 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style K

K18

Outline Dimensions

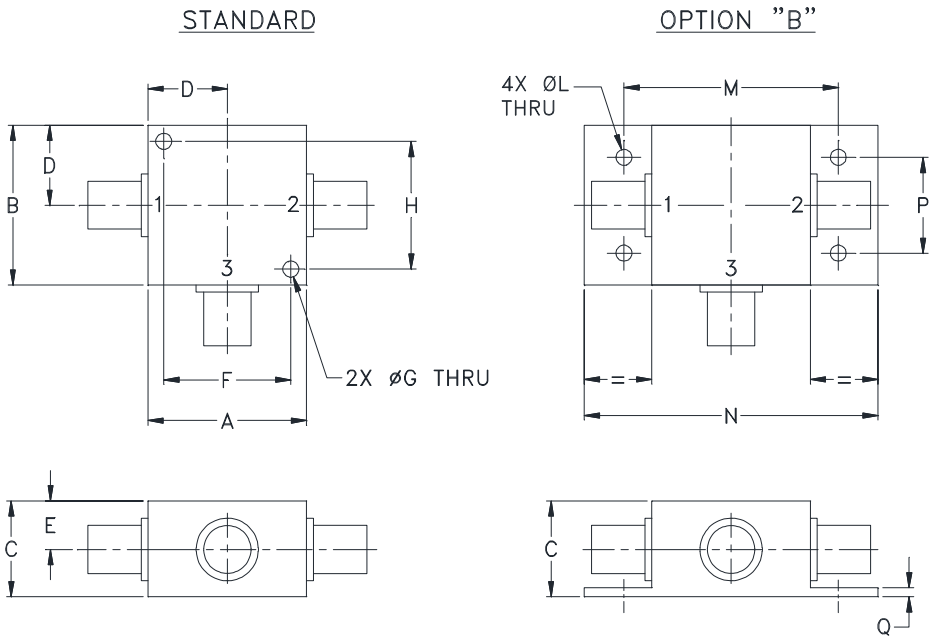

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
K18	1.25 (31.75	1.25 (31.75)	.75 (19.05)	.63 (16.00)	.38 (9.65)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	-- --	-- --	.125 (3.18)	1.688 (42.88)	2.18 (55.37)

CASE#	P	Q	WT. GRAMS
K18	.75 (19.05)	.07 (1.78)	70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3 Pl. ± .015

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
   For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
3. Mounting bracket available on request. Add suffix B to part number.
4. For port marking 1, 2, and 3 see specifications data sheet.
5. For bracket version, option B, dimension "C" changes from .75 to .94 inches when connectors are type N.
6. Refer to the individual model data sheet for the type of connectors available.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Mini-Circuits

Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.