

Coaxial Frequency Mixer

Level 23 (LO Power +23 dBm) 0.1 to 1000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	350mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	2
IF	3

Outline Drawing

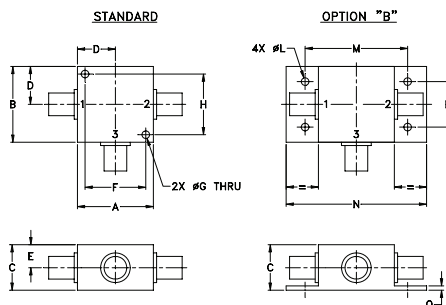

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

Features

- low conversion loss, 5.40 dB typ.
- good L-R & L-I isolation, 40 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- instrumentation
- cellular

ZFY-2+
ZFY-2



Generic photo used for illustration purposes only

CASE STYLE: K18

Connectors	Model
BNC	ZFY-2
SMA	ZFY-2-S+
BRACKET (OPTION "B")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total		L		M		U		L		M		U	
f_L-f_U		$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.1-1000	0.01-500*	5.40	0.24	7.5	9.5	40	20	40	30	30	25	37	23	40	25	25	15

1 dB COMP.: +20 dBm typ.


*IF response from 0.1 to 0.01 MHz falls off 3 dB.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m= mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +23dBm	LO +23dBm	LO +23dBm	LO +23dBm	LO +23dBm
0.10	30.10	6.00	24.85	23.85	1.20	1.25
0.50	30.50	6.04	36.68	35.77	1.21	1.28
5.00	35.00	5.85	41.65	42.30	1.22	1.21
20.00	50.00	5.23	62.70	48.55	1.21	1.25
50.00	80.00	5.27	68.47	47.81	1.22	1.30
100.00	70.00	5.41	69.04	47.05	1.26	1.22
142.94	112.94	5.59	65.49	47.18	1.30	1.23
214.37	184.37	5.62	63.14	46.03	1.35	1.19
250.08	220.08	5.85	62.33	45.83	1.43	1.14
321.50	291.50	5.73	60.72	44.37	1.60	1.11
392.92	362.92	5.85	56.12	42.97	1.83	1.31
464.34	434.34	6.34	47.61	43.68	2.10	1.51
535.77	505.77	6.82	41.48	42.23	2.21	1.70
571.48	541.48	6.64	40.17	39.59	2.26	1.73
642.90	612.90	7.21	38.48	36.34	2.49	2.06
714.32	684.32	6.76	36.93	34.82	2.62	2.20
785.74	755.74	6.76	36.93	34.82	2.73	1.95
857.16	827.16	6.90	35.86	33.15	2.72	1.37
928.59	898.59	7.11	36.31	32.34	2.59	1.19
1000.00	970.00	7.47	39.75	38.54	2.40	1.57

Electrical Schematic

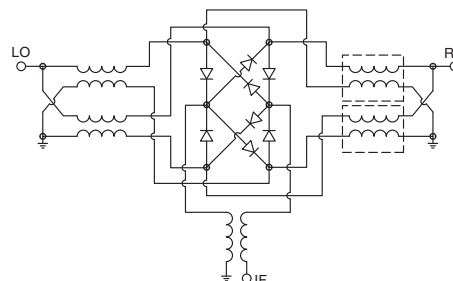

Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M153690
ZFY-2
DJ/TD/CP
200811

Performance Charts

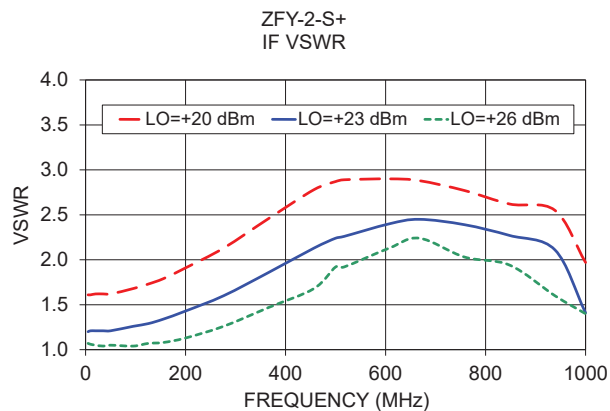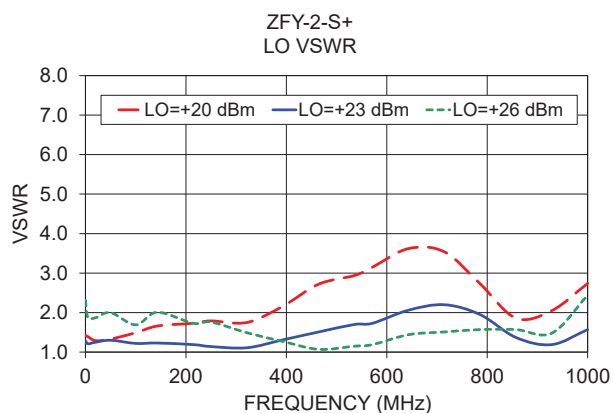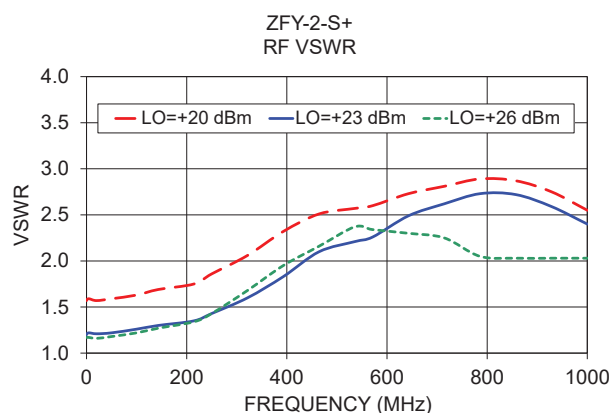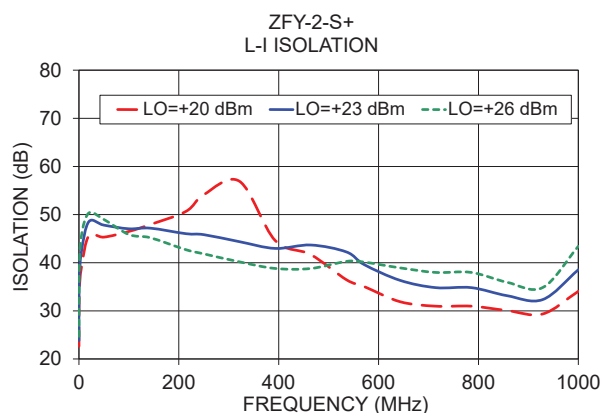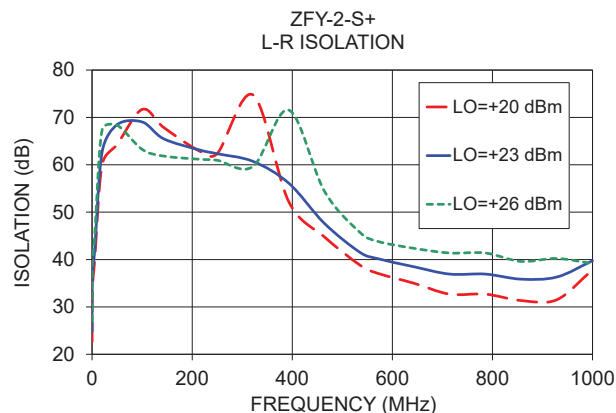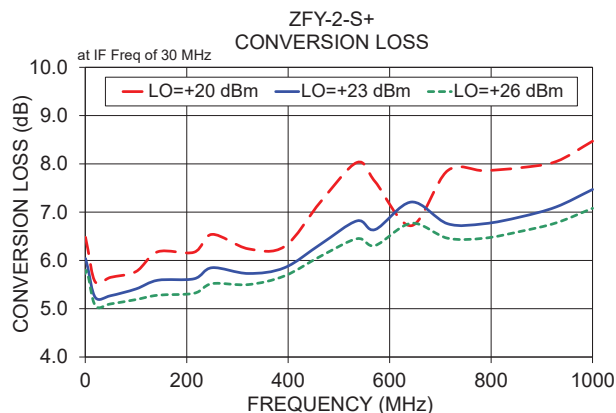

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ZFY-2+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+20	+23	+26
0.1	30.1	6.43	6.00	5.73
0.5	30.5	6.48	6.04	5.80
5.0	35.0	6.24	5.85	5.72
10.1	40.1	5.68	5.34	5.15
20.1	50.1	5.55	5.23	5.06
30.1	60.1	5.63	5.27	5.07
40.1	70.1	5.63	5.26	5.08
50.1	80.1	5.65	5.27	5.10
90.1	120.1	5.98	5.55	5.29
110.1	140.1	5.77	5.41	5.19
130.1	160.1	5.92	5.49	5.22
150.1	180.1	6.18	5.59	5.28
170.1	200.1	6.18	5.62	5.34
190.1	220.1	6.34	5.80	5.45
220.1	250.1	6.17	5.62	5.32
250.1	280.1	6.54	5.85	5.52
280.1	310.1	6.36	5.82	5.57
310.1	340.1	6.24	5.73	5.50
340.1	370.1	6.67	5.95	5.70
400.1	430.1	6.29	5.85	5.68
450.1	480.1	7.22	6.34	6.09
500.1	530.1	7.12	6.34	6.07
550.1	580.1	8.03	6.82	6.45
600.1	630.1	7.63	6.64	6.31
650.1	680.1	8.72	7.21	6.77
700.1	730.1	7.86	6.76	6.46
800.1	830.1	7.92	6.90	6.60
900.1	930.1	8.05	7.11	6.78
1000.1	1030.1	8.47	7.47	7.08
1100.1	1130.1	8.27	7.44	7.10
1200.1	1230.1	8.12	7.42	7.13
1300.1	1330.1	8.20	7.52	7.24
1400.1	1430.1	8.35	7.65	7.37
1500.1	1530.1	8.45	7.77	7.50
1600.1	1630.1	8.65	7.93	7.63
1800.1	1830.1	9.41	8.62	8.33
1900.1	1930.1	9.87	9.02	8.68
2000.1	2030.1	10.61	9.65	9.16
2100.1	2130.1	11.23	10.18	9.73
2200.1	2230.1	11.08	10.19	9.74

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+20	+23	+26
10.1	40.1	33.31	33.10	33.74
20.1	50.1	36.00	36.71	37.28
30.1	60.1	36.57	37.08	37.49
40.1	70.1	36.00	36.81	37.13
50.1	80.1	35.21	35.30	36.22
70.1	100.1	32.52	34.59	33.85
90.1	120.1	31.27	34.02	34.06
110.1	140.1	36.06	35.55	35.09
130.1	160.1	31.32	33.75	34.67
150.1	180.1	29.28	32.94	35.72
170.1	200.1	31.24	32.06	33.30
190.1	220.1	28.59	31.22	33.00
220.1	250.1	30.75	33.37	32.70
250.1	280.1	30.43	33.09	33.54
280.1	310.1	30.29	31.67	34.85
310.1	340.1	31.38	32.14	35.28
340.1	370.1	31.97	33.61	38.21
370.1	400.1	32.38	35.02	34.97
400.1	430.1	34.04	37.00	35.18
450.1	480.1	34.60	39.20	34.81
500.1	530.1	32.91	41.89	34.49
550.1	580.1	36.38	38.44	35.97
600.1	630.1	33.19	40.26	37.01
650.1	680.1	30.24	40.03	32.38
700.1	730.1	32.97	34.62	34.37
800.1	830.1	31.23	34.49	34.99
900.1	930.1	29.42	34.72	33.87
1000.1	1030.1	30.71	32.23	34.67
1100.1	1130.1	29.36	31.99	35.65
1200.1	1230.1	30.16	31.02	36.89
1300.1	1330.1	29.65	33.16	35.33
1400.1	1430.1	28.06	30.05	36.69
1500.1	1530.1	27.29	28.95	34.95
1600.1	1630.1	27.77	30.22	39.74
1700.1	1730.1	26.29	30.73	40.04
1800.1	1830.1	25.50	29.67	44.34
1900.1	1930.1	25.50	34.18	32.30
2000.1	2030.1	28.67	35.28	30.97
2100.1	2130.1	31.88	32.25	31.73
2200.1	2230.1	27.39	31.02	33.06

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+19.97dBm (dB)		
		@LO (dBm)		
		+20	+23	+26
10.1	40.1	1.11	0.61	0.35
20.1	50.1	1.33	0.81	0.51
30.1	60.1	1.47	0.89	0.54
40.1	70.1	1.41	0.84	0.49
50.1	80.1	1.38	0.75	0.41
70.1	100.1	1.00	0.50	0.23
90.1	120.1	0.90	0.50	0.26
110.1	140.1	1.17	0.70	0.40
130.1	160.1	1.26	0.82	0.49
150.1	180.1	1.23	0.79	0.45
170.1	200.1	0.97	0.51	0.23
190.1	220.1	0.79	0.50	0.30
220.1	250.1	1.25	0.80	0.49
250.1	280.1	1.08	0.60	0.32
280.1	310.1	0.79	0.47	0.22
310.1	340.1	1.13	0.68	0.38
340.1	370.1	1.17	0.59	0.28
370.1	400.1	0.66	0.29	0.11
400.1	430.1	0.97	0.47	0.24
450.1	480.1	0.66	0.24	0.09
500.1	530.1	0.56	0.34	0.16
550.1	580.1	0.25	0.10	-0.01
600.1	630.1	0.44	0.24	0.11
650.1	680.1	0.10	0.04	-0.01
700.1	730.1	0.71	0.33	0.16
800.1	830.1	0.88	0.40	0.19
900.1	930.1	0.96	0.41	0.20
1000.1	1030.1	1.05	0.42	0.19
1100.1	1130.1	1.17	0.48	0.21
1200.1	1230.1	1.32	0.56	0.24
1300.1	1330.1	1.35	0.64	0.28
1400.1	1430.1	1.34	0.72	0.33
1500.1	1530.1	1.32	0.68	0.30
1600.1	1630.1	1.17	0.59	0.28
1700.1	1730.1	1.15	0.54	0.28
1800.1	1830.1	1.11	0.45	0.22
1900.1	1930.1	1.07	0.56	0.35
2000.1	2030.1	0.93	0.53	0.43
2100.1	2130.1	0.91	0.61	0.41
2200.1	2230.1	1.35	0.85	0.49

REV. X2

ZFY-2+

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZFY-2+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+23			+23			+23
0.5	499.6	6.48	0.5	10.6	5.37	0.5	999.6	7.43
0.8	499.4	6.46	0.8	10.9	5.35	0.8	999.4	7.41
1.0	499.1	6.45	1.0	11.1	5.34	1.0	999.1	7.41
2.0	498.1	6.39	2.0	12.1	5.29	2.0	998.1	7.35
3.0	497.1	6.36	3.0	13.1	5.28	3.0	997.1	7.34
4.0	496.1	6.36	4.0	14.1	5.27	4.0	996.1	7.33
5.0	495.1	6.34	5.0	15.1	5.28	5.0	995.1	7.34
6.0	494.1	6.33	6.0	16.1	5.29	6.0	994.1	7.33
8.0	492.1	6.30	8.0	18.1	5.30	8.0	992.1	7.33
10.0	490.1	6.32	10.0	20.1	5.30	10.0	990.1	7.34
15.0	485.1	6.30	15.0	25.1	5.33	15.0	985.1	7.35
20.0	480.1	6.33	20.0	30.1	5.37	20.0	980.1	7.35
25.0	475.1	6.40	25.0	35.1	5.38	25.0	975.1	7.35
30.0	470.1	6.45	30.0	40.1	5.33	30.0	970.1	7.36
35.0	465.1	6.48	35.0	45.1	5.25	35.0	965.1	7.38
40.0	460.1	6.46	40.0	50.1	5.28	40.0	960.1	7.40
50.0	450.1	6.40	50.0	60.1	5.39	50.0	950.1	7.35
60.0	440.1	6.41	65.0	75.1	5.37	65.0	935.1	7.20
70.0	430.1	6.39	80.0	90.1	5.38	80.0	920.1	7.07
90.0	410.1	6.45	100.0	110.1	5.33	100.0	900.1	7.08
110.0	390.1	6.45	120.0	130.1	5.45	120.0	880.1	7.05
130.0	370.1	6.63	140.0	150.1	5.37	140.0	860.1	7.09
150.0	350.1	6.55	160.0	170.1	5.32	160.0	840.1	6.97
170.0	330.1	6.55	180.0	190.1	5.36	180.0	820.1	6.87
190.0	310.1	6.67	200.0	210.1	5.30	200.0	800.1	6.87
210.0	290.1	6.59	220.0	230.1	5.22	220.0	780.1	6.89
230.0	270.1	6.78	240.0	250.1	5.27	240.0	760.1	6.97
250.0	250.1	7.04	260.0	270.1	5.21	260.0	740.1	6.90
270.0	230.1	6.90	280.0	290.1	5.13	280.0	720.1	6.85
290.0	210.1	6.96	300.0	310.1	5.19	300.0	700.1	6.93
310.0	190.1	7.14	320.0	330.1	5.12	320.0	680.1	7.09
330.0	170.1	6.95	340.0	350.1	5.17	340.0	660.1	7.28
350.0	150.1	7.09	360.0	370.1	5.24	360.0	640.1	7.16
370.0	130.1	7.13	380.0	390.1	5.17	380.0	620.1	7.27
390.0	110.1	6.87	400.0	410.1	5.20	400.0	600.1	7.24
410.0	90.1	6.94	420.0	430.1	5.17	420.0	580.1	7.35
430.0	70.1	6.76	440.0	450.1	5.25	440.0	560.1	7.47
450.0	50.1	6.68	460.0	470.1	5.33	460.0	540.1	7.31
470.0	30.1	6.64	480.0	490.1	5.30	480.0	520.1	7.26
490.0	10.1	6.47	500.0	510.1	5.33	500.0	500.1	7.33

REV. X2

ZFY-2+

100818

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+20	+23	+26	+20	+23	+26
0.1	22.68	24.85	27.10	22.66	23.85	24.69
0.5	33.97	36.68	39.29	33.35	35.77	37.61
5.0	39.61	41.65	44.65	39.03	42.30	45.57
10.1	58.28	60.49	65.55	45.44	49.07	50.88
20.1	60.03	62.70	67.35	45.64	48.55	50.34
30.1	60.90	64.43	68.90	45.10	47.90	49.61
40.1	62.91	65.76	67.59	45.02	47.58	49.15
50.1	64.27	68.47	68.34	45.32	47.81	48.99
90.1	67.38	73.04	64.42	45.76	47.17	46.47
110.1	71.69	69.04	63.26	46.50	47.05	45.86
130.1	72.29	67.30	62.51	46.30	46.67	45.68
150.1	67.89	65.49	61.84	47.94	47.18	45.19
170.1	67.97	64.45	60.08	48.81	46.74	43.79
190.1	65.33	64.83	59.38	49.09	46.12	42.75
220.1	62.90	63.14	61.17	50.67	46.03	42.70
250.1	62.37	62.33	60.95	54.14	45.83	41.84
280.1	64.31	60.63	57.99	66.82	45.31	40.16
310.1	74.75	60.72	59.64	56.92	44.37	40.18
340.1	56.36	58.46	66.02	50.61	44.93	40.31
400.1	52.22	56.12	71.55	44.62	42.97	38.81
450.1	44.76	47.61	54.40	41.68	43.68	38.80
500.1	40.90	43.80	48.71	40.64	42.67	38.85
550.1	38.78	41.48	45.67	36.45	42.23	40.28
600.1	37.07	40.17	43.81	35.03	39.59	40.12
650.1	35.00	38.48	42.37	31.90	36.34	38.93
700.1	32.70	36.93	41.38	30.97	34.82	37.98
800.1	31.35	35.86	39.60	30.07	33.15	35.94
900.1	31.52	36.31	40.23	29.35	32.34	34.84
1000.1	37.84	39.75	39.15	34.06	38.54	43.41
1100.1	33.71	36.99	39.54	26.80	28.65	30.89
1200.1	32.58	36.88	40.72	25.56	27.13	29.24
1300.1	32.26	36.41	39.98	26.28	27.65	29.64
1400.1	30.93	34.54	37.31	27.79	28.91	30.86
1500.1	29.99	33.04	35.11	29.21	30.31	32.24
1600.1	29.03	31.43	32.93	30.06	31.18	33.18
1800.1	28.59	30.89	32.61	34.56	36.29	39.12
1900.1	29.88	33.63	37.28	38.94	41.34	36.60
2000.1	31.80	38.40	43.92	49.83	38.21	32.19
2100.1	28.07	31.60	33.74	39.12	32.54	28.70
2200.1	23.27	26.48	29.41	35.49	30.59	27.57

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+20	+23	+26
10.1	40.1	43.60	44.48	48.65
20.1	50.1	43.03	44.52	49.16
30.1	60.1	42.12	43.60	45.67
40.1	70.1	42.52	43.44	43.94
50.1	80.1	42.74	43.70	43.47
70.1	100.1	43.22	44.01	43.79
90.1	120.1	42.67	44.15	45.54
110.1	140.1	44.48	46.12	53.44
130.1	160.1	44.78	45.96	47.66
150.1	180.1	43.12	44.90	46.32
170.1	200.1	44.35	46.27	48.65
190.1	220.1	45.08	46.42	53.16
220.1	250.1	47.11	47.92	49.11
250.1	280.1	48.24	52.05	50.63
280.1	310.1	49.96	55.45	52.40
310.1	340.1	48.88	54.14	51.73
340.1	370.1	50.15	53.57	52.31
370.1	400.1	51.13	53.31	52.61
400.1	430.1	52.50	56.75	54.63
450.1	480.1	51.50	57.31	55.76
500.1	530.1	47.37	50.37	47.80
550.1	580.1	43.74	46.33	45.17
600.1	630.1	37.94	40.99	41.38
650.1	680.1	37.18	41.40	41.65
700.1	730.1	37.53	39.95	39.80
800.1	830.1	33.84	38.66	40.09
900.1	930.1	32.22	37.72	40.76
1000.1	1030.1	40.91	41.17	39.87
1100.1	1130.1	33.17	36.30	35.21
1200.1	1230.1	33.32	35.28	33.81
1300.1	1330.1	35.80	36.20	34.72
1400.1	1430.1	41.91	38.87	36.13
1500.1	1530.1	49.37	40.31	37.36
1600.1	1630.1	59.38	40.17	37.15
1700.1	1730.1	42.86	38.58	36.95
1800.1	1830.1	38.27	36.92	36.38
1900.1	1930.1	37.58	36.71	36.67
2000.1	2030.1	35.47	34.77	34.74
2100.1	2130.1	31.98	32.44	32.62
2200.1	2230.1	33.58	33.58	33.50

Frequency Mixer

ZFY-2+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+20	+23	+26		+20	+23	+26		+20	+23	+26
5.0	35.0	1.57	1.20	1.17	5.0	1.43	1.25	2.31	0.5	1.32	1.19	1.18
10.0	40.0	1.58	1.21	1.17	10.0	1.41	1.28	2.24	0.8	1.37	1.17	1.05
20.1	50.1	1.66	1.47	1.35	20.1	1.27	1.25	2.07	1.0	1.47	1.24	1.10
30.1	60.1	1.78	1.54	1.38	50.1	1.23	1.20	1.76	2.0	1.59	1.34	1.19
40.1	70.1	1.74	1.51	1.37	100.1	1.34	1.25	2.01	3.0	1.58	1.33	1.18
50.1	80.1	1.73	1.51	1.38	140.1	1.33	1.21	1.89	4.0	1.56	1.32	1.17
90.1	120.1	1.83	1.59	1.43	180.1	1.42	1.26	2.34	5.0	1.55	1.30	1.16
110.1	140.1	1.78	1.57	1.42	220.1	1.34	1.21	1.71	6.0	1.53	1.29	1.15
130.1	160.1	1.95	1.67	1.49	260.1	1.46	1.24	1.85	8.0	1.52	1.28	1.14
150.1	180.1	2.01	1.67	1.48	300.1	1.51	1.21	1.91	10.0	1.52	1.28	1.14
170.1	200.1	1.95	1.65	1.49	350.1	1.52	1.20	2.12	15.0	1.52	1.28	1.14
190.1	220.1	2.05	1.76	1.56	400.1	1.47	1.18	1.66	20.0	1.52	1.28	1.14
220.1	250.1	2.12	1.79	1.60	500.1	1.49	1.12	1.57	25.0	1.52	1.28	1.14
250.1	280.1	2.18	1.81	1.63	600.1	1.57	1.10	1.62	30.0	1.53	1.29	1.14
280.1	310.1	2.11	1.82	1.67	700.1	1.58	1.12	1.41	35.0	1.53	1.29	1.15
310.1	340.1	2.20	1.90	1.74	800.1	1.79	1.19	1.44	40.0	1.53	1.29	1.15
340.1	370.1	2.37	1.97	1.80	900.1	1.99	1.25	1.44	50.0	1.54	1.30	1.15
370.1	400.1	2.29	1.98	1.84	1000.1	2.18	1.33	1.32	65.0	1.55	1.30	1.15
400.1	430.1	2.39	2.08	1.93	1100.1	2.74	1.47	1.31	80.0	1.55	1.31	1.16
450.1	480.1	2.78	2.29	2.08	1200.1	2.94	1.57	1.16	100.0	1.56	1.31	1.16
500.1	530.1	2.99	2.52	2.27	1300.1	3.65	1.77	1.07	120.0	1.58	1.32	1.17
550.1	580.1	3.34	2.69	2.42	1400.1	3.77	1.90	1.19	140.0	1.58	1.33	1.17
600.1	630.1	3.54	2.88	2.58	1500.1	3.61	1.96	1.37	160.0	1.60	1.34	1.18
650.1	680.1	4.03	3.16	2.77	1600.1	3.62	2.06	1.57	180.0	1.61	1.35	1.19
700.1	730.1	3.90	3.10	2.75	1700.1	3.29	2.04	1.74	200.0	1.62	1.35	1.19
800.1	830.1	3.94	3.14	2.79	1800.1	3.11	2.15	2.14	220.0	1.64	1.37	1.20
900.1	930.1	3.30	2.82	2.61	1900.1	2.66	2.12	2.39	240.0	1.65	1.37	1.20
1000.1	1030.1	2.63	2.35	2.25	2000.1	2.59	2.27	2.65	260.0	1.65	1.37	1.20
1100.1	1130.1	1.96	1.89	1.89	2100.1	2.25	2.22	2.69	280.0	1.67	1.38	1.21
1200.1	1230.1	1.44	1.50	1.57	2250.1	1.76	2.00	2.70	300.0	1.68	1.39	1.21
1300.1	1330.1	1.13	1.25	1.34	2400.1	1.49	1.99	3.18	320.0	1.67	1.38	1.21
1400.1	1430.1	1.10	1.07	1.15	2550.1	1.26	1.78	2.83	340.0	1.68	1.39	1.21
1500.1	1530.1	1.18	1.08	1.10	2700.1	1.09	1.43	1.90	360.0	1.67	1.38	1.21
1600.1	1630.1	1.07	1.07	1.14	2850.1	1.15	1.29	1.71	380.0	1.66	1.38	1.20
1700.1	1730.1	1.25	1.24	1.27	3000.1	1.36	1.15	1.59	400.0	1.66	1.38	1.20
1800.1	1830.1	1.79	1.69	1.65	3200.1	1.70	1.12	1.27	420.0	1.65	1.37	1.20
1900.1	1930.1	2.67	2.44	2.33	3400.1	1.84	1.38	1.31	440.0	1.63	1.36	1.19
2000.1	2030.1	3.88	3.45	3.19	3600.1	2.00	1.72	1.89	460.0	1.62	1.35	1.19
2100.1	2130.1	4.01	3.67	3.48	3800.1	2.21	2.13	2.54	480.0	1.61	1.34	1.18
2200.1	2230.1	3.09	3.03	3.00	4000.1	2.17	2.22	2.67	500.0	1.59	1.33	1.17

REV. X2

ZFY-2+

100818

Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	36	35	41	38	46	50	59	60	58
1	-	32	+0	42	16	39	29	40	35	51	51	55
2	73	48	48	48	65	52	49	50	42	51	45	53
3	86	52	46	53	81	50	42	46	41	46	48	52
4	112	64	64	66	70	71	67	61	63	61	53	73
5	>119	61	58	64	58	64	55	66	54	67	55	60
6	>119	70	62	67	65	63	70	64	76	66	74	65
7	>119	70	63	65	69	68	74	67	73	64	80	64
8	>120	74	73	73	71	73	72	72	74	70	77	74
9	>119	77	81	74	78	71	84	74	85	78	91	78
10	>121	84	85	82	82	79	89	81	87	80	84	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 15.01.00 dBm.
LO IN: 530.01 MHz; +23.00 dBm
IF OUT: 29.91 MHz; 8.8 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	25	22	27	27	28	31	29	33	34
1	-	33	+0	39	17	33	32	33	31	35	38	41
2	84	60	53	67	59	53	61	53	48	58	50	67
3	101	92	63	66	59	69	51	68	52	63	59	73
4	>123	87	71	79	71	73	74	73	89	75	80	88
5	>123	81	80	85	81	88	80	82	80	80	79	83
6	>123	91	97	92	102	101	89	105	86	95	89	90
7	>121	110	99	100	93	95	93	95	98	97	98	107
8	>121	>117	110	108	110	106	111	108	105	114	103	105
9	>121	>120	>121	>120	111	114	109	110	110	112	115	115
10	>121	>120	>122	>119	>121	>121	>122	>122	>122	>122	>120	>120
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 4.94.00 dBm.
LO IN: 530.01 MHz; +23.00 dBm
IF OUT: 29.91 MHz; -1.21 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZFY-2+
100818
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

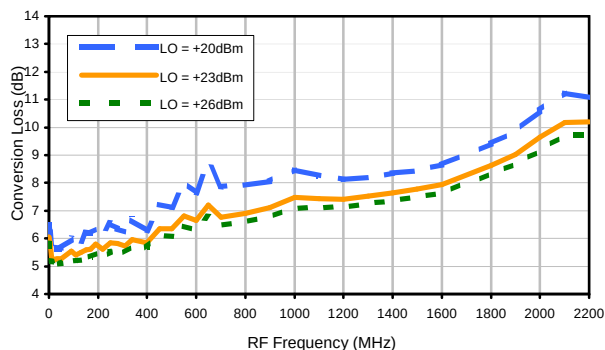


Conversion Loss vs. IF @ RF=500.1MHz

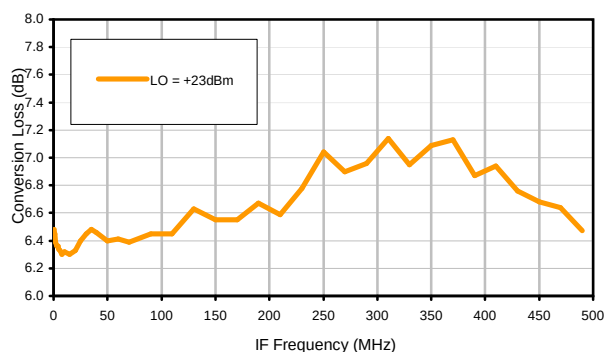


Conversion Loss vs. IF @ RF=10.1MHz

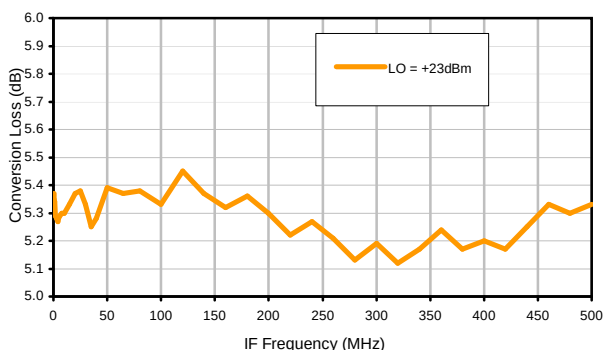


Conversion Loss vs. IF @ RF=1000.1MHz

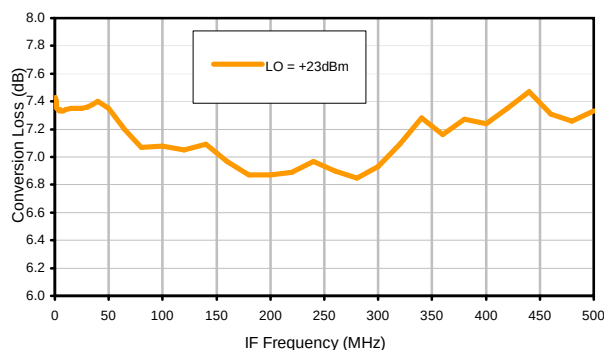

IP3 Input

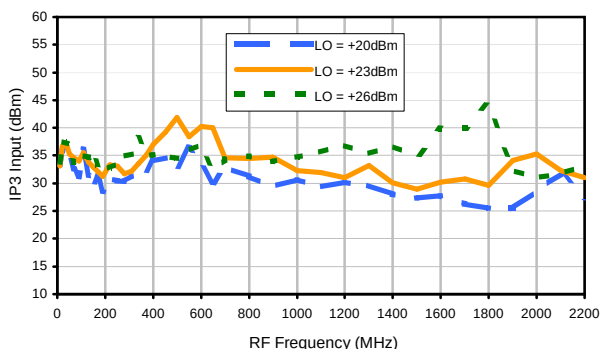

Compression @ RF IN=+19.97dBm

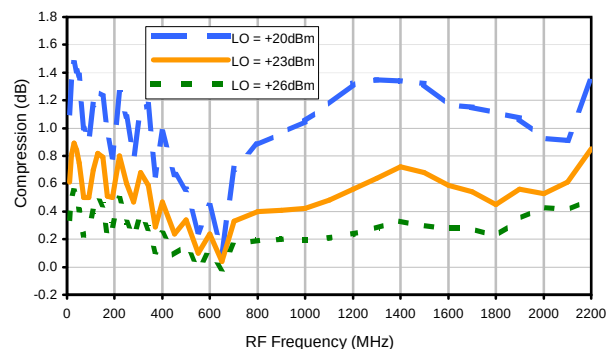

REV. X2

ZFY-2+

100818

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

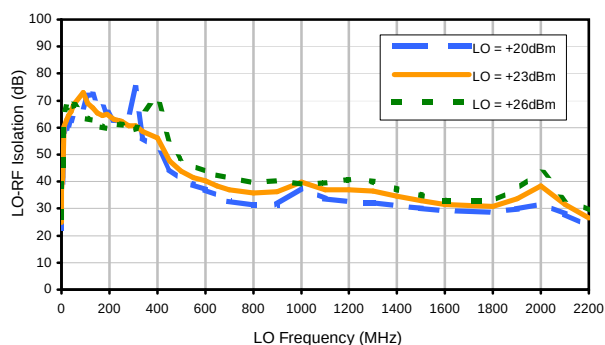


LO-IF Isolation

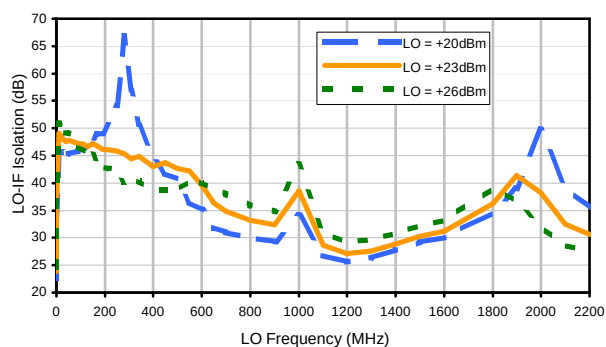


RF-IF Isolation

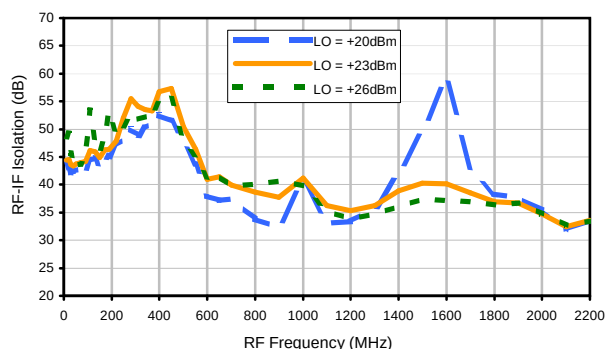


RF VSWR

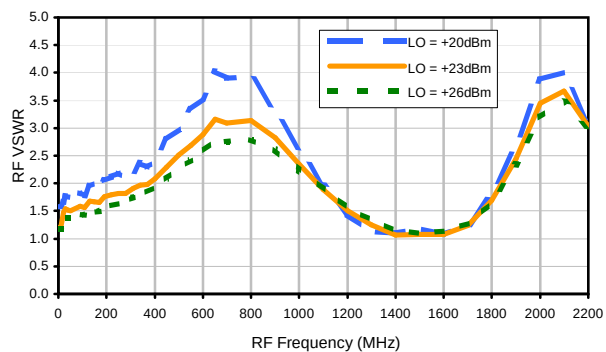

LO VSWR

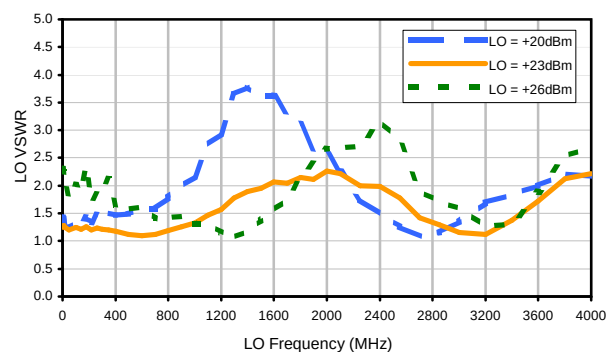

IF VSWR

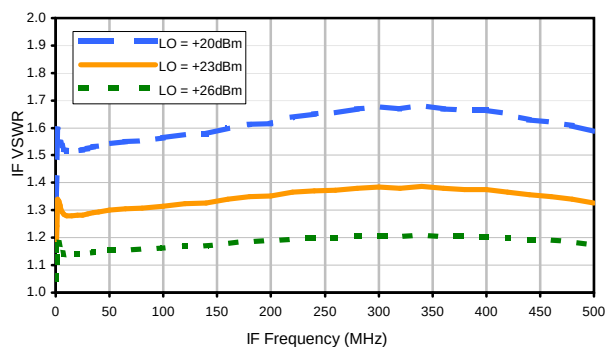

REV. X2

ZFY-2+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	36	35	41	38	46	50	59	60	58
1	-	32	+0	42	16	39	29	40	35	51	51	55
2	73	48	48	48	65	52	49	50	42	51	45	53
3	86	52	46	53	81	50	42	46	41	46	48	52
4	112	64	64	66	70	71	67	61	63	61	53	73
5	>119	61	58	64	58	64	55	66	54	67	55	60
6	>119	70	62	67	65	63	70	64	76	66	74	65
7	>119	70	63	65	69	68	74	67	73	64	80	64
8	>120	74	73	73	71	73	72	72	74	70	77	74
9	>119	77	81	74	78	71	84	74	85	78	91	78
10	>121	84	85	82	82	79	89	81	87	80	84	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 15.01.00 dBm.
LO IN: 530.01 MHz; +23.00 dBm
IF OUT: 29.91 MHz; 8.8 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	25	22	27	27	28	31	29	33	34
1	-	33	+0	39	17	33	32	33	31	35	38	41
2	84	60	53	67	59	53	61	53	48	58	50	67
3	101	92	63	66	59	69	51	68	52	63	59	73
4	>123	87	71	79	71	73	74	73	89	75	80	88
5	>123	81	80	85	81	88	80	82	80	80	79	83
6	>123	91	97	92	102	101	89	105	86	95	89	90
7	>121	110	99	100	93	95	93	95	98	97	98	107
8	>121	>117	110	108	110	106	111	108	105	114	103	105
9	>121	>120	>121	>120	111	114	109	110	110	112	115	115
10	>121	>120	>122	>119	>121	>121	>122	>122	>122	>122	>120	>120
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 4.94.00 dBm.
LO IN: 530.01 MHz; +23.00 dBm
IF OUT: 29.91 MHz; -1.21 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZFY-2+
100818
Page 3 of 3




Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Outline Dimensions

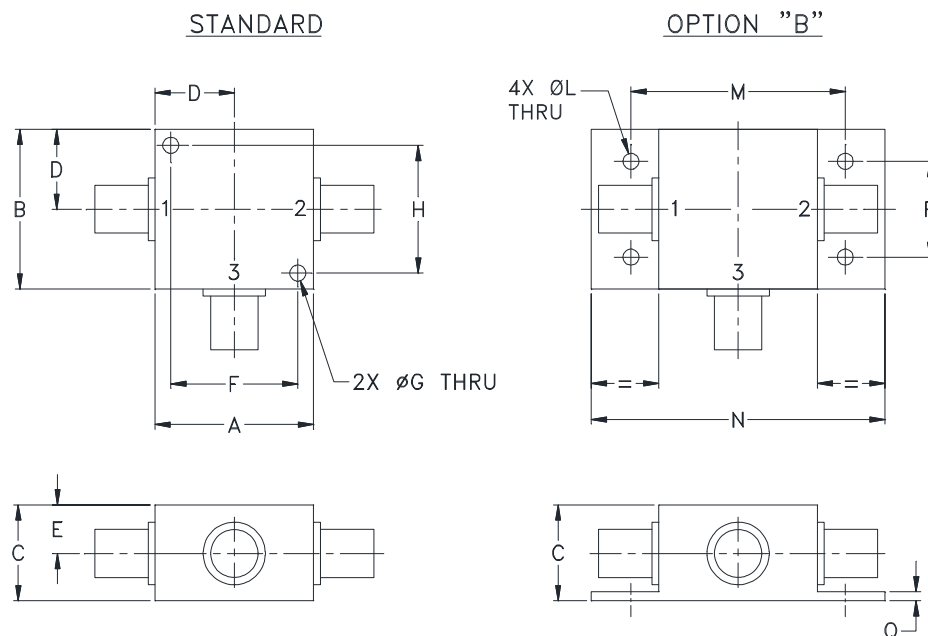

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
K18	1.25 (31.75)	1.25 (31.75)	.75 (19.05)	.63 (16.00)	.38 (9.65)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	--	--	.125 (3.18)	1.688 (42.88)	2.18 (55.37)

CASE#	P	Q	WT. GRAMS
K18	.75 (19.05)	.07 (1.78)	70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Mounting bracket available on request. Add suffix B to part number.
- For port marking 1, 2, and 3 see specifications data sheet.
- For bracket version, option B, dimension "C" changes from .75 to .94 inches when connectors are type N.
- Refer to the individual model data sheet for the type of connectors available.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I