Coaxial

Frequency Mixer

ZLW-11H+

Level 17 (LO Power +17 dBm) 10 to 3000 MHz



Generic photo used for illustration purposes only

CASE STYLE: M21

Connectors	Model
SMA	ZLW-11H+
BRACKET (OPTION "B")	
BRACKET (OPTION "BR")	

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	3
IF	2

Features

- low conversion loss, 6.83 dB typ.
- wideband, 10 to 3000 MHz
- rugged shielded case

Applications

- cellular
- GPS
- MMDS
- PCS
- instrumentation
- terrestrial radio

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

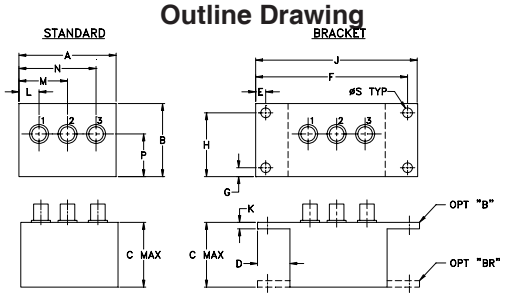

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band m			Total Range	L		M		U		L		M		U	
f_L-f_U		$\overline{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
10-3000	10-1000	6.83	0.09	10.0	12.0	27	20	25	18	23	16	27	20	25	18	23	16

1 dB COMP.: +10 dBm typ.

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
m= mid band [2f_L to f_U/2]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.00	40.00	6.43	32.26	35.01	1.13	2.07
20.00	50.00	6.58	33.52	36.23	1.07	2.19
103.44	73.44	6.60	32.25	33.97	1.08	2.01
200.00	170.00	6.78	30.89	32.03	1.13	1.96
290.31	260.31	6.75	29.76	30.61	1.18	1.91
500.00	470.00	6.94	28.74	29.28	1.29	1.83
570.63	540.69	6.81	28.80	29.04	1.34	1.81
757.50	727.50	7.00	28.06	28.08	1.48	1.81
944.38	913.91	7.05	28.00	26.87	1.66	1.80
1037.80	1007.40	7.37	28.67	26.49	1.72	1.74
1318.10	1288.00	6.81	27.69	26.66	1.92	1.69
1505.00	1474.90	6.68	27.57	27.97	1.99	1.65
1598.40	1568.30	6.65	27.30	28.78	1.75	1.91
1785.30	1755.00	6.71	27.75	28.96	1.89	1.91
1972.20	1942.10	6.57	29.51	31.44	1.76	1.75
2065.60	2035.10	6.76	28.94	33.79	1.68	1.66
2252.50	2222.10	6.61	30.22	36.80	1.68	1.49
2439.40	2408.60	6.63	31.19	37.00	1.69	1.14
2626.30	2596.00	6.95	30.21	30.13	1.49	1.26
3000.00	2969.30	8.58	32.46	26.88	1.90	2.47

Electrical Schematic

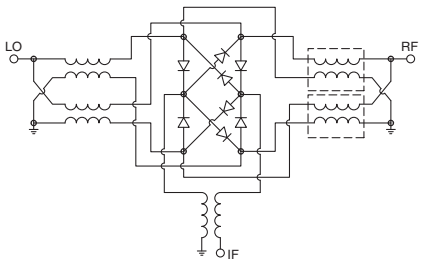

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ZLW-11H+
CONVERSION LOSS
at IF Freq of 30 MHz

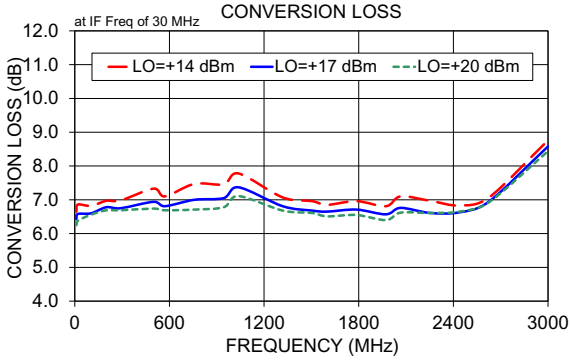

ZLW-11H+
L-R ISOLATION

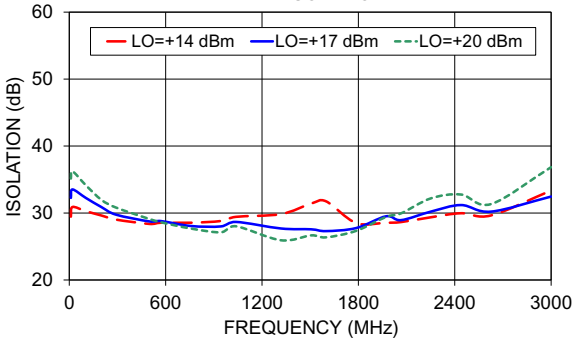

ZLW-11H+
L-I ISOLATION

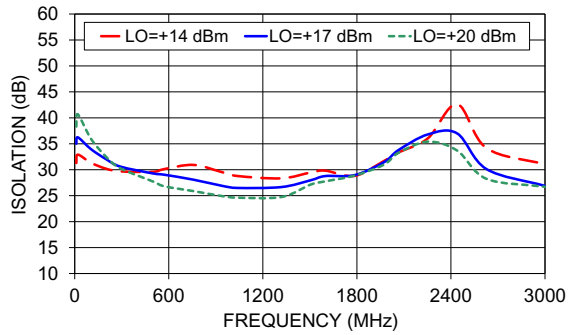

ZLW-11H+
RF VSWR

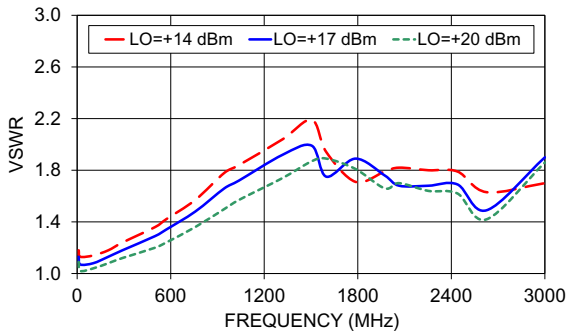

ZLW-11H+
LO VSWR

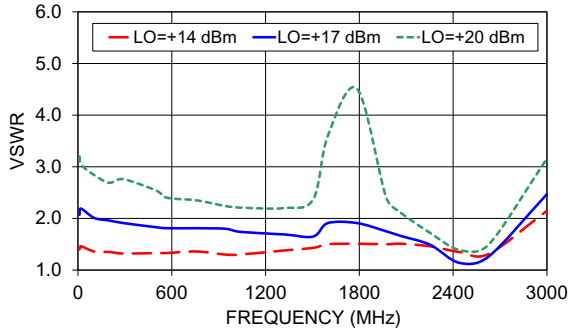

ZLW-11H+
IF VSWR

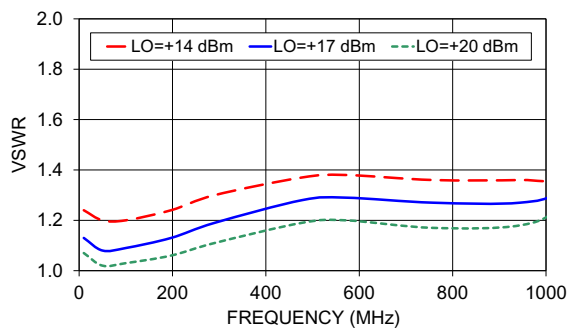

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer ZLW-11H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	7.47	7.27	7.22
110.1	140.1	7.69	7.50	7.46
210.1	240.1	7.59	7.45	7.41
310.1	340.1	7.58	7.43	7.39
410.1	440.1	7.57	7.45	7.42
510.1	540.1	7.53	7.40	7.39
610.1	640.1	7.66	7.50	7.46
710.1	740.1	7.73	7.57	7.52
810.1	840.1	7.70	7.55	7.51
910.1	940.1	7.70	7.56	7.51
1010.1	1040.1	7.71	7.56	7.51
1110.1	1140.1	7.75	7.60	7.53
1210.1	1240.1	7.98	7.76	7.66
1310.1	1340.1	8.39	8.07	7.94
1410.1	1440.1	8.92	8.46	8.27
1510.1	1540.1	9.22	8.76	8.52
1610.1	1640.1	9.17	8.81	8.65
1710.1	1740.1	9.18	8.79	8.68
1810.1	1840.1	9.23	8.79	8.64
1910.1	1940.1	9.37	8.88	8.72
2010.1	2040.1	9.50	9.04	8.84
2110.1	2140.1	9.70	9.21	8.96
2210.1	2240.1	9.92	9.39	9.12
2310.1	2340.1	10.54	10.27	10.15
2410.1	2440.1	10.46	9.87	9.59
2510.1	2540.1	10.53	9.96	9.62
2610.1	2640.1	10.54	10.01	9.73
2710.1	2740.1	10.52	10.02	9.76
2810.1	2840.1	10.49	10.00	9.73
2910.1	2940.1	10.42	9.97	9.70
3030.1	3060.1	10.65	10.17	9.94
3130.1	3160.1	10.78	10.28	10.02
3250.1	3280.1	10.93	10.44	10.21
3350.1	3380.1	11.00	10.53	10.30
3470.1	3500.1	11.21	10.84	10.64
3570.1	3600.1	11.63	11.27	11.08
3690.1	3720.1	12.40	11.97	11.77
3790.1	3820.1	13.05	12.52	12.28
3910.1	3940.1	13.90	13.27	12.96
4010.1	4040.1	14.74	13.86	13.57

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+14	+17	+20
10.1	40.1	32.18	31.60	29.11
110.1	140.1	24.78	27.15	33.13
210.1	240.1	24.89	29.33	26.48
310.1	340.1	25.77	23.66	27.66
410.1	440.1	20.62	24.28	32.81
510.1	540.1	19.15	28.29	30.02
610.1	640.1	22.33	29.00	30.62
710.1	740.1	20.32	24.59	27.45
810.1	840.1	21.88	33.54	32.58
910.1	940.1	25.69	28.14	32.03
1010.1	1040.1	26.09	29.91	29.40
1110.1	1140.1	21.99	23.62	23.83
1210.1	1240.1	26.08	29.12	33.67
1310.1	1340.1	24.62	28.29	29.26
1410.1	1440.1	26.42	27.64	30.67
1510.1	1540.1	25.44	33.12	30.61
1610.1	1640.1	21.87	22.88	23.88
1710.1	1740.1	20.13	22.49	25.01
1810.1	1840.1	21.95	25.38	33.18
1910.1	1940.1	23.98	28.16	29.78
2010.1	2040.1	23.92	24.39	27.92
2110.1	2140.1	22.66	22.04	23.90
2210.1	2240.1	22.92	20.99	23.05
2310.1	2340.1	19.80	17.13	21.50
2410.1	2440.1	23.14	26.90	31.75
2510.1	2540.1	22.15	28.62	28.10
2610.1	2640.1	24.09	30.48	26.19
2710.1	2740.1	29.57	24.31	23.08
2810.1	2840.1	23.49	21.93	21.95
2910.1	2940.1	21.17	21.25	21.49
3030.1	3060.1	19.60	20.71	21.02
3130.1	3160.1	17.75	18.44	18.76
3250.1	3280.1	17.38	18.47	19.34
3350.1	3380.1	17.15	18.79	20.32
3470.1	3500.1	17.59	20.08	22.09
3570.1	3600.1	18.13	21.14	23.60
3690.1	3720.1	18.74	21.73	24.13
3790.1	3820.1	18.54	20.48	23.15
3910.1	3940.1	17.94	20.00	21.76
4010.1	4040.1	16.55	21.93	23.04

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	0.23	0.11	0.08
110.1	140.1	0.26	0.12	0.05
210.1	240.1	0.28	0.12	0.06
310.1	340.1	0.27	0.13	0.07
410.1	440.1	0.29	0.14	0.05
510.1	540.1	0.38	0.17	0.08
610.1	640.1	0.35	0.14	0.07
710.1	740.1	0.35	0.16	0.08
810.1	840.1	0.41	0.16	0.08
910.1	940.1	0.38	0.18	0.10
1010.1	1040.1	0.43	0.21	0.13
1110.1	1140.1	0.50	0.26	0.17
1210.1	1240.1	0.67	0.41	0.30
1310.1	1340.1	0.68	0.46	0.31
1410.1	1440.1	0.46	0.32	0.22
1510.1	1540.1	0.33	0.17	0.14
1610.1	1640.1	0.40	0.16	0.10
1710.1	1740.1	0.44	0.18	0.12
1810.1	1840.1	0.45	0.23	0.17
1910.1	1940.1	0.39	0.24	0.20
2010.1	2040.1	0.34	0.22	0.19
2110.1	2140.1	0.33	0.24	0.22
2210.1	2240.1	0.34	0.29	0.32
2310.1	2340.1	0.62	0.30	0.24
2410.1	2440.1	0.34	0.26	0.21
2510.1	2540.1	0.26	0.21	0.20
2610.1	2640.1	0.40	0.25	0.21
2710.1	2740.1	0.52	0.31	0.24
2810.1	2840.1	0.69	0.43	0.32
2910.1	2940.1	0.87	0.52	0.38
3030.1	3060.1	1.02	0.58	0.41
3130.1	3160.1	1.13	0.64	0.45
3250.1	3280.1	1.22	0.65	0.40
3350.1	3380.1	1.40	0.72	0.43
3470.1	3500.1	1.54	0.78	0.45
3570.1	3600.1	1.54	0.73	0.40
3690.1	3720.1	1.45	0.59	0.28
3790.1	3820.1	1.48	0.59	0.25
3910.1	3940.1	1.63	0.70	0.26
4010.1	4040.1	1.66	0.76	0.33

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB) @LO (dBm) +17
1490.0	10.1	7.50
1449.5	50.6	7.76
1408.9	91.2	7.72
1368.4	131.7	7.78
1327.8	172.3	7.92
1287.3	212.8	7.95
1246.7	253.4	7.95
1206.2	293.9	7.99
1165.6	334.5	7.97
1125.1	375.0	7.78
1084.5	415.6	7.96
1044.0	456.1	8.03
1003.4	496.7	7.98
962.9	537.2	7.88
922.3	577.8	7.88
881.8	618.3	7.89
841.2	658.9	7.87
800.7	699.4	7.83
760.1	740.0	7.86
719.6	780.5	7.73
679.0	821.1	7.74
638.5	861.6	7.61
597.9	902.2	7.90
557.4	942.7	7.94
516.8	983.3	7.92
476.3	1023.8	7.94
435.8	1064.3	8.11
395.2	1104.9	8.14
354.7	1145.4	8.24
314.1	1186.0	8.47
273.6	1226.5	8.60
253.3	1246.8	8.64
212.7	1287.4	8.83
192.5	1307.6	8.82
151.9	1348.2	8.86
131.6	1368.5	8.85
91.1	1409.0	8.82
70.8	1429.3	8.79
30.3	1469.8	8.77
10.0	1490.1	8.95

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB) @LO (dBm) +17
10.0	20.1	7.55
90.0	100.1	7.03
170.0	180.1	7.33
250.0	260.1	7.22
330.0	340.1	7.18
410.0	420.1	7.17
490.0	500.1	6.99
570.0	580.1	7.10
650.0	660.1	7.10
730.0	740.1	6.96
810.0	820.1	6.97
890.0	900.1	6.78
970.0	980.1	6.77
1050.0	1060.1	6.57
1130.0	1140.1	6.57
1210.0	1220.1	6.60
1290.0	1300.1	6.66
1370.0	1380.1	6.67
1450.0	1460.1	6.85
1530.0	1540.1	6.91
1610.0	1620.1	7.11
1690.0	1700.1	7.24
1770.0	1780.1	7.50
1850.0	1860.1	7.66
1930.0	1940.1	7.63
2010.0	2020.1	7.87
2090.0	2100.1	7.73
2170.0	2180.1	7.65
2250.0	2260.1	7.71
2330.0	2340.1	8.31
2410.0	2420.1	8.29
2490.0	2500.1	8.55
2570.0	2580.1	8.92
2650.0	2660.1	9.40
2730.0	2740.1	10.05
2810.0	2820.1	10.76
2890.0	2900.1	11.57
2990.0	3000.1	12.47
3070.0	3080.1	13.46
3170.0	3180.1	14.47

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3000.1001MHz (dB) @LO (dBm) +17
2990.0	10.1	14.95
2910.0	90.1	14.33
2830.0	170.1	13.53
2750.0	250.1	13.09
2670.0	330.1	12.67
2590.0	410.1	12.27
2510.0	490.1	11.79
2430.0	570.1	11.60
2350.0	650.1	13.50
2270.0	730.1	10.72
2190.0	810.1	10.58
2110.0	890.1	10.61
2030.0	970.1	10.66
1950.0	1050.1	10.62
1870.0	1130.1	10.63
1790.0	1210.1	10.63
1710.0	1290.1	10.44
1630.0	1370.1	10.39
1550.0	1450.1	10.31
1470.0	1530.1	10.09
1390.0	1610.1	10.17
1310.0	1690.1	10.13
1230.0	1770.1	10.19
1150.0	1850.1	10.21
1070.0	1930.1	10.25
990.0	2010.1	10.14
910.0	2090.1	10.15
850.0	2150.1	10.14
770.0	2230.1	10.00
710.0	2290.1	10.01
630.0	2370.1	10.43
570.0	2430.1	9.97
490.0	2510.1	9.90
430.0	2570.1	9.90
350.0	2650.1	9.80
290.0	2710.1	9.77
210.0	2790.1	9.75
150.0	2850.1	9.81
70.0	2930.1	9.96
10.0	2990.1	10.13

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+14	+17	+20	+14	+17	+20
40.1	41.82	45.60	48.94	29.95	32.92	35.24
140.1	42.33	46.79	48.96	29.90	32.50	33.97
240.1	43.18	47.72	48.43	29.57	31.49	31.92
340.1	44.36	48.91	48.37	29.49	30.64	30.35
440.1	47.17	50.97	48.16	29.87	30.01	29.19
540.1	47.36	57.06	50.35	30.25	29.72	28.45
640.1	48.55	60.51	50.68	30.50	29.30	28.09
740.1	51.13	59.15	49.81	30.70	29.16	27.78
840.1	45.46	55.21	51.61	30.96	29.04	27.67
940.1	44.86	55.01	52.03	30.30	28.55	27.43
1040.1	42.96	52.37	54.33	30.66	28.64	27.47
1140.1	40.57	47.70	52.51	30.79	28.85	27.61
1240.1	38.60	45.60	62.96	31.13	29.25	28.13
1340.1	37.37	43.41	54.19	29.81	28.11	27.33
1440.1	36.40	42.20	51.19	29.06	27.18	26.48
1540.1	36.41	42.83	55.72	28.48	26.77	25.85
1640.1	36.61	44.48	54.30	28.40	26.72	25.74
1740.1	37.56	45.57	44.94	28.14	26.51	25.55
1840.1	38.62	42.28	38.99	27.81	26.51	25.57
1940.1	37.47	37.64	35.17	27.74	26.48	25.92
2040.1	36.59	35.74	33.48	27.65	26.60	26.06
2140.1	36.13	34.15	31.99	27.28	26.61	26.32
2240.1	35.31	31.81	29.84	25.77	25.51	25.60
2340.1	21.04	18.83	16.65	18.67	18.16	16.95
2440.1	29.82	29.89	30.34	40.33	35.46	33.16
2540.1	34.81	35.16	35.10	40.68	51.66	48.03
2640.1	37.91	37.59	36.44	37.88	45.82	58.49
2740.1	42.09	40.86	37.82	36.74	42.43	46.58
2840.1	49.19	44.22	38.51	36.05	39.70	41.33
2940.1	52.66	43.65	37.85	34.08	36.62	37.96
3060.1	42.51	41.34	37.47	32.64	34.47	35.79
3160.1	39.48	39.37	36.55	31.26	32.72	33.94
3280.1	39.46	40.33	36.66	30.07	31.36	32.27
3380.1	39.93	42.40	37.99	29.31	30.39	31.20
3500.1	41.89	45.64	40.00	28.55	29.52	30.11
3600.1	44.12	48.14	40.68	28.04	28.80	29.21
3720.1	48.30	47.96	40.39	27.46	27.97	28.13
3820.1	45.50	44.20	39.32	26.98	27.18	27.15
3940.1	40.87	39.63	36.94	26.34	26.21	25.81
4040.1	37.81	36.41	35.30	25.64	24.98	24.72

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+14	+17	+20
10.1	40.1	21.66	21.35	21.18
110.1	140.1	21.24	20.99	20.91
210.1	240.1	21.39	21.46	21.42
310.1	340.1	22.30	22.41	22.47
410.1	440.1	23.63	23.63	23.78
510.1	540.1	24.08	24.39	24.70
610.1	640.1	25.42	25.61	25.80
710.1	740.1	28.07	28.08	28.10
810.1	840.1	29.92	29.93	29.78
910.1	940.1	31.27	30.90	30.37
1010.1	1040.1	32.56	32.37	31.55
1110.1	1140.1	37.66	36.28	34.97
1210.1	1240.1	39.66	39.76	37.58
1310.1	1340.1	53.24	39.78	36.88
1410.1	1440.1	42.24	35.95	34.06
1510.1	1540.1	38.47	33.90	31.98
1610.1	1640.1	35.87	32.73	31.92
1710.1	1740.1	36.02	32.67	31.64
1810.1	1840.1	35.73	32.32	30.93
1910.1	1940.1	34.72	31.54	30.12
2010.1	2040.1	32.75	30.91	30.00
2110.1	2140.1	31.63	30.56	29.86
2210.1	2240.1	30.50	29.90	29.70
2310.1	2340.1	27.20	30.97	26.02
2410.1	2440.1	30.47	31.78	32.09
2510.1	2540.1	39.96	41.20	41.35
2610.1	2640.1	36.08	36.78	36.98
2710.1	2740.1	32.52	32.80	33.20
2810.1	2840.1	30.92	30.70	30.73
2910.1	2940.1	29.46	29.11	28.81
3030.1	3060.1	28.19	27.86	27.31
3130.1	3160.1	27.34	27.34	27.20
3250.1	3280.1	26.05	25.90	25.80
3350.1	3380.1	25.04	24.96	24.94
3470.1	3500.1	23.82	23.93	24.04
3570.1	3600.1	23.16	23.32	23.55
3690.1	3720.1	22.17	22.34	22.55
3790.1	3820.1	21.53	21.66	21.88
3910.1	3940.1	20.79	20.85	20.98
4010.1	4040.1	19.65	19.71	19.69

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+14	+17	+20
10.1	40.1	1.43	1.38	1.45
110.1	140.1	1.15	1.26	1.33
210.1	240.1	1.13	1.24	1.32
310.1	340.1	1.13	1.24	1.31
410.1	440.1	1.17	1.27	1.33
510.1	540.1	1.18	1.27	1.33
610.1	640.1	1.17	1.24	1.30
710.1	740.1	1.16	1.23	1.29
810.1	840.1	1.17	1.22	1.26
910.1	940.1	1.17	1.21	1.26
1010.1	1040.1	1.17	1.18	1.21
1110.1	1140.1	1.24	1.21	1.21
1210.1	1240.1	1.36	1.30	1.27
1310.1	1340.1	1.55	1.47	1.43
1410.1	1440.1	1.71	1.64	1.59
1510.1	1540.1	1.85	1.79	1.75
1610.1	1640.1	1.92	1.86	1.82
1710.1	1740.1	1.96	1.89	1.86
1810.1	1840.1	2.01	1.92	1.87
1910.1	1940.1	2.06	1.96	1.90
2010.1	2040.1	2.13	2.04	1.99
2110.1	2140.1	2.21	2.12	2.07
2210.1	2240.1	2.32	2.22	2.16
2310.1	2340.1	2.48	2.14	1.81
2410.1	2440.1	2.81	2.72	2.64
2510.1	2540.1	2.90	2.79	2.71
2610.1	2640.1	2.97	2.84	2.76
2710.1	2740.1	3.02	2.89	2.80
2810.1	2840.1	3.07	2.90	2.79
2910.1	2940.1	3.04	2.86	2.73
3030.1	3060.1	3.03	2.85	2.71
3130.1	3160.1	2.96	2.80	2.67
3250.1	3280.1	2.84	2.68	2.56
3350.1	3380.1	2.69	2.58	2.52
3470.1	3500.1	2.50	2.48	2.49
3570.1	3600.1	2.42	2.47	2.54
3690.1	3720.1	2.46	2.60	2.71
3790.1	3820.1	2.52	2.72	2.86
3910.1	3940.1	2.63	2.92	3.15
4010.1	4040.1	2.84	3.16	3.40

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+14	+17	+20
40.1	1.69	2.46	3.38
140.1	1.62	2.29	3.06
240.1	1.58	2.22	2.92
340.1	1.55	2.14	2.78
440.1	1.53	2.10	2.71
540.1	1.51	2.05	2.63
640.1	1.50	2.03	2.57
740.1	1.51	2.01	2.53
840.1	1.52	2.00	2.51
940.1	1.52	2.01	2.50
1040.1	1.53	2.01	2.50
1140.1	1.55	2.03	2.50
1240.1	1.56	2.04	2.50
1340.1	1.58	2.04	2.51
1440.1	1.59	2.04	2.50
1540.1	1.58	2.01	2.45
1640.1	1.55	1.94	2.36
1740.1	1.52	1.86	2.24
1840.1	1.48	1.75	2.09
1940.1	1.43	1.61	1.88
2040.1	1.36	1.44	1.66
2140.1	1.29	1.26	1.43
2240.1	1.23	1.07	1.27
2340.1	1.54	1.51	1.56
2440.1	1.44	1.22	1.25
2540.1	1.56	1.45	1.53
2640.1	1.72	1.71	1.81
2740.1	1.89	1.96	2.10
2840.1	2.06	2.21	2.38
2940.1	2.23	2.44	2.65
3060.1	2.40	2.66	2.86
3160.1	2.57	2.86	3.09
3280.1	2.78	3.13	3.38
3380.1	2.98	3.34	3.60
3500.1	3.20	3.59	3.90
3600.1	3.41	3.76	4.03
3720.1	3.62	3.93	4.20
3820.1	3.79	4.04	4.26
3940.1	3.90	4.04	4.14
4040.1	4.00	4.09	4.14

IF (OUT) (MHz)	IF VSWR @LO=3000.1001MHz (:1) @LO (dBm)		
	+14	+17	+20
10.1	1.26	1.41	1.51
70.1	1.22	1.37	1.48
150.1	1.21	1.36	1.47
210.1	1.19	1.32	1.42
290.1	1.15	1.27	1.35
350.1	1.13	1.23	1.30
430.1	1.13	1.16	1.21
490.1	1.17	1.13	1.14
570.1	1.27	1.18	1.14
630.1	1.38	1.27	1.20
710.1	1.44	1.31	1.23
770.1	1.55	1.41	1.31
850.1	1.67	1.52	1.41
910.1	1.75	1.59	1.48
990.1	1.86	1.69	1.57
1050.1	1.94	1.76	1.64
1130.1	2.01	1.82	1.69
1190.1	2.05	1.86	1.73
1270.1	2.07	1.88	1.75
1330.1	2.09	1.90	1.76
1410.1	2.07	1.88	1.75
1470.1	2.05	1.86	1.73
1550.1	2.00	1.81	1.68
1610.1	1.98	1.80	1.67
1690.1	1.91	1.73	1.61
1750.1	1.88	1.70	1.58
1830.1	1.77	1.59	1.48
1890.1	1.69	1.52	1.41
1970.1	1.57	1.41	1.30
2030.1	1.54	1.39	1.30
2110.1	1.43	1.30	1.23
2170.1	1.34	1.23	1.20
2250.1	1.28	1.25	1.29
2310.1	1.16	1.20	1.27
2390.1	1.95	2.07	2.18
2450.1	1.88	2.04	2.18
2530.1	2.11	2.33	2.51
2590.1	2.37	2.63	2.84
2670.1	2.86	3.21	3.47
2730.1	3.22	3.56	3.83

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+4	9	9	16	12	35	16	30	31	36
1	-	24	+0	23	19	28	24	35	41	41	45	44
2	67	57	48	48	51	60	60	59	46	67	50	54
3	>90	>76	75	72	71	>76	74	71	68	70	72	71
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -5.00 dBm.
LO IN: 1530.1 MHz; +17.00 dBm
IF OUT: 30 MHz; -14 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	6	19	20	26	24	49	30	42	52	46
1	-	24	+0	23	19	30	24	36	39	46	50	47
2	47	48	37	39	40	55	48	49	39	57	45	46
3	69	58	51	50	51	51	54	50	57	51	60	56
4	>90	65	68	64	69	59	57	65	63	61	60	60
5	>90	71	68	82	66	65	63	67	69	72	65	73
6	>90	78	83	78	>86	72	74	68	75	76	>86	71
7	>90	>86	>86	83	>86	>86	79	77	73	75	82	85
8	>90	>86	>86	>86	>86	>86	>86	>86	>86	82	>86	86
9	>90	>86	>86	>86	>86	>86	>86	>86	>86	86	83	82
10	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; 5.00 dBm.
LO IN: 1530.1 MHz; +17.00 dBm
IF OUT: 30 MHz; -3.98 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

Conversion Loss @ IF=30MHz

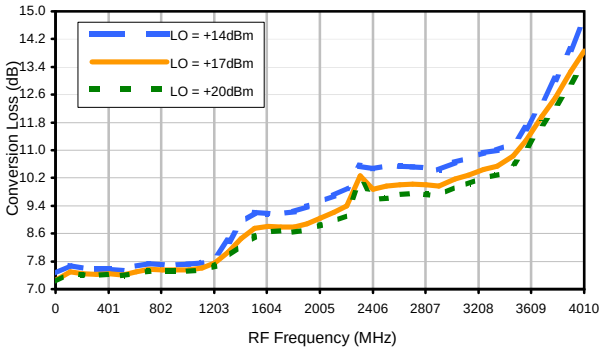

Conversion Loss vs. IF @ RF=1500.1MHz

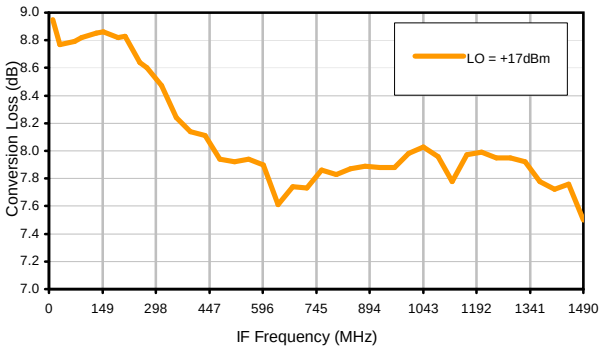

Conversion Loss vs. IF @ RF=10.1MHz

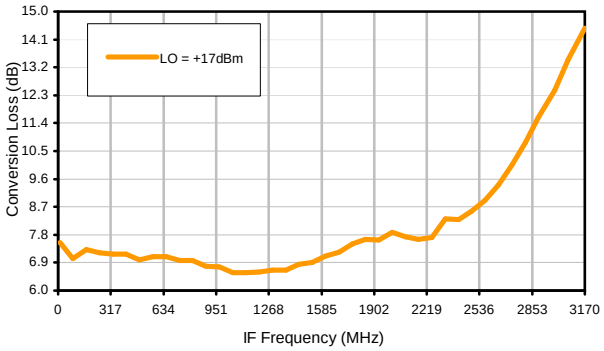

Conversion Loss vs. IF @ RF=3000.1001MHz

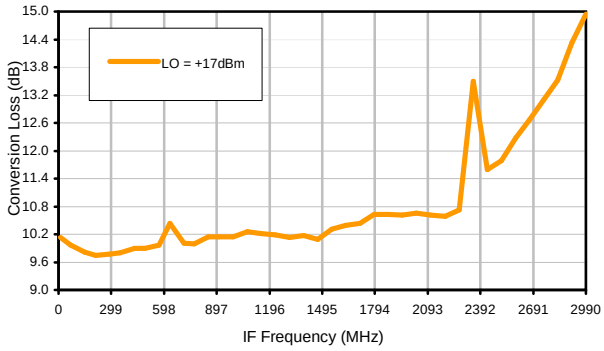

IP3 Input

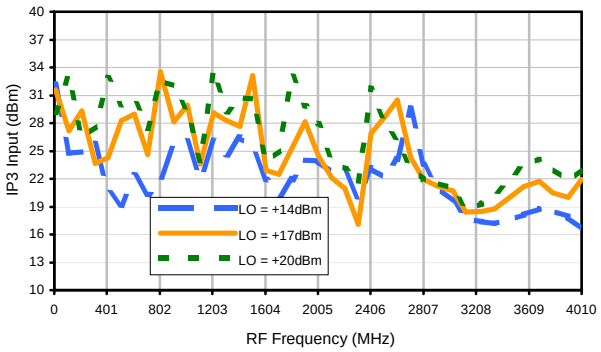

Compression @ RF IN=+10dBm

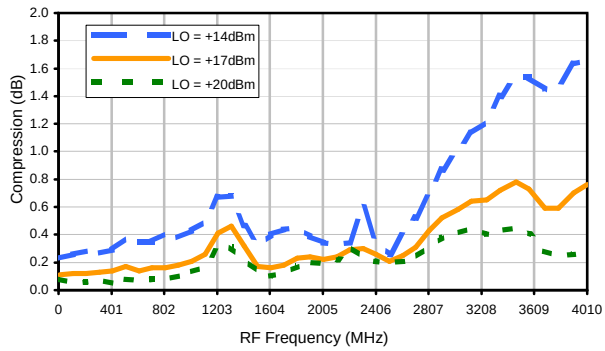

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

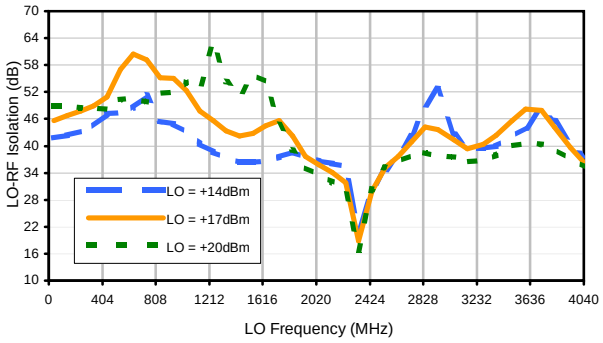

LO-IF Isolation

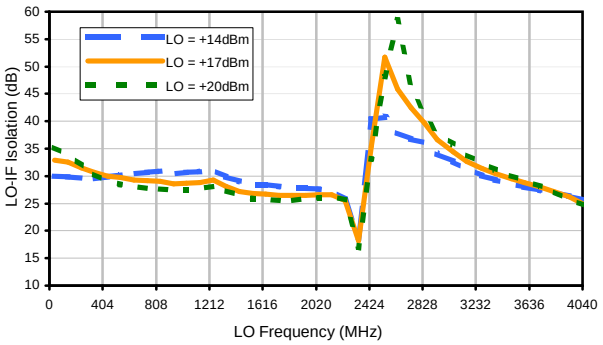

RF-IF Isolation

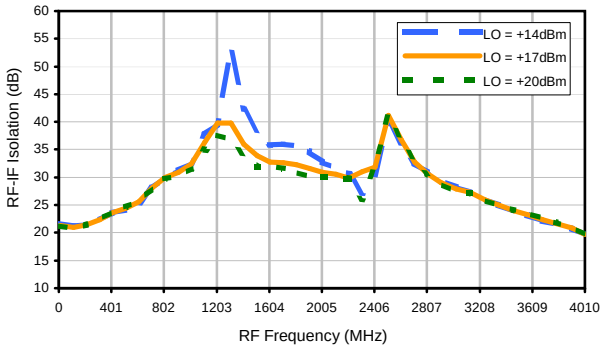

RF VSWR

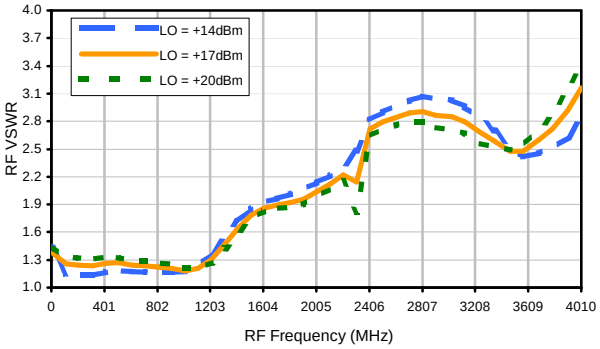

LO VSWR

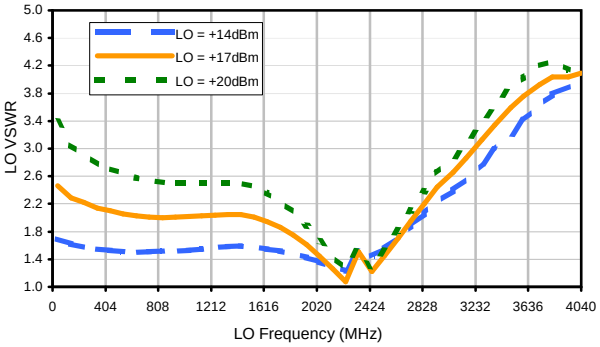

IF VSWR

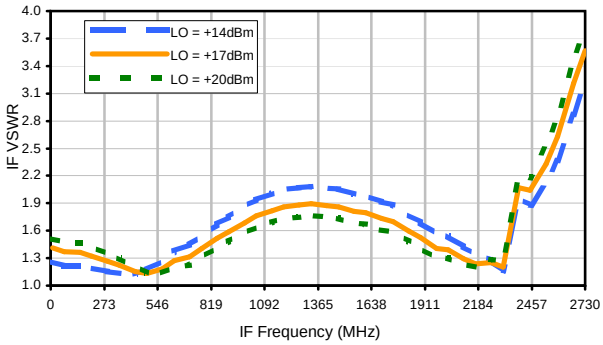

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+4	9	9	16	12	35	16	30	31	36
1	-	24	+0	23	19	28	24	35	41	41	45	44
2	67	57	48	48	51	60	60	59	46	67	50	54
3	>90	>76	75	72	71	>76	74	71	68	70	72	71
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -5.00 dBm.
LO IN: 1530.1 MHz; +17.00 dBm
IF OUT: 30 MHz; -14 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	6	19	20	26	24	49	30	42	52	46
1	-	24	+0	23	19	30	24	36	39	46	50	47
2	47	48	37	39	40	55	48	49	39	57	45	46
3	69	58	51	50	51	51	54	50	57	51	60	56
4	>90	65	68	64	69	59	57	65	63	61	60	60
5	>90	71	68	82	66	65	63	67	69	72	65	73
6	>90	78	83	78	>86	72	74	68	75	76	>86	71
7	>90	>86	>86	83	>86	>86	79	77	73	75	82	85
8	>90	>86	>86	>86	>86	>86	>86	>86	>86	82	>86	86
9	>90	>86	>86	>86	>86	>86	>86	>86	>86	86	83	82
10	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; 5.00 dBm.
LO IN: 1530.1 MHz; +17.00 dBm
IF OUT: 30 MHz; -3.98 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style M

Outline Dimensions

M21
M22
M23

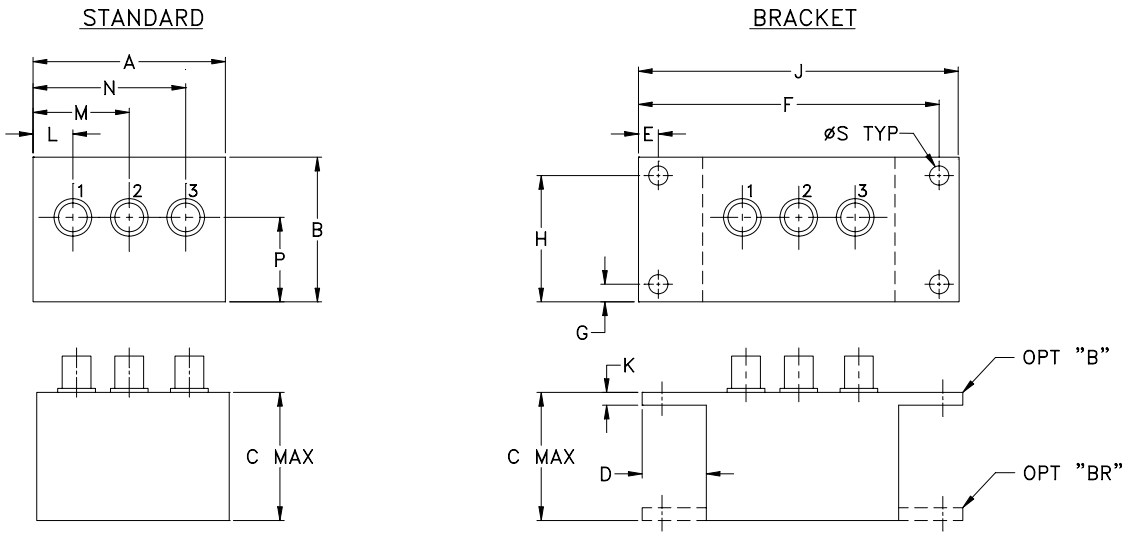

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
M21	1.50 (38.10)	1.13 (28.70)	1.00 (25.40)	.50 (12.70)	.155 (3.94)	2.345 (59.56)	.138 (3.51)	.987 (25.07)	2.50 (63.50)	.10 (2.54)	.31 (7.87)	.75 (19.05)	1.19 (30.23)
M22	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.40 (10.16)	1.15 (29.21)	1.86 (47.24)
M23	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.63 (16.00)	1.06 (26.92)	1.63 (41.40)

CASE#	P	Q	R	S	WT. GRAMS
M21	.66 (16.76)	-- --	-- --	.150 (3.81)	40.0
M22	.64 (16.26)	-- --	-- --		74.0
M23	.69 (17.53)	-- --	-- --		70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3 Pl. ± .015

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
   For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.

   For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.
   Due to transition from non-RoHS to RoHS, models will be supplied with either case style finish until the non-RoHS case inventory is depleted.
3. Mounting bracket available on request. For bracket mounted on connector end add suffix B to part number and add $5.00 to unit cost. For bracket mounted on the rear, add suffix BR to part number and add $1.50 to unit cost.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Mini-Circuits

Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.