

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 1 to 1000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	3
IF	2

Outline Drawing

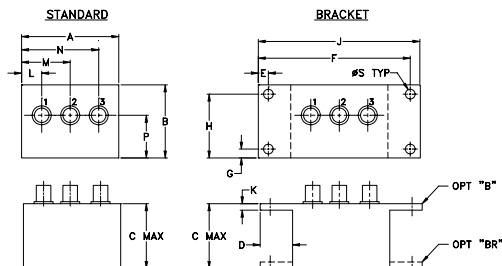

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

Features

- low conversion loss, 5.68 dB typ.
- high L-R isolation, 40 dB typ., L-I, 40 dB typ.
- wideband, 1 to 1000 MHz
- rugged shielded case

Applications

- VHF/UHF
- cellular
- instrumentations

ZLW-2



Generic photo used for illustration purposes only

CASE STYLE: M21

Connectors Model

SMA ZLW-2

BRACKET (OPTION "B")

BRACKET (OPTION "BR")

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total		L		M		U		L		M		U	
		f_L-f_U	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
1-1000	DC-1000	5.68	0.08	7.5	9.5	55	45	40	25	35	20	50	40	40	25	30	20


1 dB COMP.: +1 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1.00	31.00	7.23	>67.00	>67.00	1.30	2.70
2.00	32.00	6.50	>67.00	>67.00	1.15	2.63
5.00	35.00	5.80	>67.00	>67.00	1.07	2.77
10.00	40.00	5.62	>67.00	>67.00	1.06	2.55
20.00	50.00	5.68	>67.00	>67.00	1.07	2.41
50.00	80.00	5.58	61.94	63.74	1.09	2.37
100.00	70.00	5.53	54.33	54.76	1.11	2.29
167.34	137.34	5.57	48.65	47.61	1.16	2.20
233.87	203.87	5.72	45.10	43.03	1.18	2.16
300.40	270.40	5.45	42.56	40.00	1.20	2.13
366.94	336.94	5.73	40.45	37.57	1.22	2.06
466.74	436.74	5.82	38.33	34.32	1.23	2.13
500.00	470.00	5.72	38.80	34.10	1.26	2.09
599.81	569.81	6.02	37.43	32.81	1.29	2.09
666.34	636.34	6.11	37.94	31.57	1.34	2.04
799.41	769.41	6.27	36.06	29.67	1.40	2.13
832.68	802.68	6.46	35.22	28.79	1.47	2.19
899.21	869.21	7.00	33.77	26.14	1.55	2.24
932.48	902.48	7.37	33.17	25.03	1.66	2.28
1000.00	969.00	7.63	32.49	23.59	1.72	2.30

Electrical Schematic

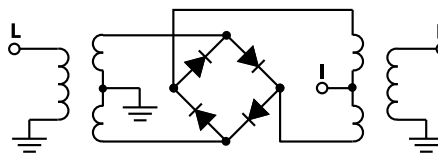







Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
ZLW-2
DJ/TD/CP/AM
200804

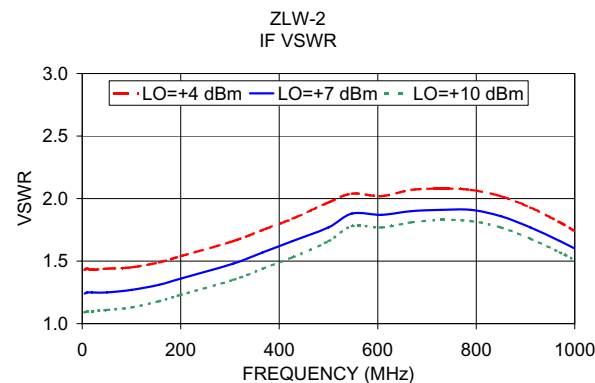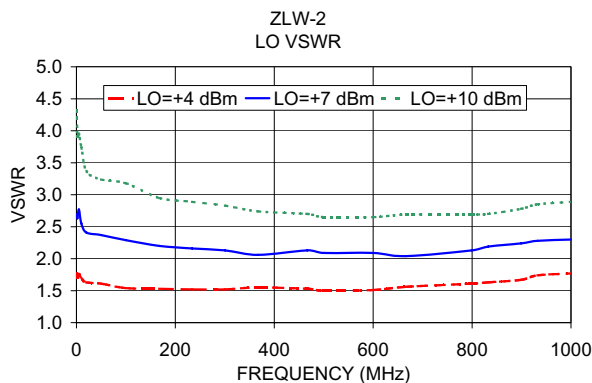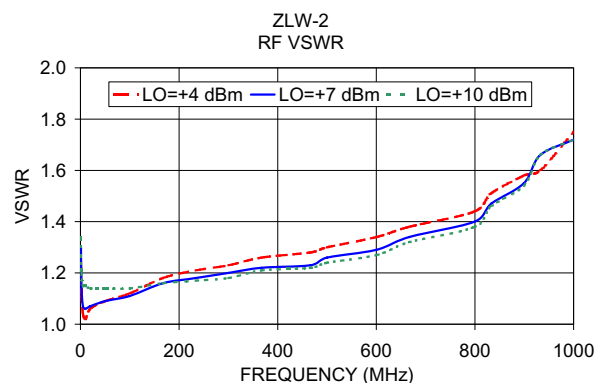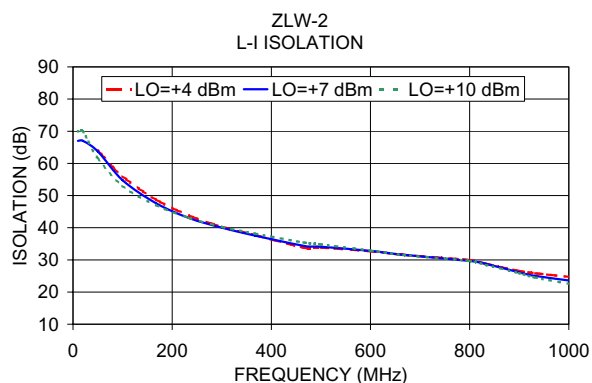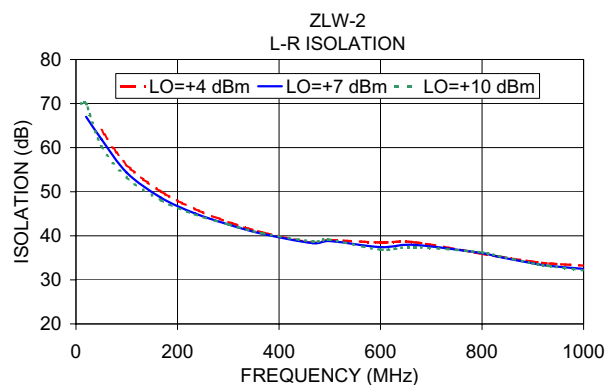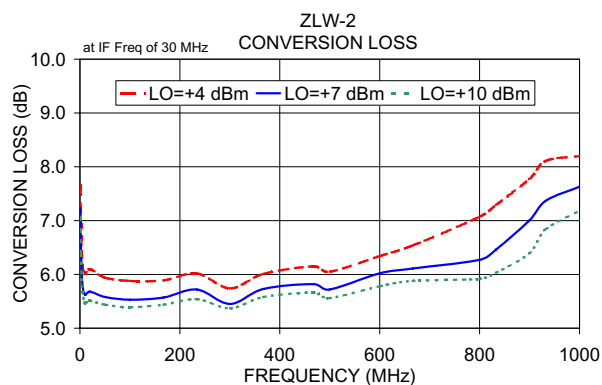

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ZLW-2

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	5.74	5.72	5.37
50.1	80.1	6.31	6.00	5.77
90.1	120.1	6.31	6.01	5.85
130.1	160.1	6.34	5.98	5.85
170.1	200.1	6.27	6.03	5.89
200.1	230.1	6.36	6.10	5.93
240.1	270.1	6.34	6.07	5.92
270.1	300.1	6.28	6.06	5.92
310.1	340.1	6.33	6.08	5.94
340.1	370.1	6.44	6.17	6.02
380.1	410.1	6.47	6.23	6.03
410.1	440.1	6.47	6.19	6.04
450.1	480.1	6.53	6.29	6.14
480.1	510.1	6.65	6.38	6.23
520.1	550.1	6.76	6.47	6.29
550.1	580.1	6.78	6.52	6.36
590.1	620.1	6.91	6.63	6.44
620.1	650.1	7.08	6.76	6.55
660.1	690.1	7.14	6.82	6.61
690.1	720.1	7.16	6.83	6.62
730.1	760.1	7.26	6.87	6.62
760.1	790.1	7.31	6.86	6.58
800.1	830.1	7.40	6.88	6.57
830.1	860.1	7.38	6.80	6.48
870.1	900.1	7.63	6.98	6.59
900.1	930.1	7.82	7.14	6.71
940.1	970.1	7.93	7.24	6.79
970.1	1000.1	8.10	7.41	6.94
1010.1	1040.1	8.35	7.65	7.14
1040.1	1070.1	8.63	7.93	7.40
1080.1	1110.1	9.16	8.51	7.96
1110.1	1140.1	9.48	8.92	8.41
1150.1	1180.1	9.77	9.38	9.01
1180.1	1210.1	9.92	9.59	9.31
1220.1	1250.1	9.98	9.68	9.46
1250.1	1280.1	10.04	9.75	9.55
1290.1	1320.1	10.34	10.04	9.85
1320.1	1350.1	10.51	10.22	10.05
1360.1	1390.1	10.76	10.49	10.31
1390.1	1420.1	11.11	10.84	10.66

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	15.82	16.68	17.02
50.1	80.1	14.38	15.25	17.86
90.1	120.1	14.68	18.48	21.07
130.1	160.1	16.78	21.01	21.07
170.1	200.1	17.63	20.28	21.05
200.1	230.1	20.82	20.95	21.03
240.1	270.1	20.83	20.96	21.04
270.1	300.1	16.59	20.43	21.04
310.1	340.1	14.78	16.98	19.90
340.1	370.1	14.77	16.16	19.79
380.1	410.1	16.73	18.99	20.98
410.1	440.1	15.81	20.67	20.98
450.1	480.1	17.69	20.86	20.93
480.1	510.1	15.93	17.96	20.89
520.1	550.1	11.55	13.62	16.84
550.1	580.1	10.00	12.35	15.12
590.1	620.1	9.49	11.93	15.56
620.1	650.1	8.66	11.01	14.70
660.1	690.1	7.36	9.60	12.67
690.1	720.1	7.59	9.89	13.23
730.1	760.1	9.24	13.19	18.76
760.1	790.1	11.42	15.94	12.56
800.1	830.1	12.01	12.46	9.82
830.1	860.1	12.63	12.23	10.08
870.1	900.1	11.49	12.93	11.14
900.1	930.1	9.15	11.97	11.63
940.1	970.1	9.24	11.74	12.21
970.1	1000.1	8.97	11.54	12.75
1010.1	1040.1	7.48	9.61	11.69
1040.1	1070.1	6.63	8.37	10.18
1080.1	1110.1	6.29	7.77	9.82
1110.1	1140.1	6.46	7.88	9.83
1150.1	1180.1	6.87	7.79	9.40
1180.1	1210.1	7.45	8.12	9.29
1220.1	1250.1	9.40	9.82	10.57
1250.1	1280.1	11.46	11.62	12.18
1290.1	1320.1	14.97	14.89	14.63
1320.1	1350.1	16.51	16.85	15.96
1360.1	1390.1	17.42	18.38	18.84
1390.1	1420.1	18.14	18.58	18.67

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	0.87	0.61	0.74
50.1	80.1	0.86	0.66	0.48
90.1	120.1	1.03	0.75	0.57
130.1	160.1	0.84	0.64	0.47
170.1	200.1	0.87	0.65	0.48
200.1	230.1	0.86	0.63	0.47
240.1	270.1	0.86	0.64	0.48
270.1	300.1	0.88	0.65	0.51
310.1	340.1	0.76	0.56	0.43
340.1	370.1	0.75	0.55	0.43
380.1	410.1	0.84	0.63	0.51
410.1	440.1	0.75	0.57	0.47
450.1	480.1	0.90	0.70	0.56
480.1	510.1	0.98	0.77	0.62
520.1	550.1	1.09	0.85	0.68
550.1	580.1	1.26	0.99	0.81
590.1	620.1	1.30	1.05	0.89
620.1	650.1	1.36	1.11	0.97
660.1	690.1	1.54	1.26	1.09
690.1	720.1	1.66	1.34	1.15
730.1	760.1	1.73	1.44	1.24
760.1	790.1	1.81	1.52	1.31
800.1	830.1	1.90	1.61	1.36
830.1	860.1	2.02	1.72	1.45
870.1	900.1	1.92	1.68	1.41
900.1	930.1	1.80	1.59	1.34
940.1	970.1	1.80	1.63	1.39
970.1	1000.1	1.75	1.61	1.41
1010.1	1040.1	1.69	1.63	1.53
1040.1	1070.1	1.53	1.56	1.55
1080.1	1110.1	1.20	1.30	1.40
1110.1	1140.1	0.95	1.03	1.15
1150.1	1180.1	0.75	0.69	0.71
1180.1	1210.1	0.75	0.61	0.56
1220.1	1250.1	0.73	0.58	0.48
1250.1	1280.1	0.73	0.54	0.43
1290.1	1320.1	0.60	0.43	0.31
1320.1	1350.1	0.58	0.40	0.29
1360.1	1390.1	0.51	0.33	0.25
1390.1	1420.1	0.39	0.26	0.19

REV. X2

ZLW-2

101011

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZLW-2

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
490.0	10.1	6.23	10.0	20.1	6.07	990.0	10.1	7.66
480.2	19.9	6.19	70.0	80.1	5.49	970.0	30.1	7.72
470.4	29.7	6.15	130.0	140.1	5.73	950.0	50.1	7.78
460.6	39.5	6.07	190.0	200.1	5.83	930.0	70.1	7.90
450.8	49.3	6.12	250.0	260.1	5.93	910.0	90.1	7.85
441.0	59.1	6.07	310.0	320.1	5.93	890.0	110.1	7.94
431.2	68.9	6.04	350.0	360.1	5.91	870.0	130.1	7.89
421.4	78.7	6.04	410.0	420.1	5.94	850.0	150.1	7.85
411.6	88.5	5.91	450.0	460.1	6.08	830.0	170.1	7.87
401.8	98.3	5.96	510.0	520.1	5.61	810.0	190.1	7.82
392.0	108.1	5.91	550.0	560.1	5.84	790.0	210.1	7.95
382.2	117.9	5.96	610.0	620.1	6.04	770.0	230.1	7.87
372.4	127.7	5.91	650.0	660.1	5.84	750.0	250.1	7.80
362.7	137.4	5.89	710.0	720.1	5.74	730.0	270.1	7.83
352.9	147.2	5.92	750.0	760.1	5.56	710.0	290.1	7.76
343.1	157.0	5.91	810.0	820.1	5.46	690.0	310.1	7.77
333.3	166.8	5.95	850.0	860.1	5.46	670.0	330.1	7.68
323.5	176.6	5.91	910.0	920.1	5.65	650.0	350.1	7.65
313.7	186.4	5.93	950.0	960.1	5.53	630.0	370.1	7.64
303.9	196.2	5.95	1010.0	1020.1	5.46	610.0	390.1	7.59
284.3	215.8	6.00	1050.0	1060.1	5.47	570.0	430.1	7.40
274.5	225.6	5.96	1110.0	1120.1	5.63	550.0	450.1	7.35
254.9	245.2	5.99	1150.0	1160.1	5.64	510.0	490.1	7.33
245.1	255.0	5.92	1210.0	1220.1	5.92	490.0	510.1	7.25
225.5	274.6	5.87	1250.0	1260.1	5.90	450.0	550.1	7.22
215.7	284.4	5.93	1310.0	1320.1	6.09	430.0	570.1	7.19
196.1	304.0	6.06	1350.0	1360.1	6.24	390.0	610.1	7.26
186.3	313.8	6.09	1410.0	1420.1	6.81	370.0	630.1	7.30
166.7	333.4	6.09	1450.0	1460.1	7.53	330.0	670.1	7.17
156.9	343.2	5.99	1510.0	1520.1	7.96	310.0	690.1	7.11
137.3	362.8	6.14	1550.0	1560.1	8.58	270.0	730.1	7.23
127.6	372.5	6.13	1610.0	1620.1	9.22	250.0	750.1	7.21
108.0	392.1	6.10	1650.0	1660.1	9.48	210.0	790.1	7.02
98.2	401.9	6.22	1710.0	1720.1	9.43	190.0	810.1	6.90
78.6	421.5	6.21	1750.0	1760.1	9.52	150.0	850.1	7.02
68.8	431.3	6.19	1810.0	1820.1	9.38	130.0	870.1	7.09
49.2	450.9	6.25	1850.0	1860.1	9.57	90.0	910.1	7.24
39.4	460.7	6.25	1910.0	1920.1	10.00	70.0	930.1	7.39
19.8	480.3	6.29	1950.0	1960.1	10.52	30.0	970.1	7.44
10.0	490.1	6.59	2010.0	2020.1	11.37	10.0	990.1	7.78

REV. X2

ZLW-2

101011

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	62.99	62.75	65.60	54.24	51.90	50.54
80.1	56.17	57.53	58.62	49.08	46.96	45.65
120.1	52.74	53.98	55.32	45.78	43.93	42.81
160.1	50.14	51.59	52.68	43.78	42.11	40.91
200.1	48.36	49.69	50.71	42.97	41.17	39.77
230.1	46.95	48.17	49.06	41.90	40.07	38.65
270.1	45.62	46.82	47.78	40.60	38.95	37.68
300.1	44.68	45.84	46.71	39.11	37.71	36.50
340.1	43.31	44.33	45.20	37.84	36.61	35.60
370.1	42.34	43.41	44.31	36.37	35.54	34.65
410.1	41.69	42.89	43.91	34.74	34.33	33.99
440.1	41.51	42.53	43.31	33.23	32.68	32.26
480.1	40.91	41.78	42.29	32.32	32.11	31.67
510.1	40.22	41.25	41.76	31.57	31.58	31.23
550.1	39.06	40.33	41.27	30.52	30.81	30.84
580.1	38.16	39.39	40.45	29.57	29.67	29.76
620.1	37.45	38.80	40.00	28.76	28.71	28.60
650.1	36.85	38.40	39.80	28.08	28.07	27.87
690.1	36.39	38.24	39.88	27.10	27.10	26.84
720.1	36.23	38.18	39.82	26.49	26.76	26.58
760.1	35.45	37.44	39.15	25.70	26.32	26.35
790.1	34.93	36.99	38.73	24.94	25.79	26.04
830.1	34.42	36.43	38.16	24.12	25.20	25.86
860.1	33.91	35.82	37.49	23.28	24.39	25.32
900.1	33.81	35.65	37.26	22.60	23.60	24.61
930.1	33.30	35.08	36.66	22.29	23.16	24.08
970.1	32.86	34.54	36.11	22.08	22.95	23.79
1000.1	32.68	34.24	35.77	21.96	22.86	23.70
1040.1	32.15	33.59	35.04	21.77	22.76	23.56
1070.1	31.70	33.01	34.38	21.97	23.07	23.87
1110.1	30.91	32.00	33.15	21.92	23.18	23.98
1140.1	30.58	31.53	32.54	22.05	23.49	24.36
1180.1	30.55	31.33	32.09	22.46	24.06	24.99
1210.1	30.54	31.29	31.96	22.30	24.14	25.28
1250.1	30.77	31.64	32.32	22.44	24.59	26.03
1280.1	30.93	31.90	32.66	22.60	24.90	26.53
1320.1	30.73	31.79	32.61	22.53	24.94	26.75
1350.1	30.79	31.91	32.88	22.81	25.21	27.09
1390.1	30.76	31.94	32.97	23.14	25.57	27.52
1420.1	30.74	32.03	33.15	23.47	25.95	27.95

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	55.03	55.33	54.89
50.1	80.1	40.62	41.08	41.35
90.1	120.1	36.10	36.49	36.71
130.1	160.1	34.09	34.58	34.93
170.1	200.1	32.52	33.07	33.42
200.1	230.1	31.82	32.49	32.98
240.1	270.1	30.96	31.59	32.03
270.1	300.1	31.14	31.94	32.56
310.1	340.1	30.76	31.84	32.65
340.1	370.1	30.75	31.75	32.50
380.1	410.1	29.97	30.58	31.11
410.1	440.1	30.02	30.67	31.24
450.1	480.1	30.15	31.11	31.98
480.1	510.1	29.91	30.87	31.72
520.1	550.1	28.16	28.36	28.56
550.1	580.1	26.39	26.28	26.03
590.1	620.1	24.69	24.52	24.32
620.1	650.1	23.61	23.38	23.15
660.1	690.1	22.48	22.21	21.97
690.1	720.1	21.82	21.53	21.23
730.1	760.1	21.26	20.95	20.69
760.1	790.1	20.94	20.56	20.35
800.1	830.1	20.87	20.44	20.23
830.1	860.1	21.26	20.80	20.55
870.1	900.1	21.75	21.26	20.91
900.1	930.1	21.81	21.25	20.86
940.1	970.1	21.65	21.02	20.53
970.1	1000.1	21.35	20.66	20.09
1010.1	1040.1	20.37	19.71	19.08
1040.1	1070.1	19.58	18.90	18.34
1080.1	1110.1	18.35	17.82	17.28
1110.1	1140.1	17.35	16.87	16.36
1150.1	1180.1	16.07	15.49	15.03
1180.1	1210.1	15.09	14.52	14.04
1220.1	1250.1	13.95	13.30	12.89
1250.1	1280.1	13.15	12.51	12.08
1290.1	1320.1	12.11	11.57	11.18
1320.1	1350.1	11.39	10.87	10.48
1360.1	1390.1	10.61	10.11	9.72
1390.1	1420.1	10.14	9.68	9.38

Frequency Mixer

ZLW-2

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)				IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)			
		@LO (dBm)				@LO (dBm)					@LO (dBm)			
		+4	+7	+10		+4	+7	+10	+4		+7	+10		
10.1	40.1	1.05	1.33	1.30	40.1	1.94	2.97	4.46	10.1	2.17	1.88	1.66		
50.1	80.1	1.01	1.09	1.16	80.1	1.80	2.60	3.66	40.1	2.26	1.95	1.74		
90.1	120.1	1.03	1.10	1.17	120.1	1.75	2.50	3.48	60.1	2.23	1.93	1.72		
130.1	160.1	1.05	1.13	1.19	160.1	1.82	2.62	3.65	90.1	2.20	1.91	1.70		
170.1	200.1	1.07	1.14	1.19	200.1	1.85	2.67	3.72	110.1	2.18	1.88	1.68		
200.1	230.1	1.07	1.14	1.19	230.1	1.80	2.56	3.54	140.1	2.28	1.98	1.77		
240.1	270.1	1.10	1.16	1.21	270.1	1.77	2.48	3.38	160.1	2.23	1.93	1.73		
270.1	300.1	1.10	1.17	1.22	300.1	1.84	2.60	3.56	190.1	2.22	1.92	1.72		
310.1	340.1	1.12	1.19	1.24	340.1	1.88	2.66	3.63	210.1	2.23	1.94	1.73		
340.1	370.1	1.12	1.18	1.23	370.1	1.81	2.50	3.37	240.1	2.28	1.98	1.78		
380.1	410.1	1.11	1.17	1.22	410.1	1.78	2.44	3.24	260.1	2.27	1.97	1.77		
410.1	440.1	1.15	1.21	1.26	440.1	1.94	2.71	3.64	290.1	2.25	1.95	1.74		
450.1	480.1	1.16	1.22	1.27	480.1	1.89	2.58	3.42	310.1	2.31	2.00	1.78		
480.1	510.1	1.16	1.22	1.27	510.1	1.89	2.58	3.45	340.1	2.32	2.01	1.79		
520.1	550.1	1.17	1.24	1.29	550.1	1.89	2.55	3.37	360.1	2.37	2.06	1.83		
550.1	580.1	1.16	1.22	1.27	580.1	1.90	2.56	3.37	390.1	2.31	2.00	1.78		
590.1	620.1	1.14	1.20	1.24	620.1	1.94	2.59	3.41	410.1	2.41	2.10	1.87		
620.1	650.1	1.11	1.16	1.20	650.1	1.93	2.56	3.33	440.1	2.40	2.09	1.86		
660.1	690.1	1.09	1.12	1.16	690.1	1.96	2.59	3.36	460.1	2.43	2.13	1.90		
690.1	720.1	1.10	1.13	1.16	720.1	1.98	2.60	3.35	490.1	2.38	2.09	1.86		
730.1	760.1	1.16	1.17	1.19	760.1	1.99	2.57	3.30	510.1	2.47	2.18	1.95		
760.1	790.1	1.21	1.21	1.23	790.1	2.02	2.61	3.34	540.1	2.42	2.14	1.92		
800.1	830.1	1.31	1.31	1.32	830.1	2.06	2.63	3.34	560.1	2.42	2.15	1.94		
830.1	860.1	1.41	1.40	1.41	860.1	2.07	2.65	3.34	590.1	2.36	2.10	1.89		
870.1	900.1	1.53	1.51	1.51	900.1	2.12	2.70	3.39	610.1	2.39	2.14	1.94		
900.1	930.1	1.66	1.62	1.62	930.1	2.14	2.72	3.40	640.1	2.32	2.07	1.88		
940.1	970.1	1.83	1.78	1.76	970.1	2.16	2.73	3.42	660.1	2.29	2.06	1.87		
970.1	1000.1	1.94	1.88	1.83	1000.1	2.17	2.74	3.42	690.1	2.24	2.02	1.84		
1010.1	1040.1	2.14	2.06	2.00	1040.1	2.20	2.78	3.45	710.1	2.20	1.99	1.82		
1040.1	1070.1	2.27	2.19	2.11	1070.1	2.22	2.78	3.45	740.1	2.14	1.94	1.78		
1080.1	1110.1	2.44	2.36	2.27	1110.1	2.23	2.79	3.46	760.1	2.07	1.88	1.72		
1110.1	1140.1	2.65	2.57	2.49	1140.1	2.27	2.82	3.50	790.1	2.03	1.84	1.69		
1150.1	1180.1	2.75	2.71	2.65	1180.1	2.29	2.83	3.49	810.1	1.95	1.77	1.63		
1180.1	1210.1	2.85	2.82	2.79	1210.1	2.30	2.84	3.51	840.1	1.92	1.74	1.60		
1220.1	1250.1	2.94	2.92	2.89	1250.1	2.36	2.90	3.58	860.1	1.81	1.63	1.51		
1250.1	1280.1	2.96	2.94	2.92	1280.1	2.36	2.89	3.55	890.1	1.78	1.61	1.48		
1290.1	1320.1	3.07	3.05	3.03	1320.1	2.42	2.95	3.62	910.1	1.67	1.51	1.39		
1320.1	1350.1	3.14	3.11	3.09	1350.1	2.49	3.01	3.69	940.1	1.65	1.49	1.38		
1360.1	1390.1	3.18	3.15	3.12	1390.1	2.57	3.06	3.72	960.1	1.54	1.38	1.27		
1390.1	1420.1	3.30	3.27	3.24	1420.1	2.66	3.15	3.81	990.1	1.55	1.39	1.29		

REV. X2

ZLW-2

101011

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	23	11	31	19	39	17	43	36	50
1	-	23	+0	33	10	34	26	43	52	52	52	51
2	79	59	46	60	46	56	45	65	67	69	54	>70
3	>90	64	63	68	66	68	59	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; -14.00 dBm.

LO IN: 530.1 MHz; +7.00 dBm

IF OUT: 30 MHz; -20.42 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	31	24	41	30	51	30	57	51	65
1	-	24	+0	32	11	35	27	47	46	58	57	56
2	60	63	38	52	37	54	41	64	>80	65	47	70
3	>90	45	40	54	46	54	40	59	54	58	60	70
4	>90	73	66	64	55	66	53	60	53	68	74	77
5	>90	73	67	74	55	66	57	64	57	65	77	76
6	>90	>80	>80	>80	74	78	71	74	68	78	76	>80
7	>90	>80	>80	>80	78	>80	75	>80	77	>80	73	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	77	80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; -4.00 dBm.

LO IN: 530.1 MHz; +7.00 dBm

IF OUT: 30 MHz; -10.45 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

ZLW-2

101011

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

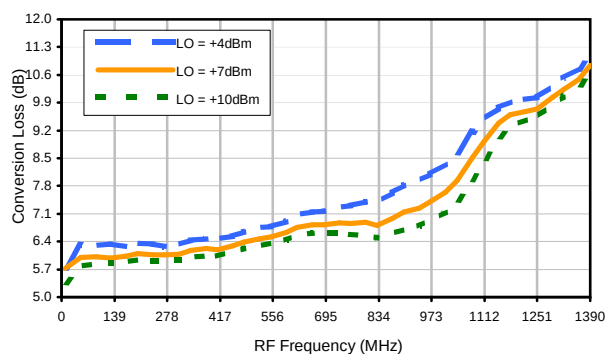


Conversion Loss vs. IF @ RF=500.1MHz

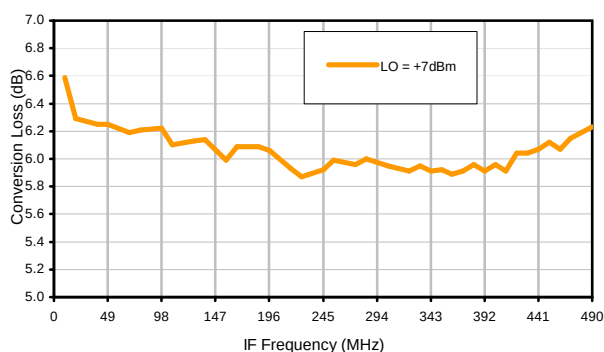


Conversion Loss vs. IF @ RF=10.1MHz

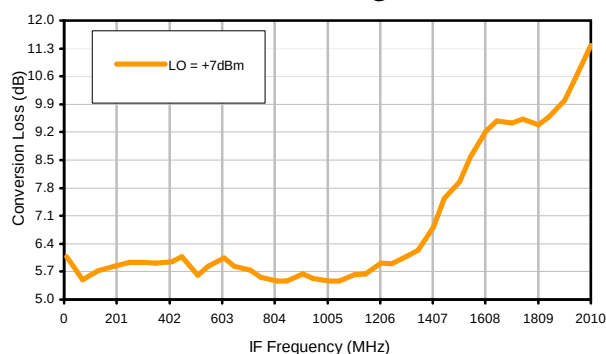


Conversion Loss vs. IF @ RF=1000.1MHz

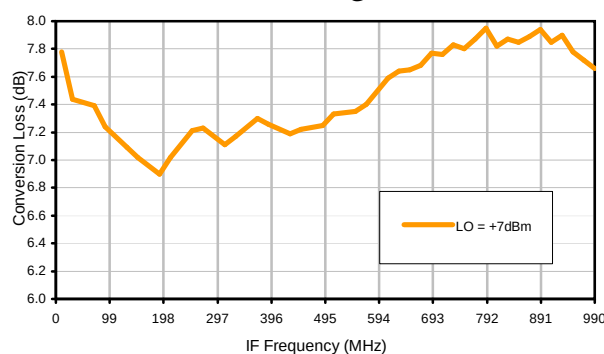

IP3 Input

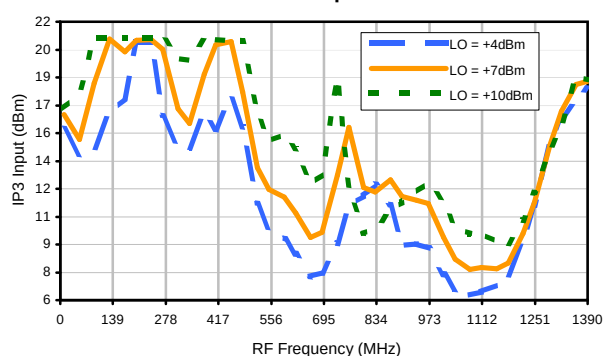


Compression @ RF IN=+1dBm

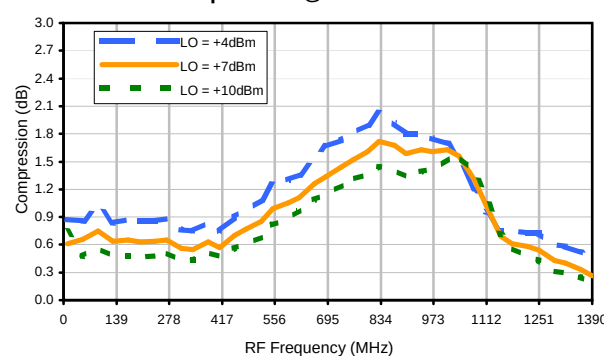


Typical Performance Curves


LO-RF Isolation

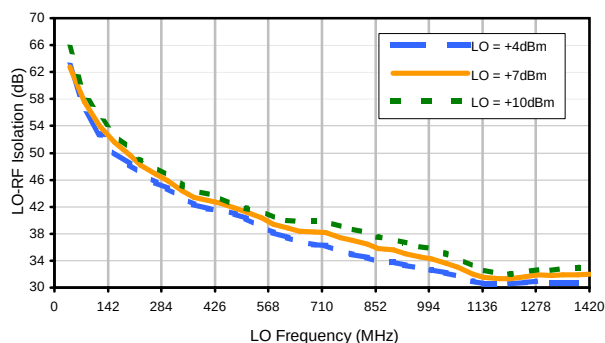


LO-IF Isolation

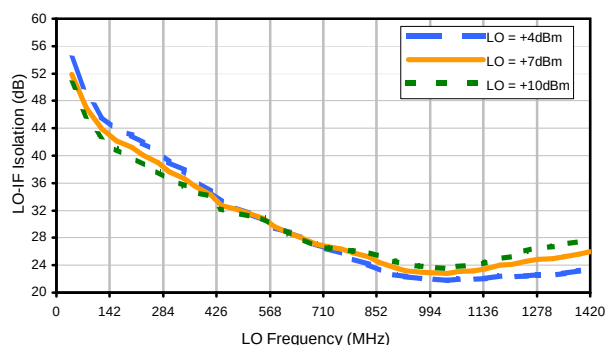


RF-IF Isolation

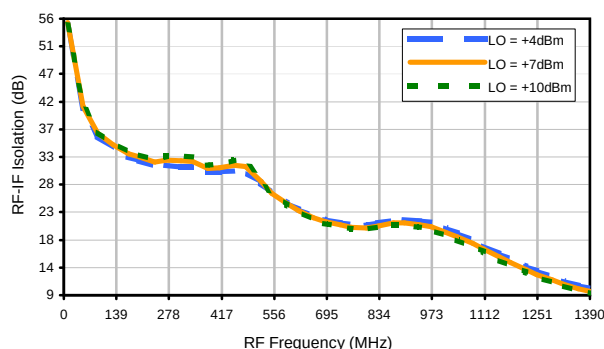


RF VSWR

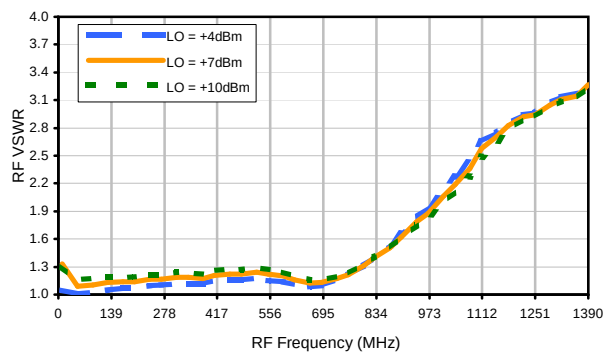

LO VSWR

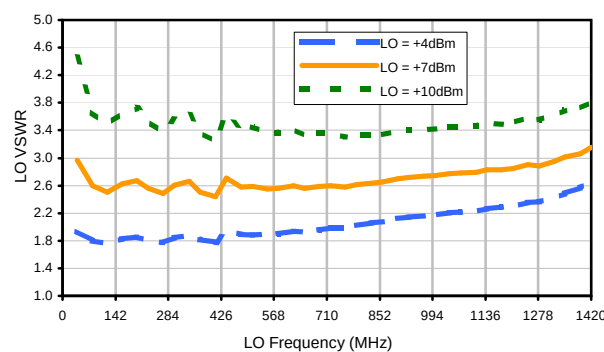

IF VSWR

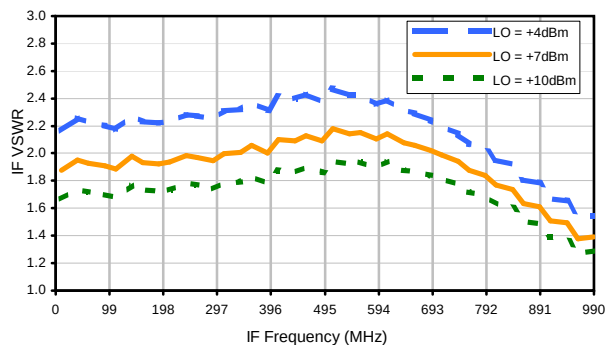

REV. X2

ZLW-2

101011

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	23	11	31	19	39	17	43	36	50
1	-	23	+0	33	10	34	26	43	52	52	52	51
2	79	59	46	60	46	56	45	65	67	69	54	>70
3	>90	64	63	68	66	68	59	>70	>70	>70	>70	>70
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
10	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -14.00 dBm.
LO IN: 530.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.42 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	31	24	41	30	51	30	57	51	65
1	-	24	+0	32	11	35	27	47	46	58	57	56
2	60	63	38	52	37	54	41	64	>80	65	47	70
3	>90	45	40	54	46	54	40	59	54	58	60	70
4	>90	73	66	64	55	66	53	60	53	68	74	77
5	>90	73	67	74	55	66	57	64	57	65	77	76
6	>90	>80	>80	>80	74	78	71	74	68	78	76	>80
7	>90	>80	>80	>80	78	>80	75	>80	77	>80	73	>80
8	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	77	80
9	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>90	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -4.00 dBm.
LO IN: 530.1 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.45 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZLW-2
101011
Page 3 of 3





Outline Dimensions

M21

M22

M23

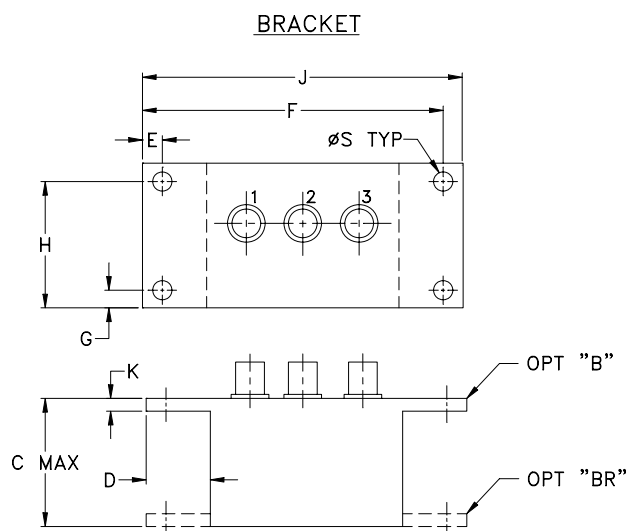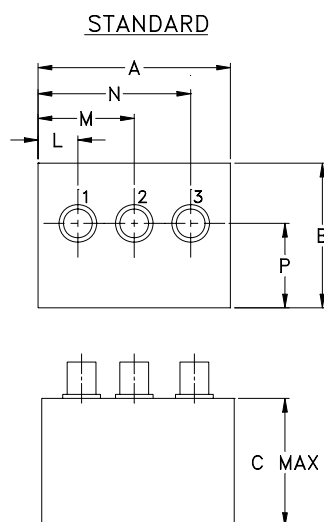

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
M21	1.50 (38.10)	1.13 (28.70)	1.00 (25.40)	.50 (12.70)	.155 (3.94)	2.345 (59.56)	.138 (3.51)	.987 (25.07)	2.50 (63.50)	.10 (2.54)	.31 (7.87)	.75 (19.05)	1.19 (30.23)
M22	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.40 (10.16)	1.15 (29.21)	1.86 (47.24)
M23	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)		.150 (3.81)	3.100 (78.74)		1.238 (31.45)	3.25 (82.55)		.63 (16.00)	1.06 (26.92)	1.63 (41.40)

CASE#	P	Q	R	S	WT. GRAMS
M21	.66 (16.76)	--	--	.150 (3.81)	40.0
M22	.64 (16.26)	--	--		74.0
M23	.69 (17.53)	--	--		70.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
 - For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
 - For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.

Due to transition from non-RoHS to RoHS, models will be supplied with either case style finish until the non-RoHS case inventory is depleted.
- Mounting bracket available on request. For bracket mounted on connector end add suffix B to part number and add \$5.00 to unit cost. For bracket mounted on the rear, add suffix BR to part number and add \$1.50 to unit cost.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I