

Power Splitter/Combiner

ZN2PD-1900W+

2 Way-0° 50Ω 1500 to 2000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.125W max.
DC Current	1.0 A (500mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUMPORT	S
PORT 1	1
PORT 2	2

Outline Drawing

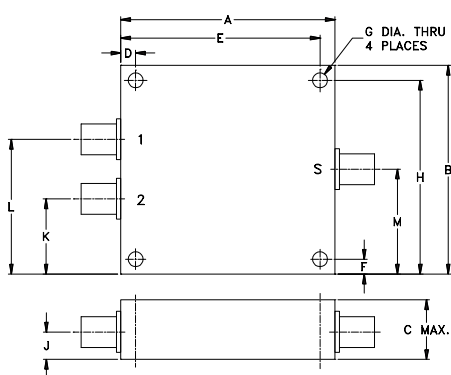

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.80	1.75	.66	.125	1.675	.125	.125
45.72	44.45	16.76	3.18	42.55	3.18	3.18

H	J	K	L	M	wt
1.625	.31	.63	1.13	.88	grams
41.28	7.87	16.00	28.70	22.35	65.2

Features

- low insertion loss, 0.2 dB typ.
- good isolation, 24 dB typ.
- up to 10W power input as a splitter
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

Applications

- PCS/DCS
- GPS
- communications systems
- instrumentations




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
							S		OUT	
	f_L - f_U	Typ.	Min.	Typ.	Max.	Max.	Max.	Typ.	Max.	Typ.
1500-2000	24	15	0.2	0.5	3	0.3	1.20	1.50	1.04	1.20


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1500.00	3.04	3.04	0.00	22.90	0.09	1.13	1.12	1.12
1525.00	3.08	3.09	0.00	23.96	0.16	1.11	1.12	1.12
1550.00	3.15	3.14	0.01	25.18	0.13	1.09	1.12	1.12
1575.00	3.09	3.09	0.00	26.64	0.09	1.08	1.12	1.12
1612.50	3.06	3.06	0.00	29.24	0.16	1.05	1.11	1.12
1650.00	3.09	3.09	0.00	32.93	0.11	1.03	1.11	1.12
1687.50	3.05	3.05	0.01	38.23	0.18	1.00	1.11	1.12
1725.00	3.07	3.08	0.01	39.45	0.12	1.02	1.11	1.12
1750.00	3.06	3.07	0.01	35.77	0.13	1.04	1.11	1.12
1775.00	3.08	3.09	0.00	32.58	0.18	1.06	1.11	1.12
1825.00	3.05	3.06	0.01	28.01	0.11	1.09	1.12	1.13
1875.00	3.09	3.09	0.00	25.05	0.22	1.13	1.12	1.13
1925.00	3.07	3.07	0.00	22.78	0.23	1.17	1.13	1.14
1975.00	3.10	3.12	0.02	21.05	0.23	1.20	1.15	1.16
2000.00	3.10	3.12	0.02	20.25	0.19	1.23	1.16	1.16

1. Total Loss = Insertion Loss + 3dB splitter loss.

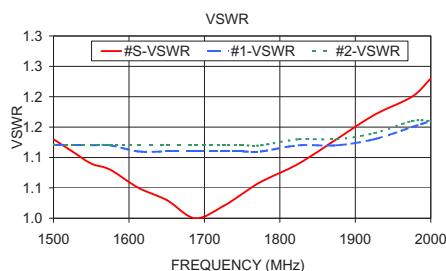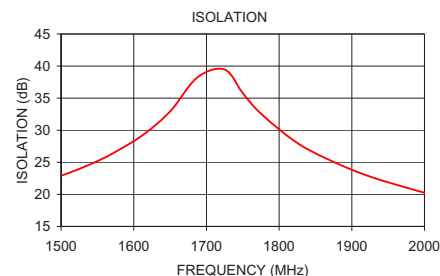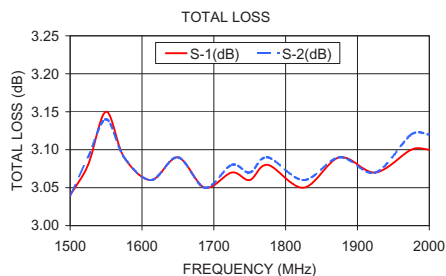

electrical schematic

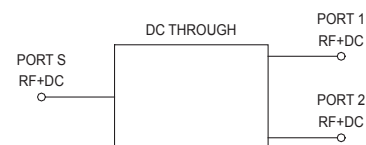

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



2 Way-0° Power Splitter/Combiner

ZN2PD-1900W+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB)	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
1500.0	3.04	3.04	0.00	22.90	0.09	1500.0	1.13	1.12	1.12
1512.5	3.04	3.05	0.01	23.41	0.14	1512.5	1.12	1.12	1.12
1525.0	3.08	3.09	0.00	23.96	0.16	1525.0	1.11	1.12	1.12
1537.5	3.12	3.12	0.00	24.56	0.13	1537.5	1.10	1.12	1.12
1550.0	3.15	3.14	0.01	25.18	0.13	1550.0	1.09	1.12	1.12
1562.5	3.14	3.15	0.00	25.90	0.11	1562.5	1.09	1.12	1.12
1575.0	3.09	3.09	0.00	26.64	0.09	1575.0	1.08	1.12	1.12
1587.5	3.05	3.05	0.00	27.41	0.16	1587.5	1.07	1.11	1.12
1600.0	3.03	3.04	0.01	28.27	0.18	1600.0	1.06	1.11	1.12
1612.5	3.06	3.06	0.00	29.24	0.16	1612.5	1.05	1.11	1.12
1625.0	3.08	3.08	0.01	30.32	0.20	1625.0	1.04	1.11	1.12
1637.5	3.10	3.10	0.00	31.54	0.16	1637.5	1.03	1.11	1.12
1650.0	3.09	3.09	0.00	32.93	0.11	1650.0	1.03	1.11	1.12
1662.5	3.09	3.09	0.01	34.52	0.15	1662.5	1.02	1.11	1.12
1675.0	3.08	3.08	0.00	36.32	0.16	1675.0	1.01	1.11	1.12
1687.5	3.05	3.05	0.01	38.23	0.18	1687.5	1.00	1.11	1.12
1700.0	3.05	3.04	0.01	39.83	0.17	1700.0	1.01	1.11	1.12
1712.5	3.08	3.08	0.00	40.49	0.15	1712.5	1.02	1.11	1.12
1725.0	3.07	3.08	0.01	39.45	0.12	1725.0	1.02	1.11	1.12
1737.5	3.06	3.06	0.00	37.68	0.15	1737.5	1.03	1.11	1.12
1750.0	3.06	3.07	0.01	35.77	0.13	1750.0	1.04	1.11	1.12
1762.5	3.08	3.09	0.01	34.08	0.23	1762.5	1.05	1.11	1.12
1775.0	3.08	3.09	0.00	32.58	0.18	1775.0	1.06	1.11	1.12
1787.5	3.07	3.07	0.00	31.21	0.21	1787.5	1.07	1.11	1.12
1800.0	3.06	3.06	0.00	30.04	0.18	1800.0	1.08	1.11	1.12
1812.5	3.05	3.06	0.01	28.97	0.13	1812.5	1.08	1.12	1.12
1825.0	3.05	3.06	0.01	28.01	0.11	1825.0	1.09	1.12	1.13
1837.5	3.06	3.06	0.01	27.17	0.20	1837.5	1.10	1.12	1.13
1850.0	3.07	3.07	0.01	26.41	0.18	1850.0	1.11	1.12	1.13
1862.5	3.07	3.08	0.00	25.71	0.18	1862.5	1.12	1.12	1.13
1875.0	3.09	3.09	0.00	25.05	0.22	1875.0	1.13	1.12	1.13
1887.5	3.09	3.09	0.01	24.45	0.20	1887.5	1.14	1.13	1.13
1900.0	3.07	3.08	0.00	23.83	0.23	1900.0	1.15	1.13	1.14
1912.5	3.06	3.07	0.01	23.29	0.22	1912.5	1.16	1.13	1.14
1925.0	3.07	3.07	0.00	22.78	0.23	1925.0	1.17	1.13	1.14
1937.5	3.06	3.08	0.01	22.31	0.23	1937.5	1.18	1.14	1.14
1950.0	3.06	3.07	0.01	21.87	0.22	1950.0	1.19	1.14	1.15
1962.5	3.07	3.07	0.01	21.43	0.18	1962.5	1.19	1.14	1.15
1975.0	3.10	3.12	0.02	21.05	0.23	1975.0	1.20	1.15	1.16
1987.5	3.13	3.14	0.01	20.65	0.16	1987.5	1.22	1.15	1.16
2000.0	3.10	3.12	0.02	20.25	0.19	2000.0	1.23	1.16	1.16

¹ Total Loss = Insertion Loss + 3dB Splitter Loss

REV. X2

ZN2PD-1900W+

100721

Page 1 of 1



IF/Rf MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



2 Way-0° Power Splitter/Combiner

ZN2PD-1900W+

Typical Performance Curves

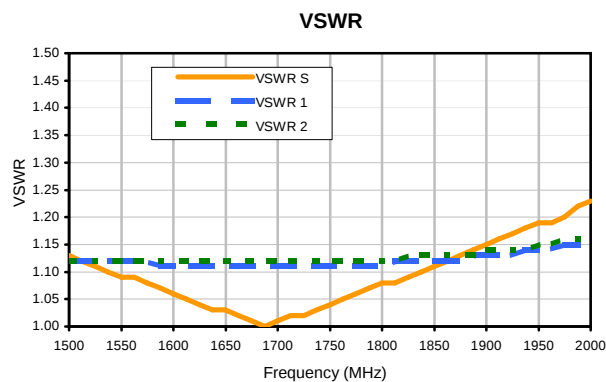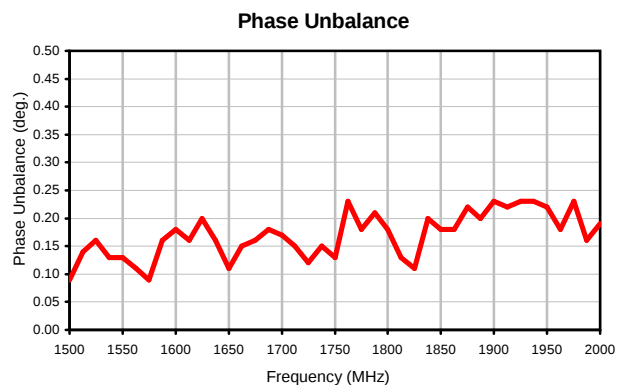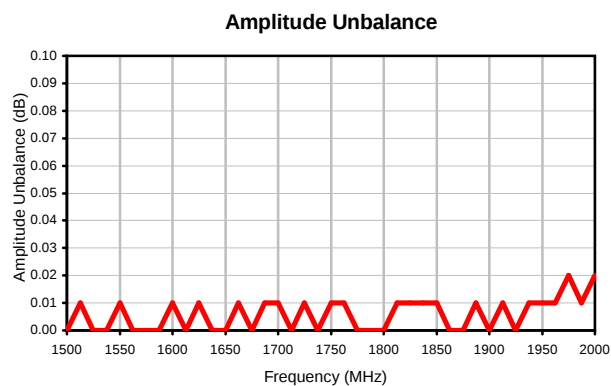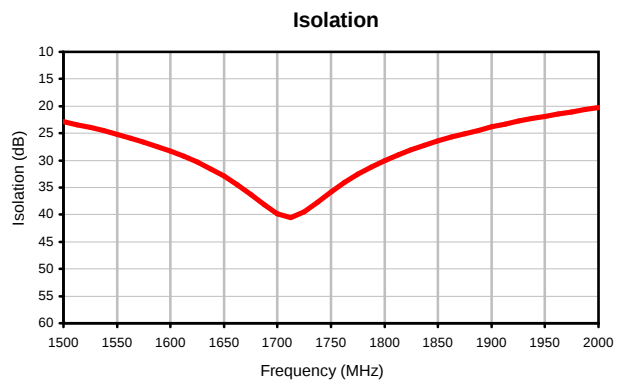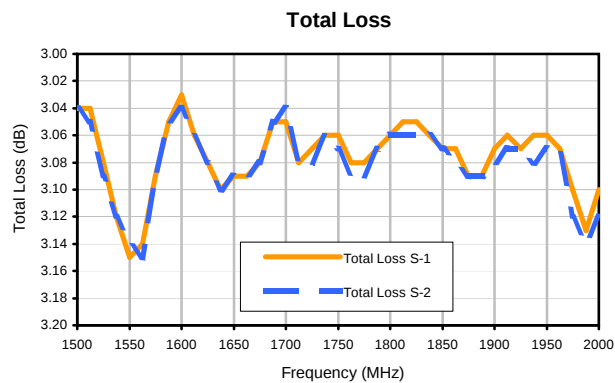


REV. X2
ZN2PD-1900W+
100721
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Outline Dimensions

VVV180

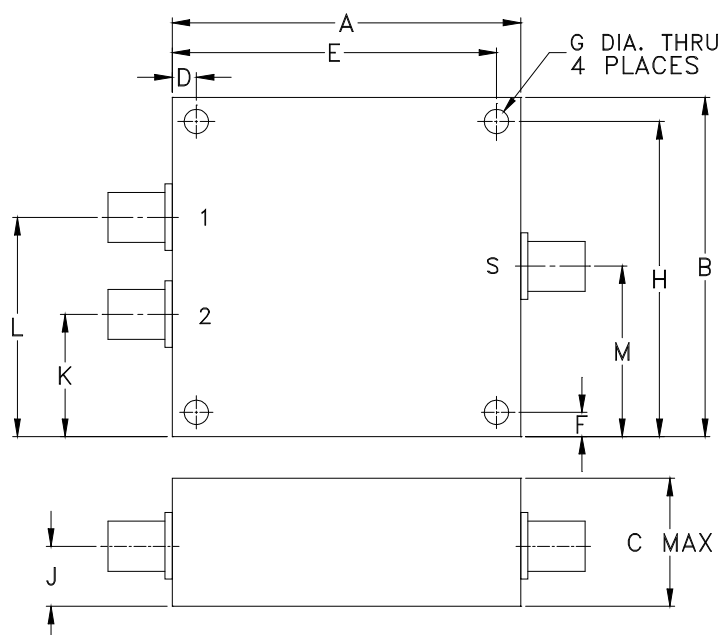

CASE#	A	B	C	D	E	F	G	H	J	K	L
VVV180	1.80 (45.72)	1.75 (44.45)	.66 (16.76)	.125 (3.18)	1.675 (42.55)	.125 (3.18)	.125 (3.18)	1.625 (41.28)	.31 (7.87)	.63 (16.00)	1.13 (28.70)

CASE#	M	WT.GRAMS
VVV180	.88 (22.35)	65.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I