

High Power, DC Pass

Power Splitter/Combiner ZN2PD2-63A-S+

2 Way-0° 50Ω 25W 350 to 6000 MHz

The Big Deal

- Wideband, 350 to 6000 MHz
- High power, up to 25W as a splitter
- Low insertion loss, 0.9 dB
- Low unbalance, 0.1 dB, 2°
- High isolation, 20 dB



CASE STYLE: F1908-3

Product Overview

Mini-Circuits' ZN2PD2-63A-S+ is a 2-way 0° high-power splitter/combiner providing up to 25W power handling as a splitter (1.0W as a combiner) and low insertion loss across the entire 350 to 6000 MHz frequency range. Its outstanding combination of high power handling and low loss minimize power dissipation and provide excellent signal power transmission from input to output. The ZN2PD2-63A-S+ comes with N-Type and SMA version in a rugged aluminum alloy case measuring 4.0 x 3.25 x 0.875" with N-type or SMA connectors.

Key Features

Feature	Advantages
Wideband, 350 to 6000 MHz	This model supports bandwidth requirements for a wide variety of applications.
High power handling: • 25W to 3600 MHz • 15W to 6000 MHz	The ZN2PD2-63A-S+ is suitable for systems with a wide range of power requirements.
Low insertion loss, 0.9 dB	The combination of 25W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
Low unbalance: • 0.1 dB amplitude unbalance • 2° phase unbalance	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
High isolation, 20 dB	Minimizes interference between ports.
DC Passing, 600mA (300mA each port)	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



High Power, DC Pass

Power Splitter/Combiner

ZN2PD2-63A-S+

2 Way-0° 50Ω 25W 350 to 6000 MHz

Maximum Ratings

Operating Temperature(@ <25W)	-55°C to 60°C
Operating Temperature(@ <10W)	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	600 mA (300mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUMPORT	S
PORT 1	1
PORT 2	2

Features

- wideband, 350-6000 MHz
- excellent amplitude unbalance, 0.1 dB typ.
- good isolation, 20 dB typ.
- excellent phase unbalance, 2 deg. typ.
- up to 25W power input as splitter

Applications

- UHF TV
- cellular/ISM/SMG/GSM
- satellite distribution
- GPS/L BAND (MARSAT)
- PCS/DCS/UMTS
- MMDC
- SATCOM




CASE STYLE: F1908-3

Connectors	Model
SMA	ZN2PD2-63A-S+
N-Type	ZN2PD2-63A-N+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

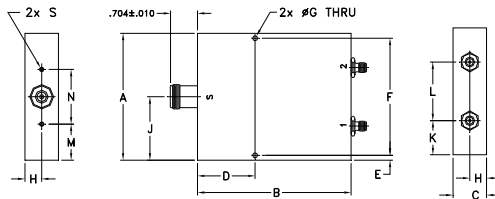

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
3.25	4.00	.88	1.50	1.13	3.00	.125	.38
82.55	101.60	22.35	38.10	28.70	76.20	3.18	9.65
J	K	L	M	N	S		wt
1.63	.88	1.500	.93	1.400	#2-56,		grams
41.40	22.35	38.10	23.62	35.56	.156 DP		300.0

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		350		6000	MHz
Insertion Loss (above theoretical 3.0 dB)	350-500	—	0.3	0.6	dB
	500-2700	—	0.5	0.9	
	2700-5200	—	0.8	1.1	
	5200-6000	—	0.9	1.4	
Isolation	350-500	16	20	—	dB
	500-2700	18	22	—	
	2700-5200	17	20	—	
	5200-6000	15	18	—	
Phase Unbalance	350-2700	—	0.5	2	Degree
	2700-3600	—	1.0	3	
	3600-6000	—	1.0	4	
Amplitude Unbalance	350-2700	—	0.15	0.3	dB
	2700-6000	—	0.2	0.5	
VSWR (Port S)	350-6000	—	1.4	—	:1
VSWR (Port 1-2)	350-6000	—	1.3	—	
Power Handling ³	As Splitter ¹	350-3600	—	25	W
	As Combiner ²	3600-6000	—	15	
		350-6000	—	1.0	

1. All outputs must terminate 50 ohm (VSWR 1.5:1 or better)

2. As a combiner of non-coherent signals, max. power per port is 1.0 watt power rating divided by number of ports.

3. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 60°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 10°C/W.

Electrical Schematic

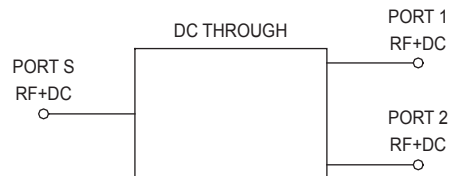

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M171494
ED-17020801
ZN2PD2-63A-S+
WP/CP/AM
190114
Page 2 of 3

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
350	3.30	3.31	0.01	18.30	0.01	1.44	1.16	1.16
500	3.20	3.21	0.01	42.15	0.04	1.15	1.15	1.15
1000	3.34	3.34	0.00	27.92	0.08	1.31	1.24	1.23
1600	3.48	3.49	0.01	23.01	0.09	1.46	1.38	1.36
2000	3.44	3.47	0.03	24.88	0.20	1.26	1.28	1.27
3500	3.57	3.61	0.04	22.27	0.10	1.20	1.27	1.25
4100	3.64	3.61	0.03	21.58	0.20	1.05	1.24	1.24
4600	3.67	3.70	0.04	28.78	0.27	1.20	1.30	1.29
5200	3.76	3.84	0.07	27.84	0.10	1.28	1.34	1.36
5500	3.78	3.77	0.01	19.88	0.04	1.03	1.23	1.21
6000	4.08	4.07	0.01	17.31	0.49	1.46	1.25	1.22

1. Total Loss = Insertion Loss + 3dB splitter loss.

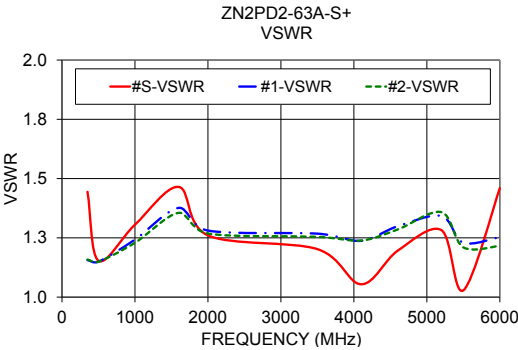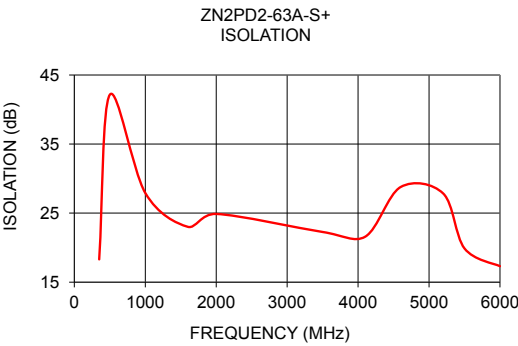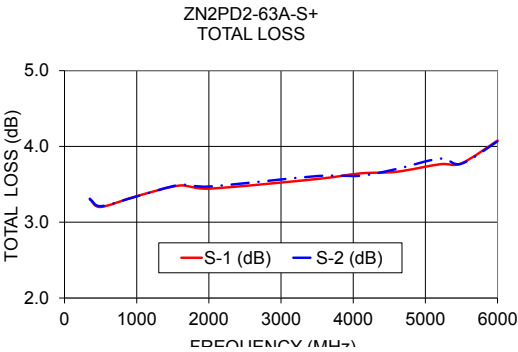

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

2 Way-0° Power Splitter/Combiner

ZN2PD2-63A+

Typical Performance Data

FREQUENCY (MHz)	TOTAL LOSS ¹ (dB)		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (deg.)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
200	3.47	3.48	0.01	10.62	0.02	200	1.75	1.26	1.27
300	3.36	3.37	0.01	15.27	0.01	300	1.55	1.17	1.17
350	3.30	3.31	0.01	18.30	0.01	350	1.44	1.16	1.16
400	3.26	3.27	0.01	22.56	0.00	400	1.34	1.16	1.16
450	3.22	3.23	0.01	30.07	0.02	450	1.24	1.16	1.16
500	3.20	3.21	0.01	42.15	0.04	500	1.15	1.15	1.15
600	3.21	3.22	0.01	23.32	0.04	600	1.06	1.13	1.13
700	3.26	3.26	0.01	19.94	0.08	700	1.18	1.13	1.12
800	3.32	3.32	0.00	19.73	0.09	800	1.30	1.17	1.16
900	3.35	3.35	0.00	21.92	0.11	900	1.34	1.22	1.21
1000	3.34	3.34	0.00	27.92	0.08	1000	1.31	1.24	1.23
1100	3.32	3.31	0.01	35.44	0.08	1100	1.19	1.22	1.21
1200	3.31	3.30	0.01	25.06	0.06	1200	1.06	1.18	1.17
1400	3.42	3.42	0.00	20.23	0.05	1400	1.33	1.25	1.23
1600	3.48	3.49	0.01	23.01	0.09	1600	1.46	1.38	1.36
1800	3.42	3.44	0.02	31.20	0.15	1800	1.28	1.33	1.32
2000	3.44	3.47	0.03	24.88	0.20	2000	1.26	1.28	1.27
2200	3.57	3.59	0.02	24.13	0.18	2200	1.48	1.39	1.39
2400	3.56	3.57	0.01	33.06	0.12	2400	1.41	1.39	1.41
2600	3.48	3.49	0.00	27.19	0.07	2600	1.14	1.23	1.26
2700	3.50	3.51	0.01	24.22	0.04	2700	1.16	1.23	1.23
2800	3.54	3.55	0.02	23.58	0.02	2800	1.26	1.29	1.29
2900	3.55	3.58	0.03	24.15	0.04	2900	1.31	1.36	1.35
3000	3.54	3.58	0.04	24.16	0.08	3000	1.30	1.39	1.40
3100	3.53	3.57	0.04	22.50	0.12	3100	1.24	1.39	1.40
3200	3.53	3.58	0.05	20.60	0.11	3200	1.21	1.37	1.38
3300	3.55	3.60	0.05	19.77	0.10	3300	1.22	1.34	1.34
3400	3.57	3.62	0.05	20.27	0.01	3400	1.23	1.31	1.30
3500	3.57	3.61	0.04	22.27	0.10	3500	1.20	1.27	1.25
3600	3.56	3.59	0.03	25.16	0.20	3600	1.14	1.22	1.21
3700	3.56	3.59	0.03	25.74	0.23	3700	1.09	1.20	1.20
3900	3.61	3.60	0.01	22.10	0.24	3900	1.09	1.23	1.25
4100	3.64	3.61	0.03	21.58	0.20	4100	1.05	1.24	1.24
4300	3.66	3.65	0.02	23.46	0.05	4300	1.02	1.17	1.15
4600	3.67	3.70	0.04	28.78	0.27	4600	1.20	1.30	1.29
4900	3.63	3.72	0.09	21.67	0.18	4900	1.01	1.19	1.19
5200	3.76	3.84	0.07	27.84	0.10	5200	1.28	1.34	1.36
5500	3.78	3.77	0.01	19.88	0.04	5500	1.03	1.23	1.21
5800	3.88	3.83	0.05	20.87	0.31	5800	1.12	1.21	1.15
6000	4.08	4.07	0.01	17.31	0.49	6000	1.46	1.25	1.22
6200	4.08	4.13	0.05	14.25	0.83	6200	1.49	1.39	1.37

¹Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com








IF/RF MICROWAVE COMPONENTS




REV. OR
ZN2PD2-63A+
3/2/2018
Page 1 of 1

Typical Performance Curves

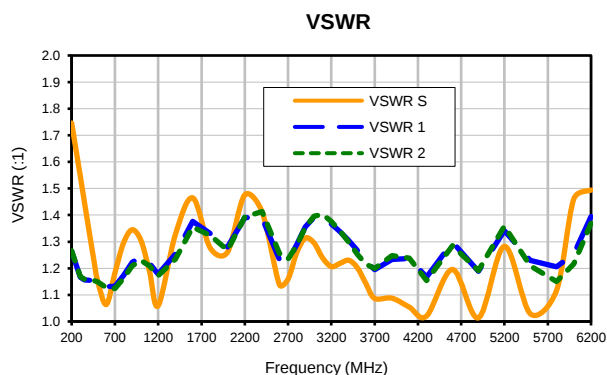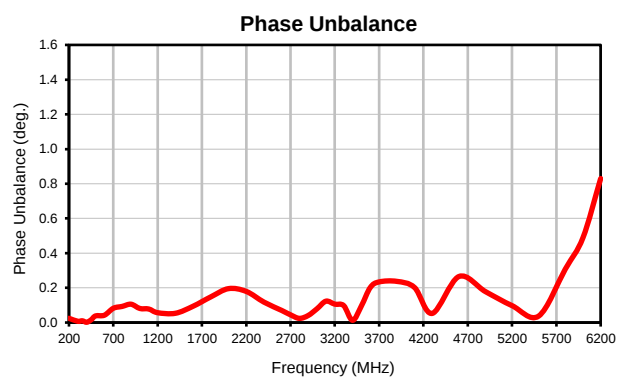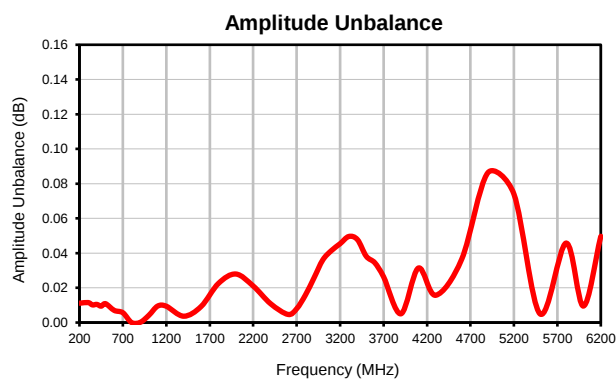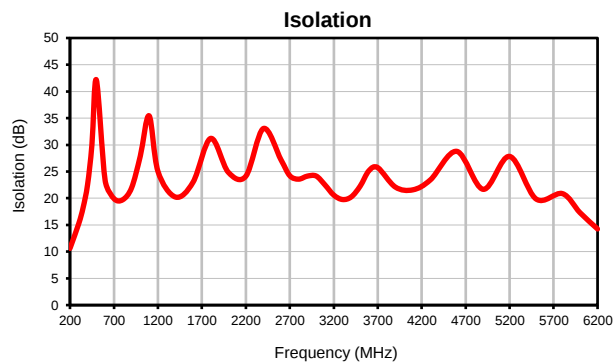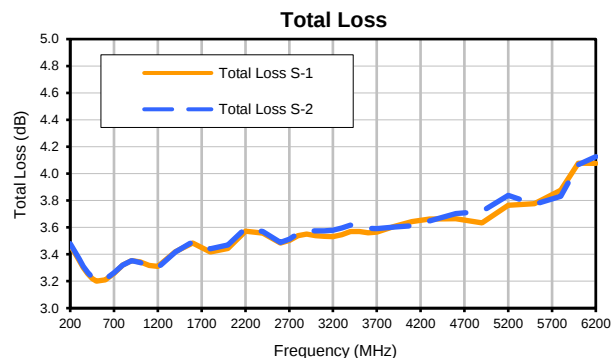

F1908-3

Outline Dimensions

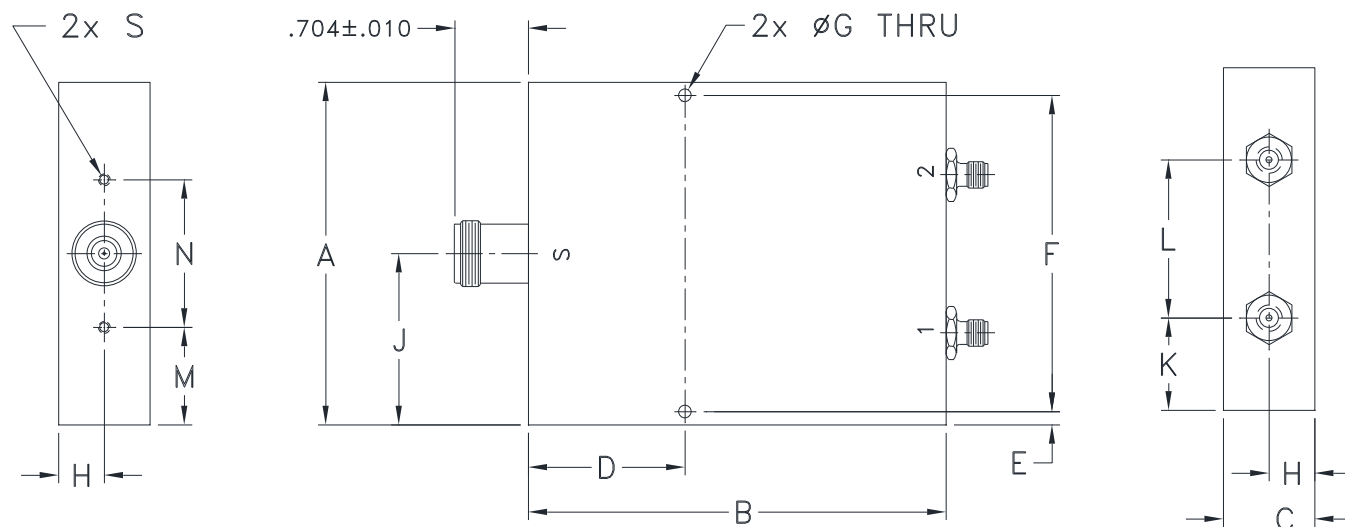

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
F1908-3	3.25 (82.55)	4.00 (101.60)	.88 (22.35)	1.50 (38.10)	.13 (3.18)	3.000 (76.20)	.125 (3.18)	.44 (11.18)	1.63 (41.40)	.88 (22.35)	1.500 (38.10)	.93 (23.62)

CASE #	N	P	Q	R	S	WT. GRAM
F1908-3	1.400 (35.56)	-	-	-	#4-40, .156 DP	300.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified