

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 0.15 to 400 MHz

**ZP-3+
ZP-3**



Generic photo used for illustration purposes only

CASE STYLE: GG60

Connectors	Model
BNC	ZP-3+
SMA	ZP-3-S(+)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	L
RF	R
IF	X

Outline Drawing

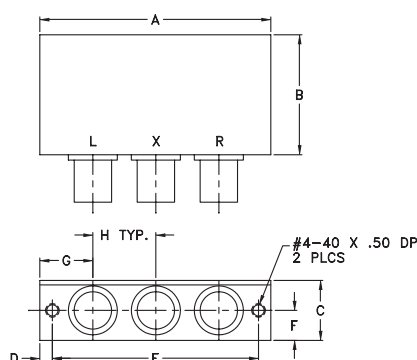

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	wt
2.31	1.20	.60	.125	2.062	.30	.53	.63	grams
58.67	30.48	15.24	3.18	52.37	7.62	13.46	16.00	75.0

Features

- low conversion loss, 4.7 dB typ.
- IF response to DC
- excellent L-R isolation, 46 dB typ., L-I, 47 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- cellular
- instrumentation

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
		Mid-Band m		Total Range Max.		L		M		U		L		M		U	
f _L -f _U	IF	$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.15-400	DC-400	4.7	0.10	7.0	8.0	60	50	46	30	35	25	60	40	47	25	35	20

1 dB COMP: +1 dBm typ.

For phase detection, DC output has positive polarity with in-phase LO and RF signals.

L = low range [f_L to $10 f_L$]
m = mid band [$2 f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
RF	LO						
		LO +7dBm	LO +7dBm		LO +7dBm	LO +7dBm	LO +7dBm
0.15	30.15	5.37	1.57	10.00	68.68	61.84	2.59
0.23	30.23	5.27	1.41	20.00	65.36	56.87	2.60
0.30	30.30	5.21	1.33	30.00	63.22	54.20	2.59
0.50	30.50	5.16	1.25	40.00	61.75	52.09	2.58
1.00	31.00	5.08	1.21	76.00	57.56	47.59	2.54
2.80	32.80	4.91	1.21	94.00	56.48	45.97	2.50
6.40	36.40	4.91	1.21	112.00	54.90	44.70	2.50
10.00	40.00	4.73	1.21	149.00	52.63	42.36	2.57
28.00	58.00	4.71	1.21	168.00	54.13	42.02	2.55
64.00	94.00	4.75	1.17	206.00	49.62	38.81	2.62
100.00	130.00	4.83	1.14	225.00	48.10	38.56	2.66
138.00	168.00	4.85	1.13	244.00	48.03	37.82	2.68
157.00	187.00	4.88	1.10	282.00	53.65	37.79	2.67
195.00	225.00	4.92	1.08	301.00	55.10	38.07	2.76
233.00	263.00	4.97	1.10	320.00	54.03	37.59	2.82
252.00	282.00	5.10	1.12	340.00	52.86	36.62	2.76
271.00	301.00	5.17	1.14	360.00	51.53	35.44	2.69
290.00	320.00	5.15	1.17	390.00	47.44	33.11	2.86
370.00	340.00	5.38	1.10	410.00	45.39	32.24	3.05
400.00	370.00	5.41	1.05	430.00	44.42	32.17	3.06

Electrical Schematic

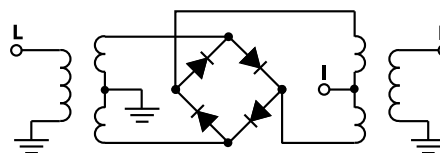

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
ZP-3
DJ/TD/CP/AM
200601
Page 1 of 2

Performance Charts

ZP-3+
ZP-3

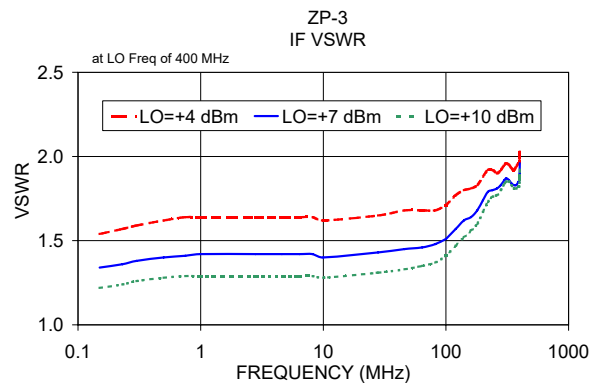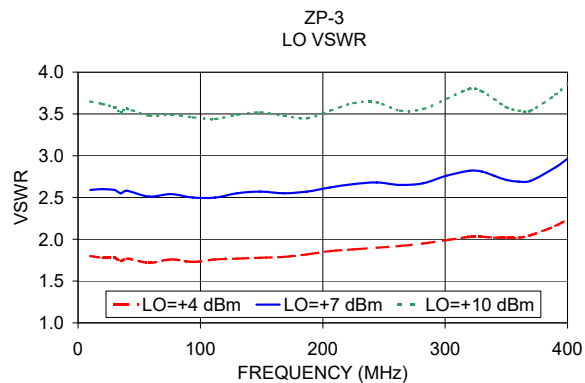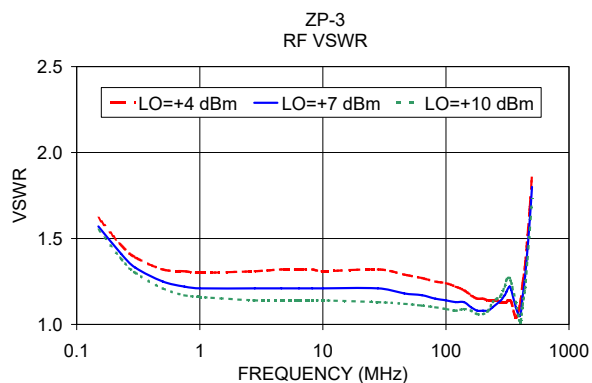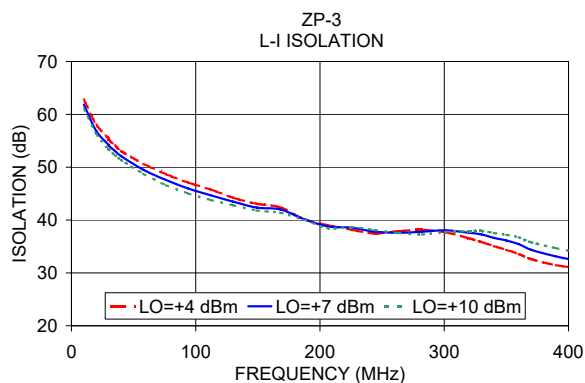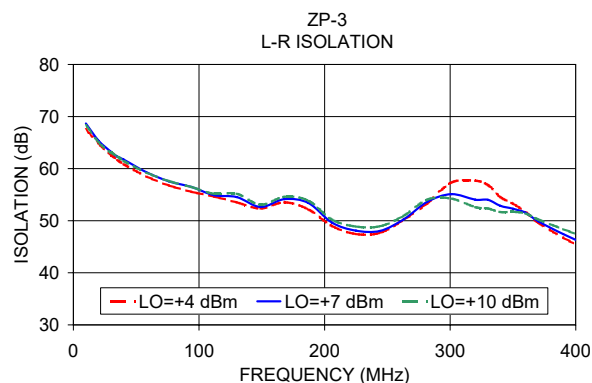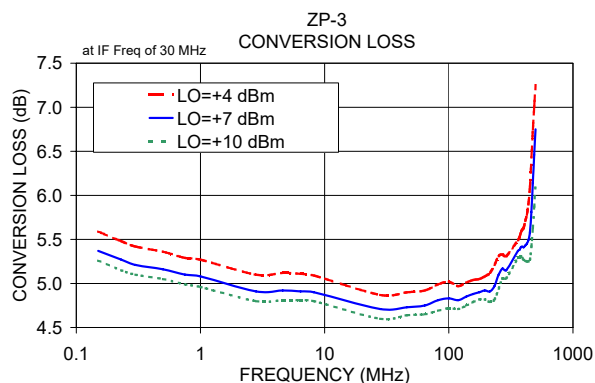

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ZP-3+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+4	+7	+10	+4	+7	+10	+4	+7	+10	+4	+7	+10			
0.15	30.2	5.84	5.60	5.46	10.1	40.1	17.19	21.35	19.03	10.1	40.1	1.15	0.81	0.57
0.2	30.2	5.75	5.52	5.39	27.8	57.8	18.32	18.01	19.22	27.8	57.8	1.07	0.80	0.57
0.3	30.3	6.69	5.47	5.33	45.5	75.5	19.83	18.86	24.60	45.5	75.5	1.22	0.83	0.61
0.5	30.5	5.64	5.41	5.28	63.2	93.2	20.63	23.22	18.46	63.2	93.2	1.05	0.77	0.54
1.0	31.0	5.54	5.31	5.20	80.9	110.9	16.80	26.58	16.94	80.9	110.9	0.97	0.74	0.52
1.5	31.5	5.47	5.25	5.14	98.6	128.6	25.04	16.13	14.33	98.6	128.6	1.00	0.64	0.52
2.0	32.0	5.44	5.22	5.10	116.3	146.3	18.41	17.83	17.27	116.3	146.3	0.96	0.66	0.49
5.0	35.0	5.44	5.19	5.06	133.9	163.9	18.99	15.58	14.06	133.9	163.9	0.94	0.72	0.53
10.0	40.0	5.46	5.21	5.07	151.6	181.6	14.11	13.19	13.45	151.6	181.6	0.96	0.72	0.56
27.8	57.8	5.11	4.78	4.63	169.3	199.3	12.04	10.62	10.62	169.3	199.3	0.83	0.64	0.49
45.5	75.5	5.16	4.84	4.72	187.0	217.0	14.03	12.27	13.06	187.0	217.0	0.89	0.64	0.50
98.6	128.6	5.10	4.84	4.72	204.7	234.7	21.75	26.48	21.67	204.7	234.7	0.92	0.69	0.51
116.3	146.3	5.16	4.92	4.79	222.4	252.4	19.43	19.51	21.84	222.4	252.4	0.94	0.72	0.57
133.9	163.9	5.14	4.93	4.79	240.1	270.1	10.61	10.51	11.18	240.1	270.1	1.08	0.83	0.65
151.6	181.6	5.19	4.95	4.78	257.8	287.8	9.99	9.60	10.16	257.8	287.8	1.25	0.93	0.73
169.3	199.3	5.29	5.04	4.87	275.5	305.5	9.05	9.09	9.47	275.5	305.5	1.43	1.04	0.81
187.0	217.0	5.31	5.04	4.87	293.2	323.2	8.02	8.83	10.18	293.2	323.2	1.63	1.19	0.91
222.4	252.4	5.44	5.16	4.96	310.9	340.9	8.21	9.85	12.08	310.9	340.9	1.78	1.25	0.94
240.1	270.1	5.45	5.22	5.05	328.6	358.6	6.41	10.59	13.64	328.6	358.6	2.01	1.50	1.10
257.8	287.8	5.43	5.24	5.10	346.3	376.3	4.33	8.82	15.99	346.3	376.3	2.00	1.67	1.31
275.5	305.5	5.41	5.21	5.09	363.9	393.9	2.25	5.33	11.08	363.9	393.9	1.99	1.76	1.49
293.2	323.2	5.46	5.19	5.08	381.6	411.6	1.43	3.34	7.25	381.6	411.6	1.90	1.69	1.53
310.9	340.9	5.59	5.31	5.15	399.3	429.3	2.08	3.41	5.95	399.3	429.3	1.68	1.55	1.49
346.3	376.3	6.23	5.62	5.19	417.0	447.0	2.94	3.92	5.87	417.0	447.0	1.40	1.32	1.27
363.9	393.9	6.64	5.98	5.36	434.7	464.7	3.70	4.97	6.58	434.7	464.7	1.17	1.12	1.07
381.6	411.6	6.92	6.28	5.55	452.4	482.4	4.07	5.57	7.07	452.4	482.4	1.10	1.04	1.01
399.3	429.3	7.15	6.50	5.79	470.1	500.1	6.38	8.50	10.40	470.1	500.1	1.07	0.99	0.97
417.0	447.0	7.57	6.99	6.25	487.8	517.8	10.01	12.67	16.66	487.8	517.8	1.14	1.02	0.90
452.4	482.4	8.14	7.44	6.86	505.5	535.5	13.53	16.04	15.00	505.5	535.5	1.20	1.10	0.94
470.1	500.1	8.03	7.40	6.92	523.2	553.2	14.72	13.43	13.07	523.2	553.2	1.34	1.18	0.97
487.8	517.8	7.98	7.42	7.06	540.9	570.9	10.55	13.42	12.55	540.9	570.9	1.49	1.23	1.01
505.5	535.5	8.12	7.55	7.22	558.6	588.6	8.68	12.20	13.85	558.6	588.6	1.51	1.07	0.83
540.9	570.9	7.97	7.45	7.21	576.3	606.3	8.28	11.47	13.65	576.3	606.3	1.39	0.93	0.71
558.6	588.6	7.95	7.52	7.44	593.9	623.9	8.60	10.97	12.11	593.9	623.9	1.38	0.88	0.66
576.3	606.3	8.19	7.87	7.79	611.6	641.6	8.94	11.82	12.88	611.6	641.6	1.33	0.83	0.65
593.9	623.9	8.53	8.17	8.11	629.3	659.3	10.22	12.68	12.12	629.3	659.3	1.30	0.75	0.65
611.6	641.6	8.76	8.45	8.41	647.0	677.0	10.42	10.90	11.99	647.0	677.0	1.13	0.66	0.62
647.0	677.0	9.48	9.19	9.21	664.7	694.7	11.02	10.57	9.90	664.7	694.7	1.05	0.64	0.63
682.4	712.4	10.44	10.16	10.11	682.4	712.4	10.02	9.84	9.42	682.4	712.4	1.19	0.76	0.80
700.1	730.1	10.89	10.62	10.53	700.1	730.1	10.10	11.11	9.05	700.1	730.1	1.32	0.82	0.80

REV. X2

ZP-3+

100818

Page 1 of 5

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZP-3+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=200.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=400.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
190.0	10.1	5.14	10.0	20.1	4.69	390.0	10.1	6.14
185.4	14.7	5.14	19.7	29.8	4.68	380.3	19.8	6.10
180.8	19.3	5.10	29.5	39.6	4.64	370.5	29.6	6.04
176.2	23.9	5.04	39.2	49.3	4.68	360.8	39.3	6.01
171.5	28.6	5.03	49.0	59.1	4.75	351.0	49.1	6.00
166.9	33.2	4.98	58.7	68.8	4.70	341.3	58.8	5.96
162.3	37.8	4.97	68.5	78.6	4.77	331.5	68.6	5.95
157.7	42.4	4.97	78.2	88.3	4.79	321.8	78.3	6.01
153.1	47.0	4.98	87.9	98.0	4.77	312.1	88.0	6.01
148.5	51.6	4.96	97.7	107.8	4.79	302.3	97.8	5.95
143.8	56.3	4.95	107.4	117.5	4.78	292.6	107.5	5.95
139.2	60.9	4.95	117.2	127.3	4.80	282.8	117.3	5.94
134.6	65.5	4.93	126.9	137.0	4.80	273.1	127.0	5.94
130.0	70.1	4.94	136.7	146.8	4.85	263.3	136.8	5.97
125.4	74.7	4.95	146.4	156.5	4.90	253.6	146.5	6.05
120.8	79.3	4.96	156.2	166.3	4.90	243.8	156.3	6.05
116.2	83.9	4.96	165.9	176.0	4.90	234.1	166.0	6.02
111.5	88.6	4.96	175.6	185.7	4.91	224.4	175.7	6.02
106.9	93.2	4.95	185.4	195.5	4.94	214.6	185.5	6.02
102.3	97.8	4.91	195.1	205.2	4.88	204.9	195.2	6.01
97.7	102.4	4.91	204.9	215.0	4.87	195.1	205.0	6.02
93.1	107.0	4.94	214.6	224.7	4.93	185.4	214.7	6.01
88.5	111.6	4.95	224.4	234.5	4.93	175.6	224.5	5.97
83.8	116.3	4.96	234.1	244.2	5.01	165.9	234.2	5.92
79.2	120.9	4.95	243.8	253.9	5.19	156.2	243.9	5.96
74.6	125.5	4.95	253.6	263.7	5.27	146.4	253.7	5.96
70.0	130.1	4.95	263.3	273.4	5.23	136.7	263.4	5.92
65.4	134.7	4.94	273.1	283.2	5.26	126.9	273.2	5.97
60.8	139.3	4.93	282.8	292.9	5.21	117.2	282.9	5.98
56.2	143.9	4.95	292.6	302.7	5.08	107.4	292.7	5.88
51.5	148.6	4.95	302.3	312.4	5.11	97.7	302.4	5.90
46.9	153.2	4.93	312.1	322.2	5.07	87.9	312.2	5.92
42.3	157.8	4.95	321.8	331.9	4.97	78.2	321.9	5.85
37.7	162.4	4.96	331.5	341.6	4.99	68.5	331.6	5.75
33.1	167.0	4.96	341.3	351.4	4.97	58.7	341.4	5.65
28.5	171.6	4.99	351.0	361.1	4.97	49.0	351.1	5.65
23.8	176.3	5.01	360.8	370.9	5.11	39.2	360.9	5.70
19.2	180.9	4.98	370.5	380.6	5.18	29.5	370.6	5.77
14.6	185.5	5.05	380.3	390.4	5.14	19.7	380.4	5.95
10.0	190.1	5.04	390.0	400.1	5.19	10.0	390.1	6.03

REV. X2

ZP-3+

100818

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
0.15	82.59	77.37	74.58	60.69	63.67	66.98
0.2	83.04	77.64	74.35	60.44	63.64	66.75
0.3	82.49	77.00	74.12	60.19	63.40	66.52
0.5	81.86	76.78	74.01	60.36	63.48	66.51
1.0	80.26	76.45	73.66	60.46	63.55	66.86
1.5	80.37	75.88	73.40	60.37	63.58	66.40
2.0	79.14	75.76	73.07	60.34	63.46	66.57
5.0	77.84	74.18	72.40	60.54	63.18	65.20
10.0	74.42	72.35	70.36	59.32	61.65	63.66
27.8	63.36	64.37	64.63	65.82	64.86	63.03
45.5	59.13	60.10	60.69	61.27	59.10	58.04
98.6	52.71	53.38	53.86	52.07	52.15	51.66
116.3	50.71	51.70	52.21	51.00	51.11	50.48
133.9	49.83	50.33	50.90	48.95	49.53	48.82
151.6	49.09	50.12	50.47	48.78	49.06	47.96
169.3	46.78	47.47	48.21	48.66	48.85	47.25
187.0	45.40	45.85	46.04	49.47	48.40	47.07
222.4	45.59	45.68	45.92	47.27	45.31	43.31
240.1	46.94	46.37	46.00	44.01	42.26	40.97
257.8	49.47	48.54	47.19	42.36	40.12	38.69
275.5	53.60	51.81	49.42	44.13	39.87	37.68
293.2	49.36	48.94	47.44	46.76	40.23	37.20
310.9	46.45	48.13	48.53	50.46	40.02	36.05
346.3	43.55	46.50	48.48	43.66	36.70	32.41
363.9	43.37	46.26	49.20	38.59	35.36	31.91
381.6	43.61	46.24	49.52	35.50	33.67	31.30
399.3	46.01	50.53	59.92	32.90	31.38	29.23
417.0	45.82	49.32	53.26	30.76	29.64	27.85
452.4	43.93	45.55	47.26	27.62	26.66	25.59
470.1	42.42	43.87	45.53	26.75	25.85	24.76
487.8	39.39	39.99	40.47	25.79	25.09	23.81
505.5	37.41	38.12	37.97	24.69	24.25	22.78
540.9	33.55	34.16	33.19	22.22	22.21	20.41
558.6	32.20	33.05	31.90	21.18	21.39	19.33
576.3	30.41	31.10	29.80	20.16	20.30	18.32
593.9	28.62	29.15	27.73	18.89	19.10	17.27
611.6	26.80	27.33	26.40	17.39	17.51	16.24
647.0	23.27	23.69	23.30	14.91	15.10	14.35
682.4	20.87	21.10	20.88	13.92	13.89	13.07
700.1	20.19	20.35	20.16	13.64	13.45	12.65

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	41.02	36.72	39.99
27.8	57.8	31.44	32.31	32.00
45.5	75.5	28.16	28.67	28.44
63.2	93.2	26.34	26.37	26.37
80.9	110.9	24.81	25.10	25.16
98.6	128.6	23.64	23.75	24.00
116.3	146.3	23.28	23.47	23.65
133.9	163.9	22.66	23.09	23.33
151.6	181.6	22.34	22.83	23.38
169.3	199.3	22.24	22.56	22.94
187.0	217.0	22.96	23.18	23.38
204.7	234.7	24.00	24.27	24.42
222.4	252.4	25.41	26.21	26.83
240.1	270.1	25.85	27.03	28.34
257.8	287.8	24.66	25.82	26.80
275.5	305.5	22.30	22.91	23.41
293.2	323.2	20.22	20.34	20.39
310.9	340.9	18.84	18.70	18.56
328.6	358.6	17.74	17.42	17.23
346.3	376.3	16.94	16.73	16.59
363.9	393.9	16.36	16.21	16.15
381.6	411.6	16.28	16.17	16.10
399.3	429.3	16.54	16.31	16.22
417.0	447.0	17.05	16.85	16.72
434.7	464.7	17.22	17.06	16.93
452.4	482.4	17.00	16.93	16.97
470.1	500.1	16.33	16.36	16.44
487.8	517.8	15.44	15.47	15.58
505.5	535.5	14.77	14.88	14.83
523.2	553.2	13.94	13.88	13.69
540.9	570.9	13.20	13.04	12.70
558.6	588.6	12.41	12.06	11.56
576.3	606.3	11.44	11.02	10.43
593.9	623.9	10.63	10.17	9.67
611.6	641.6	9.69	9.25	8.81
629.3	659.3	8.83	8.41	8.00
647.0	677.0	8.05	7.67	7.34
664.7	694.7	7.36	7.02	6.68
682.4	712.4	6.95	6.61	6.36
700.1	730.1	6.62	6.30	6.07

Frequency Mixer

ZP-3+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
5.0	35.0	1.27	1.21	1.22
10.0	40.0	1.19	1.09	1.07
27.8	57.8	1.33	1.22	1.15
45.5	75.5	1.37	1.25	1.16
63.2	93.2	1.30	1.23	1.15
80.9	110.9	1.30	1.20	1.14
98.6	128.6	1.28	1.19	1.13
116.3	146.3	1.29	1.18	1.12
133.9	163.9	1.27	1.18	1.12
151.6	181.6	1.27	1.17	1.10
169.3	199.3	1.25	1.16	1.11
187.0	217.0	1.24	1.16	1.11
204.7	234.7	1.20	1.11	1.08
222.4	252.4	1.21	1.12	1.09
240.1	270.1	1.18	1.12	1.10
257.8	287.8	1.15	1.09	1.09
275.5	305.5	1.11	1.05	1.07
293.2	323.2	1.07	1.02	1.07
310.9	340.9	1.11	1.02	1.03
328.6	358.6	1.22	1.12	1.07
346.3	376.3	1.37	1.25	1.19
363.9	393.9	1.54	1.43	1.33
381.6	411.6	1.70	1.58	1.47
399.3	429.3	1.85	1.73	1.60
417.0	447.0	2.14	2.01	1.85
434.7	464.7	2.34	2.19	2.03
452.4	482.4	2.42	2.26	2.10
470.1	500.1	2.40	2.26	2.12
487.8	517.8	2.40	2.27	2.17
505.5	535.5	2.55	2.42	2.34
523.2	553.2	2.58	2.45	2.38
540.9	570.9	2.52	2.41	2.34
558.6	588.6	2.48	2.40	2.34
576.3	606.3	2.52	2.45	2.39
593.9	623.9	2.57	2.52	2.45
611.6	641.6	2.58	2.51	2.45
629.3	659.3	2.51	2.45	2.41
647.0	677.0	2.51	2.45	2.42
664.7	694.7	2.49	2.44	2.41
682.4	712.4	2.47	2.41	2.37
700.1	730.1	2.43	2.35	2.32

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
5.0	1.81	2.60	3.64
10.0	1.71	2.50	3.52
27.8	1.58	2.44	3.49
45.5	1.58	2.37	3.40
63.2	1.51	2.21	3.12
80.9	1.49	2.14	2.98
98.6	1.50	2.19	3.06
116.3	1.57	2.30	3.22
133.9	1.62	2.36	3.29
151.6	1.61	2.30	3.18
169.3	1.60	2.26	3.10
187.0	1.62	2.29	3.13
204.7	1.70	2.39	3.26
222.4	1.77	2.47	3.36
240.1	1.82	2.50	3.35
257.8	1.82	2.49	3.34
275.5	1.84	2.50	3.35
293.2	1.90	2.57	3.44
310.9	1.98	2.66	3.54
328.6	2.06	2.70	3.55
346.3	2.12	2.73	3.54
363.9	2.19	2.81	3.60
381.6	2.27	2.94	3.76
399.3	2.35	3.08	3.94
417.0	2.43	3.17	4.07
434.7	2.46	3.18	4.07
452.4	2.48	3.17	4.05
470.1	2.53	3.22	4.09
487.8	2.60	3.30	4.19
505.5	2.68	3.37	4.25
523.2	2.72	3.38	4.23
540.9	2.75	3.36	4.16
558.6	2.78	3.37	4.14
576.3	2.85	3.40	4.15
593.9	2.93	3.45	4.18
611.6	3.03	3.51	4.21
629.3	3.18	3.59	4.25
647.0	3.36	3.73	4.32
664.7	3.54	3.88	4.43
682.4	3.67	4.03	4.55
700.1	3.73	4.11	4.61

IF (OUT) (MHz)	IF VSWR @LO=400.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
5.0	1.67	1.41	1.23
10.0	1.68	1.41	1.23
20.0	2.01	1.61	1.31
30.0	2.16	1.75	1.44
40.0	2.23	1.84	1.50
50.0	2.28	1.86	1.53
60.0	2.24	1.85	1.52
70.0	2.25	1.84	1.52
80.0	2.20	1.81	1.52
90.0	2.28	1.88	1.54
100.0	2.31	1.89	1.57
110.0	2.28	1.90	1.58
120.0	2.27	1.89	1.58
130.0	2.28	1.89	1.59
140.0	2.31	1.92	1.61
150.0	2.37	1.99	1.66
160.0	2.44	2.04	1.71
170.0	2.42	2.04	1.72
180.0	2.38	2.01	1.70
190.0	2.32	1.96	1.66
200.0	2.29	1.94	1.65
210.0	2.26	1.94	1.67
220.0	2.29	1.96	1.70
230.0	2.36	2.03	1.75
240.0	2.40	2.08	1.81
250.0	2.39	2.08	1.83
260.0	2.34	2.05	1.81
270.0	2.30	2.00	1.77
280.0	2.32	2.00	1.76
290.0	2.30	2.01	1.79
300.0	2.30	2.04	1.83
310.0	2.33	2.04	1.85
320.0	2.33	2.05	1.85
330.0	2.31	2.05	1.86
340.0	2.28	2.02	1.85
350.0	2.30	2.02	1.83
360.0	2.33	2.03	1.83
370.0	2.36	2.07	1.85
380.0	2.35	2.05	1.86
390.0	2.28	2.01	1.84
400.0	2.28	2.02	1.87

REV. X2

ZP-3+

100818

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	31	11	52	19	43	24	39	37	47
1	-	19	+0	24	11	35	30	42	38	43	39	48
2	>100	57	56	55	57	56	51	72	59	67	59	>81
3	>100	76	71	74	65	72	65	77	73	72	66	75
4	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
5	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	78	>81	>81	>81	>81	>81
7	>100	>81	>81	>81	>81	>81	>81	72	>81	>81	>81	>81
8	>100	>81	>81	>81	>81	>81	>81	>81	62	>81	>81	>81
9	>100	>81	>81	>81	>81	>81	>81	>81	>81	75	>81	>81
10	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -14.00 dBm.
LO IN: 230.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.24 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	39	21	55	30	61	39	50	50	60
1	-	19	+0	25	11	34	32	48	38	48	45	57
2	>100	54	50	52	52	50	46	64	53	58	52	66
3	>100	51	41	49	45	53	39	65	55	55	53	56
4	>100	68	68	66	64	64	64	66	62	83	67	76
5	>100	70	60	56	51	62	51	63	53	65	68	68
6	>100	89	86	84	79	81	78	84	>91	79	87	90
7	>100	89	90	83	75	69	71	72	67	75	67	82
8	>100	>91	>91	>91	>91	>91	86	87	70	89	81	86
9	>100	>91	88	>91	90	>91	76	78	76	79	79	90
10	>100	>91	>91	>91	>91	>91	>91	>91	>91	>91	89	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -4.00 dBm.
LO IN: 230.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.22 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZP-3+
100818
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

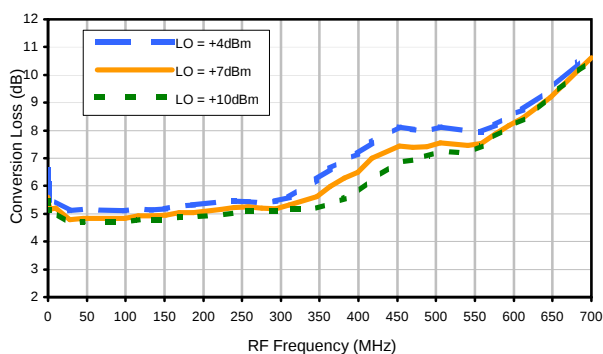


Conversion Loss vs. IF @ RF=200.1MHz

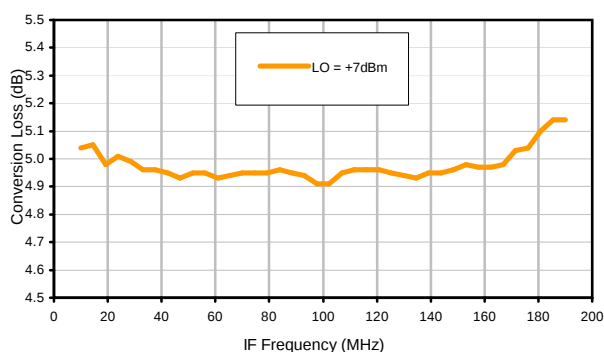


Conversion Loss vs. IF @ RF=10.1MHz

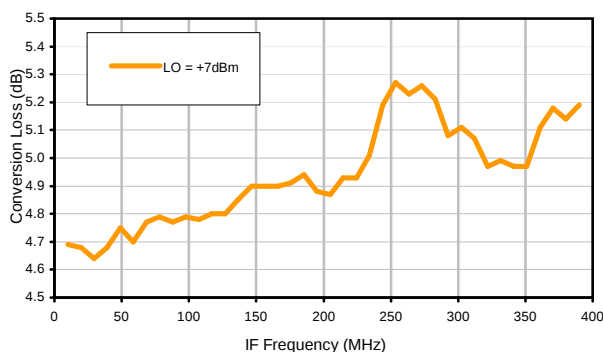


Conversion Loss vs. IF @ RF=400.1MHz

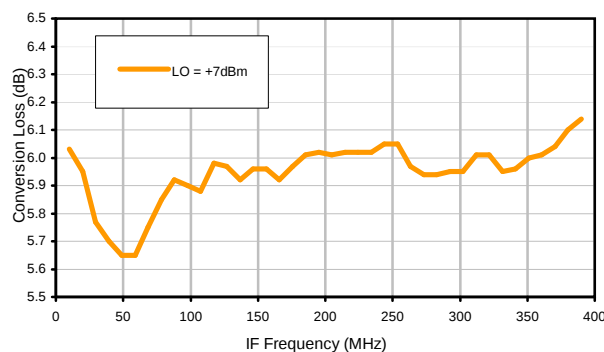

IP3 Input

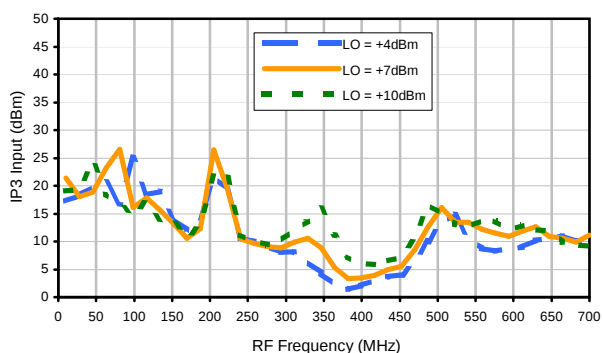


Compression @ RF IN=+1dBm

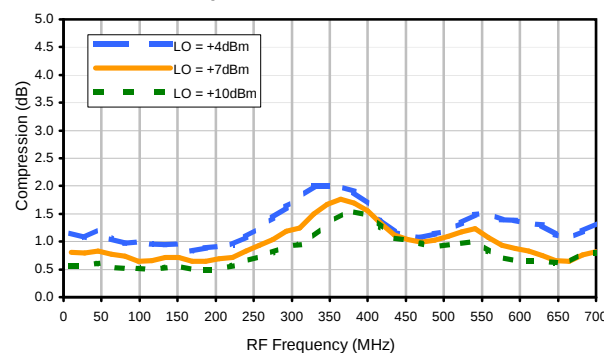


Typical Performance Curves


LO-RF Isolation

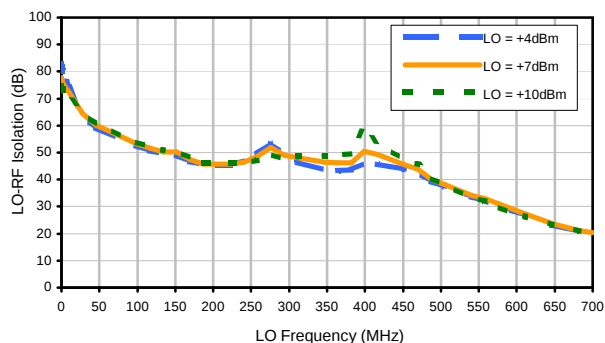


LO-IF Isolation

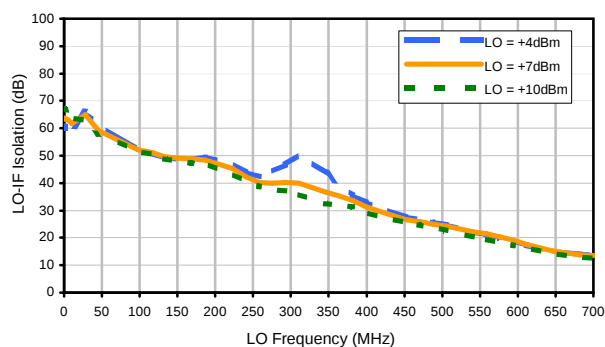


RF-IF Isolation

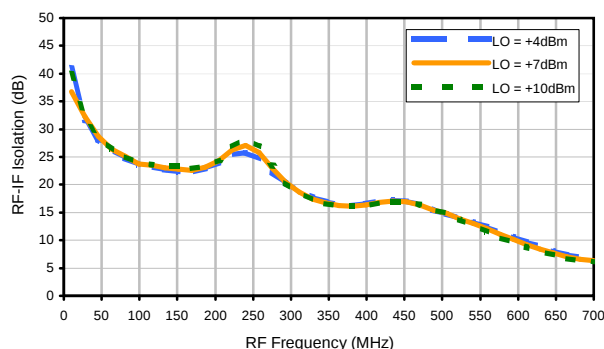


RF VSWR

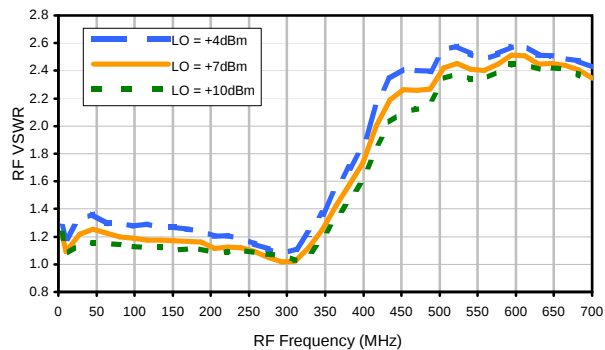

LO VSWR

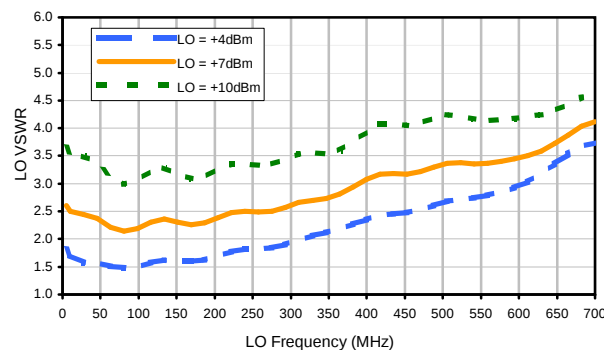

IF VSWR

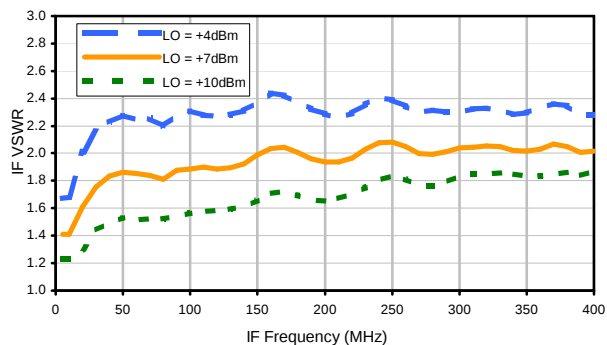

REV. X2

ZP-3+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	31	11	52	19	43	24	39	37	47
1	-	19	+0	24	11	35	30	42	38	43	39	48
2	>100	57	56	55	57	56	51	72	59	67	59	>81
3	>100	76	71	74	65	72	65	77	73	72	66	75
4	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
5	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	78	>81	>81	>81	>81	>81
7	>100	>81	>81	>81	>81	>81	>81	72	>81	>81	>81	>81
8	>100	>81	>81	>81	>81	>81	>81	>81	62	>81	>81	>81
9	>100	>81	>81	>81	>81	>81	>81	>81	>81	75	>81	>81
10	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -14.00 dBm.
LO IN: 230.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.24 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	39	21	55	30	61	39	50	50	60
1	-	19	+0	25	11	34	32	48	38	48	45	57
2	>100	54	50	52	52	50	46	64	53	58	52	66
3	>100	51	41	49	45	53	39	65	55	55	53	56
4	>100	68	68	66	64	64	64	66	62	83	67	76
5	>100	70	60	56	51	62	51	63	53	65	68	68
6	>100	89	86	84	79	81	78	84	>91	79	87	90
7	>100	89	90	83	75	69	71	72	67	75	67	82
8	>100	>91	>91	>91	>91	>91	86	87	70	89	81	86
9	>100	>91	88	>91	90	>91	76	78	76	79	79	90
10	>100	>91	>91	>91	>91	>91	>91	>91	>91	>91	89	>91
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 200.1 MHz; -4.00 dBm.
LO IN: 230.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.22 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZP-3+
100818
Page 3 of 3



Outline Dimensions

GG60

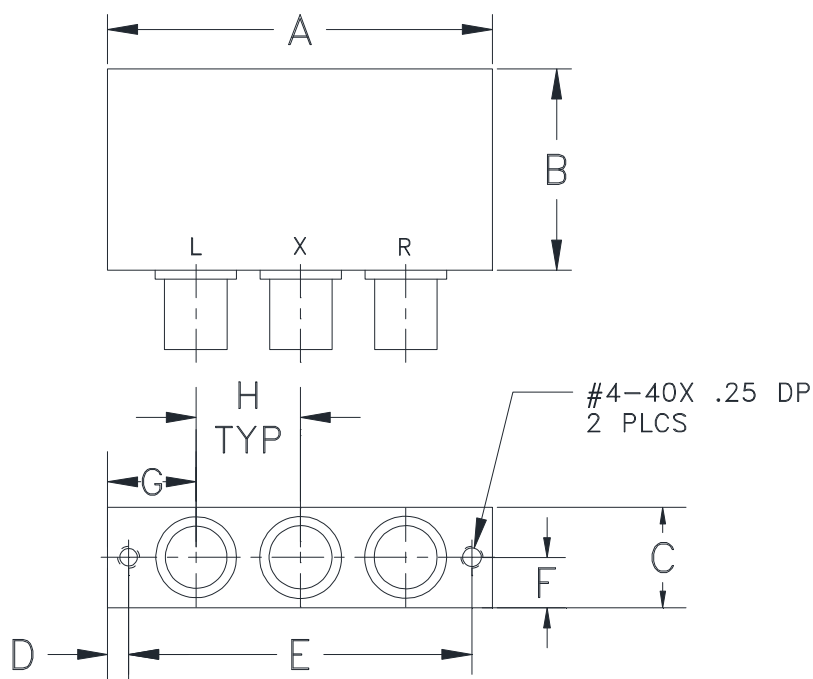

CASE #.	A	B	C	D	E	F	G	H	WT. GRAM
GG60	2.31 (58.67)	1.20 (30.48)	.60 (15.24)	.125 (3.18)	2.062 (52.37)	.30 (7.62)	.53 (13.46)	.63 (16.00)	75.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I