Coaxial

Power Splitter/Combiner

3 Way-0° 50Ω 1 to 200 MHz

ZSC-3-1+
ZSC-3-1

Generic photo used for illustration purposes only

CASE STYLE: P25

Connectors	Model
BNC	ZSC-3-1(+)
BRACKET (OPTION "B")	
BRACKET (OPTION "BR")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 40 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1 deg. typ.
- excellent VSWR, 1.5:1 typ.
- rugged shielded case

Applications

- VHF
- instrumentation
- communication system

Outline Drawing

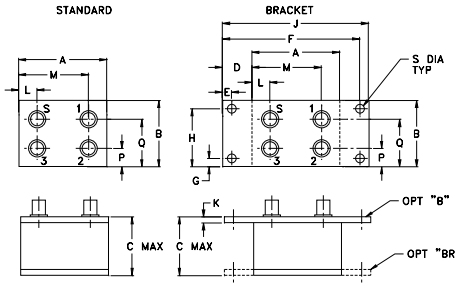

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	Q	S	wt
3.25	.10	.78	1.47	--	.38	1.00	.150	grams
82.55	2.54	19.81	37.34	--	9.65	25.40	3.81	110.0

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
f_L-f_U	Typ.	Min.	Typ.	Min.	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-200	45	30	40	25	40	25	0.3	0.5	0.4	0.7	0.6	1.0	1	2	4	0.15	0.2	0.3

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U= upper range [f_U/2 to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss[1] (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
1.00	5.11	5.10	5.10	0.00	49.11	47.46	46.70	0.05	1.23	1.19	1.19	1.18
5.00	5.02	5.02	5.02	0.00	44.98	45.11	44.74	0.04	1.16	1.14	1.14	1.14
8.00	5.02	5.03	5.02	0.01	43.57	44.02	43.72	0.09	1.15	1.14	1.14	1.14
20.00	5.06	5.05	5.05	0.01	41.08	41.74	41.14	0.19	1.14	1.14	1.13	1.13
29.00	5.07	5.06	5.07	0.01	40.08	40.44	39.84	0.21	1.14	1.14	1.13	1.13
38.00	5.08	5.07	5.07	0.01	39.15	39.44	38.61	0.30	1.13	1.14	1.13	1.13
47.00	5.09	5.09	5.09	0.00	38.26	38.41	37.64	0.42	1.13	1.13	1.13	1.13
60.00	5.08	5.07	5.10	0.03	37.10	37.35	36.39	0.56	1.13	1.13	1.13	1.13
75.00	5.11	5.10	5.12	0.01	36.09	36.35	35.09	0.63	1.13	1.13	1.13	1.13
90.00	5.13	5.15	5.16	0.03	35.28	35.44	34.23	0.76	1.12	1.13	1.13	1.12
120.00	5.15	5.15	5.19	0.04	34.19	34.35	32.97	1.13	1.12	1.12	1.12	1.12
150.00	5.20	5.21	5.23	0.03	33.89	34.16	32.49	1.26	1.10	1.11	1.12	1.11
170.00	5.17	5.19	5.24	0.07	34.20	34.61	32.64	1.46	1.08	1.10	1.11	1.10
190.00	5.17	5.21	5.27	0.09	35.05	35.66	33.32	1.55	1.06	1.09	1.10	1.10
200.00	5.18	5.22	5.29	0.10	35.86	36.56	33.82	1.70	1.05	1.09	1.10	1.10

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

ZSC-3-1
TOTAL LOSS

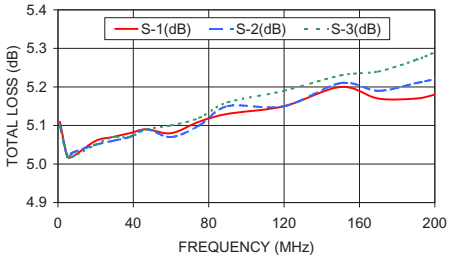

ZSC-3-1
ISOLATION

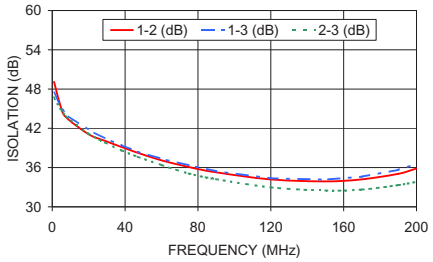

ZSC-3-1
VSWR

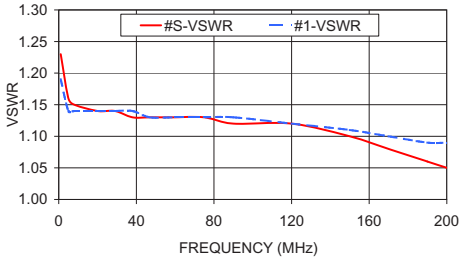

electrical schematic

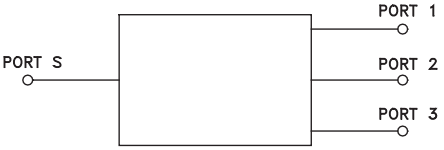

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

3 Way-0° Power Splitter/Combiner ZSC-3-1+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS[1] (dB)			AMP. UNBAL. (dB)	ISOLATION (dB)			PHASE UNBAL. (deg.)
	S-1	S-2	S-3		1-2	1-3	2-3	
1.0	5.11	5.10	5.10	0.00	49.11	47.46	46.70	0.05
2.0	5.07	5.06	5.07	0.01	47.89	47.09	46.25	0.04
3.0	5.03	5.03	5.03	0.01	46.57	46.38	45.77	0.01
4.0	5.02	5.02	5.02	0.01	45.59	45.62	45.20	0.03
5.0	5.02	5.02	5.02	0.00	44.98	45.11	44.74	0.04
6.0	5.02	5.03	5.02	0.01	44.34	44.71	44.30	0.01
7.0	5.02	5.03	5.02	0.01	43.92	44.40	44.10	0.07
8.0	5.02	5.03	5.02	0.01	43.57	44.02	43.72	0.09
9.0	5.02	5.02	5.03	0.01	43.28	43.69	43.49	0.08
10.0	5.03	5.03	5.04	0.02	43.05	43.47	43.23	0.12
20.0	5.06	5.05	5.05	0.01	41.08	41.74	41.14	0.19
23.0	5.07	5.05	5.07	0.02	40.76	41.35	40.76	0.13
26.0	5.06	5.06	5.07	0.01	40.36	40.80	40.18	0.20
29.0	5.07	5.06	5.07	0.01	40.08	40.44	39.84	0.21
32.0	5.06	5.07	5.07	0.01	39.66	40.12	39.42	0.29
35.0	5.07	5.07	5.08	0.01	39.33	39.75	39.07	0.32
38.0	5.08	5.07	5.07	0.01	39.15	39.44	38.61	0.30
41.0	5.08	5.07	5.08	0.02	38.84	39.12	38.29	0.44
44.0	5.09	5.09	5.09	0.00	38.46	38.73	37.95	0.38
47.0	5.09	5.09	5.09	0.00	38.26	38.41	37.64	0.42
50.0	5.10	5.09	5.11	0.02	37.95	38.25	37.23	0.44
55.0	5.10	5.09	5.10	0.01	37.59	37.71	36.86	0.45
60.0	5.08	5.07	5.10	0.03	37.10	37.35	36.39	0.56
65.0	5.09	5.09	5.11	0.02	36.73	36.97	35.98	0.56
70.0	5.10	5.11	5.13	0.02	36.46	36.63	35.56	0.63
75.0	5.11	5.10	5.12	0.01	36.09	36.35	35.09	0.63
80.0	5.11	5.12	5.13	0.01	35.78	35.99	34.84	0.63
85.0	5.13	5.14	5.15	0.02	35.54	35.67	34.48	0.75
90.0	5.13	5.15	5.16	0.03	35.28	35.44	34.23	0.76
95.0	5.13	5.15	5.17	0.03	35.02	35.22	33.93	0.76
100.0	5.15	5.15	5.16	0.01	34.78	35.00	33.69	0.89
110.0	5.16	5.16	5.18	0.02	34.44	34.64	33.33	1.01
120.0	5.15	5.15	5.19	0.04	34.19	34.35	32.97	1.13
130.0	5.14	5.16	5.19	0.05	33.97	34.18	32.76	1.16
140.0	5.17	5.19	5.22	0.04	33.88	34.14	32.53	1.25
150.0	5.20	5.21	5.23	0.03	33.89	34.16	32.49	1.26
160.0	5.18	5.20	5.23	0.05	33.99	34.29	32.51	1.33
170.0	5.17	5.19	5.24	0.07	34.20	34.61	32.64	1.46
180.0	5.19	5.21	5.26	0.08	34.60	35.05	32.89	1.47
190.0	5.17	5.21	5.27	0.09	35.05	35.66	33.32	1.55
200.0	5.18	5.22	5.29	0.10	35.86	36.56	33.82	1.70

FREQ. (MHz)	VSWR (:1)			
	S	1	2	3
1.0	1.23	1.19	1.19	1.18
2.0	1.20	1.17	1.16	1.16
3.0	1.18	1.15	1.15	1.15
4.0	1.17	1.15	1.15	1.14
5.0	1.16	1.14	1.14	1.14
6.0	1.16	1.14	1.14	1.14
7.0	1.15	1.14	1.14	1.14
8.0	1.15	1.14	1.14	1.14
9.0	1.15	1.14	1.14	1.14
10.0	1.15	1.14	1.14	1.13
20.0	1.14	1.14	1.13	1.13
23.0	1.14	1.14	1.13	1.13
26.0	1.14	1.14	1.13	1.13
29.0	1.14	1.14	1.13	1.13
32.0	1.13	1.14	1.13	1.13
35.0	1.13	1.14	1.13	1.13
38.0	1.13	1.14	1.13	1.13
41.0	1.13	1.13	1.13	1.13
44.0	1.13	1.13	1.13	1.13
47.0	1.13	1.13	1.13	1.13
50.0	1.13	1.13	1.13	1.13
55.0	1.13	1.13	1.13	1.13
60.0	1.13	1.13	1.13	1.13
65.0	1.13	1.13	1.13	1.13
70.0	1.13	1.13	1.13	1.13
75.0	1.13	1.13	1.13	1.13
80.0	1.13	1.13	1.13	1.13
85.0	1.13	1.13	1.13	1.12
90.0	1.12	1.13	1.13	1.12
95.0	1.12	1.13	1.13	1.12
100.0	1.12	1.12	1.13	1.12
110.0	1.12	1.12	1.13	1.12
120.0	1.12	1.12	1.12	1.12
130.0	1.11	1.12	1.12	1.11
140.0	1.11	1.11	1.12	1.11
150.0	1.10	1.11	1.12	1.11
160.0	1.09	1.10	1.11	1.10
170.0	1.08	1.10	1.11	1.10
180.0	1.07	1.10	1.11	1.10
190.0	1.06	1.09	1.10	1.10
200.0	1.05	1.09	1.10	1.10

[1] Total Loss = Insertion Loss + 4.8dB Splitter Loss

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

3 Way-0° Power Splitter/Combiner ZSC-3-1+

Typical Performance Curves

Total Loss

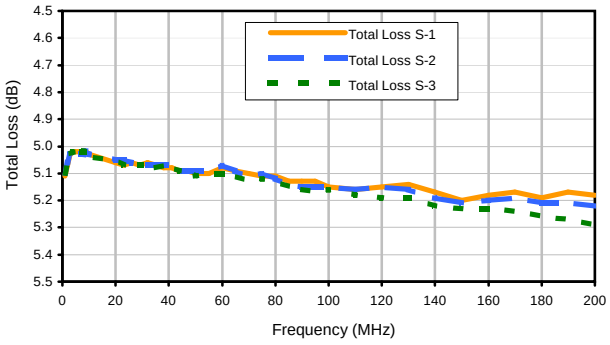

Isolation

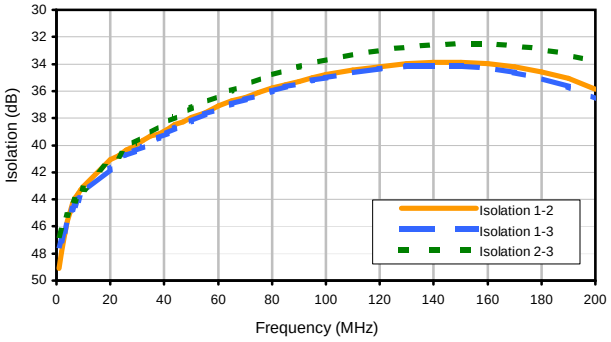

Amplitude Unbalance

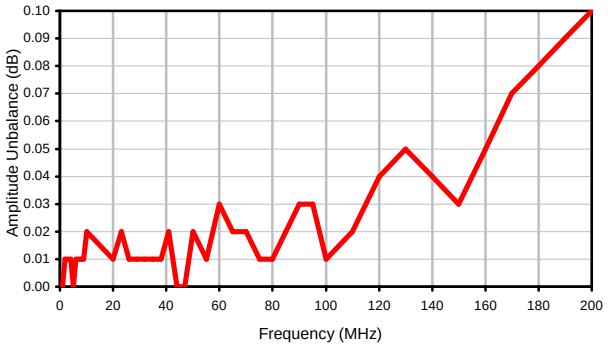

Phase Unbalance

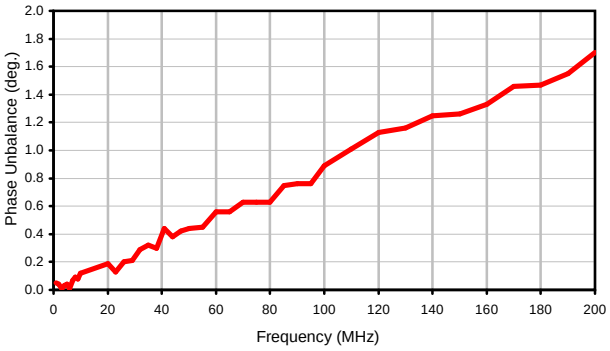

VSWR

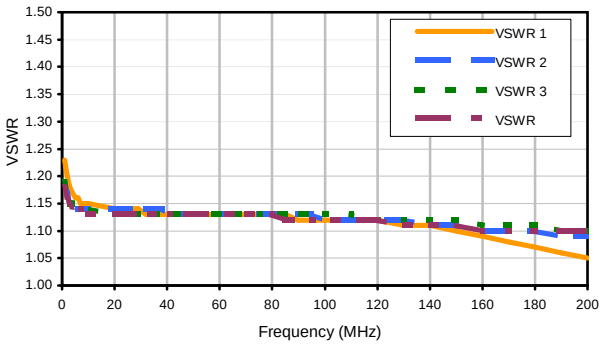

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style P

P25
P26

Outline Dimensions

STANDARD

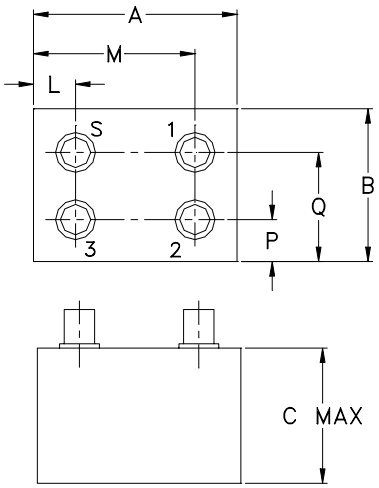

BRACKET

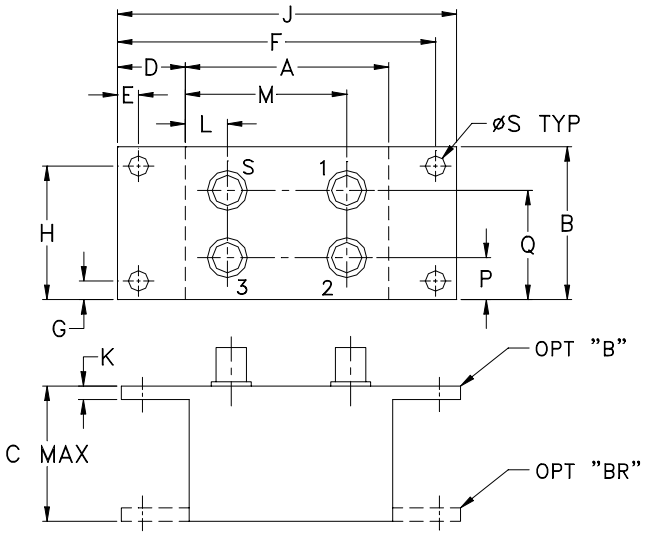

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
P25	2.25 (57.15)	1.38 (35.05)	1.24 (31.50)	.50 (12.70)	.150 (3.81)	3.100 (78.74)	.138 (3.51)	1.238 (31.45)	3.25 (82.55)	.10 (2.54)	.78 (19.81)	1.47 (37.34)	-- --
P26	1.50 (38.10)	1.13 (28.70)	1.00 (25.40)		.155 (3.94)	2.345 (59.56)		.987 (25.07)	2.50 (63.50)		.50 (12.70)	1.00 (25.40)	-- --

CASE#	P	Q	R	S	WT. GRAMS
P25	.38 (9.65)	1.00 (25.40)	-- --	.150 (3.81)	110.0
P26	.31 (7.87)	.81 (20.57)	-- --		60.0

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3 Pl. ± .015

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
   For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.

   For Non-RoHS Case Styles: Yellow hexavalent chrome based conversion coating.
   Due to transition from non-RoHS to RoHS, models will be supplied with either case style finish until the non-RoHS case inventory is depleted.
3. Mounting bracket available on request. For bracket mounted on connector end add suffix B to part number and add $5.00 to unit cost. For bracket mounted on the rear, add suffix BR to part number and add $1.50 to unit cost.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Mini-Circuits

Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.