

Frequency Mixer WIDE BAND

ZX05-43LH-S+

Level 10 (LO Power +10 dBm) 824 to 4200 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	2
RF	3
IF	1

Outline Drawing

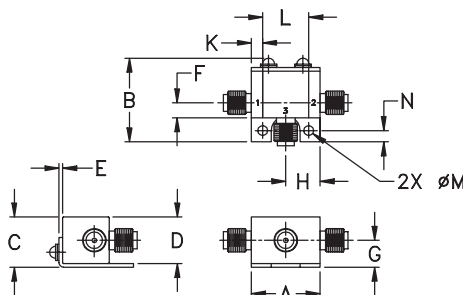

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Features

- wide bandwidth, 824 to 4200 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- rugged construction
- small size
- useable as up and down converter
- protected by US patents, 6,790,049 and 7,027,795

Applications

- cellular
- defense and weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 (dBm)
		Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	
824-4200 LO/RF $f_L - f_U$	IF								
	DC-1500								
	824-2500	6.3	0.1	8.1	35	28	24	7	15
	2500-4200	5.7	0.1	8.8	28	23	20	11	14


1 dB COMPR.: +5 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
800.10	830.10	6.97	40.28	24.13	2.20	8.01
1000.10	1030.10	6.80	40.62	26.75	2.24	2.48
1200.10	1230.10	6.21	37.61	30.55	3.04	1.16
1400.10	1430.10	6.26	33.28	34.87	3.09	1.31
1600.10	1630.10	6.28	31.73	26.86	3.01	1.85
1800.10	1830.10	6.68	34.95	19.25	3.22	2.08
2000.10	2030.10	6.80	34.01	12.32	3.50	1.77
2200.10	2230.10	6.66	35.08	12.21	3.40	1.60
2500.10	2530.10	6.78	34.96	15.85	3.10	1.79
2600.10	2630.10	6.60	32.68	17.18	2.99	1.79
2800.10	2830.10	5.72	28.25	19.07	1.83	1.43
3000.10	3030.10	5.15	29.65	21.70	1.15	1.44
3200.10	3230.10	5.21	27.31	26.03	1.33	1.25
3400.10	3430.10	5.55	28.46	24.94	1.28	1.03
3600.10	3630.10	6.03	26.81	21.60	1.83	1.37
3800.10	3830.10	6.15	26.88	18.70	2.24	1.81
4000.10	4030.10	6.95	28.58	19.35	3.12	2.52
4150.10	4180.10	7.00	28.86	16.90	2.90	3.31
4175.10	4205.10	7.13	28.88	17.17	2.99	3.42
4200.10	4230.10	7.19	28.80	16.66	3.16	3.62

Electrical Schematic

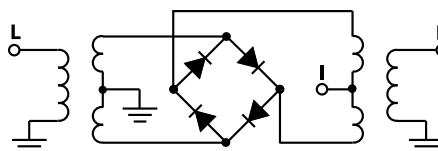

Generic photo used for illustration purposes only

CASE STYLE: FL905

Connectors	Model
SMA	ZX05-43LH-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications









Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Performance Charts

ZX05-43LH-S+

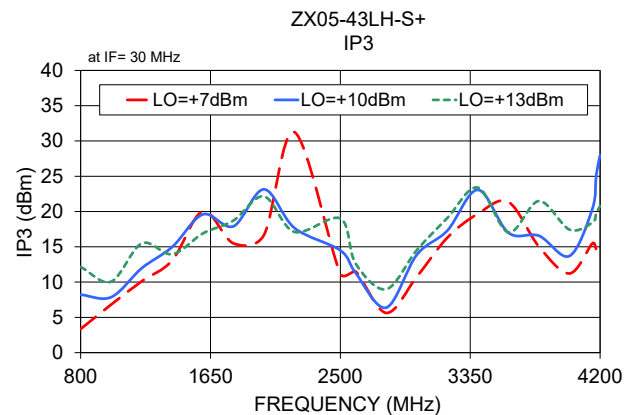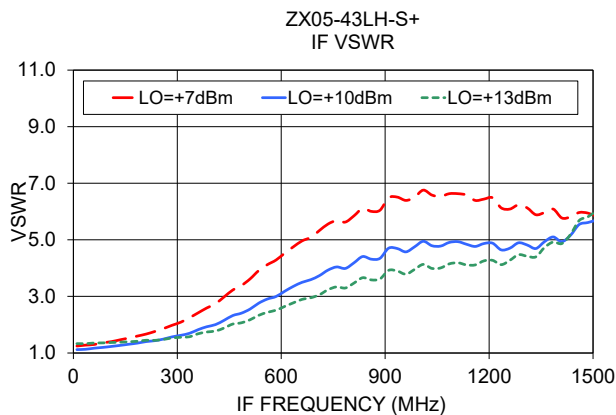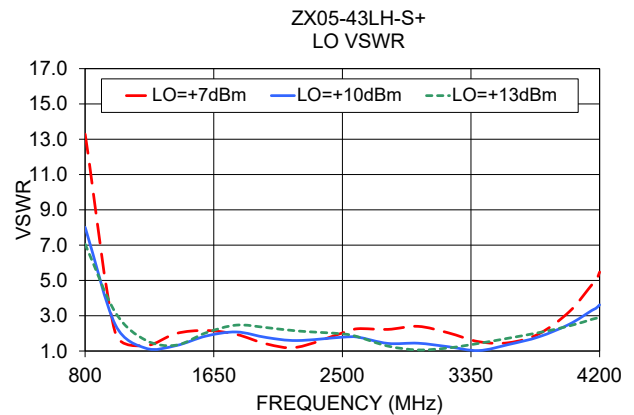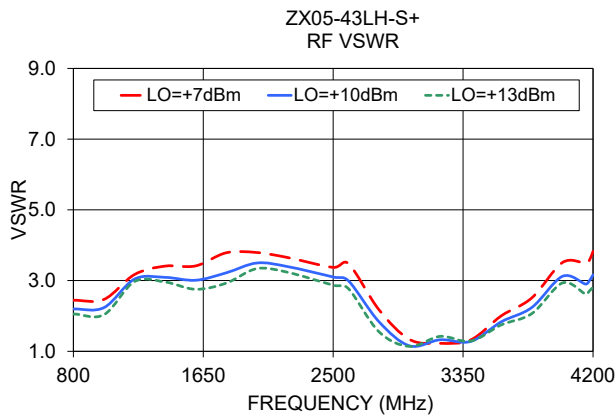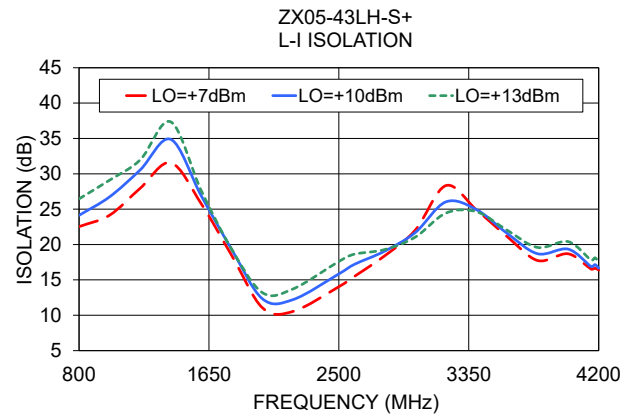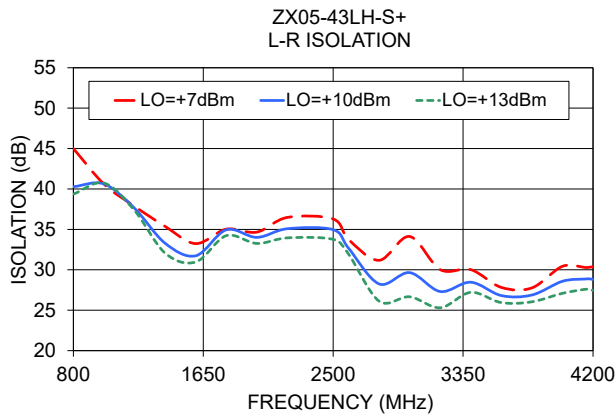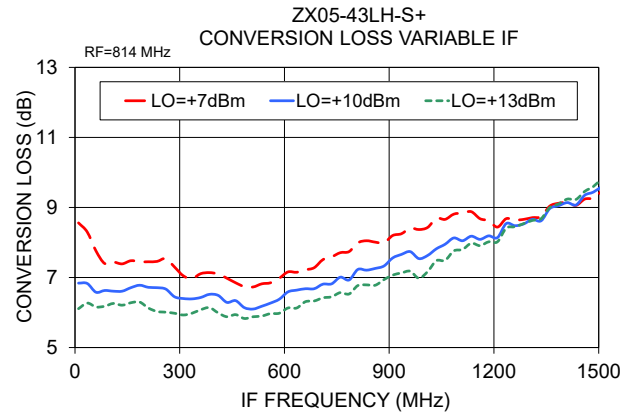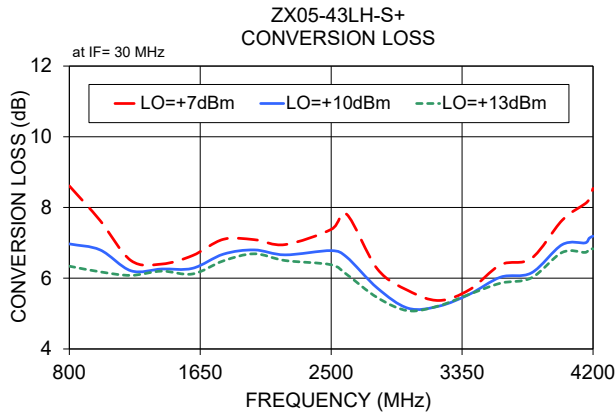

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ZX05-43LH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+7	+10	+13
670.0	700.0	20.43	11.94	8.06
770.0	800.0	10.25	7.57	6.62
870.0	900.0	7.92	6.82	6.25
970.0	1000.0	8.27	7.34	6.62
1070.0	1100.0	7.33	6.61	6.10
1170.0	1200.0	6.68	6.41	6.24
1270.0	1300.0	6.65	6.32	6.13
1370.0	1400.0	6.40	6.14	6.10
1470.0	1500.0	6.26	5.91	5.97
1570.0	1600.0	6.49	6.04	5.88
1670.0	1700.0	6.63	6.24	6.07
1770.0	1800.0	7.02	6.53	6.25
1870.0	1900.0	7.14	6.61	6.43
1970.0	2000.0	7.06	6.72	6.59
2070.0	2100.0	6.93	6.65	6.53
2170.0	2200.0	7.15	6.81	6.64
2270.0	2300.0	7.23	6.84	6.66
2370.0	2400.0	6.76	6.35	6.17
2470.0	2500.0	7.00	6.52	6.30
2570.0	2600.0	7.94	6.84	6.28
2650.0	2680.0	7.67	7.06	6.59
2750.0	2780.0	6.67	6.07	5.69
2830.0	2860.0	6.27	5.68	5.32
2930.0	2960.0	5.89	5.19	5.02
3010.0	3040.0	5.55	5.08	4.98
3110.0	3140.0	5.33	5.09	5.04
3190.0	3220.0	5.28	5.15	5.16
3290.0	3320.0	5.45	5.31	5.32
3370.0	3400.0	5.58	5.43	5.43
3470.0	3500.0	5.85	5.66	5.60
3550.0	3580.0	6.06	5.76	5.69
3650.0	3680.0	6.51	6.06	5.89
3730.0	3760.0	6.60	6.10	5.97
3830.0	3860.0	6.78	6.27	6.10
3910.0	3940.0	7.76	6.97	6.54
4010.0	4040.0	7.64	6.88	6.61
4090.0	4120.0	7.97	6.91	6.60
4190.0	4220.0	8.42	7.15	6.73
4270.0	4300.0	9.09	7.21	6.74
4370.0	4400.0	11.35	7.78	6.95

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+7	+10	+13
670.0	700.0	-5.55	1.84	7.06
770.0	800.0	3.04	6.08	12.64
870.0	900.0	5.37	7.67	9.43
970.0	1000.0	6.58	8.45	10.34
1070.0	1100.0	7.34	9.93	14.19
1170.0	1200.0	10.23	10.64	10.57
1270.0	1300.0	9.40	13.43	15.81
1370.0	1400.0	14.59	14.26	15.09
1470.0	1500.0	14.43	11.35	18.29
1570.0	1600.0	16.58	15.31	12.61
1670.0	1700.0	23.48	16.47	18.00
1770.0	1800.0	13.89	20.77	16.49
1870.0	1900.0	14.92	16.92	19.23
1970.0	2000.0	14.40	22.09	26.71
2070.0	2100.0	17.97	22.58	21.81
2170.0	2200.0	23.47	19.66	18.80
2270.0	2300.0	19.74	18.79	17.66
2370.0	2400.0	12.89	14.46	15.74
2470.0	2500.0	12.57	16.74	20.58
2570.0	2600.0	12.96	12.91	13.18
2650.0	2680.0	11.94	10.89	11.46
2750.0	2780.0	7.21	7.46	8.01
2830.0	2860.0	5.87	7.64	10.60
2930.0	2960.0	7.22	13.90	15.62
3010.0	3040.0	12.25	14.53	15.03
3110.0	3140.0	14.69	15.88	17.27
3190.0	3220.0	16.52	17.22	18.63
3290.0	3320.0	17.02	19.43	21.70
3370.0	3400.0	17.55	19.83	22.52
3470.0	3500.0	17.91	18.96	20.01
3550.0	3580.0	17.69	17.19	17.50
3650.0	3680.0	18.82	16.37	16.09
3730.0	3760.0	15.79	19.68	18.18
3830.0	3860.0	15.30	16.55	20.88
3910.0	3940.0	20.66	25.87	24.49
4010.0	4040.0	11.16	13.45	17.66
4090.0	4120.0	15.20	17.10	18.66
4190.0	4220.0	14.54	22.15	19.78
4270.0	4300.0	12.30	22.13	19.63
4370.0	4400.0	9.66	14.22	16.00

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+5dBm (dB)		
		@LO (dBm)		
		+7	+10	+13
670.0	700.0	-6.52	-0.72	0.74
770.0	800.0	1.81	1.85	1.35
870.0	900.0	2.24	2.01	1.76
970.0	1000.0	1.19	1.29	1.37
1070.0	1100.0	1.53	1.45	1.32
1170.0	1200.0	1.33	1.06	0.79
1270.0	1300.0	0.84	0.68	0.54
1370.0	1400.0	0.70	0.45	0.33
1470.0	1500.0	0.79	0.63	0.40
1570.0	1600.0	0.61	0.50	0.43
1670.0	1700.0	0.58	0.40	0.34
1770.0	1800.0	0.45	0.36	0.27
1870.0	1900.0	0.45	0.31	0.17
1970.0	2000.0	0.51	0.22	0.11
2070.0	2100.0	0.50	0.21	0.12
2170.0	2200.0	0.44	0.23	0.14
2270.0	2300.0	0.39	0.26	0.19
2370.0	2400.0	0.63	0.38	0.26
2470.0	2500.0	0.58	0.36	0.24
2570.0	2600.0	0.61	0.68	0.58
2650.0	2680.0	0.69	0.67	0.68
2750.0	2780.0	1.10	1.09	1.06
2830.0	2860.0	1.30	1.16	1.00
2930.0	2960.0	1.22	1.08	0.86
3010.0	3040.0	1.28	0.78	0.61
3110.0	3140.0	1.12	0.48	0.34
3190.0	3220.0	0.98	0.39	0.27
3290.0	3320.0	0.86	0.34	0.17
3370.0	3400.0	1.13	0.61	0.39
3470.0	3500.0	1.12	0.63	0.40
3550.0	3580.0	1.05	0.56	0.35
3650.0	3680.0	0.91	0.56	0.36
3730.0	3760.0	0.80	0.48	0.30
3830.0	3860.0	0.91	0.60	0.38
3910.0	3940.0	0.55	0.43	0.36
4010.0	4040.0	0.70	0.46	0.38
4090.0	4120.0	0.55	0.38	0.29
4190.0	4220.0	0.58	0.43	0.29
4270.0	4300.0	0.41	0.47	0.33
4370.0	4400.0	-0.39	0.71	0.54

REV. X2

ZX05-43LH+

101011

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZX05-43LH+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2512MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=813.9MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4210.1001MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+10			+10			+10
1412.0	1100.0	11.48	10.1	824.0	7.33	1350.1	2860.0	10.66
1337.2	1174.8	10.03	50.1	864.0	6.92	1310.1	2900.0	10.09
1262.5	1249.5	8.13	90.1	904.0	6.83	1270.1	2940.0	9.51
1187.7	1324.3	7.38	130.1	944.0	6.87	1230.1	2980.0	9.17
1112.9	1399.1	7.87	170.1	984.0	6.83	1190.1	3020.0	9.43
1038.1	1473.9	8.64	210.1	1024.0	6.96	1150.1	3060.0	9.13
963.4	1548.6	8.81	250.1	1064.0	6.92	1110.1	3100.0	9.02
888.6	1623.4	9.70	290.1	1104.0	6.62	1070.1	3140.0	8.71
813.8	1698.2	9.97	330.1	1144.0	6.49	1030.1	3180.0	8.66
739.0	1773.0	9.04	370.1	1184.0	6.79	990.1	3220.0	8.64
664.3	1847.7	7.93	410.1	1224.0	6.78	950.1	3260.0	8.35
589.5	1922.5	7.30	450.1	1264.0	6.48	910.1	3300.0	8.29
514.7	1997.3	6.91	490.1	1304.0	6.26	870.1	3340.0	8.22
439.9	2072.1	6.49	530.1	1344.0	6.26	830.1	3380.0	8.35
365.2	2146.8	6.16	570.1	1384.0	6.54	790.1	3420.0	8.33
290.4	2221.6	5.86	610.1	1424.0	6.66	750.1	3460.0	8.25
215.6	2296.4	5.55	650.1	1464.0	6.74	710.1	3500.0	8.37
140.9	2371.1	5.69	690.1	1504.0	6.81	670.1	3540.0	8.41
66.1	2445.9	6.34	730.1	1544.0	6.91	630.1	3580.0	8.54
10.0	2522.0	6.80	770.1	1584.0	7.12	610.1	3600.0	8.61
95.2	2607.2	6.94	810.1	1624.0	7.35	570.1	3640.0	8.78
180.5	2692.5	7.80	850.1	1664.0	7.36	550.1	3660.0	8.72
265.7	2777.7	8.20	890.1	1704.0	7.60	510.1	3700.0	8.58
350.9	2862.9	7.73	930.1	1744.0	7.69	490.1	3720.0	8.50
436.1	2948.1	7.17	970.1	1784.0	7.78	450.1	3760.0	8.30
521.4	3033.4	7.09	1010.1	1824.0	7.90	430.1	3780.0	8.36
606.6	3118.6	7.06	1050.1	1864.0	7.95	390.1	3820.0	8.23
691.8	3203.8	6.94	1090.1	1904.0	8.30	370.1	3840.0	8.10
777.0	3289.0	6.73	1130.1	1944.0	8.23	330.1	3880.0	7.89
862.3	3374.3	6.87	1170.1	1984.0	8.20	310.1	3900.0	7.67
947.5	3459.5	6.82	1210.1	2024.0	8.33	270.1	3940.0	7.51
1011.4	3523.4	6.97	1250.1	2064.0	8.41	250.1	3960.0	7.32
1096.6	3608.6	7.18	1290.1	2104.0	8.58	210.1	4000.0	7.03
1160.6	3672.6	7.31	1330.1	2144.0	8.76	190.1	4020.0	6.94
1245.8	3757.8	7.64	1370.1	2184.0	9.05	150.1	4060.0	6.81
1309.7	3821.7	7.82	1410.1	2224.0	9.36	130.1	4080.0	6.84
1394.9	3906.9	8.37	1450.1	2264.0	9.22	90.1	4120.0	6.93
1458.9	3970.9	8.98	1490.1	2304.0	9.56	70.1	4140.0	6.95
1544.1	4056.1	10.19	1530.1	2344.0	9.79	30.1	4180.0	6.99
1608.0	4120.0	11.34	1590.1	2404.0	10.52	10.1	4200.0	7.20

REV. X2

ZX05-43LH+

101011

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZX05-43LH+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+7	+10	+13	+7	+10	+13
700.0	58.76	60.28	50.62	25.77	25.84	26.01
800.0	51.75	42.46	40.38	23.15	23.86	25.93
900.0	37.67	37.10	37.19	22.24	24.66	27.32
1000.0	38.66	38.88	39.19	23.49	26.14	28.54
1100.0	41.39	41.98	42.28	25.00	27.63	30.04
1200.0	38.48	38.59	38.53	26.94	29.63	31.35
1300.0	37.04	35.98	35.51	29.25	31.91	32.89
1400.0	35.87	34.32	33.00	31.01	34.10	36.06
1500.0	34.54	32.74	31.02	31.05	34.32	37.34
1600.0	33.80	32.11	31.03	26.48	27.64	28.71
1700.0	34.69	33.12	32.30	23.98	24.91	25.04
1800.0	35.09	35.02	34.71	19.74	20.74	20.87
1900.0	34.61	34.40	33.62	15.29	16.35	16.74
2000.0	35.04	34.59	33.95	11.50	12.82	13.65
2100.0	35.28	34.57	33.86	9.98	11.53	12.75
2200.0	36.61	35.55	34.66	10.21	11.87	13.36
2300.0	37.07	35.41	34.06	11.15	12.91	14.59
2400.0	35.34	33.33	31.83	12.39	14.16	15.93
2500.0	35.28	33.61	32.50	13.64	15.41	17.20
2600.0	35.43	34.04	32.95	14.95	16.60	18.11
2680.0	31.64	29.05	28.12	16.23	17.80	19.12
2780.0	32.64	30.06	27.85	17.45	18.46	18.99
2860.0	31.31	28.32	26.27	18.87	19.40	19.69
2960.0	34.87	30.49	27.22	20.34	20.32	20.40
3040.0	33.66	29.39	26.53	22.24	21.90	21.24
3140.0	31.08	27.87	25.50	25.91	24.57	23.12
3220.0	30.18	27.67	25.59	28.29	26.30	24.75
3320.0	29.02	26.96	25.68	27.67	25.83	24.73
3400.0	30.22	28.59	27.35	24.99	24.48	23.98
3500.0	29.33	27.80	26.85	23.59	24.17	24.67
3580.0	28.91	27.50	26.62	22.27	22.47	23.00
3680.0	28.13	26.89	26.10	20.09	20.57	21.26
3760.0	27.99	26.96	26.15	18.35	18.97	19.79
3860.0	28.18	27.37	26.35	17.31	18.30	19.28
3940.0	29.01	27.83	26.66	17.59	18.17	19.13
4040.0	31.17	28.92	27.12	18.78	19.09	19.91
4120.0	31.99	30.01	28.15	17.94	17.94	18.66
4220.0	30.54	29.01	27.57	16.08	16.34	17.14
4300.0	31.68	29.64	27.91	15.84	16.11	17.01
4400.0	35.40	32.45	29.60	15.19	15.12	16.05

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+7	+10	+13
670.0	700.0	28.57	26.83	20.45
770.0	800.0	22.79	17.29	15.50
870.0	900.0	15.09	13.72	13.05
970.0	1000.0	14.06	13.34	12.83
1070.0	1100.0	16.74	15.81	15.29
1170.0	1200.0	19.96	19.34	19.15
1270.0	1300.0	22.98	22.29	21.82
1370.0	1400.0	25.35	25.57	26.10
1470.0	1500.0	26.91	26.53	27.22
1570.0	1600.0	27.55	27.72	27.77
1670.0	1700.0	26.43	26.24	26.37
1770.0	1800.0	26.59	26.92	26.68
1870.0	1900.0	28.72	28.65	28.35
1970.0	2000.0	33.92	33.86	33.87
2070.0	2100.0	40.21	39.43	39.14
2170.0	2200.0	36.77	36.27	36.23
2270.0	2300.0	36.79	36.94	37.10
2370.0	2400.0	37.90	38.08	38.53
2470.0	2500.0	39.77	39.40	39.31
2570.0	2600.0	37.72	37.65	38.36
2650.0	2680.0	36.40	36.72	36.78
2750.0	2780.0	34.61	33.66	32.26
2830.0	2860.0	29.30	29.69	30.26
2930.0	2960.0	28.62	26.50	26.36
3010.0	3040.0	28.93	28.71	29.07
3110.0	3140.0	26.78	26.37	26.55
3190.0	3220.0	26.06	25.14	24.85
3290.0	3320.0	28.30	27.86	28.00
3370.0	3400.0	27.52	25.53	24.33
3470.0	3500.0	20.94	20.16	19.84
3550.0	3580.0	20.96	20.65	20.53
3650.0	3680.0	21.93	21.14	21.03
3730.0	3760.0	22.87	21.63	21.35
3830.0	3860.0	23.30	21.98	21.52
3910.0	3940.0	27.44	25.65	24.31
4010.0	4040.0	30.26	29.98	31.68
4090.0	4120.0	29.00	27.04	25.67
4190.0	4220.0	28.89	24.12	22.10
4270.0	4300.0	30.66	24.91	22.33
4370.0	4400.0	30.93	25.68	24.31

Frequency Mixer

ZX05-43LH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=4200MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+7	+10	+13		+7	+10	+13		+7	+10	+13
670.0	700.0	8.31	4.68	3.60	700.0	28.96	27.59	19.98	10.0	1.40	1.07	1.31
770.0	800.0	2.91	2.57	2.39	800.0	18.50	11.31	8.31	50.0	1.39	1.12	1.34
870.0	900.0	2.06	1.80	1.67	900.0	5.47	4.66	5.02	90.0	1.46	1.17	1.34
970.0	1000.0	2.38	2.14	1.95	1000.0	2.41	2.79	3.49	130.0	1.56	1.25	1.38
1070.0	1100.0	2.94	2.68	2.50	1100.0	1.36	1.82	2.44	170.0	1.67	1.31	1.38
1170.0	1200.0	3.20	3.09	3.02	1200.0	1.22	1.24	1.74	210.0	1.81	1.40	1.42
1270.0	1300.0	3.37	3.22	3.14	1300.0	1.75	1.11	1.30	250.0	1.97	1.48	1.44
1370.0	1400.0	3.44	3.13	3.00	1400.0	2.06	1.30	1.22	290.0	2.18	1.60	1.51
1470.0	1500.0	3.49	3.06	2.72	1500.0	2.23	1.54	1.52	330.0	2.42	1.72	1.57
1570.0	1600.0	3.52	3.04	2.72	1600.0	2.30	1.84	1.95	370.0	2.74	1.93	1.69
1670.0	1700.0	3.62	3.16	2.84	1700.0	2.26	2.06	2.34	410.0	3.04	2.11	1.81
1770.0	1800.0	3.86	3.26	2.83	1800.0	2.07	2.16	2.52	450.0	3.34	2.36	1.98
1870.0	1900.0	3.88	3.27	3.00	1900.0	1.81	2.03	2.50	490.0	3.73	2.61	2.16
1970.0	2000.0	3.64	3.30	3.15	2000.0	1.46	1.79	2.36	530.0	4.15	2.88	2.34
2070.0	2100.0	3.48	3.21	3.05	2100.0	1.16	1.63	2.22	570.0	4.55	3.15	2.55
2170.0	2200.0	3.63	3.40	3.24	2200.0	1.19	1.57	2.12	610.0	4.86	3.37	2.69
2270.0	2300.0	3.72	3.44	3.24	2300.0	1.47	1.60	2.05	650.0	5.28	3.71	2.95
2370.0	2400.0	2.98	2.67	2.49	2400.0	1.82	1.71	1.99	710.0	5.72	3.98	3.16
2470.0	2500.0	2.94	2.68	2.49	2500.0	2.05	1.78	1.92	750.0	6.03	4.27	3.39
2570.0	2600.0	3.50	3.11	2.87	2600.0	2.20	1.67	1.69	810.0	6.30	4.46	3.56
2650.0	2680.0	3.13	2.78	2.49	2680.0	2.22	1.70	1.66	850.0	6.53	4.66	3.73
2750.0	2780.0	2.54	2.25	1.94	2780.0	2.16	1.46	1.37	910.0	6.78	4.88	3.92
2830.0	2860.0	2.03	1.66	1.41	2860.0	2.14	1.36	1.16	950.0	6.81	4.89	3.92
2930.0	2960.0	1.62	1.25	1.16	2960.0	2.19	1.38	1.08	1010.0	7.11	5.14	4.14
3010.0	3040.0	1.34	1.20	1.18	3040.0	2.27	1.38	1.09	1050.0	7.00	5.07	4.08
3110.0	3140.0	1.26	1.29	1.34	3140.0	2.17	1.32	1.11	1110.0	7.08	5.20	4.27
3190.0	3220.0	1.25	1.32	1.41	3220.0	2.06	1.26	1.15	1150.0	6.81	4.98	4.11
3290.0	3320.0	1.26	1.30	1.38	3320.0	1.86	1.17	1.22	1210.0	6.81	5.07	4.34
3370.0	3400.0	1.31	1.25	1.24	3400.0	1.75	1.10	1.30	1250.0	6.51	4.88	4.25
3470.0	3500.0	1.51	1.41	1.36	3500.0	1.62	1.11	1.40	1310.0	6.61	5.06	4.51
3550.0	3580.0	1.79	1.63	1.57	3580.0	1.59	1.21	1.51	1350.0	6.35	5.02	4.67
3650.0	3680.0	2.27	2.05	1.93	3680.0	1.62	1.38	1.67	1410.0	6.21	5.14	4.99
3730.0	3760.0	2.50	2.21	2.08	3760.0	1.76	1.55	1.81	1450.0	6.24	5.52	5.58
3830.0	3860.0	2.57	2.28	2.08	3860.0	2.07	1.78	1.98	1510.0	6.17	5.89	6.19
3910.0	3940.0	3.20	2.85	2.62	3940.0	2.48	2.08	2.18	1550.0	6.32	6.49	7.02
4010.0	4040.0	3.42	3.02	2.83	4040.0	3.21	2.47	2.40	1610.0	6.53	7.17	7.90
4090.0	4120.0	3.66	3.07	2.79	4120.0	4.26	3.05	2.69	1650.0	6.83	7.63	8.43
4190.0	4220.0	3.88	3.21	2.83	4220.0	5.81	3.77	3.03	1710.0	6.91	7.87	8.68
4270.0	4300.0	4.08	3.19	2.77	4300.0	7.66	4.44	3.18	1750.0	6.94	7.90	8.64
4370.0	4400.0	4.96	3.43	2.97	4400.0	10.82	6.13	3.69	1810.0	6.56	7.25	7.76

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+11	9	9	21	28	34	42	50	32	---
1	-	33	+0	39	18	33	31	57	44	64	53	62
2	81	50	53	50	51	56	54	58	>73	69	>73	>73
3	>90	66	60	>73	56	>73	63	70	63	>73	69	>73
4	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
5	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
6	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
7	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
8	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
9	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
10	---	---	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2512 MHz; -10.00 dBm.
LO IN: 2542 MHz; +10.00 dBm
IF OUT: 30 MHz; -16.82 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+0	19	20	34	41	48	53	58	42	---
1	-	34	+0	41	18	38	35	66	47	67	60	65
2	61	43	45	50	41	54	41	51	57	63	73	74
3	>90	46	44	78	42	56	51	51	47	70	53	77
4	>90	66	66	61	63	56	67	63	66	67	77	71
5	>90	74	61	80	58	76	53	75	62	68	64	>83
6	>90	>83	>83	>83	73	79	79	80	71	>83	71	80
7	>90	>83	>83	>83	>83	80	81	>83	74	80	>83	>83
8	>90	>83	>83	>83	>83	>83	>83	>83	>83	82	>83	>83
9	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	---	---	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2512 MHz; 0.00 dBm.
LO IN: 2542 MHz; +10.00 dBm
IF OUT: 30 MHz; -6.73 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


ZX05-43LH+

Typical Performance Curves


Conversion Loss @ IF=30MHz

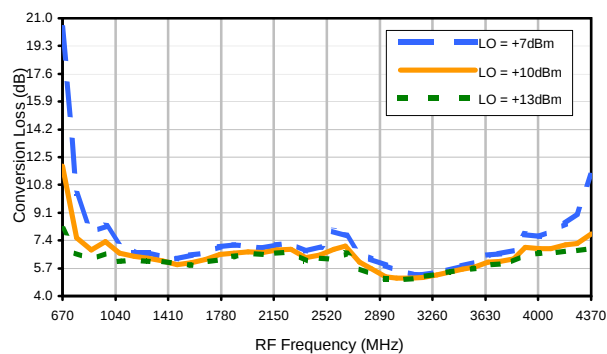


Conversion Loss vs. LO @ RF=2512MHz

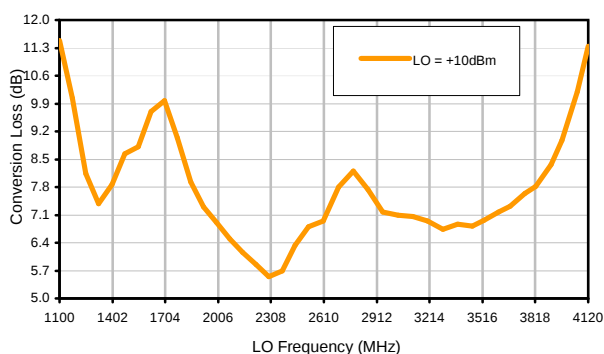


Conversion Loss vs. IF @ RF=2512MHz

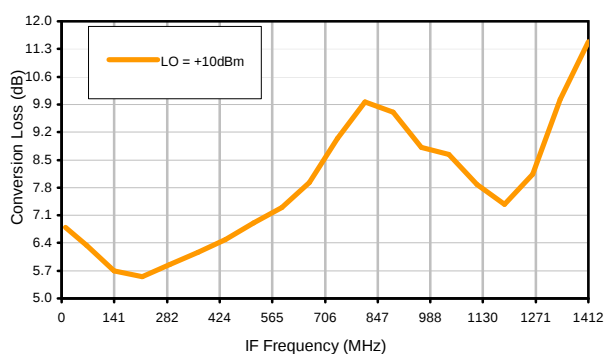


Conversion Loss vs. IF @ RF=813.9MHz

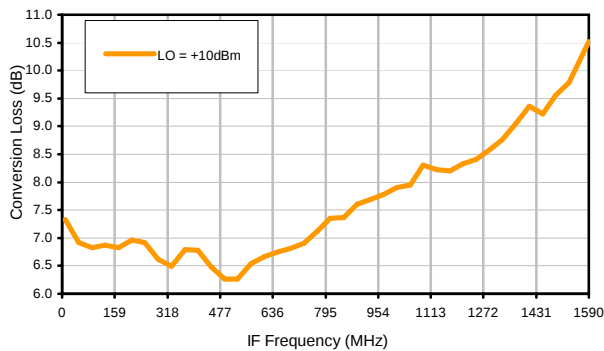


Conversion Loss vs. IF @ RF=4210.1001MHz

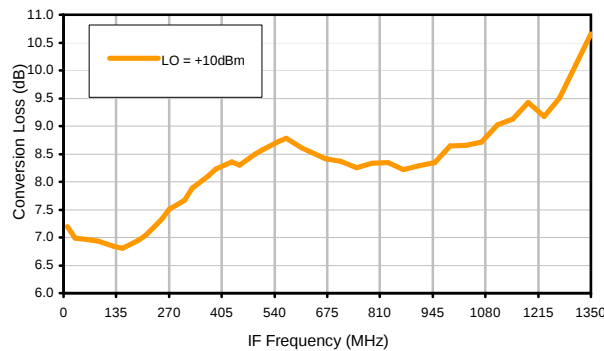

IP3 Input

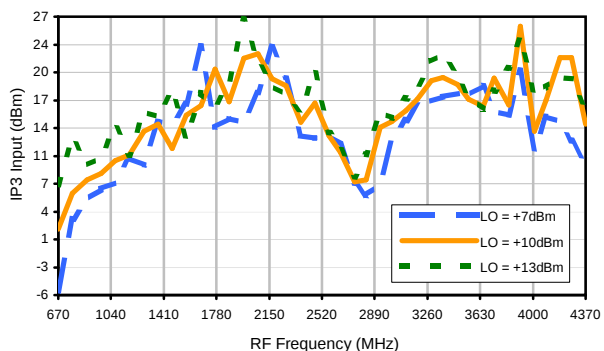


Compression @ RF IN=+5dBm

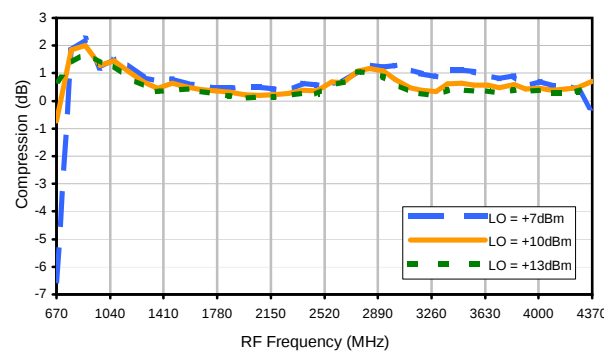


Typical Performance Curves


LO-RF Isolation

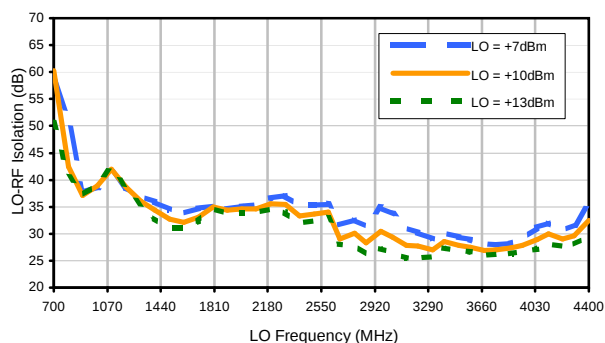


LO-IF Isolation

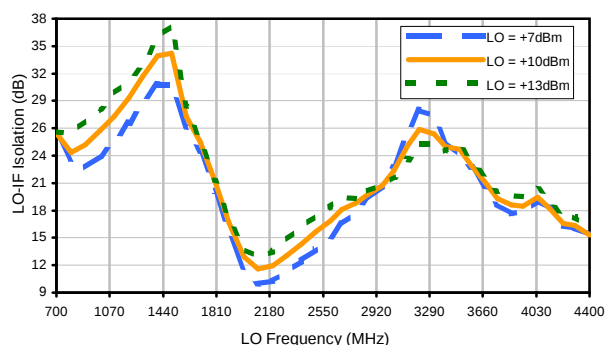


RF-IF Isolation

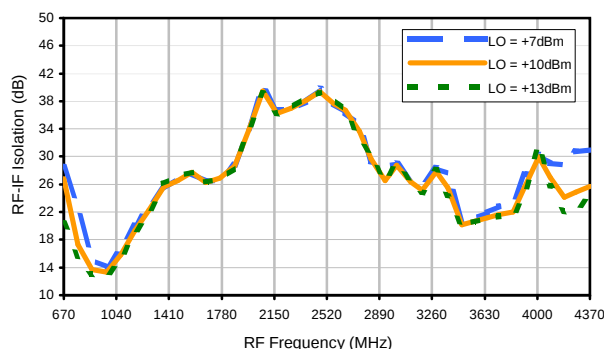


RF VSWR

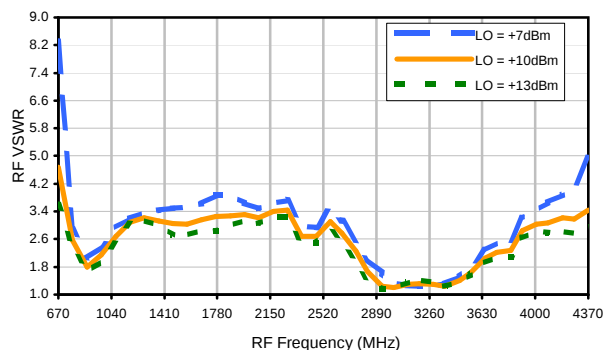

LO VSWR

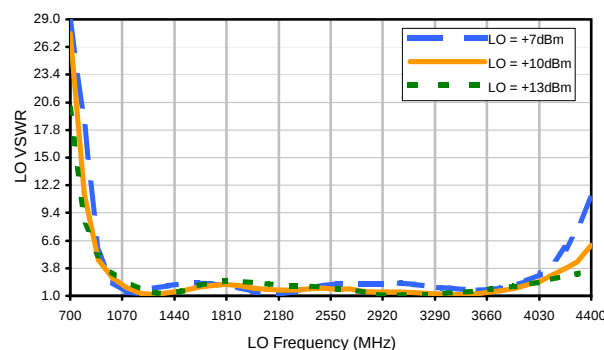

IF VSWR

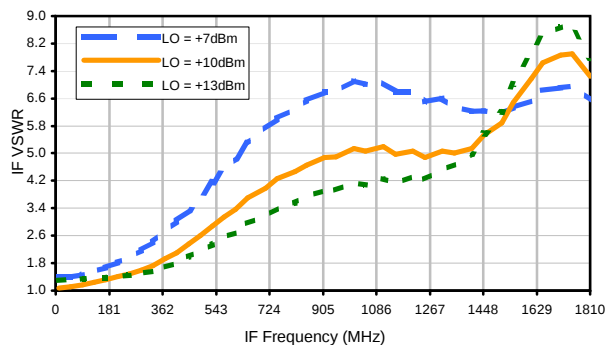

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+11	9	9	21	28	34	42	50	32	---
1	-	33	+0	39	18	33	31	57	44	64	53	62
2	81	50	53	50	51	56	54	58	>73	69	>73	>73
3	>90	66	60	>73	56	>73	63	70	63	>73	69	>73
4	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
5	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
6	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
7	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
8	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
9	>90	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
10	---	---	>73	>73	>73	>73	>73	>73	>73	>73	>73	>73
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2512 MHz; -10.00 dBm.
LO IN: 2542 MHz; +10.00 dBm
IF OUT: 30 MHz; -16.82 dBm

RF HARMONICS ORDER


	(-dBm)	(-dBc)										
0	-	-	+0	19	20	34	41	48	53	58	42	---
1	-	34	+0	41	18	38	35	66	47	67	60	65
2	61	43	45	50	41	54	41	51	57	63	73	74
3	>90	46	44	78	42	56	51	51	47	70	53	77
4	>90	66	66	61	63	56	67	63	66	67	77	71
5	>90	74	61	80	58	76	53	75	62	68	64	>83
6	>90	>83	>83	>83	73	79	79	80	71	>83	71	80
7	>90	>83	>83	>83	>83	80	81	>83	74	80	>83	>83
8	>90	>83	>83	>83	>83	>83	>83	>83	>83	82	>83	>83
9	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	---	---	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2512 MHz; 0.00 dBm.
LO IN: 2542 MHz; +10.00 dBm
IF OUT: 30 MHz; -6.73 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

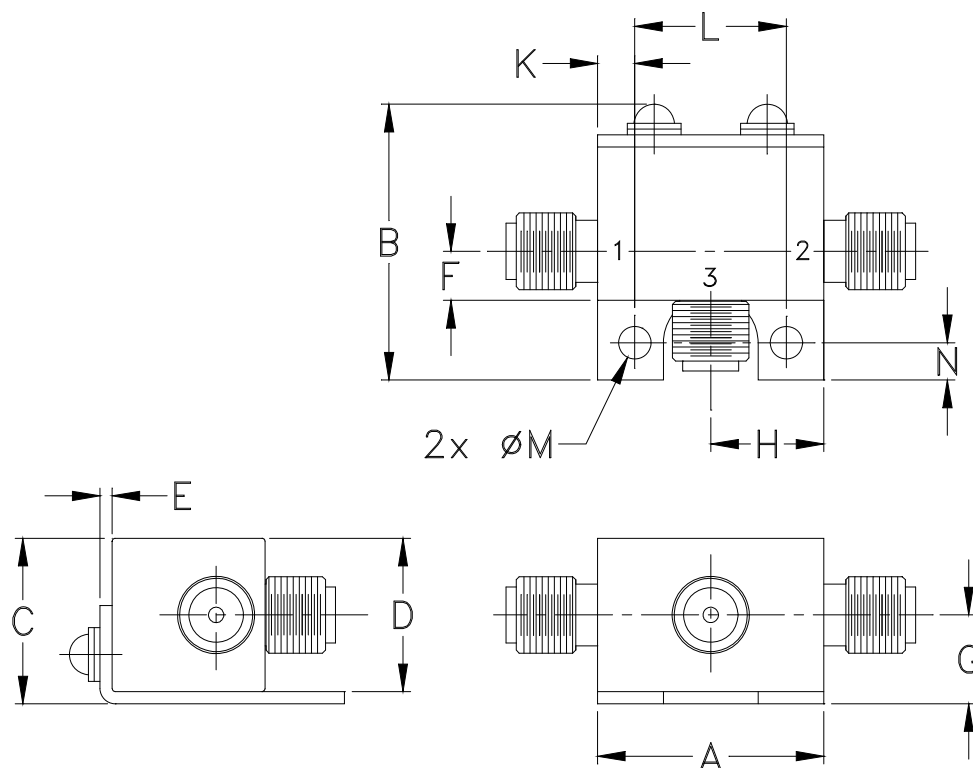

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
FL905	.74 (18.80)	.90 (22.86)	.54 (13.72)	.50 (12.70)	.04 (1.02)	.16 (4.06)	.29 (7.37)	.37 (9.40)	- -	.122 (3.10)	.496 (12.60)	.106 (2.69)	.122 (3.10)	20.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$.

Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Notes:

- Case material: Brass.
- Case finish: Nickel plate.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I