Coaxial

Frequency Mixer

ZX05-C60-S+

Level 7 (LO Power +7 dBm) 1600 to 6000 MHz

Generic photo used for illustration purposes only

CASE STYLE: FL905

Connectors	Model
SMA	ZX05-C60-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	2
IF	3

Features

- rugged construction
- small size
- low conversion loss
- high L-R isolation
- protected by US Patents 6,790,049 & 7,027,795

Applications

- cellular
- PCS
- instrumentation
- satellite communication

Outline Drawing

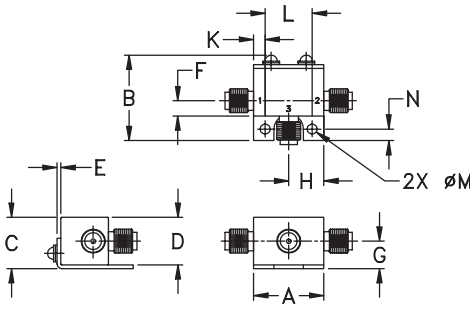

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Electrical Specifications (T_{AMB}=25°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_L-f_U	IF	$\overline{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
1600-6000	**DC-2000**								
1600-4400	DC-2000	6.3	0.2	8.3	32	20	17	—	9
4400-6000	DC-2000	6.2	0.3	8.5	23	17	18	—	8

1 dB COMP.: +1 dBm typ.
Conversion loss specification at 30 MHz IF

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1600.10	1630.11	6.47	32.80	18.08	2.24	4.87
1825.69	1855.70	5.69	40.54	20.58	2.44	2.90
2051.27	2081.28	5.51	34.62	20.26	2.50	2.41
2276.85	2306.86	5.25	31.37	19.11	2.20	2.03
2502.44	2532.45	5.28	31.45	17.13	1.94	1.84
2728.02	2758.03	5.49	33.47	17.11	1.91	2.05
2953.61	2983.62	6.00	33.21	17.20	2.93	2.31
3179.19	3209.20	6.36	33.41	16.92	2.73	2.49
3404.78	3434.79	6.76	35.02	16.07	2.69	2.72
3630.36	3660.37	6.83	34.77	14.78	2.89	3.16
3855.95	3885.96	6.87	34.23	14.48	2.74	3.95
4081.53	4111.54	7.12	33.97	15.29	2.74	3.79
4307.12	4337.13	6.75	35.18	17.32	2.85	4.45
4532.70	4562.71	6.18	33.14	18.24	2.71	4.84
4871.08	4901.09	6.24	30.72	20.71	2.92	2.16
5096.66	5126.67	5.53	25.15	23.32	1.73	1.14
5322.25	5352.26	5.72	22.88	25.07	2.00	1.54
5547.83	5577.84	5.40	22.00	22.46	1.69	2.03
5773.42	5803.43	5.85	21.83	14.93	1.43	3.10
5999.00	5968.99	6.36	21.97	13.20	1.90	6.57

Electrical Schematic

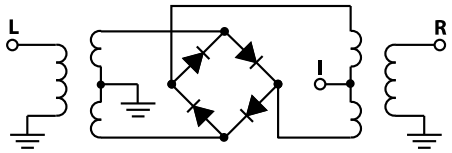

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ZX05-C60-S+
CONVERSION LOSS

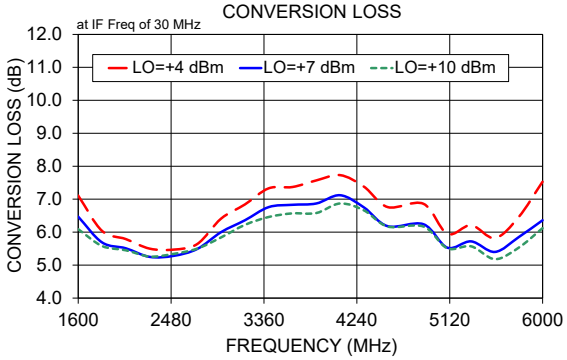

ZX05-C60-S+
L-R ISOLATION

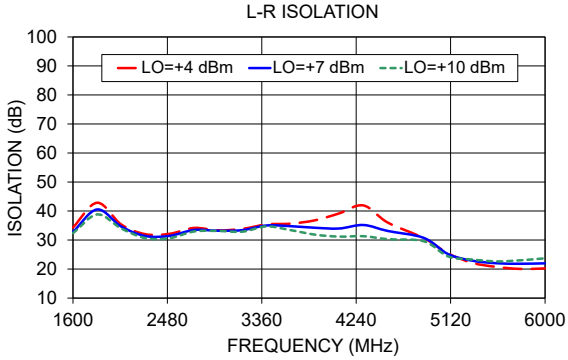

ZX05-C60-S+
L-I ISOLATION

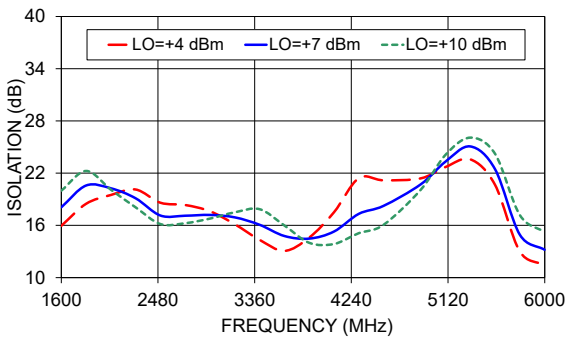

ZX05-C60-S+
RF VSWR

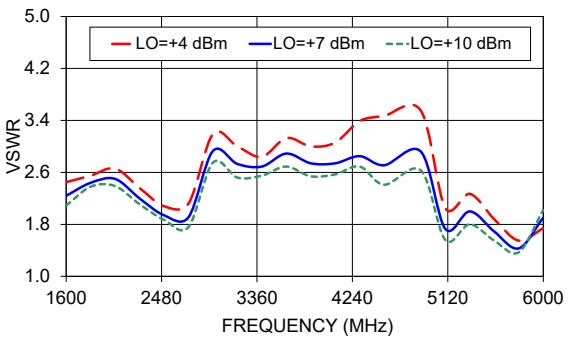

ZX05-C60-S+
LO VSWR

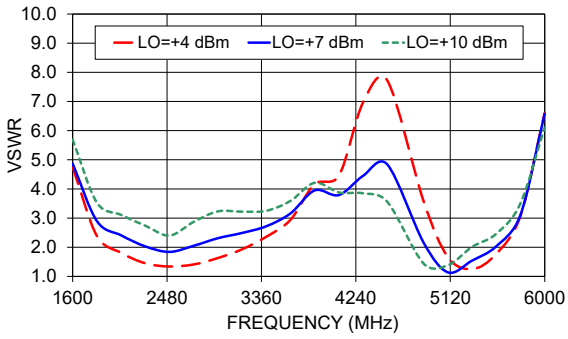

ZX05-C60-S+
IF VSWR

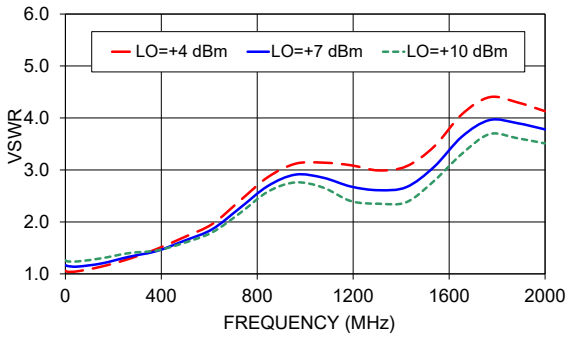

ZX05-C60-S+
IP3

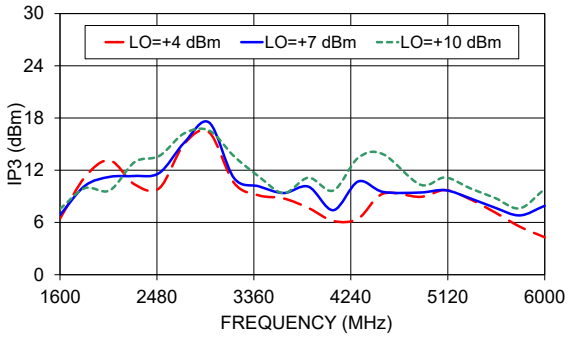

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer ZX05-C60+

Typical Performance Data

RF (MHz)	LO (MHz)	CONVERSION LOSS (dB) @LO (dBm)		
		+4	+7	+10
1600.0	1630.0	6.33	5.85	5.55
1650.0	1680.0	6.18	5.78	5.56
1700.0	1730.0	5.91	5.60	5.42
1750.0	1780.0	5.86	5.59	5.44
1800.0	1830.0	5.83	5.57	5.43
1850.0	1880.0	5.86	5.61	5.47
1900.0	1930.0	5.80	5.60	5.49
1950.0	1980.0	5.87	5.67	5.56
2000.0	2030.0	5.88	5.67	5.58
2050.0	2080.0	5.95	5.74	5.64
2100.0	2130.0	5.98	5.80	5.77
2150.0	2180.0	5.95	5.81	5.85
2200.0	2230.0	5.75	5.60	5.61
2250.0	2280.0	5.67	5.51	5.49
2300.0	2330.0	5.75	5.57	5.53
2350.0	2380.0	5.74	5.55	5.49
2400.0	2430.0	5.74	5.60	5.54
2450.0	2480.0	5.75	5.63	5.61
2500.0	2530.0	5.77	5.67	5.64
2550.0	2580.0	5.73	5.63	5.62
2600.0	2630.0	5.73	5.61	5.58
2650.0	2680.0	5.89	5.75	5.70
2700.0	2730.0	5.95	5.78	5.73
2750.0	2780.0	6.14	5.93	5.84
2800.0	2830.0	6.34	6.08	5.94
2850.0	2880.0	6.51	6.22	6.03
2900.0	2930.0	6.68	6.34	6.14
2950.0	2980.0	6.88	6.53	6.32
3000.0	3030.0	7.02	6.65	6.44
3050.0	3080.0	7.00	6.60	6.40
3100.0	3130.0	7.04	6.64	6.41
3700.0	3730.0	6.40	5.89	5.62
3750.0	3780.0	6.30	5.79	5.53
3800.0	3830.0	6.39	5.85	5.54
3850.0	3880.0	6.43	5.91	5.60
3900.0	3930.0	6.49	5.98	5.68
3950.0	3980.0	6.51	6.03	5.76
4000.0	4030.0	6.59	6.13	5.87
5000.0	5030.0	6.25	5.99	5.97
6000.0	6030.0	8.42	6.61	6.32

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+4	+7	+10	+4	+7	+10
1630.0	33.94	33.44	33.49	16.61	18.92	21.13
1680.0	35.25	34.70	34.59	16.90	19.15	21.21
1730.0	37.64	36.97	36.53	17.34	19.61	21.53
1780.0	41.10	39.56	38.50	17.73	19.92	21.61
1830.0	45.64	43.23	41.22	18.04	20.13	21.60
1880.0	45.38	43.95	42.33	18.30	20.12	21.31
1930.0	41.46	40.80	40.12	18.51	19.99	20.81
1980.0	38.63	37.93	37.40	18.73	19.86	20.29
2030.0	36.31	35.50	34.82	18.82	19.59	19.64
2080.0	35.28	33.81	32.68	18.82	19.24	19.03
2130.0	34.28	32.77	31.22	18.71	18.86	18.44
2180.0	33.71	31.83	30.12	18.54	18.20	17.50
2230.0	32.81	31.61	30.25	18.84	18.14	17.31
2280.0	32.13	30.87	29.62	18.77	17.56	16.56
2330.0	31.98	30.85	29.71	18.35	17.13	16.27
2380.0	32.08	30.79	29.65	17.99	16.76	15.90
2430.0	32.25	31.10	29.95	17.98	16.80	15.99
2480.0	32.47	31.38	30.31	18.04	16.72	15.86
2530.0	32.60	31.53	30.47	17.86	16.64	15.84
2580.0	33.14	31.99	30.97	18.01	16.72	15.94
2630.0	33.09	32.21	31.42	17.97	16.72	15.97
2680.0	33.51	32.96	32.33	18.01	16.91	16.22
2730.0	34.25	33.85	33.43	17.93	16.97	16.37
2780.0	35.26	34.84	34.41	17.76	16.99	16.50
2830.0	35.54	35.38	35.05	17.64	17.03	16.63
2880.0	34.90	34.73	34.57	17.50	17.03	16.76
2930.0	34.52	34.41	34.34	17.44	17.21	17.07
2980.0	34.20	34.01	33.87	17.22	17.15	17.15
3030.0	33.96	33.86	33.71	17.06	17.40	17.52
3080.0	33.51	33.36	33.15	16.79	17.38	17.67
3130.0	33.84	33.32	32.96	16.81	17.58	18.16
3730.0	36.21	33.46	31.14	13.93	13.85	13.49
3780.0	36.66	32.37	30.07	14.61	13.93	13.18
3830.0	39.20	33.61	30.87	15.93	14.80	13.81
3880.0	39.69	34.00	31.03	16.58	15.08	13.93
3930.0	40.07	34.55	31.56	17.37	15.52	14.18
3980.0	39.64	34.60	31.74	17.87	15.76	14.38
4030.0	39.47	34.90	31.92	18.44	16.01	14.55
5030.0	24.49	24.51	24.37	19.91	20.40	20.95
6030.0	23.05	24.37	24.74	11.51	13.33	15.01

LO (MHz)	RF (MHz)	IP3 Input (dBm) @LO (dBm)
		+7
3030.0	3000.0	13.27
3080.0	3050.0	15.34
3130.0	3100.0	10.67
3180.0	3150.0	12.29
3230.0	3200.0	10.34
3280.0	3250.0	11.38
3330.0	3300.0	9.85
3380.0	3350.0	10.63
3430.0	3400.0	9.22
3530.0	3500.0	8.13
3580.0	3550.0	7.87
3630.0	3600.0	7.49
3680.0	3650.0	8.01
3730.0	3700.0	6.96
3780.0	3750.0	8.26
3830.0	3800.0	8.12
3880.0	3850.0	7.51
3930.0	3900.0	8.54
3980.0	3950.0	7.80
4030.0	4000.0	8.04
4080.0	4050.0	8.15
4130.0	4100.0	8.66
4180.0	4150.0	11.46
4230.0	4200.0	11.90
4280.0	4250.0	10.41
4330.0	4300.0	9.76
4380.0	4350.0	10.36
4430.0	4400.0	8.89
4480.0	4450.0	9.36
4530.0	4500.0	9.12

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Frequency Mixer ZX05-C60+

Typical Performance Data

RF/LO (MHz)	RF VSWR (:1) @LO (dBm)			LO VSWR (:1) @LO (dBm)			IF (MHz)	IF VSWR (:1) @LO (dBm)		
	+4	+7	+10	+4	+7	+10		+4	+7	+10
1630.0	3.51	3.21	3.01	2.34	2.77	3.41	10.0	1.52	1.02	1.20
1680.0	3.44	3.21	3.06	2.29	2.63	3.23	20.0	1.51	1.03	1.20
1730.0	3.31	3.15	3.03	2.41	2.78	3.49	30.0	1.52	1.05	1.20
1780.0	3.12	2.93	2.82	2.44	2.97	3.78	40.0	1.52	1.06	1.20
1830.0	2.91	2.72	2.59	2.46	3.06	3.91	50.0	1.53	1.08	1.21
1880.0	2.61	2.43	2.32	2.52	3.21	4.11	60.0	1.54	1.10	1.22
1930.0	2.27	2.11	2.00	2.45	3.07	3.82	70.0	1.55	1.12	1.22
1980.0	1.93	1.79	1.69	2.50	3.20	3.95	80.0	1.57	1.13	1.23
2030.0	1.66	1.52	1.44	2.51	3.18	3.89	90.0	1.58	1.15	1.24
2080.0	1.54	1.42	1.35	2.51	3.23	3.98	150.0	1.66	1.27	1.32
2130.0	1.50	1.43	1.42	2.59	3.40	4.31	200.0	1.76	1.36	1.39
2180.0	1.58	1.58	1.64	2.54	3.43	4.45	250.0	1.85	1.46	1.47
2230.0	1.84	1.86	1.91	2.26	3.05	4.03	300.0	1.96	1.55	1.55
2280.0	2.18	2.19	2.21	2.28	3.08	4.18	350.0	2.08	1.64	1.62
2330.0	2.56	2.55	2.56	1.87	2.32	2.95	400.0	2.17	1.72	1.67
2380.0	2.94	2.91	2.87	1.60	1.88	2.39	450.0	2.30	1.81	1.73
2430.0	3.31	3.27	3.22	1.42	1.51	1.91	500.0	2.43	1.89	1.79
2480.0	3.55	3.45	3.37	1.38	1.18	1.55	550.0	2.53	1.96	1.85
2530.0	3.85	3.70	3.59	1.48	1.12	1.54	600.0	2.69	2.07	1.92
2580.0	4.14	3.93	3.74	1.56	1.38	1.73	650.0	2.85	2.16	1.97
2630.0	4.40	4.12	3.88	1.71	1.75	2.19	700.0	3.06	2.28	2.05
2680.0	4.78	4.40	4.13	1.84	2.11	2.70	750.0	3.28	2.42	2.15
2730.0	5.25	4.73	4.36	2.01	2.55	3.32	800.0	3.42	2.51	2.22
2780.0	6.10	5.49	4.97	2.19	2.96	3.96	850.0	3.54	2.58	2.27
2830.0	6.87	6.24	5.68	2.38	3.30	4.46	900.0	3.77	2.71	2.38
2880.0	7.85	7.07	6.32	2.56	3.82	5.39	950.0	3.74	2.73	2.38
2930.0	8.45	7.60	6.77	2.76	3.98	5.56	1000.0	3.76	2.73	2.37
2980.0	7.34	6.66	6.00	2.82	3.94	5.32	1050.0	3.80	2.77	2.39
3030.0	7.08	6.40	5.78	3.10	4.50	6.15	1100.0	3.83	2.78	2.38
3080.0	5.67	5.15	4.71	3.23	4.36	5.76	1150.0	3.99	2.84	2.40
3130.0	4.78	4.30	3.94	3.57	4.81	6.62	1200.0	4.09	2.85	2.38
3730.0	2.48	2.24	2.06	3.80	3.91	4.32	1250.0	4.48	2.95	2.42
3780.0	2.47	2.20	2.00	3.96	3.97	4.15	1300.0	4.53	2.92	2.40
3830.0	2.49	2.21	2.00	4.49	4.29	4.38	1350.0	4.84	3.01	2.43
3880.0	2.42	2.17	1.97	4.17	3.96	4.27	1400.0	4.76	2.96	2.40
3930.0	2.37	2.14	1.95	4.01	3.70	3.78	1450.0	4.45	2.87	2.35
3980.0	2.29	2.07	1.93	4.03	3.73	3.79	1500.0	4.25	2.80	2.31
4030.0	2.22	2.03	1.90	3.86	3.49	3.58	1550.0	3.97	2.67	2.24
5030.0	1.72	1.50	1.38	2.33	1.54	1.10	1600.0	3.85	2.61	2.20
6030.0	2.28	1.73	1.55	3.17	2.81	2.63	3000.0	23.15	37.61	46.96

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Frequency Mixer ZX05-C60+

Typical Performance Curves

Conversion Loss

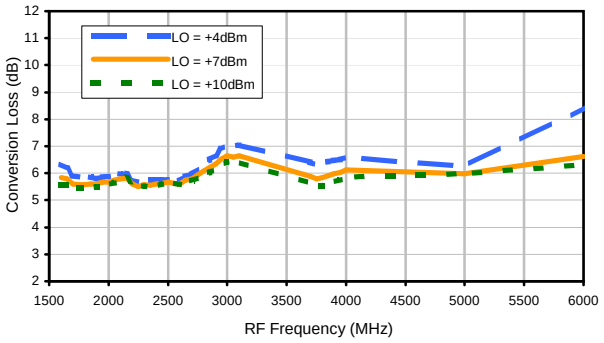

IP3 Input

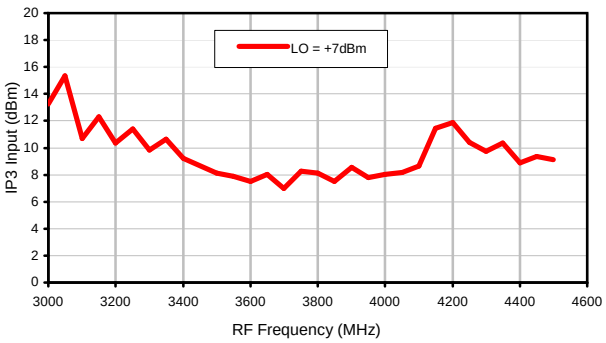

LO-RF Isolation

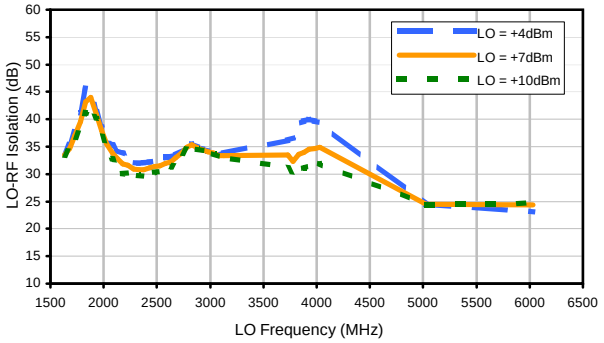

LO-IF Isolation

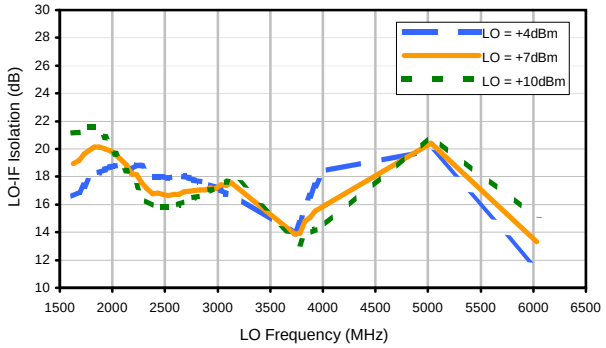

RF VSWR

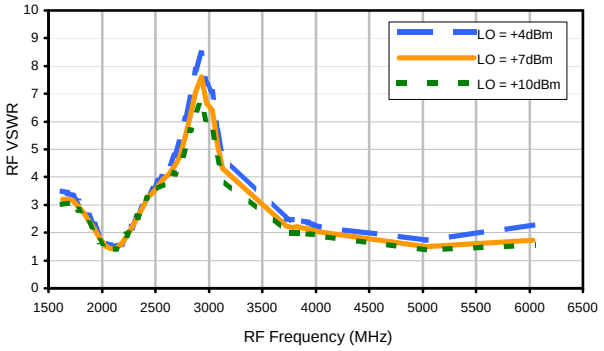

LO VSWR

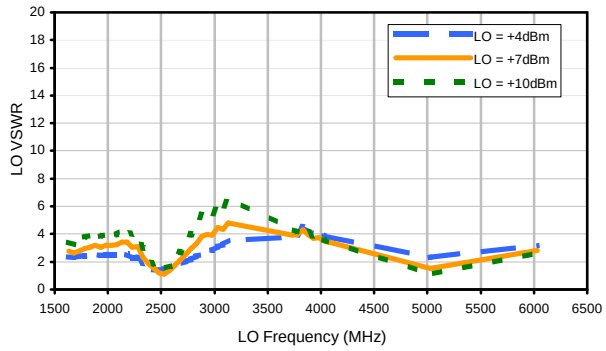

IF VSWR

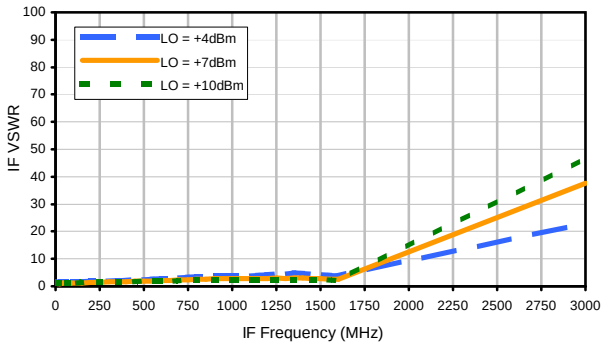

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style FL

FL905

Outline Dimensions

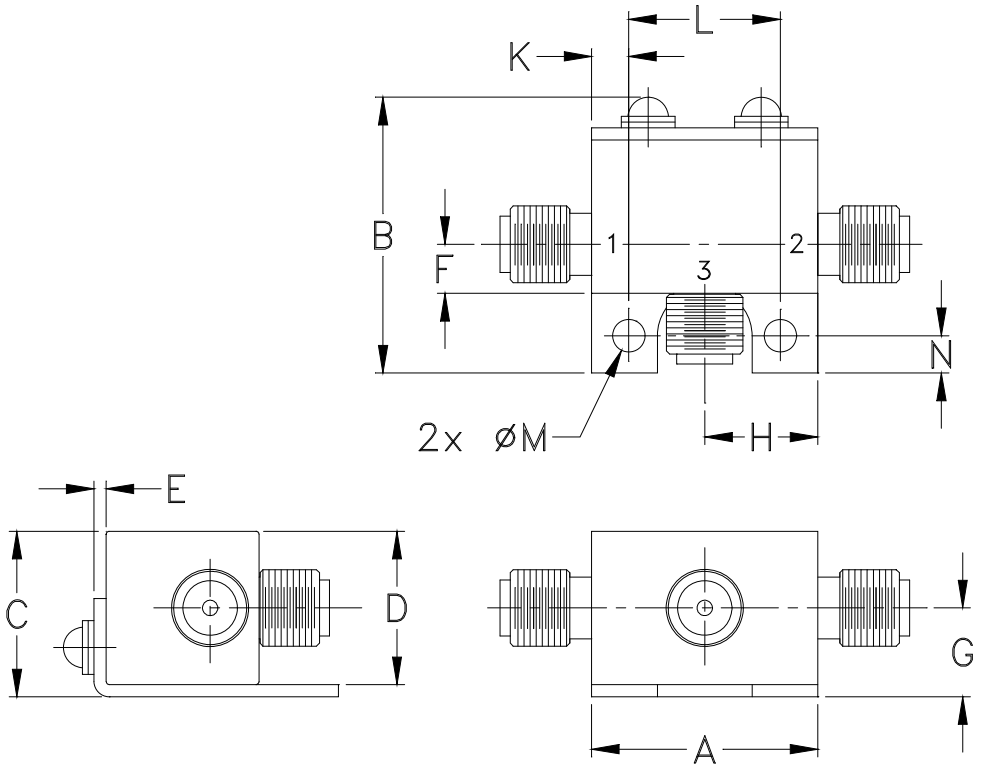

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
FL905	.74 (18.80)	.90 (22.86)	.54 (13.72)	.50 (12.70)	.04 (1.02)	.16 (4.06)	.29 (7.37)	.37 (9.40)	- -	.122 (3.10)	.496 (12.60)	.106 (2.69)	.122 (3.10)	20.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015.
Tolerance on hole size and interaxes dimensions to be ±.005.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Mini-Circuits

Environmental Specifications **ENV28T5**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.