

Power Splitter/Combiner

4 Way-0° 50Ω

1675 to 2350 MHz

ZX10-4A-24-S+


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	2.5W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

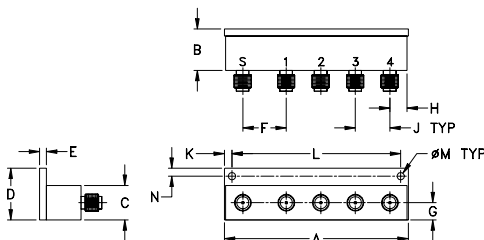

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.67	.60	.50	.75	.10	.63	.25	.25
67.82	15.24	12.70	19.05	2.54	16.00	6.35	6.35
J	K	L	M	N	wt.		
.50	.11	2.445	.106	.12	grams		
12.70	2.79	62.10	2.69	3.05	65.0		

Features

- low insertion loss, 0.8 dB typ.
- high isolation, 20 dB typ.
- rigid unibody construction
- convenient for panel mount applications
- low cost
- very small size
- protected by US patent 6,790,049

Applications

- antenna arrays
- signal distribution
- test bench




Electrical Specifications (T_{AMB}=25°C)

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6 dB		PHASE UNBALANCE (Deg.)	AMPLITUDE UNBALANCE (dB)	INPUT VSWR (:1)	OUTPUT VSWR (:1)
f _c -f _u	Typ.	Min.	Typ.	Max.	Max.	Max.	Typ.	Typ.
1675-2350	20	18	0.8	1.2	7.0	0.6	1.35	1.3
1775-2200	25	20	0.8	1.2	6.0	0.6	1.4	1.3

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1675.00	6.45	6.67	6.38	6.38	0.30	20.68	21.82	20.97	1.04	1.12	1.08	1.12	1.08	1.11
1725.00	6.46	6.69	6.39	6.37	0.32	22.61	22.24	23.07	1.08	1.10	1.08	1.14	1.07	1.11
1775.00	6.48	6.71	6.42	6.39	0.33	24.68	22.76	25.41	1.24	1.14	1.09	1.12	1.07	1.12
1815.00	6.51	6.75	6.44	6.39	0.35	26.25	23.28	27.30	1.43	1.17	1.10	1.15	1.07	1.13
1855.00	6.54	6.78	6.48	6.42	0.37	27.50	23.87	28.85	1.58	1.22	1.12	1.15	1.08	1.14
1895.00	6.58	6.82	6.51	6.43	0.39	28.19	24.58	29.67	1.76	1.26	1.14	1.17	1.10	1.16
1935.00	6.62	6.86	6.55	6.45	0.41	28.37	25.39	29.62	1.88	1.30	1.16	1.19	1.12	1.18
1975.00	6.64	6.88	6.57	6.45	0.43	28.27	26.31	29.00	2.02	1.34	1.18	1.21	1.14	1.20
2020.00	6.67	6.89	6.60	6.46	0.43	27.99	27.43	28.11	2.14	1.38	1.21	1.23	1.16	1.22
2065.00	6.69	6.91	6.62	6.47	0.43	27.71	28.69	27.41	2.31	1.41	1.23	1.27	1.20	1.25
2110.00	6.72	6.92	6.65	6.49	0.43	27.61	30.04	27.03	2.52	1.44	1.26	1.27	1.22	1.28
2155.00	6.75	6.93	6.68	6.51	0.42	27.75	31.28	26.96	2.70	1.46	1.27	1.32	1.26	1.30
2200.00	6.77	6.93	6.70	6.51	0.42	28.05	31.98	27.15	2.86	1.46	1.29	1.31	1.28	1.32
2230.00	6.78	6.92	6.71	6.51	0.41	28.26	31.91	27.37	2.98	1.45	1.30	1.32	1.30	1.34
2260.00	6.80	6.92	6.72	6.52	0.40	28.37	31.37	27.58	3.14	1.45	1.31	1.36	1.31	1.35
2290.00	6.81	6.91	6.73	6.51	0.40	28.20	30.47	27.67	3.25	1.43	1.32	1.32	1.32	1.36
2320.00	6.83	6.90	6.74	6.51	0.38	27.71	29.43	27.55	3.34	1.43	1.32	1.36	1.33	1.37
2350.00	6.85	6.89	6.74	6.51	0.38	26.84	28.30	27.07	3.52	1.41	1.33	1.38	1.34	1.37

1. Total Loss = Insertion Loss + 6dB splitter loss.

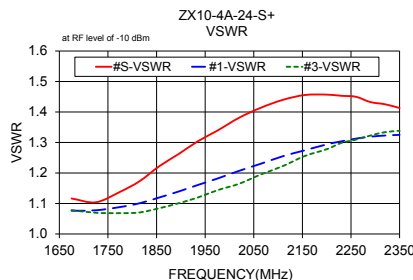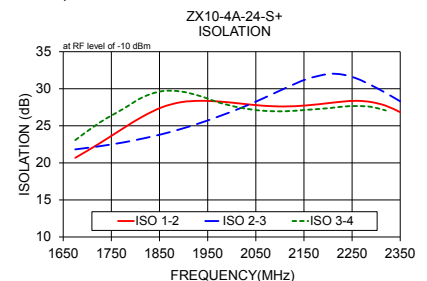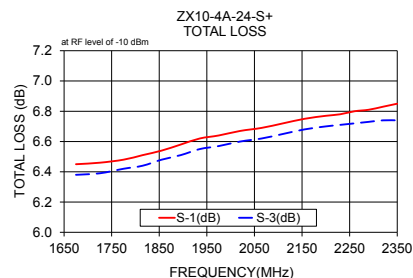

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



4 Way-0° Power Splitter/Combiner

ZX10-4A-24+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)				AMP. UNBAL. (dB)	ISOLATION (dB)			PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)				
	S-1	S-2	S-3	S-4		1-2	2-3	3-4			S	1	2	3	4
1675.0	6.45	6.67	6.38	6.38	0.30	20.68	21.82	20.97	1.04	1675.0	1.12	1.08	1.12	1.08	1.11
1725.0	6.46	6.69	6.39	6.37	0.32	22.61	22.24	23.07	1.08	1725.0	1.10	1.08	1.14	1.07	1.11
1775.0	6.48	6.71	6.42	6.39	0.33	24.68	22.76	25.41	1.24	1775.0	1.14	1.09	1.12	1.07	1.12
1815.0	6.51	6.75	6.44	6.39	0.35	26.25	23.28	27.30	1.43	1815.0	1.17	1.10	1.15	1.07	1.13
1855.0	6.54	6.78	6.48	6.42	0.37	27.50	23.87	28.85	1.58	1855.0	1.22	1.12	1.15	1.08	1.14
1895.0	6.58	6.82	6.51	6.43	0.39	28.19	24.58	29.67	1.76	1895.0	1.26	1.14	1.17	1.10	1.16
1935.0	6.62	6.86	6.55	6.45	0.41	28.37	25.39	29.62	1.88	1935.0	1.30	1.16	1.19	1.12	1.18
1975.0	6.64	6.88	6.57	6.45	0.43	28.27	26.31	29.00	2.02	1975.0	1.34	1.18	1.21	1.14	1.20
2020.0	6.67	6.89	6.60	6.46	0.43	27.99	27.43	28.11	2.14	2020.0	1.38	1.21	1.23	1.16	1.22
2065.0	6.69	6.91	6.62	6.47	0.43	27.71	28.69	27.41	2.31	2065.0	1.41	1.23	1.27	1.20	1.25
2110.0	6.72	6.92	6.65	6.49	0.43	27.61	30.04	27.03	2.52	2110.0	1.44	1.26	1.27	1.22	1.28
2155.0	6.75	6.93	6.68	6.51	0.42	27.75	31.28	26.96	2.70	2155.0	1.46	1.27	1.32	1.26	1.30
2200.0	6.77	6.93	6.70	6.51	0.42	28.05	31.98	27.15	2.86	2200.0	1.46	1.29	1.31	1.28	1.32
2230.0	6.78	6.92	6.71	6.51	0.41	28.26	31.91	27.37	2.98	2230.0	1.45	1.30	1.32	1.30	1.34
2260.0	6.80	6.92	6.72	6.52	0.40	28.37	31.37	27.58	3.14	2260.0	1.45	1.31	1.36	1.31	1.35
2290.0	6.81	6.91	6.73	6.51	0.40	28.20	30.47	27.67	3.25	2290.0	1.43	1.32	1.32	1.32	1.36
2320.0	6.83	6.90	6.74	6.51	0.38	27.71	29.43	27.55	3.34	2320.0	1.43	1.32	1.36	1.33	1.37
2350.0	6.85	6.89	6.74	6.51	0.38	26.84	28.30	27.07	3.52	2350.0	1.41	1.33	1.38	1.34	1.37

¹ Total Loss = Insertion Loss+ 6dB Splitter Loss

REV. X2
ZX10-4A-24+
100627
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



4 Way-0° Power Splitter/Combiner

ZX10-4A-24+

Typical Performance Curves

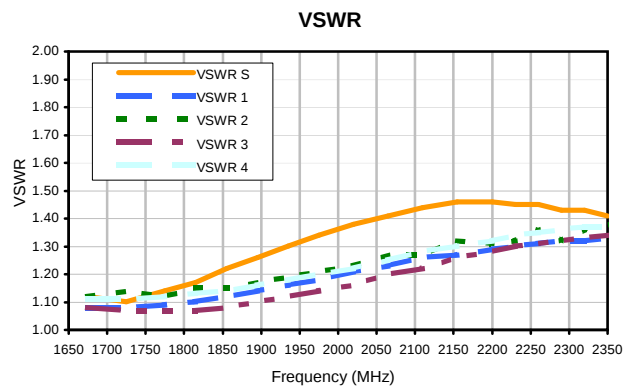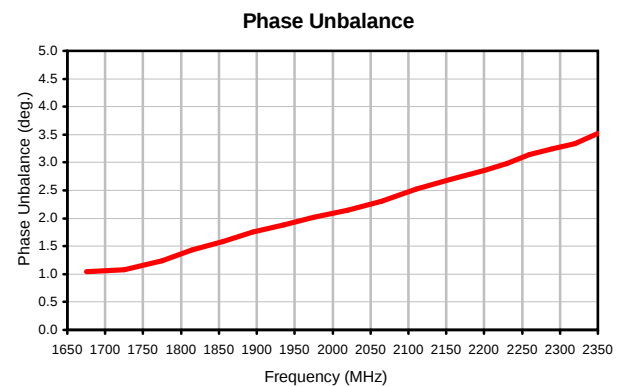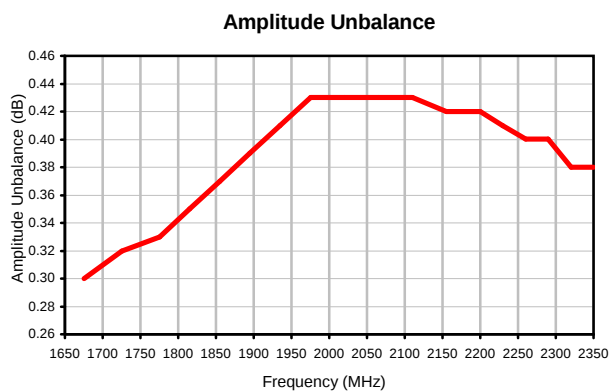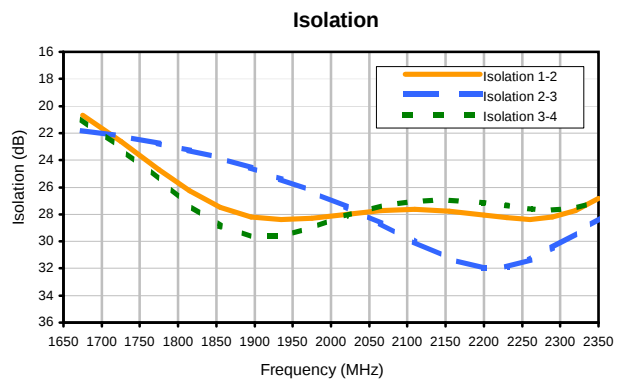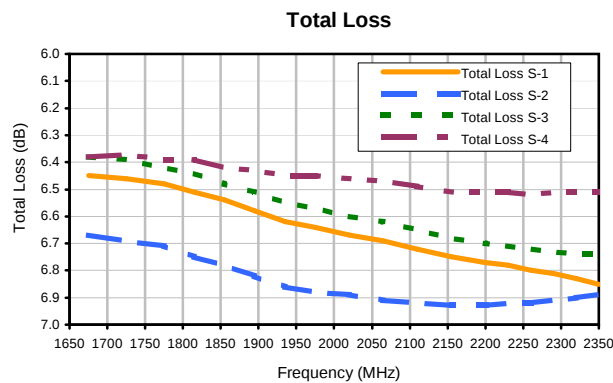


REV. X2
ZX10-4A-24+
100627
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Outline Dimensions

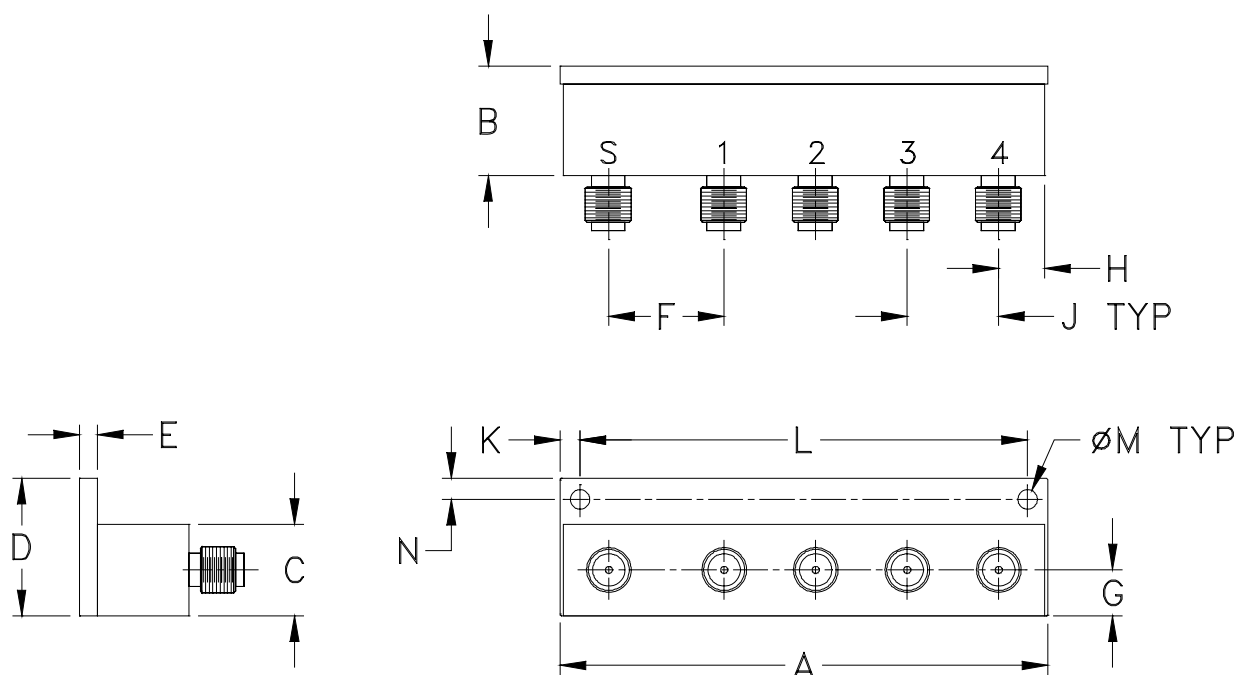

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	WT. GRAM
GY1065	2.67 (67.82)	.60 (15.24)	.50 (12.70)	.75 (19.05)	.10 (2.54)	.63 (16.00)	.25 (6.35)	.25 (6.35)	.50 (12.70)	.11 (2.79)	2.445 (62.10)	.106 (2.69)	.12 (3.05)	65.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$.

Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I