



COAXIAL

Low Noise Amplifier

ZX60-P162LN+

Mini-Circuits

50Ω 0.7 to 1.6 GHz SMA Female

THE BIG DEAL

- Ultra Low Noise Figure, 0.5 dB typ.
- High Dynamic Range
- Protected by US patent 6,790,049

APPLICATIONS

- Base station infrastructure
- Portable wireless
- GPS
- GSM
- Airborne radar



Generic photo used for illustration purposes only

Model No.	ZX60-P162LN+
Case Style	GC957-2
Connectors	SMA Female

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

PRODUCT OVERVIEW

The ZX60-P162LN+ (RoHS compliant) uses Mini-Circuits' E-pHEMT technology to offer ultra low noise figure over a broad frequency range and high IP3. Housed in a rugged, cost effective unibody chassis, this amplifier supports a wide variety of applications requiring moderate power output, low distortion and 50 ohm matched input/output ports.

KEY FEATURES

Feature	Advantages
Ultra Low Noise Figure, 0.5 dB at 1GHz	Outstanding world class noise figure performance.
High IP3 vs. DC power consumption +29.9 dBm typical at 1 GHz	Combining Low Noise and High IP3 makes this model ideal for use in Low Noise Receiver Front End (RFE)
Max. Input Power, +25 dBm	Ruggedized design operates to high input powers often seen at receiver inputs.
Very Small Size, 0.75" x 0.75"	The unique unibody size and construction enable the ZX60-P162LN+ to be used in extremely compact connectorized applications.





COAXIAL

Low Noise Amplifier

ZX60-P162LN+

Mini-Circuits

50Ω 0.7 to 1.6 GHz SMA Female

ELECTRICAL SPECIFICATIONS AT 25°C AND +4.0V, UNLESS NOTED OTHERWISE

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.7		1.6	GHz
Noise Figure	0.7	-	0.65	0.95	dB
	0.8		0.47		
	1.0		0.52		
	1.3		0.56		
	1.6		0.74		
Gain	0.7	20.9	24.1	24.5	dB
	0.8		23.8		
	1.0		22.5		
	1.3		20.5		
	1.6		18.5		
Output Power at 1dB Compression	0.7	17.5	19.2	-	dBm
	0.8		19.9		
	1.0		19.9		
	1.3		19.7		
	1.6		19.5		
Output IP3	0.7	28.0	29.0	-	dBm
	0.8		29.8		
	1.0		29.9		
	1.3		30.2		
	1.6		29.6		
Input VSWR	0.7		2.18		:1
	0.8		1.63		
	1.0		1.19		
	1.3		1.23		
	1.6		1.39		
Output VSWR	0.7		1.57		:1
	0.8		1.42		
	1.0		1.38		
	1.3		1.65		
	1.6		2.11		
Active Directivity (Isolation-Gain)	0.7 - 1.6		8.0		dB
DC Supply Voltage		3.8	4.0	4.2	V
Supply Current		44	52	60	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C Case
Storage Temperature	-55°C to 100°C
DC Voltage	+5.5V
Input RF Power (no damage) Vd=4V	+25 dBm
Power Consumption	0.55W

Permanent damage may occur if any of these limits are exceeded.





COAXIAL


Low Noise Amplifier

ZX60-P162LN+

Mini-Circuits

50Ω 0.7 to 1.6 GHz SMA Female

OUTLINE DRAWING

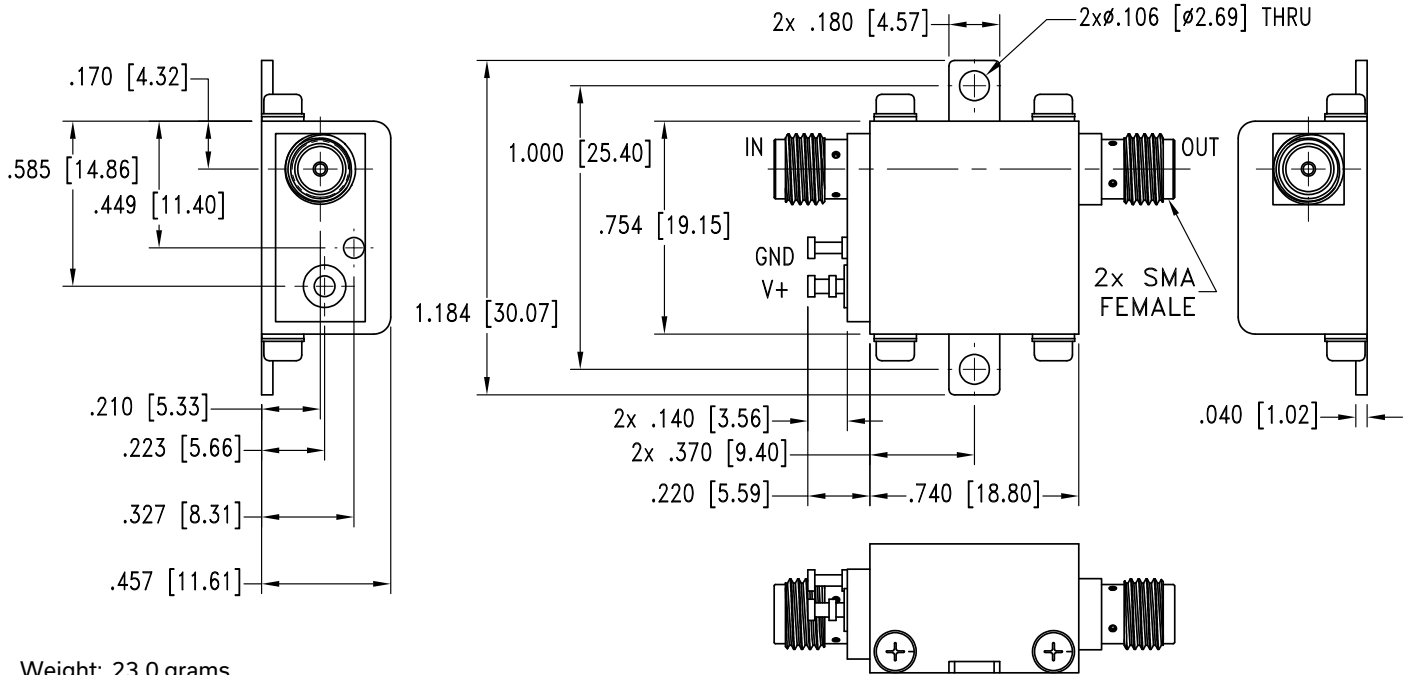

Weight: 23.0 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03; 3 Pl. ±.015 Inches

NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. [AN-40-010](#).



COAXIAL

Low Noise Amplifier







ZX60-P162LN+

Mini-Circuits

50Ω 0.7 to 1.6 GHz SMA Female

TYPICAL PERFORMANCE DATA/CURVES

Frequency (MHz)	Gain (dB)	Directivity (dB)	VSWR (:1)		Power Out @ 1 dB COMPR. (dBm)	Noise Figure (dB)	Output IP3 (dBm)
			IN	OUT			
700.00	24.09	13.78	2.19	1.58	19.2	0.7	29.0
800.00	23.78	13.74	1.64	1.43	19.9	0.5	29.8
900.00	23.17	14.08	1.35	1.37	20.0	0.6	30.2
1000.00	22.49	14.69	1.19	1.38	19.9	0.5	29.9
1100.00	21.81	15.35	1.09	1.44	19.9	0.6	30.3
1200.00	21.12	16.12	1.16	1.53	20.2	0.6	30.4
1300.00	20.46	16.65	1.23	1.65	19.7	0.6	30.2
1400.00	19.81	17.42	1.29	1.80	19.6	0.7	29.8
1500.00	19.16	18.07	1.34	1.95	19.3	0.6	29.8
1600.00	18.53	18.84	1.40	2.13	19.5	0.7	29.6

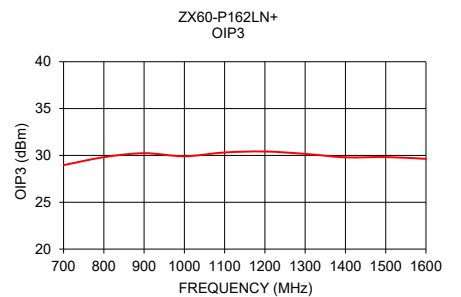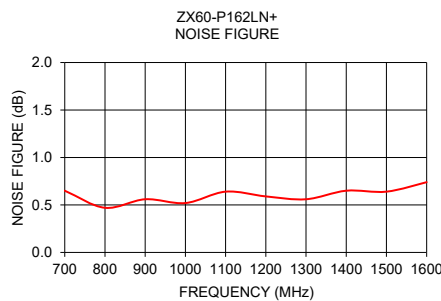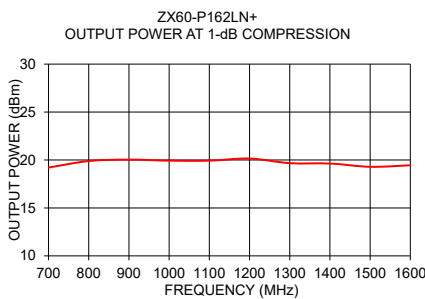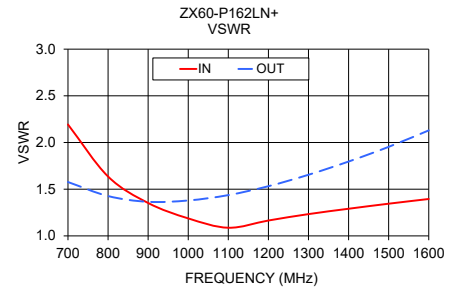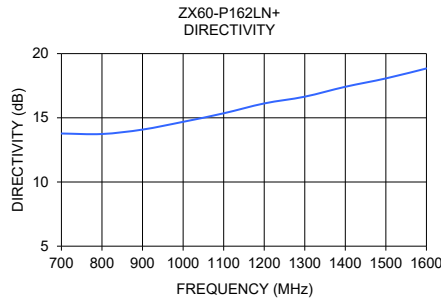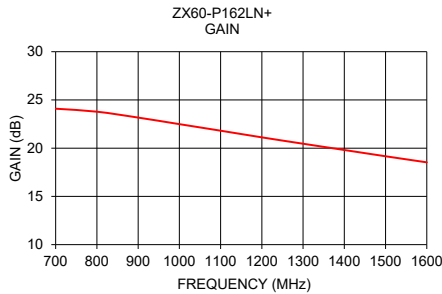

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Amplifier

ZX60-P162LN+

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.0V, Id = 50.99mA @ Temperature = 25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
					K	Measure			
(MHz)	(dB)	(dB)	(dB)	(dB)			(dBm)	(dBm)	(dB)
700.0	24.18	38.09	9.54	13.00	2.24	1.00	29.47	19.21	0.65
800.0	23.85	37.74	14.51	15.10	2.43	0.95	30.53	19.89	0.47
900.0	23.27	37.50	20.87	16.24	2.60	0.94	31.34	20.04	0.56
1000.0	22.62	37.57	31.45	16.38	2.82	0.94	31.47	19.93	0.52
1100.0	21.96	37.59	29.58	15.69	3.02	0.95	31.97	19.93	0.50
1200.0	21.29	37.66	23.25	14.44	3.22	0.95	32.44	20.15	0.59
1300.0	20.64	37.55	20.08	13.07	3.35	0.95	32.76	19.67	0.56
1400.0	20.00	37.97	18.21	11.74	3.67	0.94	32.79	19.63	0.65
1500.0	19.37	38.02	16.77	10.55	3.84	0.93	32.91	19.29	0.64
1600.0	18.73	37.92	15.69	9.51	3.94	0.91	32.65	19.45	0.74
1700.0	18.11	38.12	14.79	8.56	4.15	0.89	32.97	19.24	0.75
1800.0	17.46	38.52	13.96	7.70	4.46	0.87	33.20	18.67	0.84
1900.0	16.73	38.88	13.23	6.88	4.79	0.84	32.20	18.62	0.87
2000.0	16.30	38.41	12.69	6.60	4.64	0.83	33.04	17.81	0.90
2100.0	15.76	38.57	12.17	5.94	4.75	0.80	32.53	17.34	0.88
2200.0	15.18	39.01	11.65	5.38	5.03	0.77	31.08	17.03	0.97
2300.0	14.60	39.09	11.18	4.92	5.12	0.74	29.67	16.49	1.01
2400.0	14.02	39.21	10.73	4.52	5.24	0.72	29.87	16.33	1.12
2500.0	13.45	39.36	10.29	4.19	5.38	0.69	28.74	15.39	1.14
2600.0	12.89	39.78	9.89	3.88	5.68	0.67	28.68	15.15	1.31
2700.0	12.31	39.82	9.48	3.63	5.77	0.65	27.95	14.99	1.42
2800.0	11.75	39.50	9.11	3.40	5.60	0.63	27.86	14.38	1.51
2900.0	11.22	39.31	8.80	3.23	5.55	0.61	27.82	13.73	1.48
3000.0	10.72	39.11	8.49	3.05	5.45	0.59	26.40	13.20	1.50
3100.0	10.21	38.96	8.15	2.89	5.38	0.58	25.70	13.04	1.44
3200.0	9.71	38.52	7.85	2.71	5.09	0.56	25.21	12.71	1.65
3300.0	9.25	38.11	7.59	2.54	4.79	0.54	26.09	12.18	1.72
3400.0	8.80	37.57	7.36	2.41	4.48	0.52	24.60	11.95	1.95
3500.0	8.36	36.86	7.11	2.28	4.09	0.51	24.50	11.50	1.77
3600.0	7.92	36.40	6.87	2.17	3.84	0.50	23.52	11.57	1.91
3700.0	7.47	35.76	6.65	2.07	3.55	0.49	24.14	11.12	2.03
3800.0	7.04	35.19	6.49	2.00	3.32	0.48	23.60	10.46	2.04
3900.0	6.66	34.41	6.35	1.93	3.02	0.47	22.34	10.29	2.42
4000.0	6.24	33.62	6.19	1.88	2.79	0.47	21.77	9.83	2.22

Amplifier

ZX60-P162LN+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.0V, Id = 51.96mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
					K	Measure			
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
700.0	24.57	38.61	8.51	12.36	2.19	1.01	29.86	19.28	0.42
800.0	24.29	38.12	12.58	14.32	2.36	0.96	31.05	19.94	0.28
900.0	23.76	37.82	17.08	15.60	2.52	0.95	31.60	20.08	0.35
1000.0	23.15	37.96	22.70	15.99	2.77	0.94	31.58	19.97	0.28
1100.0	22.52	37.82	31.95	15.54	2.92	0.94	32.02	19.98	0.26
1200.0	21.89	37.88	32.87	14.51	3.12	0.94	32.17	20.20	0.34
1300.0	21.26	37.74	26.12	13.32	3.24	0.94	32.21	19.75	0.34
1400.0	20.65	38.13	22.77	12.06	3.54	0.93	31.92	19.68	0.39
1500.0	20.03	37.86	20.33	10.87	3.58	0.92	31.64	19.36	0.39
1600.0	19.42	38.01	18.54	9.78	3.77	0.90	31.32	19.46	0.49
1700.0	18.82	38.18	17.26	8.81	3.97	0.88	31.59	19.38	0.46
1800.0	18.19	38.51	16.23	7.93	4.24	0.86	31.39	18.70	0.54
1900.0	17.47	38.67	15.24	7.06	4.44	0.83	30.40	18.61	0.58
2000.0	17.04	38.21	14.46	6.84	4.33	0.83	30.45	17.85	0.59
2100.0	16.53	38.95	13.76	6.11	4.71	0.80	29.88	17.29	0.56
2200.0	15.96	38.93	13.05	5.50	4.72	0.77	28.89	17.13	0.61
2300.0	15.39	38.83	12.43	5.02	4.70	0.74	28.12	16.58	0.66
2400.0	14.83	39.80	11.85	4.61	5.29	0.71	28.46	16.45	0.70
2500.0	14.26	39.94	11.30	4.23	5.40	0.68	27.37	15.36	0.72
2600.0	13.71	40.03	10.80	3.90	5.46	0.66	27.25	15.39	0.88
2700.0	13.14	40.01	10.36	3.64	5.50	0.64	26.75	15.18	0.98
2800.0	12.59	40.22	9.90	3.43	5.71	0.62	26.78	14.67	1.05
2900.0	12.04	39.85	9.44	3.24	5.51	0.60	26.80	14.07	0.98
3000.0	11.53	40.02	8.99	3.07	5.66	0.59	25.32	13.53	1.06
3100.0	11.03	39.76	8.61	2.92	5.52	0.58	24.85	13.47	0.92
3200.0	10.55	39.63	8.30	2.76	5.44	0.56	24.60	13.10	1.18
3300.0	10.09	39.12	8.00	2.56	5.03	0.54	25.22	12.61	1.17
3400.0	9.65	38.67	7.69	2.38	4.66	0.51	23.97	12.46	1.30
3500.0	9.23	38.18	7.38	2.24	4.32	0.50	23.90	11.95	1.27
3600.0	8.81	37.23	7.09	2.13	3.80	0.49	23.25	12.13	1.30
3700.0	8.36	36.64	6.85	2.02	3.50	0.47	23.99	11.76	1.29
3800.0	7.93	36.08	6.62	1.91	3.24	0.46	23.35	11.07	1.39
3900.0	7.55	35.22	6.39	1.83	2.87	0.45	22.26	11.05	1.72
4000.0	7.16	34.54	6.20	1.79	2.65	0.45	21.96	10.63	1.50

Amplifier

ZX60-P162LN+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)









Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.0V, Id = 52.33mA @ Temperature = 85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
					K	Measure			
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
700.0	23.88	37.98	9.95	13.09	2.31	0.99	28.81	18.76	0.85
800.0	23.55	37.66	15.48	15.19	2.51	0.95	29.65	19.44	0.65
900.0	22.95	37.52	23.18	16.16	2.70	0.94	30.04	19.57	0.69
1000.0	22.28	37.65	31.03	16.11	2.95	0.95	30.01	19.48	0.67
1100.0	21.60	37.73	24.61	15.43	3.17	0.95	30.59	19.52	0.66
1200.0	20.92	37.84	20.46	14.16	3.40	0.95	30.89	19.70	0.71
1300.0	20.25	37.86	18.06	12.77	3.58	0.95	30.79	19.28	0.73
1400.0	19.59	37.98	16.48	11.47	3.79	0.94	30.71	19.23	0.84
1500.0	18.95	38.16	15.37	10.38	4.03	0.93	30.88	18.92	0.84
1600.0	18.32	38.39	14.51	9.39	4.29	0.92	30.91	19.01	0.92
1700.0	17.68	38.29	13.72	8.46	4.37	0.90	30.74	18.84	0.97
1800.0	17.02	38.80	12.96	7.61	4.76	0.88	30.97	18.30	1.03
1900.0	16.28	39.30	12.30	6.86	5.21	0.85	30.75	18.18	1.10
2000.0	15.87	38.71	11.89	6.58	4.98	0.84	31.15	17.52	1.18
2100.0	15.32	39.01	11.48	5.96	5.20	0.81	31.18	17.07	1.16
2200.0	14.74	39.48	11.03	5.41	5.54	0.78	30.77	16.72	1.21
2300.0	14.15	39.69	10.64	4.96	5.74	0.75	30.07	16.18	1.29
2400.0	13.59	39.50	10.26	4.58	5.68	0.73	29.98	16.11	1.38
2500.0	13.03	39.39	9.90	4.27	5.67	0.71	29.63	15.17	1.47
2600.0	12.46	39.51	9.52	3.98	5.82	0.68	29.37	15.04	1.63
2700.0	11.87	39.38	9.13	3.72	5.80	0.66	28.60	14.90	1.74
2800.0	11.32	39.53	8.80	3.48	5.95	0.64	28.54	14.42	1.90
2900.0	10.80	39.49	8.57	3.30	6.00	0.62	28.70	13.73	1.91
3000.0	10.30	38.88	8.32	3.15	5.67	0.61	27.43	13.21	1.90
3100.0	9.77	38.83	8.01	2.99	5.70	0.59	26.56	13.15	1.90
3200.0	9.26	38.06	7.72	2.80	5.18	0.57	25.82	12.83	2.09
3300.0	8.79	37.70	7.50	2.63	4.94	0.55	26.89	12.29	2.17
3400.0	8.36	37.24	7.31	2.52	4.70	0.54	25.37	12.13	2.40
3500.0	7.90	36.45	7.12	2.43	4.34	0.53	25.27	11.58	2.34
3600.0	7.43	35.98	6.88	2.31	4.10	0.52	24.08	11.54	2.56
3700.0	6.97	35.11	6.66	2.19	3.67	0.51	24.58	11.14	2.52
3800.0	6.55	34.53	6.57	2.13	3.47	0.50	24.17	10.51	2.56
3900.0	6.16	34.02	6.48	2.09	3.34	0.49	22.68	10.31	3.01
4000.0	5.72	33.40	6.37	2.05	3.18	0.49	21.95	9.85	2.83

Typical Performance Curves

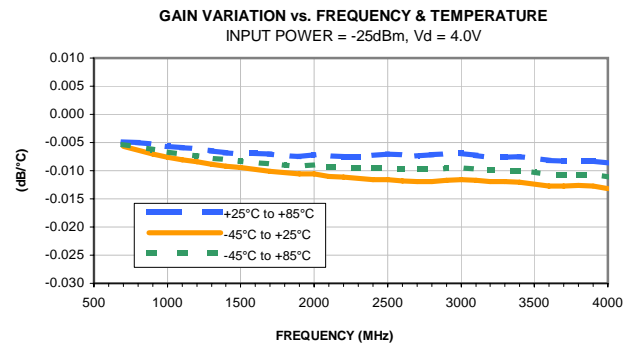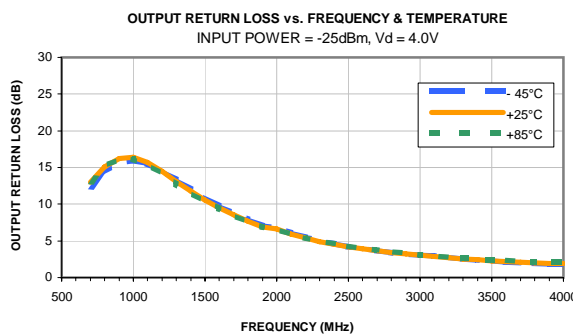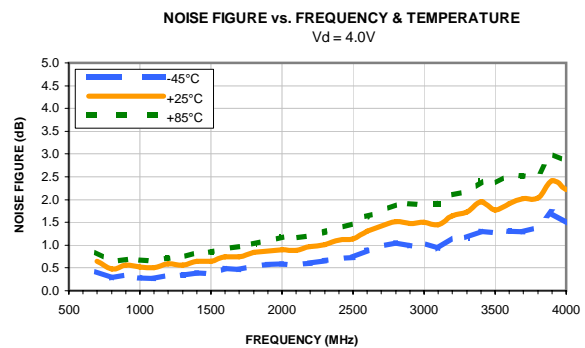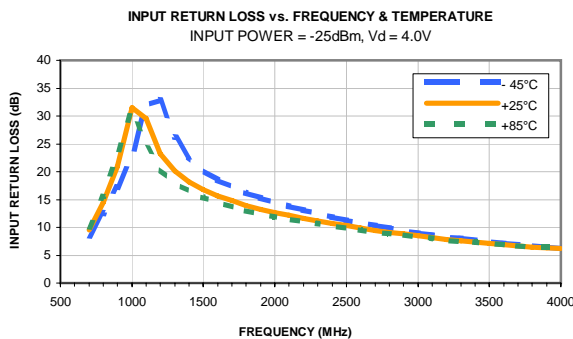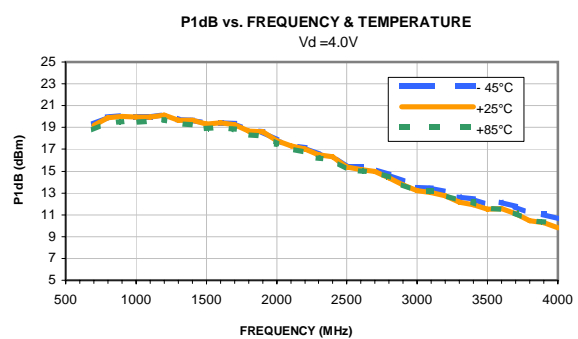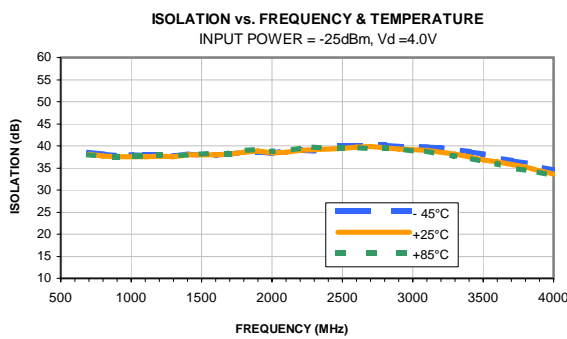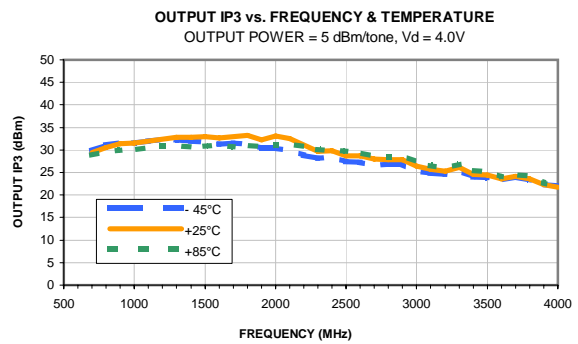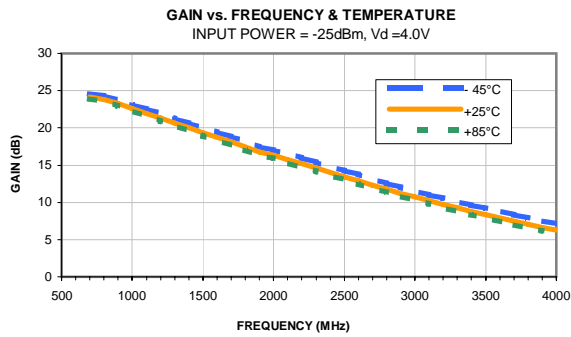


Case Style

GC

Outline Dimensions

GC957-2

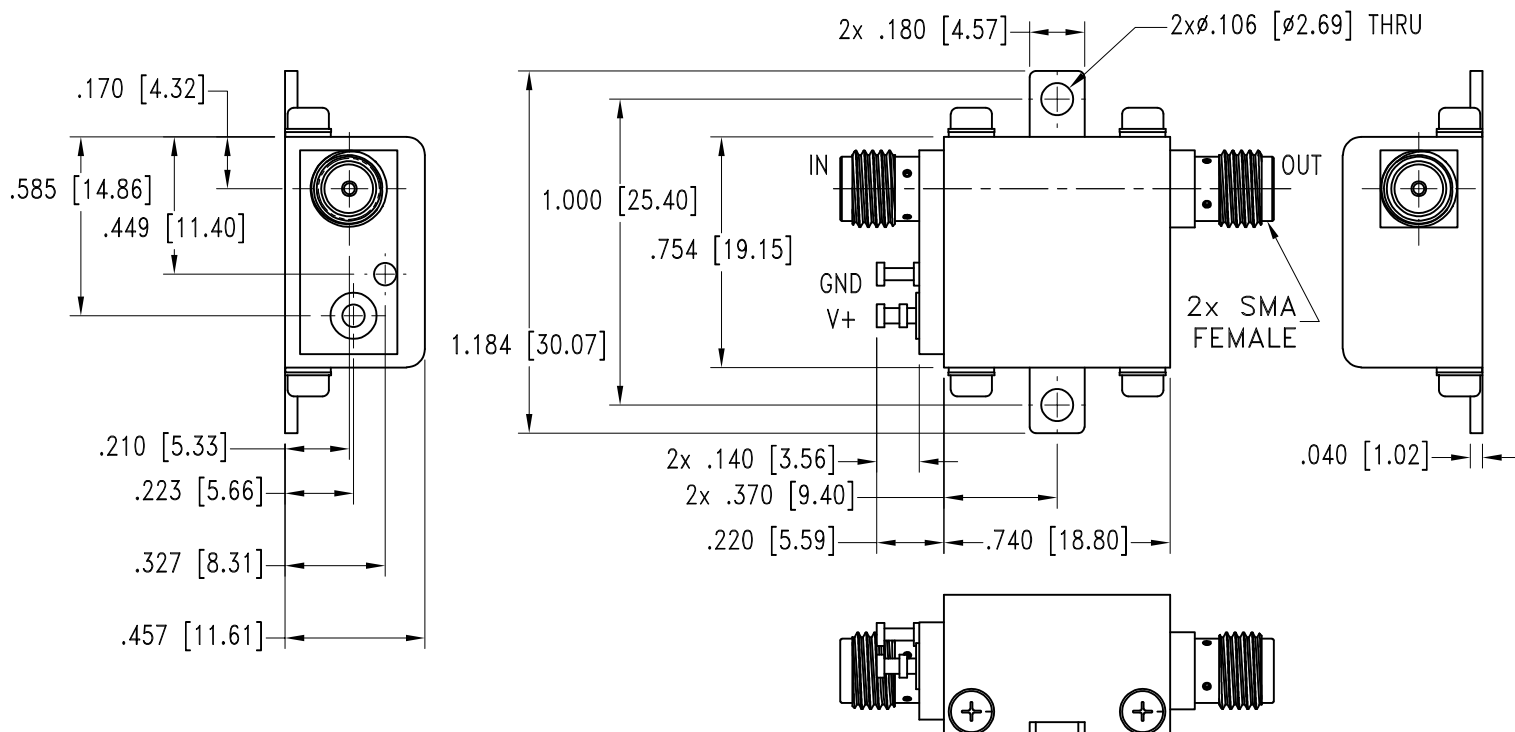

Weight: 23.0 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$ Inches

Notes:

Case material: Brass.
Case Finish: Nickel plate.

Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C