Coaxial

Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω DC to 6 GHz

The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from <1 to 25%
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions

Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters,diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Custom integrated assembly with LNA in greatly simplifying system integration. They can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial

Bandpass Filter

ZX75BP-1090-S+

50Ω 1060 to 1120 MHz

Generic photo used for illustration purposes only

CASE STYLE: HY1238

Connectors	Model
SMA-M\F	ZX75BP-1090-S+

Features

- Low Insertion loss
- High selectivity
- Good VSWR
- Connectorized package

Applications

- Traffic collision avoidance system (TCAS)
- Aeronautical radio navigation
- Fixed satellite
- Radio astronomy
- Radar and navigation system

Functional Schematic

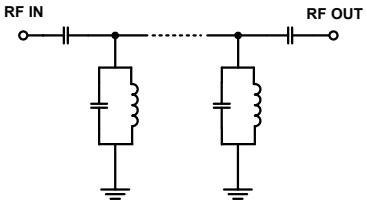

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	-	1090	-	MHz
	Insertion Loss	F1-F2	1060-1120	-	1.1	2	dB
	VSWR	F1-F2	1060-1120	-	1.3	-	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 955	20	35	-	dB
	VSWR	DC-F3	DC - 955	-	20	-	:1
Stop Band, Upper	Insertion Loss	F4-F5	1255-2200	20	30	-	dB
	VSWR	F4-F5	1255-2200	-	20	-	:1

Maximum Ratings	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	5 W max.

* Passband rating, derate linearly to 3.5W at 85.°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	111.72	5431.57	1060	8.62
500	69.80	283.51	1064	8.29
955	36.83	58.90	1069	7.97
972	30.22	48.71	1072	7.82
995	20.47	31.78	1076	7.64
1015	10.75	13.06	1078	7.58
1032	3.38	3.06	1080	7.51
1060	1.14	1.08	1082	7.45
1080	1.06	1.15	1086	7.34
1090	1.06	1.20	1088	7.30
1105	1.09	1.27	1090	7.26
1120	1.12	1.30	1092	7.23
1158	3.62	3.79	1095	7.19
1163	5.02	5.53	1097	7.17
1180	10.76	16.88	1100	7.15
1212	20.52	47.98	1103	7.14
1255	30.23	71.80	1106	7.14
1440	72.37	86.11	1110	7.17
1800	45.10	79.06	1115	7.24
2200	40.31	77.46	1120	7.37

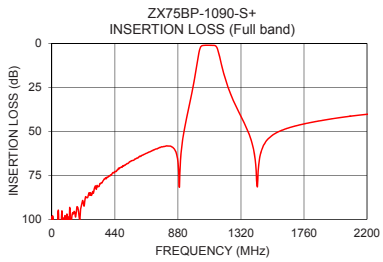

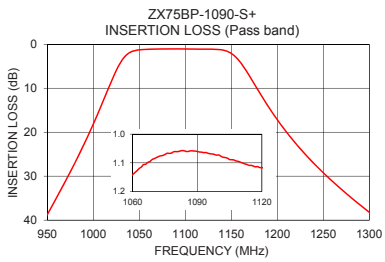

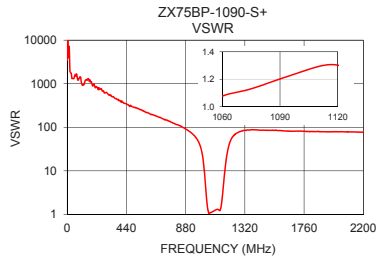

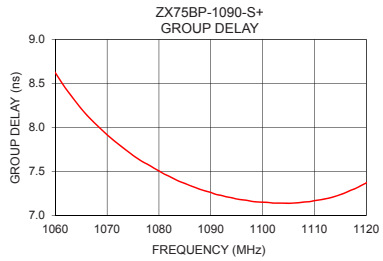

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Connections

INPUT	SMA-MALE
OUTPUT	SMA-FEMALE

Outline Drawing

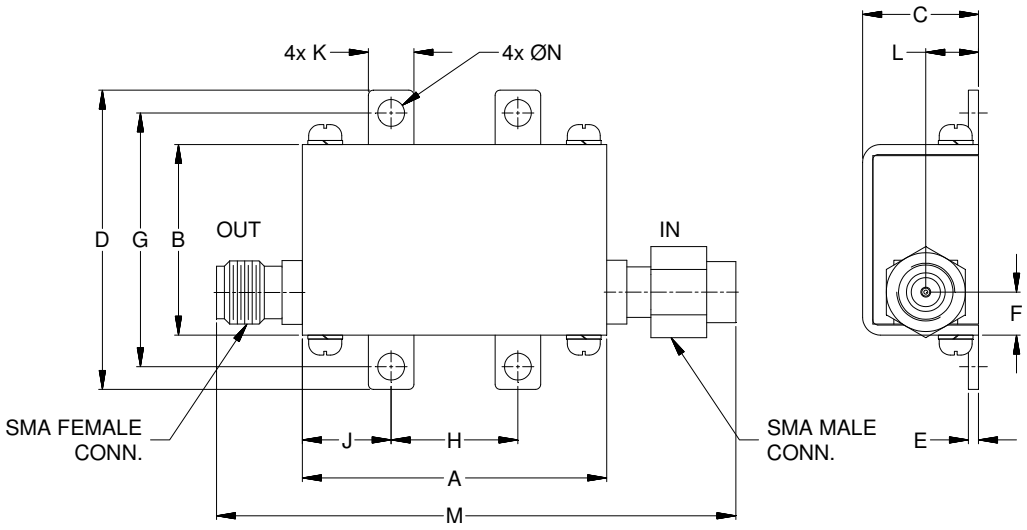

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
1.20	**.75**	**.46**	**1.18**	**.04**	**.17**	**1.00**
30.48	19.05	11.68	29.97	1.02	4.32	25.40

H	J	K	L	M	N	Wt.
.50	**.35**	**.18**	**.21**	**2.05**	**.106**	grams
12.70	8.89	4.57	5.28	52.07	2.69	35.0

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Band Pass Filter ZX75BP-1090-S+

Typical Performance Data

FREQ.	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
(MHz)	(dB)			(dB)			(dB)		
	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C
1	118.88	111.72	101.82	0.00	0.00	0.00	0.00	0.00	0.00
10	101.83	100.84	110.94	0.00	0.00	0.00	0.00	0.00	0.01
50	100.02	105.26	105.30	0.01	0.01	0.01	0.02	0.02	0.02
100	97.52	102.76	97.71	0.00	0.01	0.01	0.02	0.03	0.03
250	86.37	87.61	88.05	0.00	0.02	0.03	0.06	0.09	0.11
500	69.55	69.80	69.80	0.01	0.06	0.08	0.24	0.30	0.34
750	59.15	59.24	59.79	0.05	0.12	0.15	0.45	0.55	0.61
800	57.95	58.28	58.83	0.06	0.14	0.17	0.48	0.59	0.66
900	67.18	64.25	61.97	0.12	0.21	0.24	0.56	0.70	0.78
950	39.30	38.76	38.16	0.18	0.28	0.33	0.61	0.77	0.87
955	37.38	36.83	36.27	0.19	0.29	0.35	0.62	0.78	0.88
960	35.44	34.92	34.36	0.20	0.31	0.36	0.62	0.79	0.90
970	31.54	31.02	30.46	0.23	0.35	0.41	0.64	0.82	0.93
972	30.75	30.22	29.67	0.24	0.36	0.42	0.65	0.83	0.94
980	27.51	26.97	26.41	0.27	0.40	0.47	0.67	0.86	0.98
995	21.05	20.47	19.88	0.39	0.55	0.64	0.76	0.98	1.13
1000	18.75	18.15	17.55	0.46	0.64	0.75	0.82	1.06	1.22
1020	8.78	8.25	7.76	1.47	1.94	2.33	1.79	2.30	2.73
1032	3.52	3.38	3.26	4.75	5.88	6.77	5.03	6.16	7.05
1050	1.01	1.27	1.42	23.40	26.40	28.18	24.87	26.86	26.98
1060	0.88	1.14	1.29	28.20	28.59	29.61	28.39	27.97	27.51
1070	0.83	1.09	1.23	25.38	25.47	25.45	24.51	24.56	24.13
1090	0.81	1.06	1.20	20.86	20.75	20.79	20.31	20.12	19.89
1100	0.82	1.07	1.22	18.94	19.11	19.19	18.65	18.69	18.56
1120	0.86	1.12	1.26	17.19	17.63	17.74	18.16	18.73	18.92
1130	0.86	1.13	1.29	18.81	19.49	19.88	22.12	24.33	26.30
1150	1.62	2.08	2.42	9.19	8.69	8.16	9.74	9.20	8.62
1156	2.58	3.16	3.59	5.75	5.49	5.17	6.15	5.87	5.54
1170	6.58	7.29	7.83	1.83	1.90	1.88	2.23	2.28	2.27
1180	10.05	10.76	11.27	0.89	1.03	1.07	1.31	1.45	1.51
1190	13.42	14.09	14.56	0.50	0.65	0.71	0.95	1.10	1.18
1200	16.54	17.17	17.59	0.32	0.47	0.53	0.79	0.95	1.04
1210	19.40	19.98	20.36	0.23	0.38	0.44	0.71	0.88	0.97
1220	22.02	22.57	22.90	0.18	0.32	0.38	0.67	0.83	0.93
1230	24.42	24.94	25.25	0.15	0.28	0.34	0.64	0.81	0.91
1240	26.66	27.16	27.43	0.13	0.26	0.32	0.63	0.80	0.90
1250	28.76	29.23	29.49	0.12	0.25	0.30	0.62	0.79	0.89
1255	29.76	30.23	30.47	0.11	0.24	0.30	0.62	0.79	0.89
1260	30.74	31.19	31.42	0.11	0.24	0.29	0.62	0.78	0.89
1270	32.62	33.05	33.27	0.11	0.23	0.28	0.62	0.79	0.89
1280	34.42	34.84	35.03	0.10	0.22	0.27	0.61	0.78	0.89
1290	36.15	36.56	36.74	0.10	0.21	0.27	0.61	0.79	0.89
1300	37.85	38.23	38.40	0.10	0.21	0.26	0.61	0.78	0.89
1320	41.16	41.50	41.66	0.09	0.21	0.25	0.60	0.78	0.89
1325	41.97	42.33	42.47	0.09	0.20	0.25	0.60	0.78	0.89
1400	57.20	57.58	57.54	0.09	0.20	0.24	0.60	0.79	0.90
1450	65.04	65.36	66.05	0.10	0.20	0.25	0.60	0.80	0.90
1500	54.99	55.11	55.63	0.10	0.20	0.25	0.61	0.80	0.91
1525	52.83	53.26	53.55	0.10	0.20	0.25	0.61	0.81	0.91
1540	51.91	52.20	52.59	0.11	0.20	0.25	0.61	0.81	0.91
1550	51.40	51.65	51.98	0.11	0.20	0.25	0.62	0.81	0.91
1600	49.29	49.61	49.94	0.11	0.21	0.25	0.63	0.82	0.92
1620	48.64	48.97	49.33	0.12	0.21	0.25	0.63	0.83	0.92
1660	47.58	47.85	48.28	0.12	0.21	0.26	0.64	0.83	0.93
1750	45.66	45.99	46.37	0.12	0.21	0.26	0.68	0.86	0.95
1800	44.77	45.10	45.50	0.12	0.22	0.26	0.71	0.88	0.96
1900	43.25	43.62	44.03	0.12	0.22	0.26	0.80	0.95	1.04
1950	42.59	42.97	43.39	0.12	0.22	0.27	0.84	0.99	1.08
2000	42.00	42.35	42.77	0.11	0.22	0.27	0.88	1.04	1.13
2200	40.00	40.31	40.69	0.10	0.22	0.28	1.05	1.26	1.41

Typical Performance Data

FREQ. (MHz)	GROUP DELAY (nsec)		
	@-40°C	@+25°C	@+85°C
1060	8.79	8.62	8.49
1061	8.69	8.53	8.41
1062	8.59	8.44	8.33
1063	8.50	8.37	8.26
1064	8.41	8.29	8.19
1065	8.34	8.21	8.12
1066	8.26	8.15	8.06
1067	8.19	8.08	8.00
1068	8.13	8.03	7.94
1069	8.07	7.97	7.89
1070	8.01	7.92	7.84
1071	7.96	7.87	7.79
1072	7.90	7.82	7.74
1073	7.86	7.77	7.70
1074	7.81	7.73	7.66
1075	7.76	7.68	7.62
1076	7.72	7.64	7.58
1077	7.68	7.61	7.55
1078	7.64	7.58	7.52
1079	7.61	7.54	7.48
1080	7.57	7.51	7.45
1081	7.53	7.47	7.42
1082	7.50	7.45	7.39
1083	7.47	7.41	7.37
1084	7.44	7.39	7.34
1085	7.42	7.36	7.32
1086	7.39	7.34	7.30
1087	7.37	7.32	7.28
1088	7.34	7.30	7.26
1089	7.32	7.28	7.24
1090	7.30	7.26	7.23
1091	7.28	7.24	7.21
1092	7.27	7.23	7.20
1093	7.25	7.21	7.18
1094	7.23	7.20	7.18
1095	7.22	7.19	7.17
1096	7.21	7.18	7.16
1097	7.20	7.17	7.15
1098	7.18	7.16	7.14
1099	7.18	7.15	7.14
1100	7.17	7.15	7.14
1101	7.17	7.15	7.13
1102	7.16	7.14	7.13
1103	7.15	7.14	7.13
1104	7.15	7.14	7.13
1105	7.15	7.14	7.13
1106	7.15	7.14	7.14
1107	7.16	7.15	7.14
1108	7.16	7.15	7.15
1109	7.16	7.16	7.15
1110	7.17	7.17	7.17
1111	7.17	7.18	7.18
1112	7.18	7.19	7.19
1113	7.20	7.20	7.21
1114	7.21	7.22	7.22
1115	7.22	7.24	7.24
1116	7.24	7.26	7.27
1117	7.27	7.29	7.30
1118	7.29	7.31	7.33
1120	7.34	7.37	7.40

Typical Performance Curves

INSERTION LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

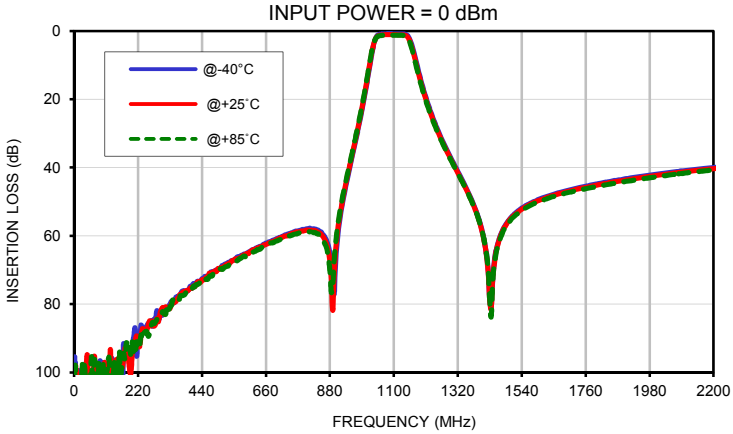

INSERTION LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

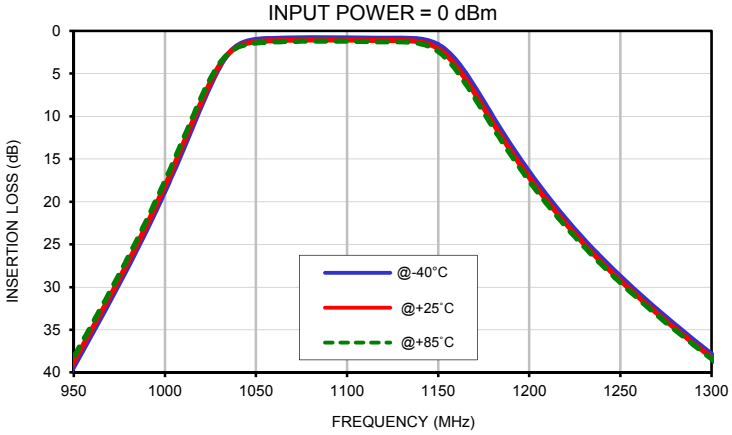

INPUT RETURN LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

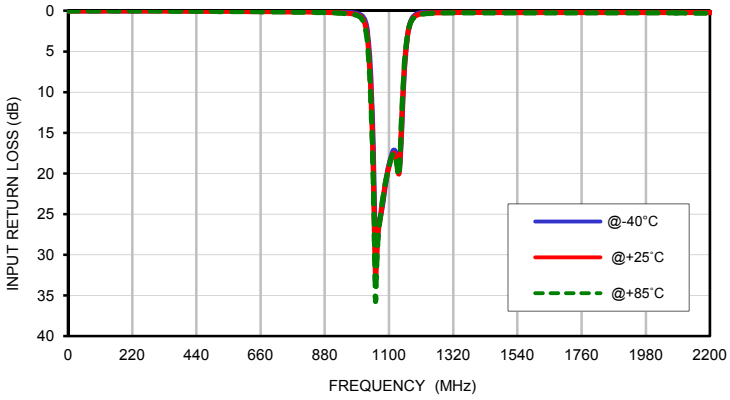

INPUT RETURN LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

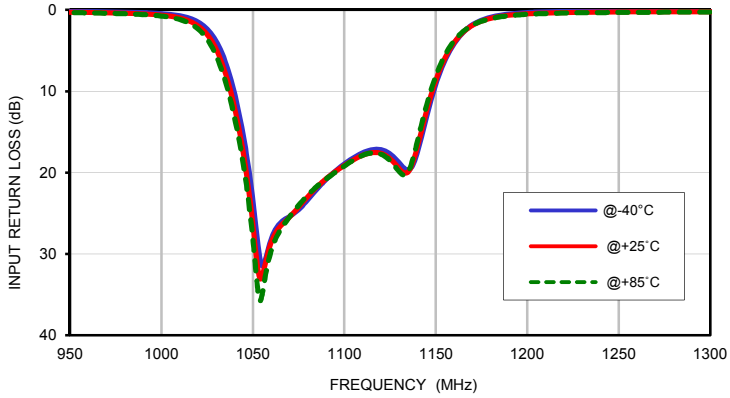

OUTPUT RETURN LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

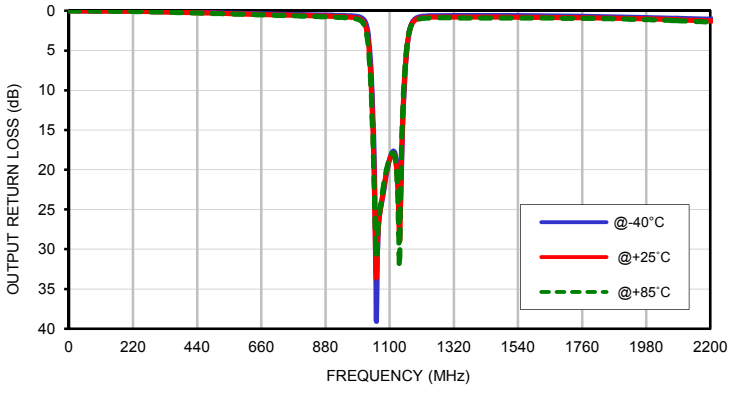

OUTPUT RETURN LOSS vs. TEMPERATURE
INPUT POWER = 0 dBm

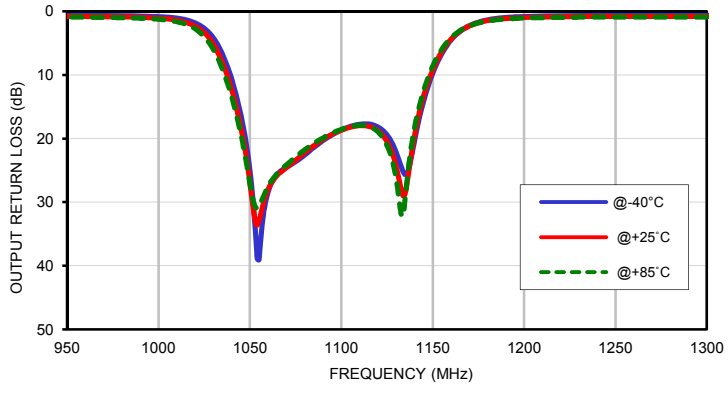

Typical Performance Curves

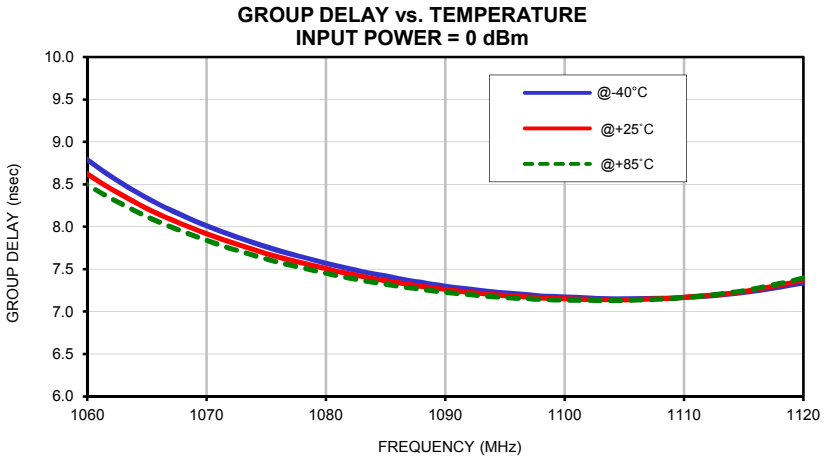

Case Style HY

Outline Dimensions

HY1238

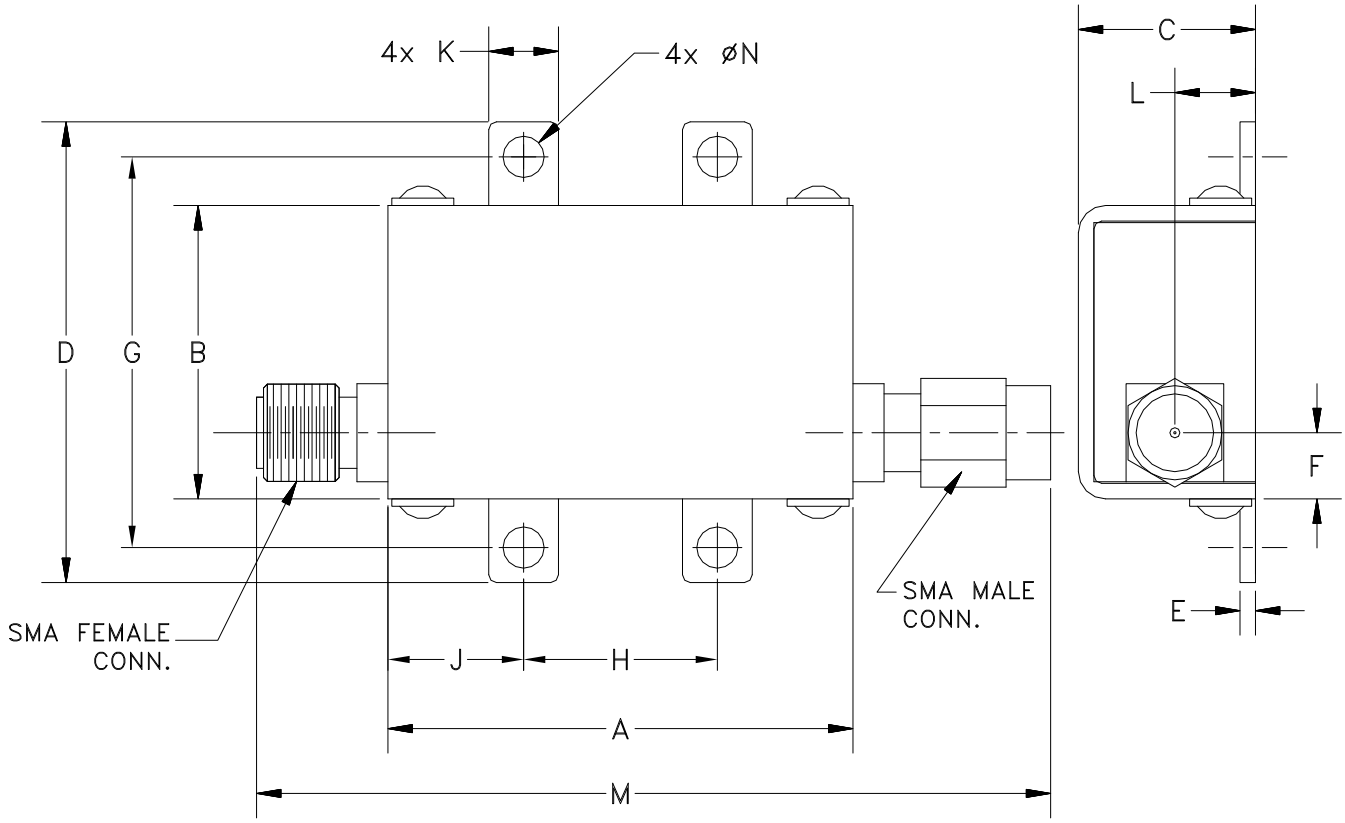

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT GRAMS
HY1238	1.20 (30.48)	.75 (19.05)	.46 (11.68)	1.18 (29.97)	.04 (1.02)	.17 (4.32)	1.00 (25.40)	.50 (12.70)	.35 (8.89)	.18 (4.57)	.21 (5.28)	2.05 (52.07)	.106 (2.69)	35.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015
Tolerance on hole size and interaxes dimensions to be ± .005.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Mini-Circuits

Environmental Specifications ENV46

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 40°C, 96 hours; Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103, Condintion B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11ms half-sine, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition A

This document and its contents are the property of Mini-Circuits.