



Mini-Circuits

COAXIAL

Adapter

24F-35M+

50Ω DC to 34.5 GHz 2.4 mm-Female to 3.5 mm-Male

KEY FEATURES

- Ultra-Wideband, DC to 34.5 GHz
- Low Insertion Loss, 0.09 dB Typ.
- Excellent VSWR, 1.05:1 Typ.
- Straight Body



Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' 24F-35M+ is a coaxial 2.4 mm-Female to 3.5 mm-Male adapter supporting a wide range of applications from DC to 34.5 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The 24F-35M+ features passivated stainless-steel construction and measures only 0.86" in length. These adapters are used to enable connections between connector types that would otherwise not mate.

ELECTRICAL SPECIFICATIONS¹ AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		34.5	GHz
Insertion Loss	DC-26.5	-	0.07	0.45	dB
	26.5-34.5	-	0.13	0.45	
VSWR	DC-26.5	-	1.04	1.25	:1
	26.5-34.5	-	1.10	1.33	

1. Specifications are tested to minimum frequency of 0.01 GHz.

ABSOLUTE MAXIMUM RATINGS²

Operating Case Temperature	-45 °C to +125 °C
Storage Temperature	-45 °C to +125 °C

2. Permanent damage may occur if any of these limits are exceeded.





COAXIAL




Adapter

24F-35M+

Mini-Circuits

50 Ω DC to 34.5 GHz 2.4 mm-Female to 3.5 mm-Male

TYPICAL PERFORMANCE GRAPHS

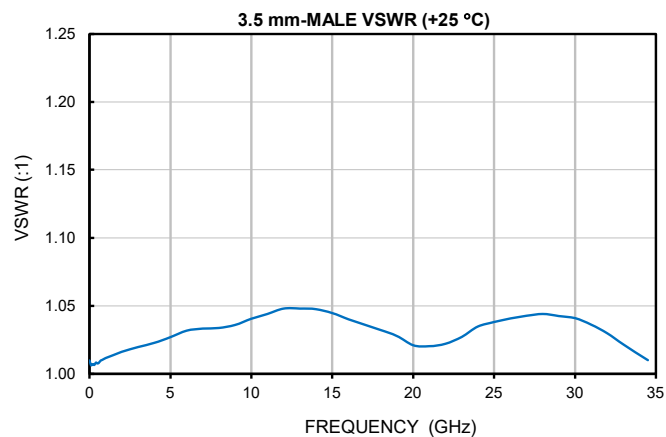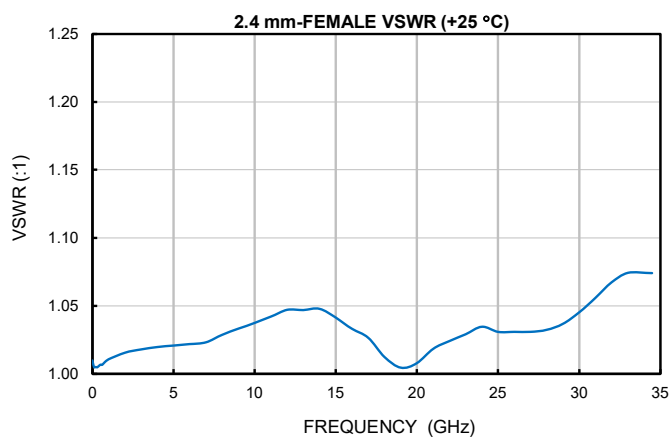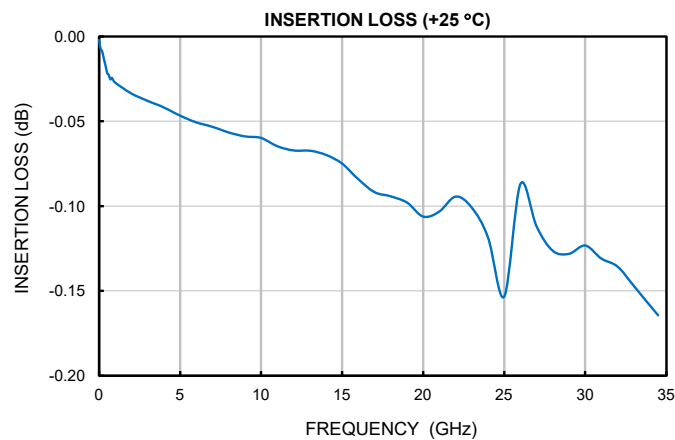




CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	2.4 mm-Female	3.5 mm-Male
Orientation	Straight	Straight

CASE STYLE DRAWING

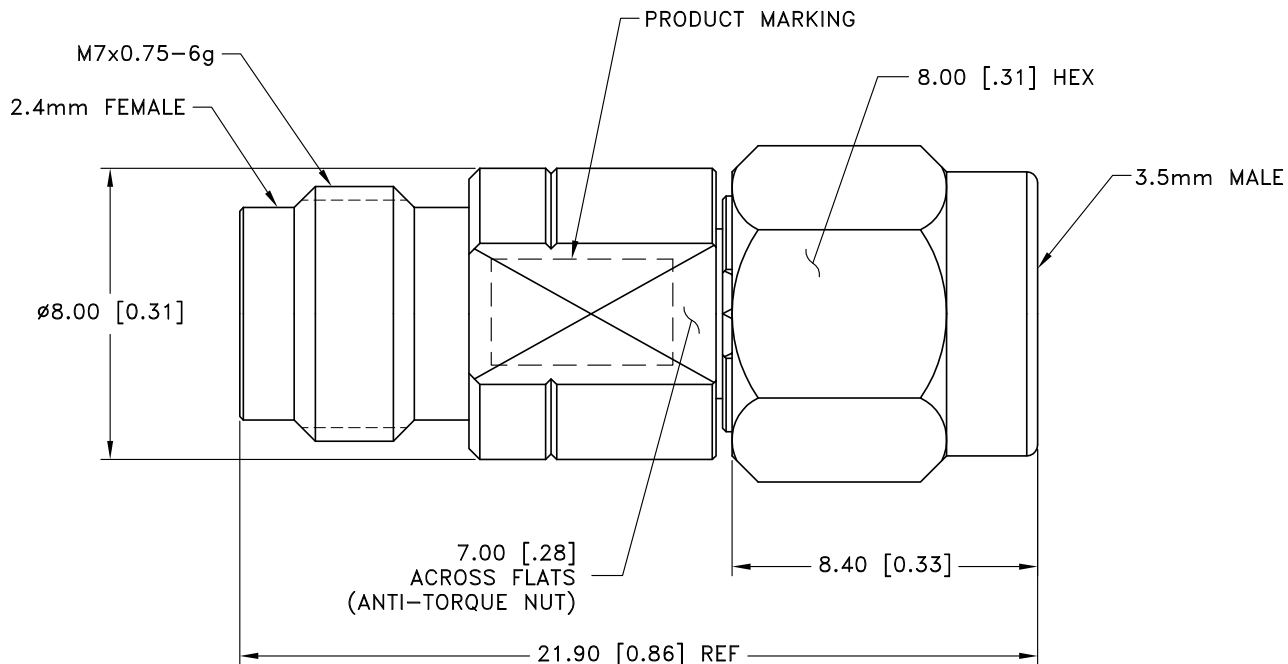

Weight: 5.0 grams

Dimensions are in mm [inches]. Tolerances: 2 PI \pm .40 mm

PRODUCT MARKING*: 24F-35M+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

COAXIAL

Adapter

24F-35M+

50Ω DC to 34.5 GHz 2.4 mm-Female to 3.5 mm-Male

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

CLICK HERE

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3746-2
RoHS Status	Compliant
Environmental Ratings	ENV152

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"; Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

