

Surface Mount

Power Splitter/Combiner

ADP-2-4

2 Way-0° 50Ω 10 to 1000 MHz



Generic photo used for illustration purposes only

CASE STYLE: CD636

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
GROUND	6
Externally connect together & isolate	2,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G		
.272	.310	.220	.100	.162	.055	.100		
6.91	7.87	5.59	2.54	4.11	1.40	2.54		
H	J	K	L				wt	
.030	.026	.065	.300				grams	
0.76	0.66	1.65	7.62				0.25	

Demo Board MCL P/N: TB-208 Suggested PCB Layout (PL-116)

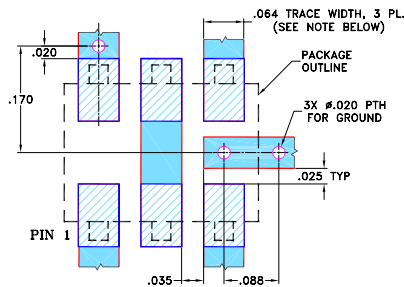

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.10 dB typ.
- very good phase unbalance, 0.5 deg. typ.
- aqueous washable
- protected under U.S. Patent 6,133,525

Applications

- instrumentation
- cellular

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L		M	U		L		M	U	L		M	U					
	Typ.	Min.	Typ. Min.	Typ.	Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.					
10-1000	25	20	23	16	19	14	0.3	0.5	0.4	0.9	0.8	1.5	1.0	3.0	5.0	0.15	0.2	0.4

L = 10-100 MHz M = 100-500 MHz U = 500-1000 MHz


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10.00	3.27	3.26	0.01	29.66	0.03	1.12	1.27	1.27
50.00	3.26	3.26	0.00	27.85	0.05	1.12	1.24	1.24
100.00	3.22	3.22	0.00	26.35	0.13	1.15	1.25	1.25
200.00	3.30	3.30	0.00	24.51	0.21	1.22	1.27	1.26
250.00	3.35	3.34	0.01	23.57	0.21	1.25	1.28	1.27
350.00	3.38	3.36	0.02	22.19	0.32	1.32	1.31	1.30
400.00	3.53	3.52	0.01	21.78	0.36	1.36	1.33	1.31
500.00	3.56	3.53	0.03	20.95	0.44	1.42	1.36	1.33
550.00	3.58	3.55	0.03	20.65	0.50	1.44	1.37	1.34
650.00	3.66	3.60	0.05	20.35	0.54	1.48	1.39	1.35
700.00	3.69	3.63	0.07	20.39	0.62	1.49	1.40	1.35
800.00	3.87	3.79	0.08	20.86	0.70	1.48	1.40	1.35
850.00	3.72	3.62	0.10	21.23	0.76	1.46	1.39	1.34
950.00	3.94	3.82	0.12	23.04	0.78	1.39	1.38	1.31
1000.00	4.01	3.88	0.13	24.55	0.90	1.34	1.37	1.30

1. Total Loss = Insertion Loss + 3dB splitter loss.

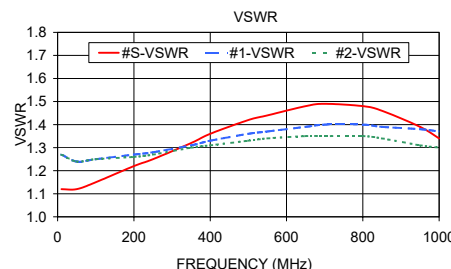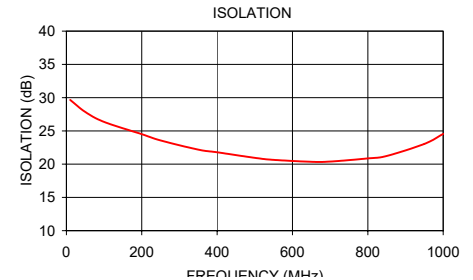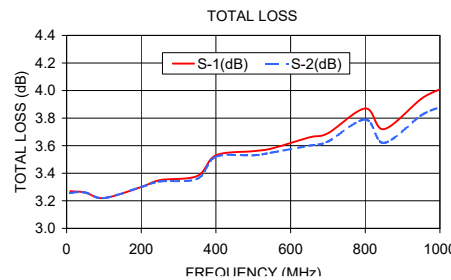

electrical schematic



A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

