

RF Transformer

ADT10-ED7968/1

Impedance Ratio : 10

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CD636


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C				
Parameter		Min.	Typ.	Max. Units
Frequency		0.3		86.4 MHz
Insertion Loss *	3 dB Bandwidth		0.3 - 86.4	MHz
	2 dB Bandwidth		0.3 - 72.2	MHz
	1 dB Bandwidth		0.3 - 58	MHz

Note:

* Insertion Loss is referenced to mid-band loss, 0.37dB typ.

MAXIMUM RATINGS	
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	30 mA

Configuration : C

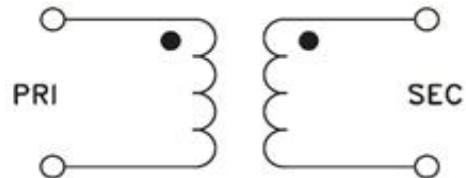

PIN CONNECTIONS	
PRIMARY DOT	1
PRIMARY	3
SECONDARY DOT	6
SECONDARY	4
NOT USED	2,5