

RF Transformer

ADT2-ED10636/1

Impedance Ratio : 2

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CD542


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C				
Parameter		Min.	Typ.	Max.
Frequency		0.1		150
Insertion Loss *	3 dB Bandwidth		0.1 - 150	
	2 dB Bandwidth		0.06 - 150	
	1 dB Bandwidth		0.09 - 150	
Amplitude Unbalance	over 3dB Bandwidth		0.5	
	over 1dB Bandwidth		0.1	
Phase Unbalance	over 3dB Bandwidth		5.0	
	over 1dB Bandwidth		1.00	

Note:

* Insertion Loss is referenced to mid-band loss, 0.32dB typ.

MAXIMUM RATINGS	
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	30 mA

Configuration : A

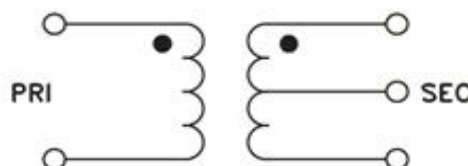

PIN CONNECTIONS	
PRIMARY DOT	1
PRIMARY	3
SECONDARY DOT	4
SECONDARY	6
SECONDARY CT	5
ISOLATE	2