

Coaxial Termination

ANNE-50V+

50Ω 2.4 mm DC to 50 GHz

The Big Deal

- Ultra-wideband, DC to 50 GHz
- Excellent return loss, 28 dB typ. up to 18 GHz; 20 dB typ. up to 50 GHz
- Input power handling up to 1W
- Mates with 1.85mm connector



CASE STYLE: LL2539

Product Overview

Mini-Circuits' ANNE-50V+ is an ultra-wideband 50Ω termination capable of absorbing signals up to 1W from DC to 50 GHz. It provides excellent return loss across its entire operating frequency range, effectively dissipating signal power with minimal reflections. This model has a 2.4mm-male connector, mechanically compatible with 2.4mm-female and 1.85 mm-female connectors. The unit features rugged construction for a long life of use and comes in a Cu-Sn-Zn-plated brass case measuring only 0.67" (l) x 0.31" (dia.).

Key Features

Feature	Advantages
Ultra-wideband, DC to 50 GHz	Extremely wide frequency range provides application flexibility and makes this model ideal for broadband and multi-band use.
Good return loss: <ul style="list-style-type: none">• 28 dB up to 18 GHz• 20 dB up to 50 GHz	Good return loss minimizes signal reflections across multiple-decade frequency range.
2.44 mm connector mates with 1.85 mm connectors	Provides flexible connection options, avoiding the need for extra adapters.
Power handling up to 1W	ANNE-50V+ meets a wide range of system power requirements in a small device size.
Wide operating temperature range, -55 to +100°C	Withstands tough operating conditions and is suitable for use near high power components where heat rise is common.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Termination

2.4 mm

ANNE-50V+

50Ω DC to 50 GHz


Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	wt
.67	.312	.59	.281	—	grams
17.0	7.9	15.0	7.1	—	4.4

Features

- wideband coverage, DC to 50 GHz
- return loss, 28 dB typ. up to 18 GHz and 20 dB typ. up to 50 GHz
- rugged construction
- mechanically compatible with 1.85 mm connectors

Applications

- test and measurement equipment
- test labs
- defense and aerospace
- 5G applications
- Q and V band communication links



Generic photo used for illustration purposes only

CASE STYLE: LL2539

Connector	Model
2.4 mm-M	ANNE-50V+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC	—	50	GHz
Impedance			50		Ohms
Return Loss	DC - 18	23	28	—	dB
	18 - 3.5	17.7	22	—	
	35 - 50	14.7	20	—	
Input Power ¹	DC - 50	—	—	1	W

1. At 25°C, derate linearly to 300 mW at 100°C.

Typical Performance Data

Frequency (MHz)	Return Loss (dB)
10	38.66
100	42.37
1000	43.66
5000	38.00
10000	37.62
15000	34.80
20000	27.25
30000	20.89
40000	25.98
50000	19.08

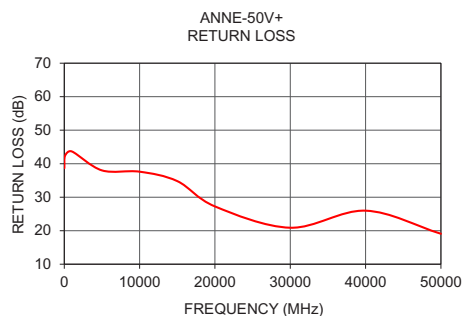

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

